

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 351545

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address AMEREDEV OPERATING, LLC 2901 Via Fortuna Austin, TX 78746		2. OGRID Number 372224
		3. API Number 30-025-52095
4. Property Code 331807	5. Property Name AZALEA 26 36 28 STATE COM	6. Well No. 284H

7. Surface Location

UL - Lot A	Section 28	Township 26S	Range 36E	Lot Idn A	Feet From 230	N/S Line N	Feet From 795	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot H	Section 33	Township 26S	Range 36E	Lot Idn 1	Feet From 50	N/S Line S	Feet From 990	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	-----------------	---------------	------------------	---------------	---------------

9. Pool Information

WC-025 G-08 S263620C;LWR BONE SPRIN	98150
-------------------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 2911
16. Multiple N	17. Proposed Depth 18223	18. Formation 2nd Bone Spring Carbonate	19. Contractor	20. Spud Date 12/1/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1744	1372	0
Int1	12.25	10.75	45.5	5100	1334	0
Prod	8.75	5.5	17	18223	5879	0

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	TBD

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature: Printed Name: Electronically filed by Christie Hanna Title: Regulatory Email Address: channa@ameredev.com Date: 10/10/2023	OIL CONSERVATION DIVISION Approved By: Paul F Kautz Title: Geologist Approved Date: 10/17/2023 Expiration Date: 10/17/2025 Conditions of Approval Attached
---	---

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ **AMENDED REPORT**

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-	² Pool Code 98150	³ Pool Name WC-025 G-08 S263620C; LWR BONE SPRING
⁴ Property Code 331807	⁵ Property Name AZALEA 26 36 28 STATE COM	
⁷ OGRID No. 372224	⁸ Operator Name AMEREDEV OPERATING, LLC.	⁶ Well Number 284H ⁹ Elevation 2911'

¹⁰Surface Location

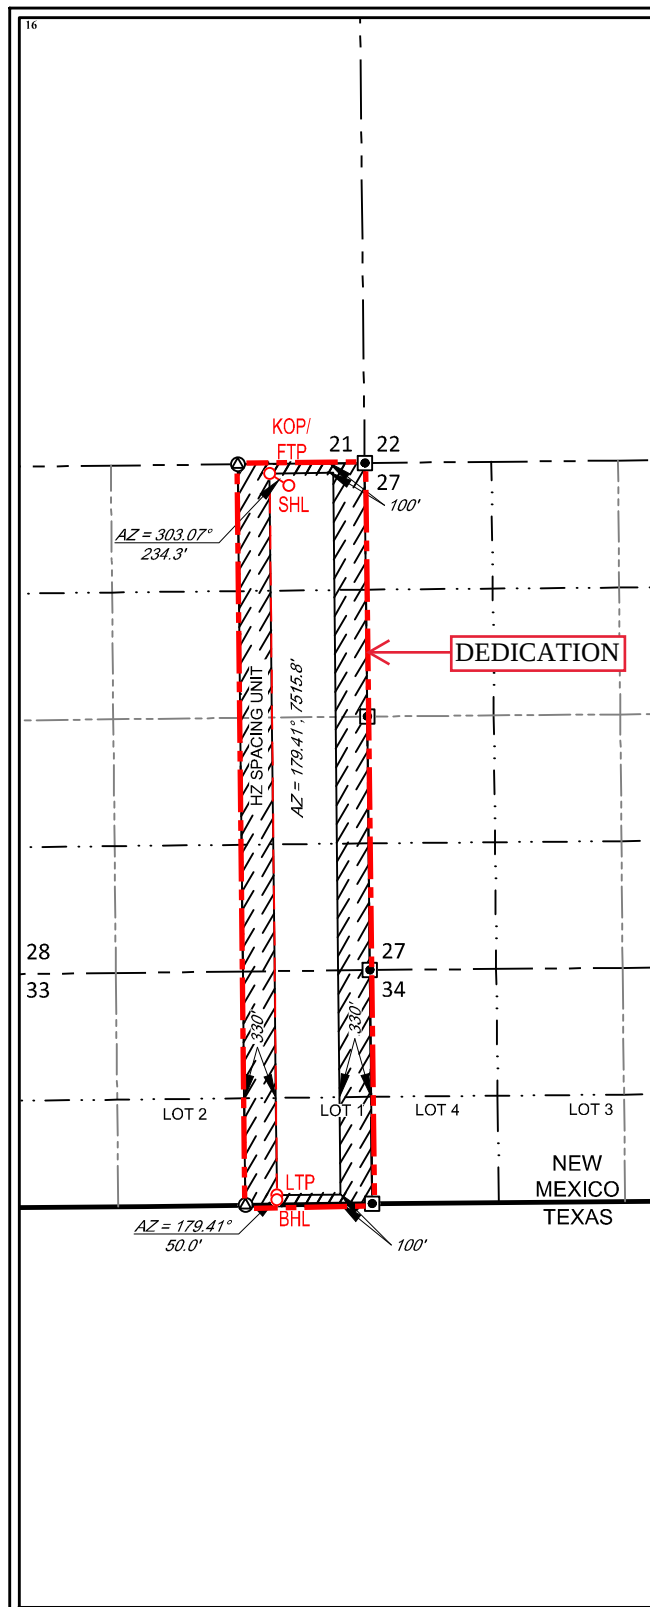
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	28	26-S	36-E	—	230'	NORTH	795'	EAST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	33	26-S	36-E	—	50'	SOUTH	990'	EAST	LEA

¹² Dedicated Acres 233.75	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
--	-------------------------------	--	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NEW MEXICO EAST
NAD 1983

SURFACE LOCATION (SHL)

230' FNL - SEC. 28
795' FEL - SEC. 28
X=872718 Y=372982
LAT.: N 32.0208990
LONG.: W 103.2641063

KICK OFF POINT (KOP)/
FIRST TAKE POINT (FTP)

50' FNL - SEC. 28
990' FEL - SEC. 28
X=872522 Y=373109
LAT.: N 32.0212557
LONG.: W 103.2647355

LAST TAKE POINT (LTP)

100' FSL - SEC. 33
990' FEL - SEC. 33
X=872599 Y=365594
LAT.: N 32.0005974
LONG.: W 103.2647270

BOTTOM HOLE LOCATION (BHL)

50' FSL - SEC. 33
990' FEL - SEC. 33
X=872600 Y=365544
LAT.: N 32.0004600
LONG.: W 103.2647269

¹⁷OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

De Hammorsol 10/2/2023
Signature Date

Floyd Hammond

Printed Name _____

fhammond@ameredev.com

E-mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.

03/15/2018

Date of Survey
Signature and Seal of Professional Surveyor



Certificate Number

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 351545

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: AMEREDEV OPERATING, LLC [372224] 2901 Via Fortuna Austin, TX 78746	API Number: 30-025-52095
	Well: AZALEA 26 36 28 STATE COM #284H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string , a CBL is required for that string of casing.
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

Azalea 26 36 28 State Com 284H							
Second Bone Spring Upper 1.5 Mile Lateral							
County, St: Lea, NM SHL: Section 28 , T26S , R36E 230' FNL, 795' FEL BHL: Section 33 , T26S , R36E 50' FSL, 990' FEL Wellhead: A - 13-5/8" 5M x 13-5/8" SOW B - 13-5/8" 5M x 13-5/8" 5M C - 13-5/8" 5M x 13-5/8" 5M Tubing Spool: 7-1/16" 10M x 13-3/8" 5M Xmas Tree: 2-9/16" 10M Tubing: 3-1/2" L-80 6.5# 8rd EUE				Co. Well ID: XXXXXX AFE #: 2023-XXX API #: 30-025-XXXXX Permit: NMOCDC GL: 2,911' Field: Delaware Rig: H&P 642 KB: 27.0' Elevation: 2,938' E-Mail: drillingengineering@amerdev.com Offsets:			
General Notes	Hole Size	Casing & Cement		Geology	TVD	Mud Weight	
Notify BLM prior to spud, running casing, cementing, and BOP testing Sundry to be sent before spud	17-1/2"	Lead (100% OH excess) 1032 sx 12.8 ppg Class C Top of Lead @ 0' Tail (100% OH excess) 340 sx 14.8 ppg Class C Top of Tail @ 1444' 13.375 54.5 J-55 BTC 0 - 1744		Conductor	122'	8.4 - 8.6 ppg FW	
1500 psi Surface Casing Test Done by Spudder Rig		1744' MD		Rustler	1,731'		
Stage 1 Designed to Circulate Cement to Surface	12-1/4"	Stg 1 Lead (50% OH excess) 446 sx 11 ppg Class C - Low Portland Top of Lead @ 0' Stg 1 Tail (50% OH excess) 177 sx 14.8 ppg Class C Top of Tail @ 4350' Stg 2 Lead (50% OH excess) 605 sx 12.8 ppg Class C - Low Portland Top of Lead @ 0' Stg 2 Tail (25% OH excess) 106 sx 14.8 ppg Class C Top of Tail @ 3076' 10.75 45.5 HC L-80 SC BTC 0 - 5100		Salado	2,100'	10 ppg Brine	
DV Tool (Int) 3676		5100' MD		Tansill	3,239'		
Casing Test to 1500 psi		5100' TVD		Capitan	3,726'		
				Lamar	4,925'		
FIT to 10.5 ppg EMW	8-3/4" Vertical			Bell Canyon	5,095'		
				Brushy Canyon	7,024'	9.0 - 9.5 ppg Cut Brine	
				Bone Spring Lime	8,010'		
				First Bone Spring	9,554'		
		KOP 9911' MD 9868' TVD					
12" DLS curve section Surveys: 45' Curve , 90' Lateral	8-3/4" Curve	Lead (50% OH excess) 1738 sx 10.6 ppg ProLite Top of Lead @ 0' Tail (20% OH excess) 4141 sx 14.5 ppg Class H - Premium PozMix Top of Tail @ 8223' 5.5 17 USS RYS P-110 Eagle SFH 0 - 18223 5-1/2" marker jts @ ~9760', 13220' MD		Second Bone Spring	10,171'	9.0 - 9.5 ppg Cut Brine	
LTP VS: 7568' 90° INC, 179.41° AZM		EOC 10661' MD 10345' TVD					
BHL VS: 7618' 90° INC, 179.41° AZM	8-1/2" Lateral	18223' MD 10,345' TVD @ BHL 7,618' VS		No Casing Test			



Ameredev Operating

Lea County, NM (N83-NME)

Camelia_Azalea

AZALEA 26 36 28 STATE COM 284H

OWB

Plan: PWP0

Standard Planning Report - Geographic

20 June, 2023



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	Lea County, NM (N83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Camelia_Azalea		
Site Position:		Northing:	372,956.73 usft
From:	Lat/Long	Easting:	870,464.84 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32.0208919
		Longitude:	-103.2713773

Well	AZALEA STATE COM 26-36-28 284H		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	3.0 usft	Wellhead Elevation:	usft
Grid Convergence:	0.57 °	Latitude:	32.0208990
		Longitude:	-103.2641063
		Ground Level:	2,911.0 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	6/20/2023	6.15	59.69	47,197.69141274

Design	PWP0			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	179.41

Plan Survey Tool Program	Date	6/20/2023		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	18,226.3 PWP0 (OWB)	MWD	
			OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,400.0	8.00	341.54	1,398.7	26.4	-8.8	2.00	2.00	0.00	341.54	
5,582.4	8.00	341.54	5,540.4	578.6	-193.2	0.00	0.00	0.00	0.00	
5,982.4	0.00	0.00	5,939.1	605.0	-202.0	2.00	-2.00	0.00	180.00	
9,910.8	0.00	0.00	9,867.5	605.0	-202.0	0.00	0.00	0.00	0.00	
10,660.8	90.00	179.41	10,345.0	127.6	-197.1	12.00	12.00	23.92	179.41	
18,226.3	90.00	179.41	10,345.0	-7,437.5	-118.8	0.00	0.00	0.00	0.00	BHL (ASC 284H)



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
100.0	0.00	0.00	100.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
200.0	0.00	0.00	200.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
300.0	0.00	0.00	300.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
400.0	0.00	0.00	400.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
500.0	0.00	0.00	500.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
600.0	0.00	0.00	600.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
700.0	0.00	0.00	700.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
800.0	0.00	0.00	800.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
900.0	0.00	0.00	900.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
1,000.0	0.00	0.00	1,000.0	0.0	0.0	372,981.54	872,718.40	32.0208990	-103.2641063
Start Build 2.00									
1,100.0	2.00	341.54	1,100.0	1.7	-0.6	372,983.19	872,717.85	32.0209036	-103.2641080
1,200.0	4.00	341.54	1,199.8	6.6	-2.2	372,988.15	872,716.19	32.0209173	-103.2641132
1,300.0	6.00	341.54	1,299.5	14.9	-5.0	372,996.42	872,713.43	32.0209401	-103.2641219
1,400.0	8.00	341.54	1,398.7	26.4	-8.8	373,007.98	872,709.57	32.0209720	-103.2641339
Start 4182.4 hold at 1400.0 MD									
1,500.0	8.00	341.54	1,497.7	39.6	-13.2	373,021.18	872,705.17	32.0210084	-103.2641477
1,600.0	8.00	341.54	1,596.8	52.8	-17.6	373,034.38	872,700.76	32.0210448	-103.2641615
1,700.0	8.00	341.54	1,695.8	66.0	-22.1	373,047.58	872,696.35	32.0210812	-103.2641753
1,723.4	8.00	341.54	1,719.0	69.1	-23.1	373,050.68	872,695.32	32.0210897	-103.2641786
Rustler									
1,800.0	8.00	341.54	1,794.8	79.2	-26.5	373,060.78	872,691.94	32.0211176	-103.2641891
1,900.0	8.00	341.54	1,893.8	92.4	-30.9	373,073.98	872,687.53	32.0211540	-103.2642029
2,000.0	8.00	341.54	1,992.9	105.7	-35.3	373,087.19	872,683.13	32.0211904	-103.2642167
2,100.0	8.00	341.54	2,091.9	118.9	-39.7	373,100.39	872,678.72	32.0212268	-103.2642305
2,160.7	8.00	341.54	2,152.0	126.9	-42.4	373,108.40	872,676.04	32.0212489	-103.2642389
Salado									
2,200.0	8.00	341.54	2,190.9	132.1	-44.1	373,113.59	872,674.31	32.0212632	-103.2642443
2,300.0	8.00	341.54	2,289.9	145.3	-48.5	373,126.79	872,669.90	32.0212996	-103.2642581
2,400.0	8.00	341.54	2,389.0	158.5	-52.9	373,139.99	872,665.50	32.0213360	-103.2642719
2,500.0	8.00	341.54	2,488.0	171.7	-57.3	373,153.19	872,661.09	32.0213724	-103.2642857
2,600.0	8.00	341.54	2,587.0	184.9	-61.7	373,166.39	872,656.68	32.0214088	-103.2642995
2,700.0	8.00	341.54	2,686.1	198.1	-66.1	373,179.59	872,652.27	32.0214452	-103.2643133
2,800.0	8.00	341.54	2,785.1	211.3	-70.5	373,192.79	872,647.87	32.0214816	-103.2643271
2,900.0	8.00	341.54	2,884.1	224.5	-74.9	373,205.99	872,643.46	32.0215180	-103.2643409
2,952.4	8.00	341.54	2,936.0	231.4	-77.3	373,212.91	872,641.15	32.0215371	-103.2643481
Dewey Lake									
3,000.0	8.00	341.54	2,983.1	237.7	-79.4	373,219.19	872,639.05	32.0215544	-103.2643547
3,100.0	8.00	341.54	3,082.2	250.9	-83.8	373,232.40	872,634.64	32.0215908	-103.2643685
3,200.0	8.00	341.54	3,181.2	264.1	-88.2	373,245.60	872,630.24	32.0216272	-103.2643823
3,255.4	8.00	341.54	3,236.0	271.4	-90.6	373,252.90	872,627.80	32.0216474	-103.2643899
Tansill									
3,300.0	8.00	341.54	3,280.2	277.3	-92.6	373,258.80	872,625.83	32.0216636	-103.2643961
3,400.0	8.00	341.54	3,379.2	290.5	-97.0	373,272.00	872,621.42	32.0217000	-103.2644099
3,500.0	8.00	341.54	3,478.3	303.7	-101.4	373,285.20	872,617.01	32.0217364	-103.2644237
3,600.0	8.00	341.54	3,577.3	316.9	-105.8	373,298.40	872,612.61	32.0217728	-103.2644375
3,700.0	8.00	341.54	3,676.3	330.1	-110.2	373,311.60	872,608.20	32.0218092	-103.2644513
3,800.0	8.00	341.54	3,775.3	343.3	-114.6	373,324.80	872,603.79	32.0218456	-103.2644651
3,800.7	8.00	341.54	3,776.0	343.4	-114.6	373,324.89	872,603.76	32.0218459	-103.2644652
Capitan									
3,900.0	8.00	341.54	3,874.4	356.5	-119.0	373,338.00	872,599.38	32.0218820	-103.2644789
4,000.0	8.00	341.54	3,973.4	369.7	-123.4	373,351.20	872,594.98	32.0219184	-103.2644927
4,100.0	8.00	341.54	4,072.4	382.9	-127.8	373,364.41	872,590.57	32.0219548	-103.2645065



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
4,200.0	8.00	341.54	4,171.5	396.1	-132.2	373,377.61	872,586.16	32.0219912	-103.2645203	
4,300.0	8.00	341.54	4,270.5	409.3	-136.6	373,390.81	872,581.75	32.0220276	-103.2645341	
4,400.0	8.00	341.54	4,369.5	422.5	-141.1	373,404.01	872,577.35	32.0220640	-103.2645479	
4,500.0	8.00	341.54	4,468.5	435.7	-145.5	373,417.21	872,572.94	32.0221004	-103.2645617	
4,600.0	8.00	341.54	4,567.6	448.9	-149.9	373,430.41	872,568.53	32.0221368	-103.2645755	
4,700.0	8.00	341.54	4,666.6	462.1	-154.3	373,443.61	872,564.12	32.0221732	-103.2645893	
4,800.0	8.00	341.54	4,765.6	475.3	-158.7	373,456.81	872,559.72	32.0222096	-103.2646031	
4,900.0	8.00	341.54	4,864.6	488.5	-163.1	373,470.01	872,555.31	32.0222460	-103.2646169	
5,000.0	8.00	341.54	4,963.7	501.7	-167.5	373,483.21	872,550.90	32.0222825	-103.2646307	
5,011.4	8.00	341.54	4,975.0	503.2	-168.0	373,484.72	872,550.40	32.0222866	-103.2646322	
Lamar										
5,100.0	8.00	341.54	5,062.7	514.9	-171.9	373,496.41	872,546.49	32.0223189	-103.2646445	
5,183.1	8.00	341.54	5,145.0	525.9	-175.6	373,507.39	872,542.83	32.0223491	-103.2646559	
Bell Canyon										
5,200.0	8.00	341.54	5,161.7	528.1	-176.3	373,509.62	872,542.08	32.0223553	-103.2646583	
5,300.0	8.00	341.54	5,260.7	541.3	-180.7	373,522.82	872,537.68	32.0223917	-103.2646721	
5,400.0	8.00	341.54	5,359.8	554.5	-185.1	373,536.02	872,533.27	32.0224281	-103.2646859	
5,500.0	8.00	341.54	5,458.8	567.7	-189.5	373,549.22	872,528.86	32.0224645	-103.2646997	
5,582.4	8.00	341.54	5,540.4	578.6	-193.2	373,560.09	872,525.23	32.0224944	-103.2647110	
Start Drop -2.00										
5,600.0	7.65	341.54	5,557.8	580.8	-193.9	373,562.37	872,524.47	32.0225007	-103.2647134	
5,700.0	5.65	341.54	5,657.2	591.8	-197.6	373,573.35	872,520.81	32.0225310	-103.2647249	
5,800.0	3.65	341.54	5,756.8	599.5	-200.2	373,581.03	872,518.24	32.0225522	-103.2647329	
5,900.0	1.65	341.54	5,856.7	603.9	-201.6	373,585.41	872,516.78	32.0225643	-103.2647375	
5,982.4	0.00	0.00	5,939.1	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
Start 3928.4 hold at 5982.4 MD										
6,000.0	0.00	0.00	5,956.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,100.0	0.00	0.00	6,056.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,200.0	0.00	0.00	6,156.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,300.0	0.00	0.00	6,256.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,400.0	0.00	0.00	6,356.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,500.0	0.00	0.00	6,456.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,600.0	0.00	0.00	6,556.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,700.0	0.00	0.00	6,656.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,800.0	0.00	0.00	6,756.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
6,900.0	0.00	0.00	6,856.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,000.0	0.00	0.00	6,956.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,014.3	0.00	0.00	6,971.0	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
Brushy Canyon										
7,100.0	0.00	0.00	7,056.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,200.0	0.00	0.00	7,156.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,300.0	0.00	0.00	7,256.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,400.0	0.00	0.00	7,356.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,500.0	0.00	0.00	7,456.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,600.0	0.00	0.00	7,556.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,700.0	0.00	0.00	7,656.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,800.0	0.00	0.00	7,756.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
7,900.0	0.00	0.00	7,856.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,000.0	0.00	0.00	7,956.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,008.3	0.00	0.00	7,965.0	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
Bone Spring Lime										
8,100.0	0.00	0.00	8,056.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,200.0	0.00	0.00	8,156.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,300.0	0.00	0.00	8,256.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,400.0	0.00	0.00	8,356.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,500.0	0.00	0.00	8,456.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,600.0	0.00	0.00	8,556.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,700.0	0.00	0.00	8,656.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,800.0	0.00	0.00	8,756.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
8,900.0	0.00	0.00	8,856.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,000.0	0.00	0.00	8,956.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,100.0	0.00	0.00	9,056.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,200.0	0.00	0.00	9,156.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,300.0	0.00	0.00	9,256.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,400.0	0.00	0.00	9,356.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,500.0	0.00	0.00	9,456.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,600.0	0.00	0.00	9,556.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,620.3	0.00	0.00	9,577.0	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
First Bone Spring										
9,700.0	0.00	0.00	9,656.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,800.0	0.00	0.00	9,756.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,900.0	0.00	0.00	9,856.7	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
9,910.8	0.00	0.00	9,867.5	605.0	-202.0	373,586.54	872,516.40	32.0225674	-103.2647387	
KOP-Start DLS 12.00 TFO 179.41										
9,925.0	1.70	179.41	9,881.7	604.8	-202.0	373,586.32	872,516.40	32.0225668	-103.2647387	
9,950.0	4.70	179.41	9,906.7	603.4	-202.0	373,584.93	872,516.42	32.0225629	-103.2647387	
9,975.0	7.70	179.41	9,931.5	600.7	-202.0	373,582.23	872,516.45	32.0225555	-103.2647387	
10,000.0	10.70	179.41	9,956.2	596.7	-201.9	373,578.23	872,516.49	32.0225445	-103.2647386	
10,025.0	13.70	179.41	9,980.6	591.4	-201.9	373,572.94	872,516.54	32.0225300	-103.2647386	
10,050.0	16.70	179.41	10,004.7	584.9	-201.8	373,566.39	872,516.61	32.0225120	-103.2647386	
10,075.0	19.70	179.41	10,028.5	577.0	-201.7	373,558.58	872,516.69	32.0224905	-103.2647386	
10,100.0	22.70	179.41	10,051.8	568.0	-201.6	373,549.54	872,516.79	32.0224657	-103.2647386	
10,125.0	25.70	179.41	10,074.6	557.8	-201.5	373,539.29	872,516.89	32.0224375	-103.2647386	
10,150.0	28.70	179.41	10,096.8	546.3	-201.4	373,527.86	872,517.01	32.0224061	-103.2647386	
10,175.0	31.70	179.41	10,118.4	533.8	-201.3	373,515.29	872,517.14	32.0223715	-103.2647386	
10,200.0	34.70	179.41	10,139.3	520.1	-201.1	373,501.60	872,517.28	32.0223339	-103.2647385	
10,206.9	35.53	179.41	10,145.0	516.1	-201.1	373,497.62	872,517.32	32.0223230	-103.2647385	
Second Bone Spring										
10,225.0	37.70	179.41	10,159.5	505.3	-201.0	373,486.84	872,517.43	32.0222933	-103.2647385	
10,250.0	40.70	179.41	10,178.9	489.5	-200.8	373,471.04	872,517.60	32.0222499	-103.2647385	
10,275.0	43.70	179.41	10,197.4	472.7	-200.6	373,454.25	872,517.77	32.0222037	-103.2647385	
10,300.0	46.70	179.41	10,215.0	455.0	-200.4	373,436.51	872,517.95	32.0221550	-103.2647384	
10,325.0	49.70	179.41	10,231.7	436.3	-200.3	373,417.87	872,518.15	32.0221038	-103.2647384	
10,350.0	52.70	179.41	10,247.3	416.9	-200.1	373,398.39	872,518.35	32.0220502	-103.2647384	
10,375.0	55.70	179.41	10,262.0	396.6	-199.8	373,378.12	872,518.56	32.0219945	-103.2647384	
10,400.0	58.70	179.41	10,275.5	375.6	-199.6	373,357.11	872,518.78	32.0219367	-103.2647383	
10,425.0	61.70	179.41	10,287.9	353.9	-199.4	373,335.41	872,519.00	32.0218771	-103.2647383	
10,450.0	64.70	179.41	10,299.2	331.6	-199.2	373,313.10	872,519.23	32.0218158	-103.2647383	
10,475.0	67.70	179.41	10,309.3	308.7	-198.9	373,290.23	872,519.47	32.0217529	-103.2647382	
10,500.0	70.70	179.41	10,318.1	285.3	-198.7	373,266.86	872,519.71	32.0216887	-103.2647382	
10,525.0	73.70	179.41	10,325.8	261.5	-198.4	373,243.06	872,519.95	32.0216232	-103.2647382	
10,550.0	76.70	179.41	10,332.2	237.4	-198.2	373,218.90	872,520.20	32.0215568	-103.2647381	
10,575.0	79.70	179.41	10,337.3	212.9	-197.9	373,194.43	872,520.46	32.0214896	-103.2647381	
10,600.0	82.70	179.41	10,341.1	188.2	-197.7	373,169.73	872,520.71	32.0214217	-103.2647381	
10,625.0	85.70	179.41	10,343.6	163.3	-197.4	373,144.86	872,520.97	32.0213533	-103.2647380	
10,650.0	88.70	179.41	10,344.8	138.4	-197.2	373,119.89	872,521.23	32.0212847	-103.2647380	
10,660.8	90.00	179.41	10,345.0	127.6	-197.1	373,109.10	872,521.34	32.0212550	-103.2647380	
LP-Start 7565.5 hold at 10660.8 MD										



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,700.0	90.00	179.41	10,345.0	88.4	-196.7	373,069.90	872,521.75	32.0211472	-103.2647379	
10,800.0	90.00	179.41	10,345.0	-11.6	-195.6	372,969.90	872,522.78	32.0208724	-103.2647378	
10,900.0	90.00	179.41	10,345.0	-111.6	-194.6	372,869.91	872,523.81	32.0205975	-103.2647376	
11,000.0	90.00	179.41	10,345.0	-211.6	-193.6	372,769.91	872,524.85	32.0203226	-103.2647375	
11,100.0	90.00	179.41	10,345.0	-311.6	-192.5	372,669.92	872,525.88	32.0200478	-103.2647373	
11,200.0	90.00	179.41	10,345.0	-411.6	-191.5	372,569.92	872,526.92	32.0197729	-103.2647372	
11,300.0	90.00	179.41	10,345.0	-511.6	-190.5	372,469.93	872,527.95	32.0194980	-103.2647370	
11,400.0	90.00	179.41	10,345.0	-611.6	-189.4	372,369.93	872,528.98	32.0192232	-103.2647369	
11,500.0	90.00	179.41	10,345.0	-711.6	-188.4	372,269.94	872,530.02	32.0189483	-103.2647367	
11,600.0	90.00	179.41	10,345.0	-811.6	-187.4	372,169.95	872,531.05	32.0186735	-103.2647366	
11,700.0	90.00	179.41	10,345.0	-911.6	-186.3	372,069.95	872,532.09	32.0183986	-103.2647365	
11,800.0	90.00	179.41	10,345.0	-1,011.6	-185.3	371,969.96	872,533.12	32.0181237	-103.2647363	
11,900.0	90.00	179.41	10,345.0	-1,111.6	-184.2	371,869.96	872,534.15	32.0178489	-103.2647362	
12,000.0	90.00	179.41	10,345.0	-1,211.6	-183.2	371,769.97	872,535.19	32.0175740	-103.2647360	
12,100.0	90.00	179.41	10,345.0	-1,311.6	-182.2	371,669.97	872,536.22	32.0172991	-103.2647359	
12,200.0	90.00	179.41	10,345.0	-1,411.6	-181.1	371,569.98	872,537.26	32.0170243	-103.2647357	
12,300.0	90.00	179.41	10,345.0	-1,511.6	-180.1	371,469.98	872,538.29	32.0167494	-103.2647356	
12,400.0	90.00	179.41	10,345.0	-1,611.5	-179.1	371,369.99	872,539.32	32.0164745	-103.2647354	
12,500.0	90.00	179.41	10,345.0	-1,711.5	-178.0	371,269.99	872,540.36	32.0161997	-103.2647353	
12,600.0	90.00	179.41	10,345.0	-1,811.5	-177.0	371,170.00	872,541.39	32.0159248	-103.2647351	
12,700.0	90.00	179.41	10,345.0	-1,911.5	-176.0	371,070.00	872,542.43	32.0156499	-103.2647350	
12,800.0	90.00	179.41	10,345.0	-2,011.5	-174.9	370,970.01	872,543.46	32.0153751	-103.2647348	
12,900.0	90.00	179.41	10,345.0	-2,111.5	-173.9	370,870.01	872,544.49	32.0151002	-103.2647347	
13,000.0	90.00	179.41	10,345.0	-2,211.5	-172.9	370,770.02	872,545.53	32.0148253	-103.2647346	
13,100.0	90.00	179.41	10,345.0	-2,311.5	-171.8	370,670.03	872,546.56	32.0145505	-103.2647344	
13,200.0	90.00	179.41	10,345.0	-2,411.5	-170.8	370,570.03	872,547.60	32.0142756	-103.2647343	
13,300.0	90.00	179.41	10,345.0	-2,511.5	-169.8	370,470.04	872,548.63	32.0140007	-103.2647341	
13,400.0	90.00	179.41	10,345.0	-2,611.5	-168.7	370,370.04	872,549.67	32.0137259	-103.2647340	
13,500.0	90.00	179.41	10,345.0	-2,711.5	-167.7	370,270.05	872,550.70	32.0134510	-103.2647338	
13,600.0	90.00	179.41	10,345.0	-2,811.5	-166.7	370,170.05	872,551.73	32.0131761	-103.2647337	
13,700.0	90.00	179.41	10,345.0	-2,911.5	-165.6	370,070.06	872,552.77	32.0129013	-103.2647335	
13,800.0	90.00	179.41	10,345.0	-3,011.5	-164.6	369,970.06	872,553.80	32.0126264	-103.2647334	
13,900.0	90.00	179.41	10,345.0	-3,111.5	-163.6	369,870.07	872,554.84	32.0123516	-103.2647332	
14,000.0	90.00	179.41	10,345.0	-3,211.5	-162.5	369,770.07	872,555.87	32.0120767	-103.2647331	
14,100.0	90.00	179.41	10,345.0	-3,311.5	-161.5	369,670.08	872,556.90	32.0118018	-103.2647329	
14,200.0	90.00	179.41	10,345.0	-3,411.5	-160.5	369,570.08	872,557.94	32.0115270	-103.2647328	
14,300.0	90.00	179.41	10,345.0	-3,511.4	-159.4	369,470.09	872,558.97	32.0112521	-103.2647327	
14,400.0	90.00	179.41	10,345.0	-3,611.4	-158.4	369,370.09	872,560.01	32.0109772	-103.2647325	
14,500.0	90.00	179.41	10,345.0	-3,711.4	-157.4	369,270.10	872,561.04	32.0107024	-103.2647324	
14,600.0	90.00	179.41	10,345.0	-3,811.4	-156.3	369,170.11	872,562.07	32.0104275	-103.2647322	
14,700.0	90.00	179.41	10,345.0	-3,911.4	-155.3	369,070.11	872,563.11	32.0101526	-103.2647321	
14,800.0	90.00	179.41	10,345.0	-4,011.4	-154.3	368,970.12	872,564.14	32.0098778	-103.2647319	
14,900.0	90.00	179.41	10,345.0	-4,111.4	-153.2	368,870.12	872,565.18	32.0096029	-103.2647318	
15,000.0	90.00	179.41	10,345.0	-4,211.4	-152.2	368,770.13	872,566.21	32.0093280	-103.2647316	
15,100.0	90.00	179.41	10,345.0	-4,311.4	-151.2	368,670.13	872,567.24	32.0090532	-103.2647315	
15,200.0	90.00	179.41	10,345.0	-4,411.4	-150.1	368,570.14	872,568.28	32.0087783	-103.2647313	
15,300.0	90.00	179.41	10,345.0	-4,511.4	-149.1	368,470.14	872,569.31	32.0085034	-103.2647312	
15,400.0	90.00	179.41	10,345.0	-4,611.4	-148.1	368,370.15	872,570.35	32.0082286	-103.2647310	
15,500.0	90.00	179.41	10,345.0	-4,711.4	-147.0	368,270.15	872,571.38	32.0079537	-103.2647309	
15,600.0	90.00	179.41	10,345.0	-4,811.4	-146.0	368,170.16	872,572.41	32.0076788	-103.2647308	
15,700.0	90.00	179.41	10,345.0	-4,911.4	-145.0	368,070.16	872,573.45	32.0074040	-103.2647306	
15,800.0	90.00	179.41	10,345.0	-5,011.4	-143.9	367,970.17	872,574.48	32.0071291	-103.2647305	
15,900.0	90.00	179.41	10,345.0	-5,111.4	-142.9	367,870.18	872,575.52	32.0068542	-103.2647303	
16,000.0	90.00	179.41	10,345.0	-5,211.4	-141.9	367,770.18	872,576.55	32.0065794	-103.2647302	
16,100.0	90.00	179.41	10,345.0	-5,311.3	-140.8	367,670.19	872,577.58	32.0063045	-103.2647300	



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
16,200.0	90.00	179.41	10,345.0	-5,411.3	-139.8	367,570.19	872,578.62	32.0060296	-103.2647299	
16,300.0	90.00	179.41	10,345.0	-5,511.3	-138.7	367,470.20	872,579.65	32.0057548	-103.2647297	
16,400.0	90.00	179.41	10,345.0	-5,611.3	-137.7	367,370.20	872,580.69	32.0054799	-103.2647296	
16,500.0	90.00	179.41	10,345.0	-5,711.3	-136.7	367,270.21	872,581.72	32.0052051	-103.2647294	
16,600.0	90.00	179.41	10,345.0	-5,811.3	-135.6	367,170.21	872,582.76	32.0049302	-103.2647293	
16,700.0	90.00	179.41	10,345.0	-5,911.3	-134.6	367,070.22	872,583.79	32.0046553	-103.2647291	
16,800.0	90.00	179.41	10,345.0	-6,011.3	-133.6	366,970.22	872,584.82	32.0043805	-103.2647290	
16,900.0	90.00	179.41	10,345.0	-6,111.3	-132.5	366,870.23	872,585.86	32.0041056	-103.2647288	
17,000.0	90.00	179.41	10,345.0	-6,211.3	-131.5	366,770.23	872,586.89	32.0038307	-103.2647287	
17,100.0	90.00	179.41	10,345.0	-6,311.3	-130.5	366,670.24	872,587.93	32.0035559	-103.2647286	
17,200.0	90.00	179.41	10,345.0	-6,411.3	-129.4	366,570.24	872,588.96	32.0032810	-103.2647284	
17,300.0	90.00	179.41	10,345.0	-6,511.3	-128.4	366,470.25	872,589.99	32.0030061	-103.2647283	
17,400.0	90.00	179.41	10,345.0	-6,611.3	-127.4	366,370.26	872,591.03	32.0027313	-103.2647281	
17,500.0	90.00	179.41	10,345.0	-6,711.3	-126.3	366,270.26	872,592.06	32.0024564	-103.2647280	
17,600.0	90.00	179.41	10,345.0	-6,811.3	-125.3	366,170.27	872,593.10	32.0021815	-103.2647278	
17,700.0	90.00	179.41	10,345.0	-6,911.3	-124.3	366,070.27	872,594.13	32.0019067	-103.2647277	
17,800.0	90.00	179.41	10,345.0	-7,011.3	-123.2	365,970.28	872,595.16	32.0016318	-103.2647275	
17,900.0	90.00	179.41	10,345.0	-7,111.3	-122.2	365,870.28	872,596.20	32.0013569	-103.2647274	
18,000.0	90.00	179.41	10,345.0	-7,211.2	-121.2	365,770.29	872,597.23	32.0010821	-103.2647272	
18,100.0	90.00	179.41	10,345.0	-7,311.2	-120.1	365,670.29	872,598.27	32.0008072	-103.2647271	
18,200.0	90.00	179.41	10,345.0	-7,411.2	-119.1	365,570.30	872,599.30	32.0005323	-103.2647269	
18,226.3	90.00	179.41	10,345.0	-7,437.5	-118.8	365,543.99	872,599.57	32.0004600	-103.2647269	
TD at 18226.3										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
BHL (ASC 284H) - hit/miss target - Shape - Point	0.00	0.00	10,345.0	-7,437.5	-118.8	365,543.99	872,599.57	32.0004600	-103.2647269	
LTP (ASC 284H) - plan hits target center - Point	0.00	0.00	10,345.0	-7,387.6	-119.4	365,593.98	872,599.05	32.0005974	-103.2647270	
FTP (ASC 284H) - plan misses target center by 0.8usft at 10660.5usft MD (10345.0 TVD, 127.8 N, -197.1 E) - Point	0.00	0.00	10,345.0	127.8	-196.3	373,109.37	872,522.10	32.0212557	-103.2647355	



Planning Report - Geographic

Database:	AUS-COMPASS - EDM_15 - 32bit	Local Co-ordinate Reference:	Well AZALEA STATE COM26-36-28 284H
Company:	Ameredev Operating	TVD Reference:	KB=25' @ 2936.0usft
Project:	Lea County, NM (N83-NME)	MD Reference:	KB=25' @ 2936.0usft
Site:	Camelia_Azalea	North Reference:	Grid
Well:	AZALEA STATE COM 26-36-28 284H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,723.4	1,719.0	Rustler			
2,160.7	2,152.0	Salado			
2,952.4	2,936.0	Dewey Lake			
3,255.4	3,236.0	Tansill			
3,800.7	3,776.0	Capitan			
5,011.4	4,975.0	Lamar			
5,183.1	5,145.0	Bell Canyon			
7,014.3	6,971.0	Brushy Canyon			
8,008.3	7,965.0	Bone Spring Lime			
9,620.3	9,577.0	First Bone Spring			
10,206.9	10,145.0	Second Bone Spring			

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,000.0	1,000.0	0.0	0.0	Start Build 2.00
1,400.0	1,398.7	26.4	-8.8	Start 4182.4 hold at 1400.0 MD
5,582.4	5,540.4	578.6	-193.2	Start Drop -2.00
5,982.4	5,939.1	605.0	-202.0	Start 3928.4 hold at 5982.4 MD
9,910.8	9,867.5	605.0	-202.0	KOP-Start DLS 12.00 TFO 179.41
10,660.8	10,345.0	127.6	-197.1	LP-Start 7565.5 hold at 10660.8 MD
18,226.3	10,345.0	-7,437.5	-118.8	TD at 18226.3



H₂S Drilling Operation Plan

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:

- a. Characteristics of H₂S
- b. Physical effects and hazards
- c. Principal and operation of H₂S detectors, warning system and briefing areas
- d. Evacuation procedure, routes and first aid
- e. Proper use of safety equipment and life support systems
- f. Essential personnel meeting Medical Evaluation criteria will receive additional training on the proper use of 30 minute pressure demand air packs.

2. Briefing Area:

- a. Two perpendicular areas will be designated by signs and readily accessible.
- b. Upon location entry there will be a designated area to establish all safety compliance criteria (1.) has been met.

3. H₂S Detection and Alarm Systems:

- a. H₂S sensors/detectors shall be located on the drilling rig floor, in the base of the sub structure/cellar area, and on the mud pits in the shale shaker area. Additional H₂S detectors may be placed as deemed necessary. All detectors will be set to initiate visual alarm at 10 ppm and visual with audible at 14 ppm and all equipment will be calibrated every 30 days or as needed.
- b. An audio alarm will be installed on the derrick floor and in the top doghouse.

4. Protective Equipment for Essential Personnel:

- a. **Breathing Apparatus:**
 - i. Rescue Packs (SCBA) - 1 Unit shall be placed at each briefing area.
 - ii. Two (SCBA) Units will be stored in safety trailer on location.
 - iii. Work/Escapes packs - 1 Unit will be available on rig floor in doghouse for emergency evacuation for driller.
- b. **Auxiliary Rescue Equipment:**
 - i. Stretcher
 - ii. 2 - OSHA full body harnesses
 - iii. 100 ft. 5/8" OSHA approved rope
 - iv. 1 - 20# class ABC fire extinguisher

5. Windsock and/or Wind Streamers:

- a. Windsock at mud pit area should be high enough to be visible.
- b. Windsock on the rig floor should be high enough to be visible.

6. Communication:

- a. While working under mask scripting boards will be used for communication where applicable.
- b. Hand signals will be used when script boards are not applicable.



H₂S Drilling Operation Plan

- c. Two way radios will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at Drilling Foreman's Office.
- 7. **Drill Stem Testing:** - No Planned DST at this time.
- 8. **Mud program:**
 - a. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.
- 9. **Metallurgy:**
 - a. All drill strings, casing, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.
 - b. Drilling Contractor supervisor will be required to be familiar with the effect H₂S has on tubular goods and other mechanical equipment provided through contractor.



H₂S Contingency Plan

Emergency Procedures

In the event of a release of H₂S, the first responder(s) must:

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the “buddy system” to ensure no injuries occur during the response.
- Take precautions to avoid personal injury during this operation.
- Contact Operator and/or local officials the aid in operation. See list of phone numbers attached.
- Have received training in the:
 - Detection of H₂S and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air=1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air=1	2 ppm	N/A	1000 ppm

Contacting Authorities

Ameredev Operating LLC personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including direction to site. The following call list of essential and potential responders has been prepared for use during a release. Ameredev Operating LLC’s response must be in coordination with the State of New Mexico’s “Hazardous Materials Emergency Response Plan” (HMER)



H₂S Contingency Plan

Ameredev Operating LLC – Emergency Phone 737-300-4799			
Key Personnel:			
Name	Title	Office	Mobile
Floyd Hammond	Chief Operating officer	737-300-4724	512-783-6810
Shane McNeely	Operations Engineer	737-300-4729	432-413-8593
Dayeed Khan	Construction Manager	737-300-4733	281-928-4692

<u>Artesia</u>	
Ambulance	911
State Police	575-748-9718
City Police	575-746-5000
Sheriff's Office	575-887-7551
Fire Department	575-746-5051
Artesia General Hospital	575-748-3333
New Mexico Oil Conservation Division	575-626-0830
<u>Carlsbad</u>	
Ambulance	911
State Police	575-885-3138
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-885-3125
Carlsbad Medical Center	575-887-4100
Hobbs Hospital	575-492-5000
BLM Hobbs Field Office	575-689-5981
BLM Carlsbad Field Office	575-361-2822
New Mexico Oil Conservation Division	575-626-0830
<u>Santa Fe</u>	
Department of Homeland Security and Emergency Management (Santa Fe)	505-476-9600
New Mexico State Emergency Operations Center	505-476-9635
<u>National</u>	
National Emergency Response Center (Washington, D.C.)	800-424-8802
<u>Medical</u>	
Aerocare - R3, Box 49F; Lubbock, TX	800-627-2376
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM	505-842-4433
Lifeguard Air Emergency Services- 2505 Clark Carr Loop S.E.; Albuquerque, NM	505-243-2343

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: _____ Ameredev II, LLC _____ **OGRID:** _____ 372224 _____ **Date:** _____ 06/21/2023 _____

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Azalea 26 36 28 State Com 284H	30025-		230' FNL & 795' FEL	10	51	18
Azalea 26 36 28 State Com 061H	30025-		210' FNL & 385' FEL	679	3,238	2,992
Azalea 26 36 28 State Com 062H	30025-		230' FNL & 1686' FWL	8	40	20
Azalea 26 36 28 State Com 071H	30025-		230' FNL & 1386' FWL	49	244	86
Azalea 26 36 28 State Com 072H	30025-		250' FNL & 2111' FWL	8	38	13
Azalea 26 36 28 State Com 074H	30025-		230' FNL & 735' FEL	8	38	13

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Azalea 26 36 28 State Com 284H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025
Azalea 26 36 28 State Com 061H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025
Azalea 26 36 28 State Com 062H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025
Azalea 26 36 28 State Com 071H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025
Azalea 26 36 28 State Com 072H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025
Azalea 26 36 28 State Com 074H	30025-	12/01/2024	01/15/2025	02/15/2025	03/01/2025	03/04/2025

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Cesca Yu</i>
Printed Name: Cesca Yu
Title: Engineer
E-mail Address: cyu@ameredev.com
Date: 06/21/2023
Phone: 512-775-1417

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:
Title:
Approval Date:
Conditions of Approval:

Natural Gas Management Plan

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment is sized to allow for retention time and velocity to adequately separate oil, gas, and water at anticipated peak rates.
- All central tank battery equipment is designed to efficiently capture the remaining gas from the liquid phase.
- Valves and meters are designed to service without flow interruption or venting of gas.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

19.15.27.8 (A)

Ameredev's field operations are designed with the goal of minimizing flaring and preventing venting of natural gas. If capturing the gas is not possible then the gas is combusted/flared using properly sized flares or combustors in accordance with state air permit rules.

19.15.27.8 (B) Venting and Flaring during drilling operations

- A properly-sized flare stack will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared. Venting will only occur if there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment.

19.15.27.8 (C) Venting and Flaring during completions or recompletions operations.

- During all phases of flowback, wells will flow through a sand separator, or other appropriate flowback separation equipment, and the well stream will be directed to a central tank battery (CTB) through properly sized flowlines
- The CTB will have properly sized separation equipment for maximum anticipated flowrates
- Multiple stages of separation will be used to separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet.

19.15.27.8 (D) Venting and Flaring during production operations.

- During production, the well stream will be routed to the CTB where multiple stages of separation will separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks with a closed

loop system that will recover any residual gas from the tanks and route such gas to a sales outlet, minimizing tank emissions.

- Flares are equipped with auto-ignition systems and continuous pilot operations.
- Automatic gauging equipment is installed on all tanks.

19.15.27.8 (E) Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- Automatic gauging equipment is installed on all tanks to minimize venting
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Flares are equipped with continuous pilots and auto-ignitors along with remote monitoring of the pilot status
- Weekly AVOs and monthly LDAR inspections will be performed on all wells and facilities that produce more than 60 Mcfd.
- Gas/H₂S detectors will be installed throughout the facilities and wellheads to detect leaks and enable timely repairs.

19.15.27.8 (F) Measurement or estimation of vented and flared natural gas

- All high pressure flared gas is measured by equipment conforming to API 14.10.
- No meter bypasses are installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated through flare flow curves with the assistance of air emissions consultants, as necessary.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Ameredev will use best management practices to vent as minimally as possible during well intervention operations and downhole well maintenance
- All natural gas is routed into the gas gathering system and directed to one of Ameredev's multiple gas sales outlets.
- All venting events will be recorded and all start-up, shutdown, maintenance logs will be kept for control equipment
- All control equipment will be maintained to provide highest run-time possible
- All procedures are drafted to keep venting and flaring to the absolute minimum