

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 355594

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Permian Resources Operating, LLC 1001 17th Street, Suite 1800 Denver, CO 80202		2. OGRID Number 372165
		3. API Number 30-025-52323
4. Property Code 335051	5. Property Name BRIDGE 28 STATE	6. Well No. 508H

7. Surface Location

UL - Lot O	Section 28	Township 22S	Range 35E	Lot Idn O	Feet From 250	N/S Line S	Feet From 1748	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot B	Section 21	Township 22S	Range 35E	Lot Idn B	Feet From 100	N/S Line N	Feet From 1652	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

9. Pool Information

ROCK LAKE;BONE SPRING	52766
-----------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3519
16. Multiple N	17. Proposed Depth 20558	18. Formation 2nd Bone Spring Sand	19. Contractor	20. Spud Date 1/10/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1801	1360	0
Int1	12.25	9.625	40	5870	1550	0
Prod	7.875	5.5	20	20558	1390	9874
Prod	8.75	5.5	20	10624	650	5370

Casing/Cement Program: Additional Comments

Drilling 8.75 ?hole size for the curve and 7.875 ?hole size for the lateral for the 5.5 production casing string. DV Tool set @ 3987.

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Pipe	10000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by Stephanie Rabadue	Approved By: Paul F Kautz	
Title: Regulatory Manager	Title: Geologist	
Email Address: stephanie.rabadue@permianres.com	Approved Date: 12/15/2023	Expiration Date: 12/15/2025
Date: 12/12/2023	Phone: 432-260-4388	Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	² Pool Code 52766	³ Pool Name Rock Lake; Bone Spring
⁴ Property Code	⁵ Property Name BRIDGE STATE 28	⁶ Well Number 508H
⁷ OGRID No. 372165	⁸ Operator Name PERMIAN RESOURCES OPERATING, LLC	⁹ Elevation 3519.2'


¹⁰ Surface Location

UL or lot no. O	Section 28	Township 22S	Range 35E	Lot Idn	Feet from the 250	North/South line SOUTH	Feet from the 1748	East/West line EAST	County LEA
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. B	Section 21	Township 22S	Range 35E	Lot Idn	Feet from the 100	North/South line NORTH	Feet from the 1652	East/West line EAST	County LEA
¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

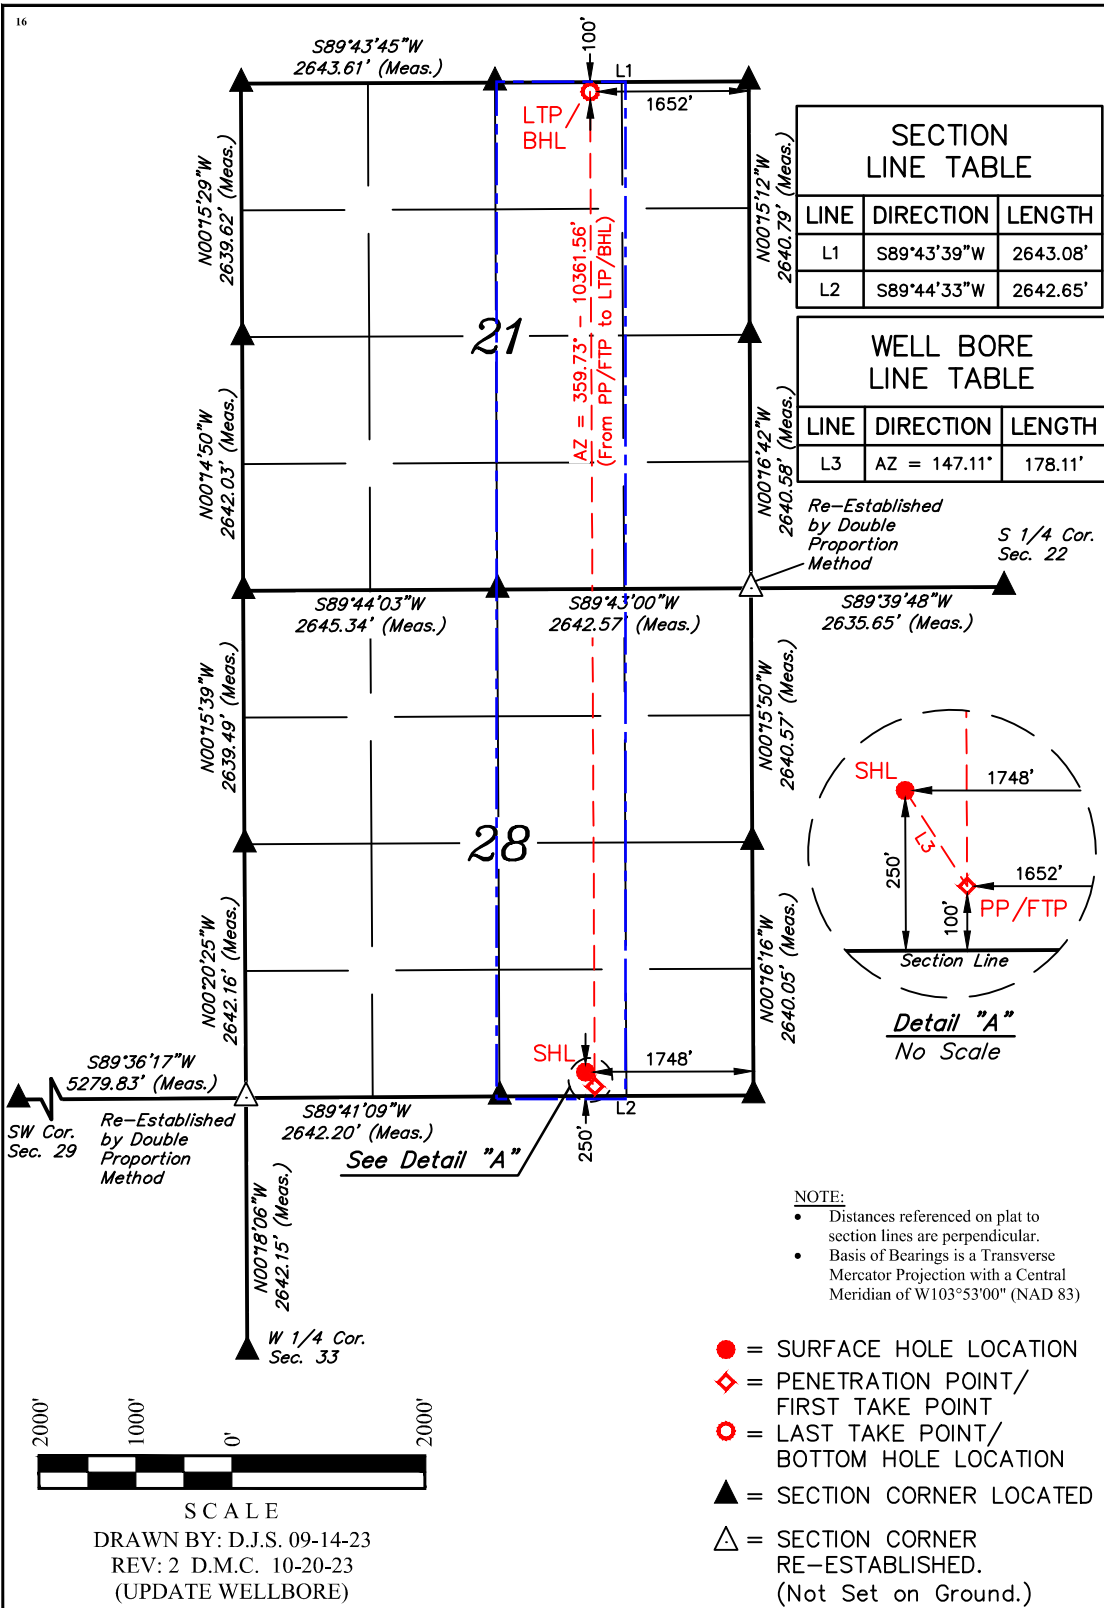

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Kanicia Schlichting Date: 12/12/23

Printed Name: Kanicia Schlichting

E-mail Address: kanicia.schlichting@permianres.com

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

October 4, 2023

Date of Survey: 12/12/23
Signature and Seal of Professional Surveyor: Paul Buchele

Certificate Number: 23782

NAD 83 (SURFACE HOLE LOCATION) LATITUDE = 32°21'22.18" (32.356160°) LONGITUDE = -103°22'10.70" (-103.369639°)	NAD 83 (PP/FTP) LATITUDE = 32°21'20.69" (32.355748°) LONGITUDE = -103°22'09.58" (-103.369328°)	NAD 83 (LTP/BHL) LATITUDE = 32°23'03.20" (32.384223°) LONGITUDE = -103°22'09.56" (-103.369323°)
NAD 27 (SURFACE HOLE LOCATION) LATITUDE = 32°21'21.73" (32.356035°) LONGITUDE = -103°22'08.99" (-103.369164°)	NAD 27 (PP/FTP) LATITUDE = 32°21'20.24" (32.355623°) LONGITUDE = -103°22'07.87" (-103.368854°)	NAD 27 (LTP/BHL) LATITUDE = 32°23'02.75" (32.384098°) LONGITUDE = -103°22'07.85" (-103.368848°)
STATE PLANE NAD 83 (N.M. EAST) N: 494642.40' E: 838916.76'	STATE PLANE NAD 83 (N.M. EAST) N: 494493.26' E: 839014.08'	STATE PLANE NAD 83 (N.M. EAST) N: 504852.86' E: 838922.28'
STATE PLANE NAD 27 (N.M. EAST) N: 494581.91' E: 797732.64'	STATE PLANE NAD 27 (N.M. EAST) N: 494432.77' E: 797829.95'	STATE PLANE NAD 27 (N.M. EAST) N: 504792.10' E: 797738.35'

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 355594

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Permian Resources Operating, LLC [372165] 1001 17th Street, Suite 1800 Denver, CO 80202	API Number: 30-025-52323
	Well: BRIDGE 28 STATE #508H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string, a CBL is required for that string of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

State of New Mexico
Energy, Minerals and Natural Resources Department

Oil Conservation Division
 1220 South St. Francis Dr
 Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: Permian Resources Operating, LLC **OGRID:** 372165 **Date:** 10/24/2023

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____.

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil	Anticipated Gas	Anticipated Prod Water
Bridge State Unit 28 508H		O-28-T22S-R35E	250' FSL – 1748' FEL	1600 BOPD	1900 MCFD	9800 BWPD
Bridge State Unit 28 509H		O-28-T22S-R35E	250' FSL – 1715' FEL	1600 BOPD	1900 MCFD	9800 BWPD

IV. Central Delivery Point Name: Bridge State 29 CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Bridge State Unit 28 508H		2/17/2024	3/3/2024	4/29/2024	5/15/2024	5/15/2024
Bridge State Unit 28 509H		2/1/2024	2/17/2024	4/29/2024	5/15/2024	5/15/2024

VI. Separation Equipment: ☒ Attach a complete description of how Operator will seize separation equipment to optimize gas capture.

VII. Operations Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 3 – Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) Power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 – Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
 - (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
 - (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, not later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file and update for each Natural Gas Management Plan until the Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
 - (c) OCD may deny or conditionally approve and APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:



Printed Name: Tinlee Via

Title: Contract Drilling Engineer

E-mail Address: tinlee.via@permianres.com

Date: 10/24/2023

Phone: 512-755-6018

OIL CONSERVATION DIVISION**(Only applicable when submitted as a standalone form)**

Approved By:

Title:

Approval Date:

Conditions of Approval:

Permian Resources Operating, LLC (372165)

Natural Gas Management Plan Descriptions**VI. Separation Equipment:**

Permian Resources Operating, LLC (Permian) utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations. Our goal is to maintain 5 minutes of retention time in the test vessel and 20 minutes in the heater treater at peak production rates. The gas produced is routed from the separator to the gas sales line.

VII. Operational Practices:*Drilling*

During Permian's drilling operations it is uncommon for venting or flaring to occur. If flaring is needed due to safety concerns, gas will be routed to a flare and volumes will be estimated.

Flowback

During completion/recompletion flowback operations, after separation flowback begins and as soon as it is technically feasible, Permian routes gas through a permanent separator and the controlled facility where the gas is either sold or flared through a high-pressure flare if needed.

Production

Per 19.15.27.8.D, Permian's facilities are designed to minimize waste. Our produced gas will only be vented or flared in an emergency or malfunction situation, except as allowed for normal operations noted in 19.15.27.8.D(2) & (4). All gas that is flared is metered. All gas that may be vented will be estimated.

Performance Standards

Permian utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations.

All of Permian's permanent storage tanks associated with production operations which are routed to a flare or control device are equipped with an automatic gauging system.

All of Permian's flare stacks, both currently installed and for future installation, are:

- 1) Appropriately sized and designed to ensure proper combustion efficiency.
- 2) Equipped with an automatic ignitor or continuous pilot.
- 3) Anchored and located at least 100 feet from the well and storage tanks.

Permian's field operations and HSE teams have implemented an AVO inspection schedule that adheres to the requirements of 19.15.27.8.E(5).

All of our operations and facilities are designed to minimize waste. We routinely employ the following methods and practices:

- Closed-loop systems
- Enclosed and properly sized tanks

Permian Resources Operating, LLC (372165)

- Vapor recovery units to maximize recovery of low-pressure gas streams and potential unauthorized emissions
- Low-emitting or electric engines whenever practical
- Combustors and flare stacks in the event of a malfunction or emergency
- Routine facility inspections to identify leaking components, functioning control devices, such as flares and combustors, and repair / replacement of malfunctioning components where applicable

Measurement or estimation

Permian measures or estimates the volumes of natural gas vented, flared and/or beneficially used for all of our drilling, completing and producing wells. We utilize accepted industry standards and methodology which can be independently verified. Annual GOR testing is completed on our wells and will be submitted as required by the OCD. None of our equipment is designed to allow diversion around metering elements except during inspection, maintenance and repair operations.

VIII. Best Management Practices:

Permian Resources utilizes the following BMPs to minimize venting during active and planned maintenance activities:

- Use a closed-loop process wherever possible during planned maintenance activities, such as blowdowns, liquid removal, and work over operations.
- Employ low-emitting or electric engines for equipment, such as compressors
- Adhere to a strict preventative maintenance program which includes routine facility inspections, identification of component malfunctions, and repairing or replacing components such as hatches, seals, valves, etc. where applicable
- Utilize vapor recovery units (VRU's) to maximize recovery of volumes of low-pressure gas streams and potential unauthorized emissions
- Route low pressure gas and emissions streams to a combustion device to prevent venting where necessary

Enhanced Natural Gas Management Plan

Operator's Plan to Manage Production in Response to Increased Line Pressure

Permian Resources Operating, LLC (Permian) anticipates that its existing wells connected to the same portion of the natural gas gathering system will continue to meet anticipated increases in line pressure caused by the new wells. Permian will actively monitor line pressure throughout the field and will make necessary adjustments to existing production separators' pressures to send gas to sales. Permian also plans to implement automated alarms on all flare meters to alert of flaring events as they occur. The alarms will send notifications to field operations and engineering staff via text message and email at every occurrence of flaring. In addition, Permian plans to implement automated alarms on all flare meters to alert of any continuous flaring event that has continued for at least 4 hours. The alarms will send notifications to field operations and engineering management. Permian personnel will promptly respond to these alarms, communicate with midstream partners, and take the appropriate action to reduce flaring caused by high line pressure from new well production.

NEW MEXICO

(SP) LEA

BRIDGE ST

BRIDGE ST 28 508H

OWB

Plan: PWP0

Standard Planning Report - Geographic

23 October, 2023

Permian Resources
Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	(SP) LEA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		BRIDGE ST			
Site Position:		Northing:	494,673.07 usft	Latitude:	32° 21' 22.666 N
From:	Map	Easting:	836,829.49 usft	Longitude:	103° 22' 35.028 W
Position Uncertainty:		0.0 usft	Slot Radius:	13-3/16 "	

Well	BRIDGE ST 28 508H					
Well Position	+N/-S	0.0 usft	Northing:	494,642.40 usft	Latitude:	32° 21' 22.178 N
	+E/-W	0.0 usft	Easting:	838,916.76 usft	Longitude:	103° 22' 10.700 W
Position Uncertainty	0.0 usft		Wellhead Elevation:	usft	Ground Level:	3,519.0 usft
Grid Convergence:	0.52 °					

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.67	60.40	48,894.88148661

Design	PWP0			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	0.03

Plan Survey Tool Program	Date	10/23/2023		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	20,557.7 PWP0 (OWB)	MWD	
			OWSG_Rev2_ MWD - Star	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,250.0	5.00	153.90	2,249.7	-9.8	4.8	2.00	2.00	0.00	153.90	
4,430.2	5.00	153.90	4,421.6	-180.4	88.4	0.00	0.00	0.00	0.00	
4,930.2	0.00	0.00	4,920.9	-200.0	98.0	1.00	-1.00	0.00	180.00	
9,874.7	0.00	0.00	9,865.5	-200.0	98.0	0.00	0.00	0.00	0.00	
10,624.7	90.00	359.49	10,343.0	277.4	93.8	12.00	12.00	-0.07	359.49	
20,558.2	90.00	359.49	10,343.0	10,210.5	5.5	0.00	0.00	0.00	0.00	BHL_Bridge ST 28

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
100.0	0.00	0.00	100.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
200.0	0.00	0.00	200.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
300.0	0.00	0.00	300.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
400.0	0.00	0.00	400.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
500.0	0.00	0.00	500.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
600.0	0.00	0.00	600.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
700.0	0.00	0.00	700.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
800.0	0.00	0.00	800.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
900.0	0.00	0.00	900.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,600.0	0.00	0.00	1,600.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,700.0	0.00	0.00	1,700.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,776.0	0.00	0.00	1,776.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
RSLR									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
1,900.0	0.00	0.00	1,900.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
2,000.0	0.00	0.00	2,000.0	0.0	0.0	494,642.40	838,916.76	32° 21' 22.178 N	103° 22' 10.700 W
Start Build 2.00									
2,100.0	2.00	153.90	2,100.0	-1.6	0.8	494,640.83	838,917.53	32° 21' 22.162 N	103° 22' 10.691 W
2,143.1	2.86	153.90	2,143.0	-3.2	1.6	494,639.19	838,918.33	32° 21' 22.146 N	103° 22' 10.682 W
SLDO									
2,200.0	4.00	153.90	2,199.8	-6.3	3.1	494,636.13	838,919.83	32° 21' 22.115 N	103° 22' 10.665 W
2,250.0	5.00	153.90	2,249.7	-9.8	4.8	494,632.61	838,921.56	32° 21' 22.080 N	103° 22' 10.645 W
Start 2180.2 hold at 2250.0 MD									
2,300.0	5.00	153.90	2,299.5	-13.7	6.7	494,628.70	838,923.47	32° 21' 22.042 N	103° 22' 10.623 W
2,400.0	5.00	153.90	2,399.1	-21.5	10.5	494,620.87	838,927.31	32° 21' 21.964 N	103° 22' 10.579 W
2,500.0	5.00	153.90	2,498.7	-29.4	14.4	494,613.05	838,931.14	32° 21' 21.886 N	103° 22' 10.536 W
2,600.0	5.00	153.90	2,598.4	-37.2	18.2	494,605.22	838,934.98	32° 21' 21.808 N	103° 22' 10.492 W
2,700.0	5.00	153.90	2,698.0	-45.0	22.1	494,597.39	838,938.81	32° 21' 21.730 N	103° 22' 10.448 W
2,800.0	5.00	153.90	2,797.6	-52.8	25.9	494,589.57	838,942.65	32° 21' 21.653 N	103° 22' 10.404 W
2,900.0	5.00	153.90	2,897.2	-60.7	29.7	494,581.74	838,946.48	32° 21' 21.575 N	103° 22' 10.360 W
3,000.0	5.00	153.90	2,996.8	-68.5	33.6	494,573.91	838,950.32	32° 21' 21.497 N	103° 22' 10.316 W
3,100.0	5.00	153.90	3,096.4	-76.3	37.4	494,566.09	838,954.15	32° 21' 21.419 N	103° 22' 10.272 W
3,200.0	5.00	153.90	3,196.1	-84.1	41.2	494,558.26	838,957.99	32° 21' 21.341 N	103° 22' 10.228 W
3,300.0	5.00	153.90	3,295.7	-92.0	45.1	494,550.43	838,961.82	32° 21' 21.264 N	103° 22' 10.185 W
3,400.0	5.00	153.90	3,395.3	-99.8	48.9	494,542.61	838,965.66	32° 21' 21.186 N	103° 22' 10.141 W
3,500.0	5.00	153.90	3,494.9	-107.6	52.7	494,534.78	838,969.49	32° 21' 21.108 N	103° 22' 10.097 W
3,600.0	5.00	153.90	3,594.5	-115.4	56.6	494,526.95	838,973.33	32° 21' 21.030 N	103° 22' 10.053 W
3,700.0	5.00	153.90	3,694.2	-123.3	60.4	494,519.13	838,977.16	32° 21' 20.953 N	103° 22' 10.009 W
3,788.2	5.00	153.90	3,782.0	-130.2	63.8	494,512.23	838,980.54	32° 21' 20.884 N	103° 22' 9.970 W
BASE OF SALT									
3,800.0	5.00	153.90	3,793.8	-131.1	64.2	494,511.30	838,981.00	32° 21' 20.875 N	103° 22' 9.965 W
3,900.0	5.00	153.90	3,893.4	-138.9	68.1	494,503.47	838,984.83	32° 21' 20.797 N	103° 22' 9.921 W
3,968.9	5.00	153.90	3,962.0	-144.3	70.7	494,498.09	838,987.47	32° 21' 20.743 N	103° 22' 9.891 W
YTES									
4,000.0	5.00	153.90	3,993.0	-146.8	71.9	494,495.65	838,988.67	32° 21' 20.719 N	103° 22' 9.877 W
4,100.0	5.00	153.90	4,092.6	-154.6	75.7	494,487.82	838,992.50	32° 21' 20.641 N	103° 22' 9.833 W
4,200.0	5.00	153.90	4,192.3	-162.4	79.6	494,479.99	838,996.34	32° 21' 20.564 N	103° 22' 9.790 W

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
4,300.0	5.00	153.90	4,291.9	-170.2	83.4	494,472.17	839,000.17	32° 21' 20.486 N	103° 22' 9.746 W	
4,400.0	5.00	153.90	4,391.5	-178.1	87.2	494,464.34	839,004.01	32° 21' 20.408 N	103° 22' 9.702 W	
4,430.2	5.00	153.90	4,421.6	-180.4	88.4	494,461.98	839,005.17	32° 21' 20.385 N	103° 22' 9.689 W	
Start Drop -1.00										
4,455.7	4.74	153.90	4,447.0	-182.4	89.4	494,460.03	839,006.12	32° 21' 20.365 N	103° 22' 9.678 W	
CPTN										
4,500.0	4.30	153.90	4,491.2	-185.5	90.9	494,456.90	839,007.66	32° 21' 20.334 N	103° 22' 9.660 W	
4,600.0	3.30	153.90	4,590.9	-191.5	93.8	494,450.94	839,010.57	32° 21' 20.275 N	103° 22' 9.627 W	
4,700.0	2.30	153.90	4,690.8	-195.8	96.0	494,446.55	839,012.72	32° 21' 20.231 N	103° 22' 9.602 W	
4,800.0	1.30	153.90	4,790.8	-198.7	97.3	494,443.73	839,014.11	32° 21' 20.203 N	103° 22' 9.586 W	
4,900.0	0.30	153.90	4,890.8	-199.9	98.0	494,442.47	839,014.72	32° 21' 20.191 N	103° 22' 9.579 W	
4,930.2	0.00	0.00	4,920.9	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
Start 4944.6 hold at 4930.2 MD										
5,000.0	0.00	0.00	4,990.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,100.0	0.00	0.00	5,090.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,200.0	0.00	0.00	5,190.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,300.0	0.00	0.00	5,290.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,400.0	0.00	0.00	5,390.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,500.0	0.00	0.00	5,490.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,600.0	0.00	0.00	5,590.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,700.0	0.00	0.00	5,690.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,800.0	0.00	0.00	5,790.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,900.0	0.00	0.00	5,890.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
5,929.2	0.00	0.00	5,920.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
CYCN										
6,000.0	0.00	0.00	5,990.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,100.0	0.00	0.00	6,090.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,200.0	0.00	0.00	6,190.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,232.2	0.00	0.00	6,223.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
MANAZANITA LIME										
6,300.0	0.00	0.00	6,290.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,400.0	0.00	0.00	6,390.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,500.0	0.00	0.00	6,490.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,600.0	0.00	0.00	6,590.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,700.0	0.00	0.00	6,690.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,800.0	0.00	0.00	6,790.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
6,900.0	0.00	0.00	6,890.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,000.0	0.00	0.00	6,990.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,100.0	0.00	0.00	7,090.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,200.0	0.00	0.00	7,190.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,271.2	0.00	0.00	7,262.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
BYCN										
7,300.0	0.00	0.00	7,290.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,400.0	0.00	0.00	7,390.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,500.0	0.00	0.00	7,490.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,600.0	0.00	0.00	7,590.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,700.0	0.00	0.00	7,690.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,800.0	0.00	0.00	7,790.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
7,900.0	0.00	0.00	7,890.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,000.0	0.00	0.00	7,990.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,100.0	0.00	0.00	8,090.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,200.0	0.00	0.00	8,190.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,300.0	0.00	0.00	8,290.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,400.0	0.00	0.00	8,390.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,500.0	0.00	0.00	8,490.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,500.2	0.00	0.00	8,491.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
SBSGL										
8,600.0	0.00	0.00	8,590.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,614.2	0.00	0.00	8,605.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
AVALON										
8,700.0	0.00	0.00	8,690.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,800.0	0.00	0.00	8,790.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
8,900.0	0.00	0.00	8,890.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,000.0	0.00	0.00	8,990.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,100.0	0.00	0.00	9,090.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,200.0	0.00	0.00	9,190.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,300.0	0.00	0.00	9,290.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,400.0	0.00	0.00	9,390.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,500.0	0.00	0.00	9,490.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,589.2	0.00	0.00	9,580.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
FBSG SAND										
9,600.0	0.00	0.00	9,590.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,700.0	0.00	0.00	9,690.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,745.2	0.00	0.00	9,736.0	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
SBSG SHALE										
9,800.0	0.00	0.00	9,790.8	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
9,874.7	0.00	0.00	9,865.5	-200.0	98.0	494,442.40	839,014.76	32° 21' 20.190 N	103° 22' 9.579 W	
Start DLS 12.00 TFO 359.49										
9,900.0	3.03	359.49	9,890.7	-199.3	98.0	494,443.07	839,014.75	32° 21' 20.197 N	103° 22' 9.579 W	
9,925.0	6.03	359.49	9,915.7	-197.4	98.0	494,445.04	839,014.74	32° 21' 20.216 N	103° 22' 9.579 W	
9,950.0	9.03	359.49	9,940.4	-194.1	97.9	494,448.32	839,014.71	32° 21' 20.249 N	103° 22' 9.579 W	
9,975.0	12.03	359.49	9,965.0	-189.5	97.9	494,452.89	839,014.67	32° 21' 20.294 N	103° 22' 9.579 W	
10,000.0	15.03	359.49	9,989.3	-183.7	97.9	494,458.73	839,014.61	32° 21' 20.352 N	103° 22' 9.579 W	
10,025.0	18.03	359.49	10,013.3	-176.6	97.8	494,465.85	839,014.55	32° 21' 20.422 N	103° 22' 9.579 W	
10,050.0	21.03	359.49	10,036.8	-168.2	97.7	494,474.20	839,014.48	32° 21' 20.505 N	103° 22' 9.579 W	
10,075.0	24.03	359.49	10,059.9	-158.6	97.6	494,483.78	839,014.39	32° 21' 20.600 N	103° 22' 9.579 W	
10,100.0	27.03	359.49	10,082.5	-147.8	97.5	494,494.55	839,014.30	32° 21' 20.706 N	103° 22' 9.579 W	
10,122.2	29.69	359.49	10,102.0	-137.3	97.4	494,505.09	839,014.20	32° 21' 20.810 N	103° 22' 9.579 W	
SBSG SAND										
10,125.0	30.03	359.49	10,104.5	-135.9	97.4	494,506.49	839,014.19	32° 21' 20.824 N	103° 22' 9.579 W	
10,150.0	33.03	359.49	10,125.8	-122.8	97.3	494,519.56	839,014.07	32° 21' 20.954 N	103° 22' 9.579 W	
10,175.0	36.03	359.49	10,146.4	-108.7	97.2	494,533.73	839,013.95	32° 21' 21.094 N	103° 22' 9.579 W	
10,200.0	39.03	359.49	10,166.2	-93.4	97.1	494,548.96	839,013.81	32° 21' 21.245 N	103° 22' 9.579 W	
10,225.0	42.03	359.49	10,185.2	-77.2	96.9	494,565.20	839,013.67	32° 21' 21.405 N	103° 22' 9.579 W	
10,250.0	45.03	359.49	10,203.3	-60.0	96.8	494,582.42	839,013.51	32° 21' 21.576 N	103° 22' 9.579 W	
10,275.0	48.03	359.49	10,220.5	-41.8	96.6	494,600.56	839,013.35	32° 21' 21.755 N	103° 22' 9.579 W	
10,300.0	51.03	359.49	10,236.7	-22.8	96.4	494,619.58	839,013.18	32° 21' 21.943 N	103° 22' 9.579 W	
10,325.0	54.03	359.49	10,251.9	-3.0	96.2	494,639.42	839,013.01	32° 21' 22.140 N	103° 22' 9.579 W	
10,350.0	57.03	359.49	10,266.1	17.6	96.1	494,660.02	839,012.83	32° 21' 22.343 N	103° 22' 9.578 W	
10,375.0	60.03	359.49	10,279.1	38.9	95.9	494,681.34	839,012.64	32° 21' 22.554 N	103° 22' 9.578 W	
10,400.0	63.03	359.49	10,291.0	60.9	95.7	494,703.32	839,012.44	32° 21' 22.772 N	103° 22' 9.578 W	
10,425.0	66.03	359.49	10,301.8	83.5	95.5	494,725.88	839,012.24	32° 21' 22.995 N	103° 22' 9.578 W	
10,450.0	69.03	359.49	10,311.3	106.6	95.3	494,748.98	839,012.04	32° 21' 23.224 N	103° 22' 9.578 W	
10,475.0	72.03	359.49	10,319.7	130.1	95.1	494,772.55	839,011.83	32° 21' 23.457 N	103° 22' 9.578 W	
10,500.0	75.03	359.49	10,326.8	154.1	94.9	494,796.52	839,011.61	32° 21' 23.694 N	103° 22' 9.578 W	
10,525.0	78.03	359.49	10,332.6	178.4	94.6	494,820.83	839,011.40	32° 21' 23.935 N	103° 22' 9.578 W	
10,550.0	81.03	359.49	10,337.1	203.0	94.4	494,845.41	839,011.18	32° 21' 24.178 N	103° 22' 9.578 W	
10,575.0	84.03	359.49	10,340.4	227.8	94.2	494,870.19	839,010.96	32° 21' 24.423 N	103° 22' 9.578 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,600.0	87.03	359.49	10,342.3	252.7	94.0	494,895.11	839,010.74	32° 21' 24.670 N	103° 22' 9.578 W	
10,624.7	90.00	359.49	10,343.0	277.4	93.8	494,919.85	839,010.52	32° 21' 24.914 N	103° 22' 9.578 W	
Start 9933.4 hold at 10624.7 MD										
10,700.0	90.00	359.49	10,343.0	352.7	93.1	494,995.10	839,009.85	32° 21' 25.659 N	103° 22' 9.578 W	
10,800.0	90.00	359.49	10,343.0	452.7	92.2	495,095.09	839,008.96	32° 21' 26.649 N	103° 22' 9.578 W	
10,900.0	90.00	359.49	10,343.0	552.7	91.3	495,195.09	839,008.07	32° 21' 27.638 N	103° 22' 9.578 W	
11,000.0	90.00	359.49	10,343.0	652.7	90.4	495,295.08	839,007.18	32° 21' 28.628 N	103° 22' 9.578 W	
11,100.0	90.00	359.49	10,343.0	752.7	89.5	495,395.08	839,006.30	32° 21' 29.617 N	103° 22' 9.577 W	
11,200.0	90.00	359.49	10,343.0	852.7	88.6	495,495.08	839,005.41	32° 21' 30.607 N	103° 22' 9.577 W	
11,300.0	90.00	359.49	10,343.0	952.7	87.8	495,595.07	839,004.52	32° 21' 31.596 N	103° 22' 9.577 W	
11,400.0	90.00	359.49	10,343.0	1,052.7	86.9	495,695.07	839,003.63	32° 21' 32.586 N	103° 22' 9.577 W	
11,500.0	90.00	359.49	10,343.0	1,152.7	86.0	495,795.06	839,002.74	32° 21' 33.575 N	103° 22' 9.577 W	
11,600.0	90.00	359.49	10,343.0	1,252.7	85.1	495,895.06	839,001.85	32° 21' 34.564 N	103° 22' 9.577 W	
11,700.0	90.00	359.49	10,343.0	1,352.7	84.2	495,995.06	839,000.97	32° 21' 35.554 N	103° 22' 9.577 W	
11,800.0	90.00	359.49	10,343.0	1,452.7	83.3	496,095.05	839,000.08	32° 21' 36.543 N	103° 22' 9.576 W	
11,900.0	90.00	359.49	10,343.0	1,552.6	82.4	496,195.05	838,999.19	32° 21' 37.533 N	103° 22' 9.576 W	
12,000.0	90.00	359.49	10,343.0	1,652.6	81.5	496,295.05	838,998.30	32° 21' 38.522 N	103° 22' 9.576 W	
12,100.0	90.00	359.49	10,343.0	1,752.6	80.7	496,395.04	838,997.41	32° 21' 39.512 N	103° 22' 9.576 W	
12,200.0	90.00	359.49	10,343.0	1,852.6	79.8	496,495.04	838,996.52	32° 21' 40.501 N	103° 22' 9.576 W	
12,300.0	90.00	359.49	10,343.0	1,952.6	78.9	496,595.03	838,995.64	32° 21' 41.491 N	103° 22' 9.576 W	
12,400.0	90.00	359.49	10,343.0	2,052.6	78.0	496,695.03	838,994.75	32° 21' 42.480 N	103° 22' 9.576 W	
12,500.0	90.00	359.49	10,343.0	2,152.6	77.1	496,795.03	838,993.86	32° 21' 43.470 N	103° 22' 9.575 W	
12,600.0	90.00	359.49	10,343.0	2,252.6	76.2	496,895.02	838,992.97	32° 21' 44.459 N	103° 22' 9.575 W	
12,700.0	90.00	359.49	10,343.0	2,352.6	75.3	496,995.02	838,992.08	32° 21' 45.449 N	103° 22' 9.575 W	
12,800.0	90.00	359.49	10,343.0	2,452.6	74.4	497,095.01	838,991.19	32° 21' 46.438 N	103° 22' 9.575 W	
12,900.0	90.00	359.49	10,343.0	2,552.6	73.5	497,195.01	838,990.31	32° 21' 47.428 N	103° 22' 9.575 W	
13,000.0	90.00	359.49	10,343.0	2,652.6	72.7	497,295.01	838,989.42	32° 21' 48.417 N	103° 22' 9.575 W	
13,100.0	90.00	359.49	10,343.0	2,752.6	71.8	497,395.00	838,988.53	32° 21' 49.407 N	103° 22' 9.575 W	
13,200.0	90.00	359.49	10,343.0	2,852.6	70.9	497,495.00	838,987.64	32° 21' 50.396 N	103° 22' 9.574 W	
13,300.0	90.00	359.49	10,343.0	2,952.6	70.0	497,594.99	838,986.75	32° 21' 51.386 N	103° 22' 9.574 W	
13,400.0	90.00	359.49	10,343.0	3,052.6	69.1	497,694.99	838,985.86	32° 21' 52.375 N	103° 22' 9.574 W	
13,500.0	90.00	359.49	10,343.0	3,152.6	68.2	497,794.99	838,984.98	32° 21' 53.365 N	103° 22' 9.574 W	
13,600.0	90.00	359.49	10,343.0	3,252.6	67.3	497,894.98	838,984.09	32° 21' 54.354 N	103° 22' 9.574 W	
13,700.0	90.00	359.49	10,343.0	3,352.6	66.4	497,994.98	838,983.20	32° 21' 55.344 N	103° 22' 9.574 W	
13,800.0	90.00	359.49	10,343.0	3,452.6	65.6	498,094.97	838,982.31	32° 21' 56.333 N	103° 22' 9.574 W	
13,900.0	90.00	359.49	10,343.0	3,552.6	64.7	498,194.97	838,981.42	32° 21' 57.323 N	103° 22' 9.573 W	
14,000.0	90.00	359.49	10,343.0	3,652.6	63.8	498,294.97	838,980.53	32° 21' 58.312 N	103° 22' 9.573 W	
14,100.0	90.00	359.49	10,343.0	3,752.6	62.9	498,394.96	838,979.65	32° 21' 59.302 N	103° 22' 9.573 W	
14,200.0	90.00	359.49	10,343.0	3,852.6	62.0	498,494.96	838,978.76	32° 22' 0.291 N	103° 22' 9.573 W	
14,300.0	90.00	359.49	10,343.0	3,952.6	61.1	498,594.95	838,977.87	32° 22' 1.281 N	103° 22' 9.573 W	
14,400.0	90.00	359.49	10,343.0	4,052.5	60.2	498,694.95	838,976.98	32° 22' 2.270 N	103° 22' 9.573 W	
14,500.0	90.00	359.49	10,343.0	4,152.5	59.3	498,794.95	838,976.09	32° 22' 3.260 N	103° 22' 9.573 W	
14,600.0	90.00	359.49	10,343.0	4,252.5	58.4	498,894.94	838,975.21	32° 22' 4.249 N	103° 22' 9.572 W	
14,700.0	90.00	359.49	10,343.0	4,352.5	57.6	498,994.94	838,974.32	32° 22' 5.238 N	103° 22' 9.572 W	
14,800.0	90.00	359.49	10,343.0	4,452.5	56.7	499,094.93	838,973.43	32° 22' 6.228 N	103° 22' 9.572 W	
14,900.0	90.00	359.49	10,343.0	4,552.5	55.8	499,194.93	838,972.54	32° 22' 7.217 N	103° 22' 9.572 W	
15,000.0	90.00	359.49	10,343.0	4,652.5	54.9	499,294.93	838,971.65	32° 22' 8.207 N	103° 22' 9.572 W	
15,100.0	90.00	359.49	10,343.0	4,752.5	54.0	499,394.92	838,970.76	32° 22' 9.196 N	103° 22' 9.572 W	
15,200.0	90.00	359.49	10,343.0	4,852.5	53.1	499,494.92	838,969.88	32° 22' 10.186 N	103° 22' 9.572 W	
15,300.0	90.00	359.49	10,343.0	4,952.5	52.2	499,594.91	838,968.99	32° 22' 11.175 N	103° 22' 9.571 W	
15,400.0	90.00	359.49	10,343.0	5,052.5	51.3	499,694.91	838,968.10	32° 22' 12.165 N	103° 22' 9.571 W	
15,500.0	90.00	359.49	10,343.0	5,152.5	50.5	499,794.91	838,967.21	32° 22' 13.154 N	103° 22' 9.571 W	
15,600.0	90.00	359.49	10,343.0	5,252.5	49.6	499,894.90	838,966.32	32° 22' 14.144 N	103° 22' 9.571 W	
15,700.0	90.00	359.49	10,343.0	5,352.5	48.7	499,994.90	838,965.43	32° 22' 15.133 N	103° 22' 9.571 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
15,800.0	90.00	359.49	10,343.0	5,452.5	47.8	500,094.90	838,964.55	32° 22' 16.123 N	103° 22' 9.571 W	
15,900.0	90.00	359.49	10,343.0	5,552.5	46.9	500,194.89	838,963.66	32° 22' 17.112 N	103° 22' 9.570 W	
16,000.0	90.00	359.49	10,343.0	5,652.5	46.0	500,294.89	838,962.77	32° 22' 18.102 N	103° 22' 9.570 W	
16,100.0	90.00	359.49	10,343.0	5,752.5	45.1	500,394.88	838,961.88	32° 22' 19.091 N	103° 22' 9.570 W	
16,200.0	90.00	359.49	10,343.0	5,852.5	44.2	500,494.88	838,960.99	32° 22' 20.081 N	103° 22' 9.570 W	
16,300.0	90.00	359.49	10,343.0	5,952.5	43.3	500,594.88	838,960.10	32° 22' 21.070 N	103° 22' 9.570 W	
16,400.0	90.00	359.49	10,343.0	6,052.5	42.5	500,694.87	838,959.22	32° 22' 22.060 N	103° 22' 9.570 W	
16,500.0	90.00	359.49	10,343.0	6,152.5	41.6	500,794.87	838,958.33	32° 22' 23.049 N	103° 22' 9.570 W	
16,600.0	90.00	359.49	10,343.0	6,252.5	40.7	500,894.86	838,957.44	32° 22' 24.039 N	103° 22' 9.569 W	
16,700.0	90.00	359.49	10,343.0	6,352.5	39.8	500,994.86	838,956.55	32° 22' 25.028 N	103° 22' 9.569 W	
16,800.0	90.00	359.49	10,343.0	6,452.5	38.9	501,094.86	838,955.66	32° 22' 26.018 N	103° 22' 9.569 W	
16,900.0	90.00	359.49	10,343.0	6,552.5	38.0	501,194.85	838,954.77	32° 22' 27.007 N	103° 22' 9.569 W	
17,000.0	90.00	359.49	10,343.0	6,652.4	37.1	501,294.85	838,953.89	32° 22' 27.997 N	103° 22' 9.569 W	
17,100.0	90.00	359.49	10,343.0	6,752.4	36.2	501,394.84	838,953.00	32° 22' 28.986 N	103° 22' 9.569 W	
17,200.0	90.00	359.49	10,343.0	6,852.4	35.4	501,494.84	838,952.11	32° 22' 29.976 N	103° 22' 9.569 W	
17,300.0	90.00	359.49	10,343.0	6,952.4	34.5	501,594.84	838,951.22	32° 22' 30.965 N	103° 22' 9.568 W	
17,400.0	90.00	359.49	10,343.0	7,052.4	33.6	501,694.83	838,950.33	32° 22' 31.955 N	103° 22' 9.568 W	
17,500.0	90.00	359.49	10,343.0	7,152.4	32.7	501,794.83	838,949.44	32° 22' 32.944 N	103° 22' 9.568 W	
17,600.0	90.00	359.49	10,343.0	7,252.4	31.8	501,894.82	838,948.56	32° 22' 33.933 N	103° 22' 9.568 W	
17,700.0	90.00	359.49	10,343.0	7,352.4	30.9	501,994.82	838,947.67	32° 22' 34.923 N	103° 22' 9.568 W	
17,800.0	90.00	359.49	10,343.0	7,452.4	30.0	502,094.82	838,946.78	32° 22' 35.912 N	103° 22' 9.568 W	
17,900.0	90.00	359.49	10,343.0	7,552.4	29.1	502,194.81	838,945.89	32° 22' 36.902 N	103° 22' 9.568 W	
18,000.0	90.00	359.49	10,343.0	7,652.4	28.2	502,294.81	838,945.00	32° 22' 37.891 N	103° 22' 9.567 W	
18,100.0	90.00	359.49	10,343.0	7,752.4	27.4	502,394.80	838,944.11	32° 22' 38.881 N	103° 22' 9.567 W	
18,200.0	90.00	359.49	10,343.0	7,852.4	26.5	502,494.80	838,943.23	32° 22' 39.870 N	103° 22' 9.567 W	
18,300.0	90.00	359.49	10,343.0	7,952.4	25.6	502,594.80	838,942.34	32° 22' 40.860 N	103° 22' 9.567 W	
18,400.0	90.00	359.49	10,343.0	8,052.4	24.7	502,694.79	838,941.45	32° 22' 41.849 N	103° 22' 9.567 W	
18,500.0	90.00	359.49	10,343.0	8,152.4	23.8	502,794.79	838,940.56	32° 22' 42.839 N	103° 22' 9.567 W	
18,600.0	90.00	359.49	10,343.0	8,252.4	22.9	502,894.78	838,939.67	32° 22' 43.828 N	103° 22' 9.567 W	
18,700.0	90.00	359.49	10,343.0	8,352.4	22.0	502,994.78	838,938.78	32° 22' 44.818 N	103° 22' 9.566 W	
18,800.0	90.00	359.49	10,343.0	8,452.4	21.1	503,094.78	838,937.90	32° 22' 45.807 N	103° 22' 9.566 W	
18,900.0	90.00	359.49	10,343.0	8,552.4	20.2	503,194.77	838,937.01	32° 22' 46.797 N	103° 22' 9.566 W	
19,000.0	90.00	359.49	10,343.0	8,652.4	19.4	503,294.77	838,936.12	32° 22' 47.786 N	103° 22' 9.566 W	
19,100.0	90.00	359.49	10,343.0	8,752.4	18.5	503,394.77	838,935.23	32° 22' 48.776 N	103° 22' 9.566 W	
19,200.0	90.00	359.49	10,343.0	8,852.4	17.6	503,494.76	838,934.34	32° 22' 49.765 N	103° 22' 9.566 W	
19,300.0	90.00	359.49	10,343.0	8,952.4	16.7	503,594.76	838,933.45	32° 22' 50.755 N	103° 22' 9.565 W	
19,400.0	90.00	359.49	10,343.0	9,052.4	15.8	503,694.75	838,932.57	32° 22' 51.744 N	103° 22' 9.565 W	
19,500.0	90.00	359.49	10,343.0	9,152.3	14.9	503,794.75	838,931.68	32° 22' 52.734 N	103° 22' 9.565 W	
19,600.0	90.00	359.49	10,343.0	9,252.3	14.0	503,894.75	838,930.79	32° 22' 53.723 N	103° 22' 9.565 W	
19,700.0	90.00	359.49	10,343.0	9,352.3	13.1	503,994.74	838,929.90	32° 22' 54.713 N	103° 22' 9.565 W	
19,800.0	90.00	359.49	10,343.0	9,452.3	12.3	504,094.74	838,929.01	32° 22' 55.702 N	103° 22' 9.565 W	
19,900.0	90.00	359.49	10,343.0	9,552.3	11.4	504,194.73	838,928.13	32° 22' 56.692 N	103° 22' 9.565 W	
20,000.0	90.00	359.49	10,343.0	9,652.3	10.5	504,294.73	838,927.24	32° 22' 57.681 N	103° 22' 9.564 W	
20,100.0	90.00	359.49	10,343.0	9,752.3	9.6	504,394.73	838,926.35	32° 22' 58.671 N	103° 22' 9.564 W	
20,200.0	90.00	359.49	10,343.0	9,852.3	8.7	504,494.72	838,925.46	32° 22' 59.660 N	103° 22' 9.564 W	
20,300.0	90.00	359.49	10,343.0	9,952.3	7.8	504,594.72	838,924.57	32° 23' 0.650 N	103° 22' 9.564 W	
20,400.0	90.00	359.49	10,343.0	10,052.3	6.9	504,694.71	838,923.68	32° 23' 1.639 N	103° 22' 9.564 W	
20,500.0	90.00	359.49	10,343.0	10,152.3	6.0	504,794.71	838,922.80	32° 23' 2.628 N	103° 22' 9.564 W	
20,558.2	90.00	359.49	10,343.0	10,210.5	5.5	504,852.86	838,922.28	32° 23' 3.204 N	103° 22' 9.564 W	
TD at 20558.2										

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well BRIDGE ST 28 508H
Company:	NEW MEXICO	TVD Reference:	KB=26' @ 3545.0usft (tbd)
Project:	(SP) LEA	MD Reference:	KB=26' @ 3545.0usft (tbd)
Site:	BRIDGE ST	North Reference:	Grid
Well:	BRIDGE ST 28 508H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
FTP_Bridge ST 28 50	0.00	0.00	10,343.0	-149.1	97.3	494,493.26	839,014.08	32° 21' 20.693 N	103° 22' 9.581 W
- plan misses target center by 162.9usft at 10275.0usft MD (10220.5 TVD, -41.8 N, 96.6 E)									
- Point									
BHL Bridge ST 28 50	0.00	0.00	10,343.0	10,210.5	5.5	504,852.86	838,922.28	32° 23' 3.204 N	103° 22' 9.564 W
- plan hits target center									
- Point									

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,776.0	1,776.0	RSLR			
	2,143.1	2,143.0	SLDO			
	3,788.2	3,782.0	BASE OF SALT			
	3,968.9	3,962.0	YTES			
	4,455.7	4,447.0	CPTN			
	5,929.2	5,920.0	CYCN			
	6,232.2	6,223.0	MANAZANITA LIME			
	7,271.2	7,262.0	BYCN			
	8,500.2	8,491.0	SBSGL			
	8,614.2	8,605.0	AVALON			
	9,589.2	9,580.0	FBSG SAND			
	9,745.2	9,736.0	SBSG SHALE			
	10,122.2	10,102.0	SBSG SAND			

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,000.0	2,000.0	0.0	0.0	Start Build 2.00
2,250.0	2,249.7	-9.8	4.8	Start 2180.2 hold at 2250.0 MD
4,430.2	4,421.6	-180.4	88.4	Start Drop -1.00
4,930.2	4,920.9	-200.0	98.0	Start 4944.6 hold at 4930.2 MD
9,874.7	9,865.5	-200.0	98.0	Start DLS 12.00 TFO 359.49
10,624.7	10,343.0	277.4	93.8	Start 9933.4 hold at 10624.7 MD
20,558.2	10,343.0	10,210.5	5.5	TD at 20558.2

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018