

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. NMNM0629320Z

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator EARTHSTONE OPERATING LLC

3a. Address 300 N MARIENFIELD STREET SUITE 1000, MID3b. Phone No. (include area code) (432) 695-4222

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 30/T26S/R35E/NMP

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No. LOS VAQUEROS FED/513H

9. API Well No. 3002550003

10. Field and Pool or Exploratory Area WC-025 G-09 S263619C/WOLFCAMP

11. Country or Parish, State LEA/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☒ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

API: 30-025-50003
WELL NAME CHANGE
FROM: LOS VAQUEROS FED 513H
TO; LOS VAQUEROS FED 523H
SURFACE HOLE LOCATION
FROM: B-30-26S-35E; 210' FNL, 2558' FEL
TO: B-30-26S-35E; 210' FNL, 2614' FEL;
FIRST TAKE POINT
FROM: B-30-26S-35E; 100' FNL, 1526' FEL
TO: B-30-26S-35E; 100' FNL, 2210' FEL;
STATE LINE CROSSING - LOT 4-31-26S-35E; 0' FSL, 2210' FEL;
LTP & BHL CHANGES HAVE BEEN MADE
Continued on page 3 additional information

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) JENNIFER ELROD / Ph: (940) 452-6214

Senior Regulatory Analyst

Title

(Electronic Submission)

Signature

Date 01/16/2024

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved

Petroleum Engineer

Title

01/29/2024

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office CARLSBAD

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

FROM: LOT 4-31-26S-32E; LEA COUNTY, NM
TO: SECT. 25, BLOCK C24, PUBLIC LANDS SURVEY A-701; LOVING COUNTY, TX;
DRILLING PLAN & CASING DESIGN CHANGES ATTACHED

Location of Well

0. SHL: NWNE / 210 FNL / 2558 FEL / TWSP: 26S / RANGE: 35E / SECTION: 30 / LAT: 32.0209786 / LONG: -103.4061943 (TVD: 0 feet, MD: 0 feet)
PPP: NWNE / 100 FNL / 1914 FEL / TWSP: 26S / RANGE: 35E / SECTION: 30 / LAT: 32.0212762 / LONG: -103.404117 (TVD: 12876 feet, MD: 12950 feet)
BHL: LOT 4 / 10 FSL / 1537 FEL / TWSP: 26S / RANGE: 35E / SECTION: 31 / LAT: 32.000318 / LONG: -103.4028662 (TVD: 13133 feet, MD: 20682 feet)

CONFIDENTIAL

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (505) 334-6170

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
Well Number, SHL, FTP, State
line crossing, LTP, BHL

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-025-50003	2 Pool Code 96776	3 Pool Name JABALINA; WOLFCAMP, SOUTHWEST
4 Property Code 331213	5 Property Name LOS VAQUEROS FED	6 Well Number 523H
7 OGRID No. 331165	8 Operator Name EARTHSTONE OPERATING LLC	9 Elevation 3183'

10 Surface Location



UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	30	26-S	35-E		210'	NORTH	2614'	EAST	LEA

11 State Line Crossing If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	31	26-S	35-E		0	SOUTH	2210'	EAST	LEA

12 Dedicated Acres 235	13 Joint or Infill Y	14 Consolidation Code	15 Order No.
---------------------------	-------------------------	-----------------------	--------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.
***BHL & LTP WILL BE IN TEXAS**

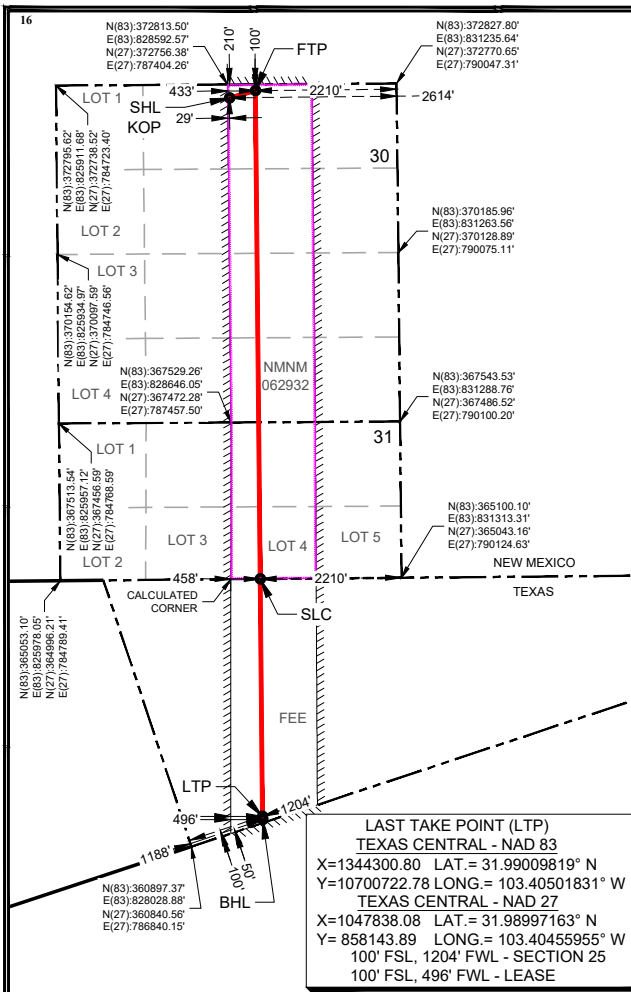	16 SURFACE HOLE LOCATION (SHL) KICK OFF POINT (KOP) NEW MEXICO EAST - NAD 83 X=828623.63 LAT.= 32.02097932° N Y=372603.43 LONG.= 103.40637493° W NEW MEXICO EAST - NAD 27 X=787435.30 LAT.= 32.02085297° N Y=372546.31 LONG.= 103.40591467° W 210' FNL, 2614' FEL - SECTION 30 210' FNL, 29' FWL - LEASE	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.  12/15/2023 Signature Date JENNIFER ELROD Printed Name jennifer.elrod@permianres.com E-mail Address
	18 FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=829026.70 LAT.= 32.02127880° N Y=372715.85 LONG.= 103.40507139° W NEW MEXICO EAST - NAD 27 X=787838.38 LAT.= 32.02115244° N Y=372658.72 LONG.= 103.40461116° W 100' FNL, 2210' FEL - SECTION 30 100' FNL, 433' FWL - LEASE	
	19 STATE LINE CROSSING (SLC) NEW MEXICO EAST - NAD 83 X=829103.39 LAT.= 32.00029001° N Y=365080.44 LONG.= 103.40503555° W NEW MEXICO EAST - NAD 27 X=787914.73 LAT.= 32.00016354° N Y=365023.52 LONG.= 103.40457652° W 0' FSL, 2210' FEL - SECTION 31 0' FSL, 458' FWL - LEASE	
	20 LAST TAKE POINT (LTP) TEXAS CENTRAL - NAD 83 X=1344300.80 LAT.= 31.99009819° N Y=10700722.78 LONG.= 103.40501831° W TEXAS CENTRAL - NAD 27 X=1047838.08 LAT.= 31.98997163° N Y=858143.89 LONG.= 103.40455955° W 100' FSL, 1204' FWL - SECTION 25 100' FSL, 496' FWL - LEASE	
	21 BOTTOM HOLE LOCATION (BHL) TEXAS CENTRAL - NAD 83 X=1344299.37 LAT.= 31.98994783° N Y=10700668.10 LONG.= 103.40501806° W TEXAS CENTRAL - NAD 27 X=1047836.65 LAT.= 31.98982127° N Y=858089.21 LONG.= 103.40455930° W 50' FSL, 1188' FWL - SECTION 25 50' FSL, 496' FWL - LEASE	22 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  12/14/2023 Date of Survey Signature and Seal of Professional Surveyor Certificate Number 25490

Well Name: LOS VAQUEROS FED	Well Location: T26S / R35E / SEC 30 / NWNE /	County or Parish/State:
Well Number: 523H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM062932	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002550003	Well Status: Approved Application for Permit to Drill	Operator: EARTHSTONE OPERATING LLC

Notice of Intent

Sundry ID: 2769698

Type of Submission: Notice of Intent

Date Sundry Submitted: 01/12/2024

Date proposed operation will begin: 01/25/2024

Type of Action: APD Change

Time Sundry Submitted: 04:33

Procedure Description: API: 30-025-50003 WELL NAME CHANGE FROM: LOS VAQUEROS FED 513H TO: LOS VAQUEROS FED 523H SURFACE HOLE LOCATION FROM: B-30-26S-35E; 210' FNL, 2558' FEL TO: B-30-26S-35E; 210' FNL, 2614' FEL; FIRST TAKE POINT FROM: B-30-26S-35E; 100' FNL, 1526' FEL TO: B-30-26S-35E; 100' FNL, 2210' FEL; STATE LINE CROSSING - LOT 4-31-26S-35E; 0' FSL, 2210' FEL; LTP & BHL CHANGES HAVE BEEN MADE FROM: LOT 4-31-26S-32E; LEA COUNTY, NM TO: SECT. 25, BLOCK C24, PUBLIC LANDS SURVEY A-701; LOVING COUNTY, TX; DRILLING PLAN & CASING DESIGN CHANGES ATTACHED

NOI Attachments

Procedure Description

Los_Vaqueros_523H_APD_change_sundry_attachments_20240112163316.pdf

Well Name: LOS VAQUEROS FED	Well Location: T26S / R35E / SEC 30 / NWNE /	County or Parish/State:
Well Number: 523H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM062932	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002550003	Well Status: Approved Application for Permit to Drill	Operator: EARTHSTONE OPERATING LLC

Conditions of Approval

Additional

Los_Vaqueros_Fed_523H_COA_20240124140040.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JENNIFER ELROD

Signed on: JAN 16, 2024 08:44 AM

Name: EARTHSTONE OPERATING LLC

Title: Senior Regulatory Analyst

Street Address: 300 N MARIENFIELD STREET SUITE 1000

City: MIDLANDState: TX

Phone: (940) 452-6214

Email address: JENNIFER.ELROD@PERMIANRES.COM

Field

Representative Name:

Street Address:

City:State:Zip:

Phone:

Email address:

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Earthstone
LEASE NO.:	NMNM629320
LOCATION:	Section 30, T.26 S, R.35 E., NMPM
COUNTY:	Lea County, New Mexico
WELL NAME & NO.:	Los Vaqueros Fed 523H
SURFACE HOLE FOOTAGE:	210'/N & 2614'/E
BOTTOM HOLE FOOTAGE:	0'/S & 2210'E

Previously known as **Los Vaqueros Fed 513H**. Changes approved through engineering via **Sundry 2769698** on 1-24-2024. Any previous COAs not addressed within the updated COAs still apply.

COA

H₂S	☐ Yes	☒ No		
Potash / WIPP	☒ None	☐ Secretary	☐ R-111-P	☐ WIPP
Cave / Karst	☒ Low	☐ Medium	☐ High	☐ Critical
Wellhead	☐ Conventional	☒ Multibowl	☐ Both	☐ Diverter
Cementing	☐ Primary Squeeze	☐ Cont. Squeeze	☐ EchoMeter	☐ DV Tool
Special Req	☐ Break Testing	☐ Water Disposal	☐ COM	☐ Unit
Variance	☒ Flex Hose	☐ Casing Clearance	☐ Pilot Hole	☐ Capitan Reef
Variance	☐ Four-String	☒ Offline Cementing	☐ Fluid-Filled	☐ Open Annulus
☐ Batch APD / Sundry				

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area must meet all requirements from **43 CFR 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **9-5/8** inch surface casing shall be set at approximately **1130** feet (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type of temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

D. SPECIAL REQUIREMENT (S)**Offline Cementing**

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Email **or** call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a

larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.

- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the valve on casing head below test plug open. The operator also has the option of utilizing an independent tester to test without a plug (i.e., against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000-psi chart for a 5M BOP/BOPE and on a 15000-psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-hour chart is used, tester shall make a notation that it is run with a two-hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS 1/24/2024

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (505) 334-6170

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☒ AMENDED REPORT
Well Number, SHL, FTP, State
line crossing, LTP, BHL

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-025-50003	2 Pool Code 96776	3 Pool Name JABALINA; WOLFCAMP, SOUTHWEST
4 Property Code 331213	5 Property Name LOS VAQUEROS FED	6 Well Number 523H
7 OGRID No. 331165	8 Operator Name EARTHSTONE OPERATING LLC	9 Elevation 3183'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	30	26-S	35-E		210'	NORTH	2614'	EAST	LEA

¹¹ State Line Crossing If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	31	26-S	35-E		0	SOUTH	2210'	EAST	LEA

12 Dedicated Acres	13 Joint or Infill	14 Consolidation Code	15 Order No.
235	Y		

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

***BHL & LTP WILL BE IN TEXAS**

	SURFACE HOLE LOCATION (SHL) KICK OFF POINT (KOP) NEW MEXICO EAST - NAD 83 X=828623.63 LAT.= 32.02097932° N Y=372603.43 LONG.= 103.40637493° W NEW MEXICO EAST - NAD 27 X=787435.30 LAT.= 32.02085297° N Y=372546.31 LONG.= 103.40591467° W 210' FNL, 2614' FEL - SECTION 30 210' FNL, 29' FWL - LEASE	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature Date 12/15/2023 JENNIFER ELROD Printed Name jennifer.elrod@permianres.com E-mail Address	
	FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=829026.70 LAT.= 32.02127880° N Y=372715.85 LONG.= 103.40507139° W NEW MEXICO EAST - NAD 27 X=787838.38 LAT.= 32.02115244° N Y=372658.72 LONG.= 103.40461116° W 100' FNL, 2210' FEL - SECTION 30 100' FNL, 433' FWL - LEASE		18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey 12/14/2023 Signature and Seal of Professional Surveyor Certificate Number
	STATE LINE CROSSING (SLC) NEW MEXICO EAST - NAD 83 X=829103.39 LAT.= 32.00029001° N Y=365080.44 LONG.= 103.40503555° W NEW MEXICO EAST - NAD 27 X=787914.73 LAT.= 32.00016354° N Y=365023.52 LONG.= 103.40457652° W 0' FSL, 2210' FEL - SECTION 31 0' FSL, 458' FWL - LEASE		
	LAST TAKE POINT (LTP) TEXAS CENTRAL - NAD 83 X=1344300.80 LAT.= 31.99009819° N Y=10700722.78 LONG.= 103.40501831° W TEXAS CENTRAL - NAD 27 X=1047838.08 LAT.= 31.98997163° N Y=858143.89 LONG.= 103.40455955° W 100' FSL, 1204' FWL - SECTION 25 100' FSL, 496' FWL - LEASE		
BOTTOM HOLE LOCATION (BHL) TEXAS CENTRAL - NAD 83 X=1344299.37 LAT.= 31.98994783° N Y=10700668.10 LONG.= 103.40501806° W TEXAS CENTRAL - NAD 27 X=1047836.65 LAT.= 31.98982127° N Y=858089.21 LONG.= 103.40455930° W 50' FSL, 1188' FWL - SECTION 25 50' FSL, 496' FWL - LEASE			

EARTHSTONE OPERATING, LLC

SHEET NO. 1 OF 1


NATURE OF WORK PAD SITE EXHIBIT DATE 11-29-23 SRID NO. _____

PROJECT- LOS VAQUEROS WELL PAD 3 PLAT JOB OR AFE _____

SEC. 30 BLK OR RANGE 35E TWP 26S MERIDIAN NEW MEXICO PRINCIPAL MERIDIAN CO. LEA STATE NEW MEXICO

REMARKS TOTAL AREA= 5.240 ACRES (228,256 SQUARE FEET) RE: ☐ AS-BUILT ☒ STAKING _____

PROP. ROW. WIDTH _____ TEMP. WORK ROW WIDTH _____

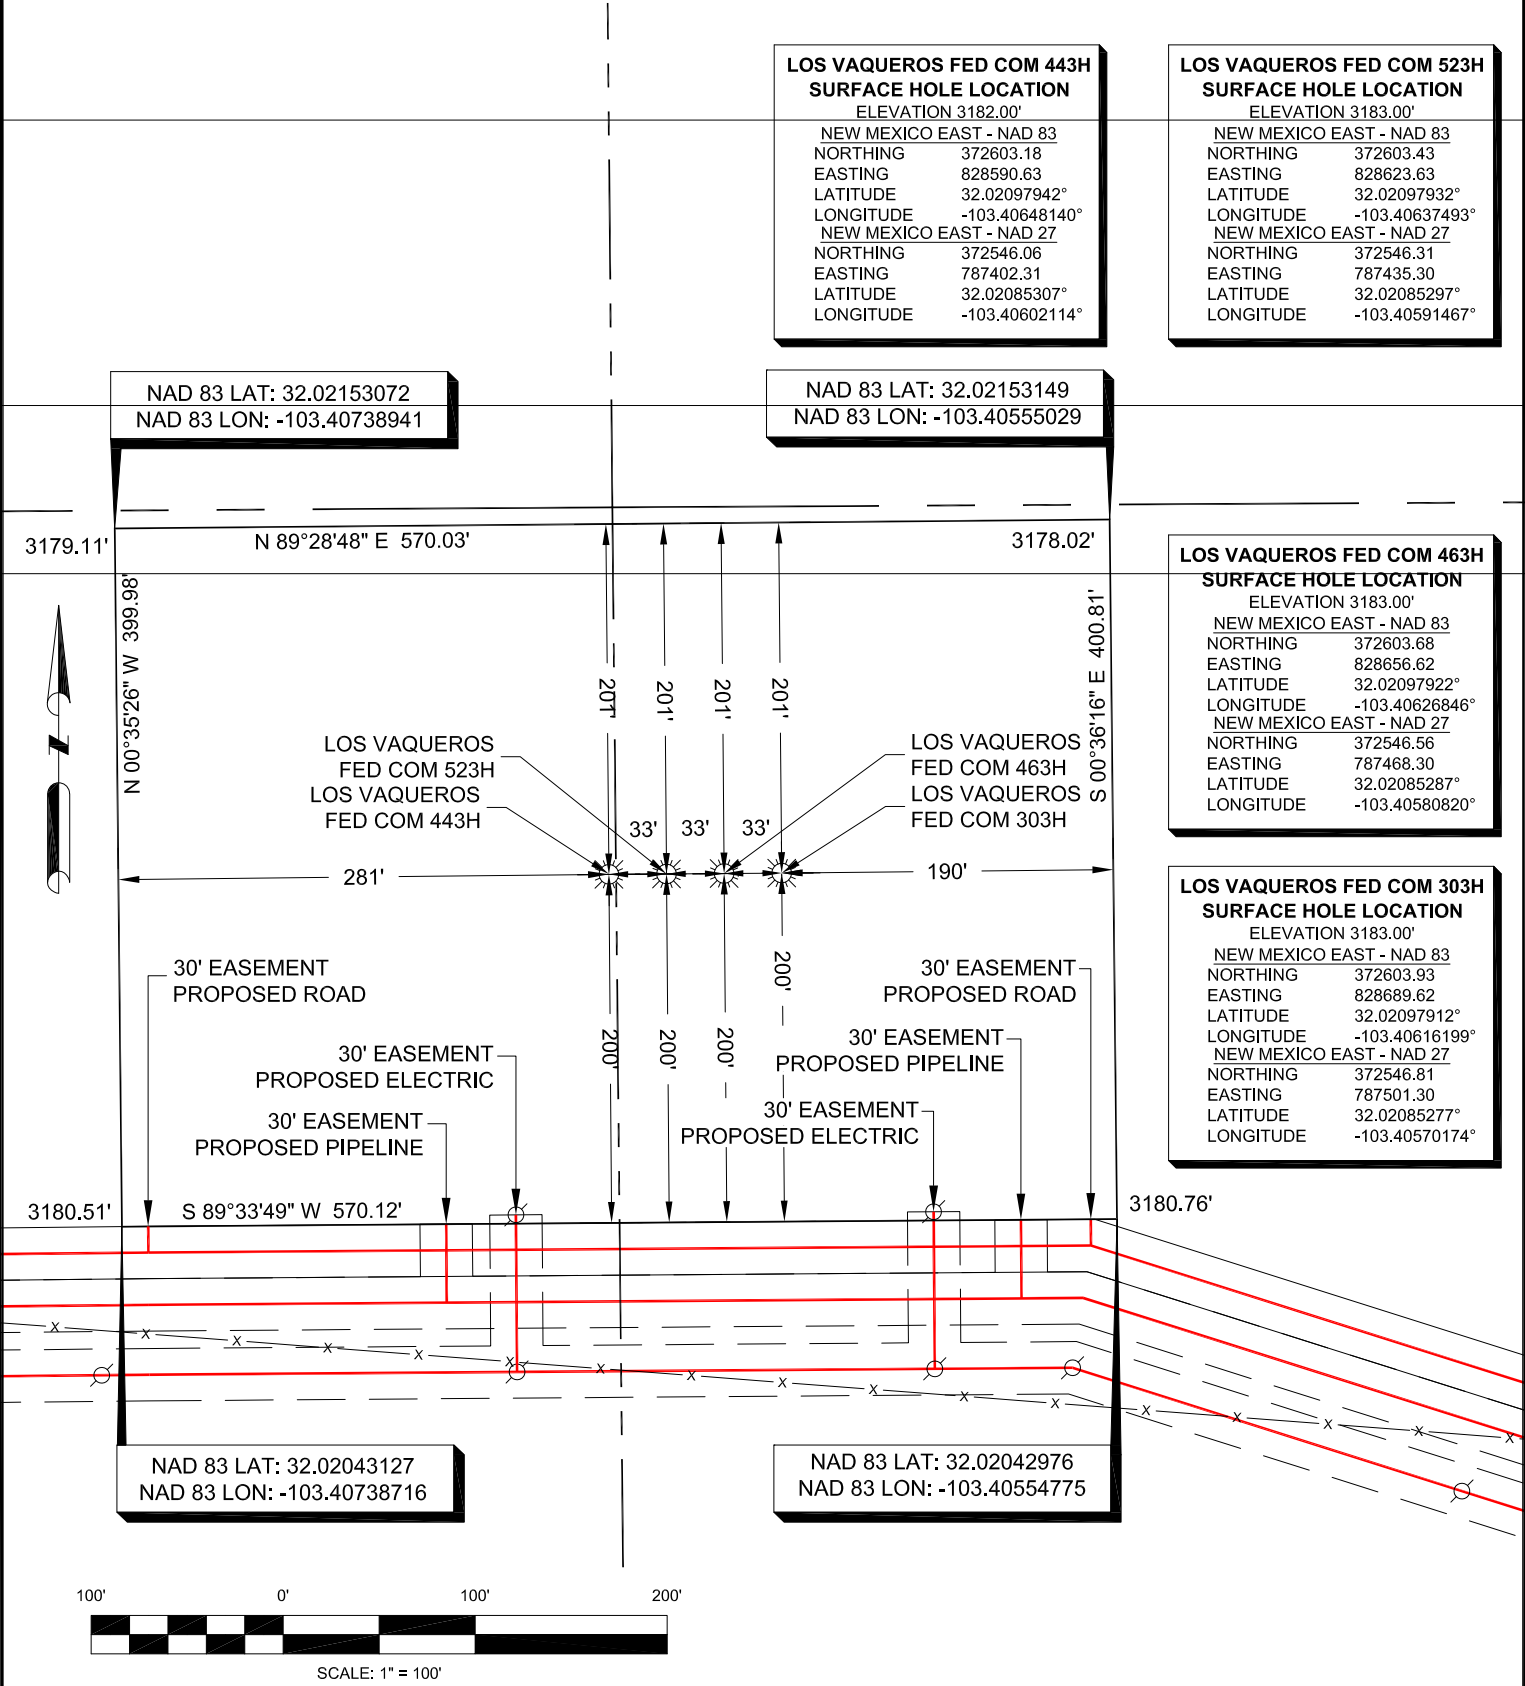

- NOTES:
1. BEARINGS, DISTANCES, AREA AND COORDINATES SHOWN HEREON ARE CORRELATED TO THE NEW MEXICO STATE PLANE COORDINATE SYSTEM OF 1983, EAST ZONE, AS DETERMINED BY GPS OPUS OBSERVATIONS. ALL BEARINGS AND DISTANCES SHOWN ARE GRID.
 2. LATITUDE & LONGITUDE ARE NAD 83 DECIMAL GEOGRAPHIC.
 3. THIS SURVEY WAS PERFORMED WITHOUT THE BENEFIT OF A TITLE REPORT AND THE REVIEW OF THE ABSTRACT OF TITLE. THERE MAY BE EASEMENTS AND/OR COVENANTS AFFECTING THIS PROPERTY NOT SHOWN HEREON. LOCATION OF ALL IMPROVEMENTS WAS BEYOND COMMISSIONED SCOPE OF THIS PROJECT AND HAS BEEN SPECIFICALLY OMITTED. VESTING DOCUMENTS NOT FURNISHED FOR THIS SURVEY.



DATE: 11-29-23 DATE SURVEYED 10-05-23 DRAFT AVP

JOB NO. 20060 FIELD BOOK V. JR01, P. 14 REV. 1

FILE 20060 LOS VAQUEROS WELL PAD 3 PLAT



TRANSGLOBAL
SERVICES LLC

TBPELS FIRM# 10194245
201 West Wall Street, Suite 325
Midland, TX 79701
(817) 529-1180 ~ Fax (817) 529-1181

I, CHARLES JURICA, A NEW MEXICO PROFESSIONAL LAND SURVEYOR, DO HEREBY CERTIFY THAT I CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.


CHARLES JURICA NEW MEXICO PS #25490

12/13/2023
DATE

Permian Resources - Los Vaqueros Fed Com 523H

1. Geologic Formations

Formation	Lithology	Elevation	TVD	Target
Rustler	Sandstone	2173	1040	No
Top of Salt	Salt	1713	1500	No
Lamar	Anhydrite/Shale	-2121	5334	No
Capitan	Limestone	NP	NP	No
Cherry Canyon	Sandstone	-2165	5378	No
Brushy Canyon	Sandstone	NP	NP	No
Bone Spring Lime	Limestone	-6061	9274	No
1st Bone Spring Sand	Sandstone/Limestone/Shale	-7387	10600	No
2nd Bone Spring Sand	Sandstone/Limestone/Shale	-7849	11062	No
3rd Bone Spring Sand	Sandstone/Limestone/Shale	-8929	12142	No
Wolfcamp AXY	Sandstone/Limestone/Shale	-9341	12554	No
Wolfcamp B	Sandstone/Limestone/Shale	-9763	12976	Yes

2. Blowout Prevention

BOP installed and tested before drilling	Size?	Min. Required WP	Type	x	Tested to:
8.75	13-5/8"	5M	Annular	x	5000 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		
6.75	13-5/8"	10M	Annular	x	50% testing pressure
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		

Equipment: BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. All BOPE connections shall be flanged, welded or clamped. All choke lines shall be straight unless targeted with running tees or tee blocks are used, and choke lines shall be anchored to prevent whip and reduce vibrations. All valves in the choke line & the choke manifold shall be full opening as to not cause restrictions and to allow for straight fluid paths to minimize potential erosion. All gauges utilized in the well control system shall be of a type designed for drilling fluid service. A top drive inside BOP valve will be utilized at all times. Subs equipped with full opening valves sized to fit the drill pipe and collars will be available on the rig floor in the open position. The key to operate said valve equipped subs will be on the rig floor at all times. The accumulator system will have sufficient capacity to open the HCR and close all three sets of rams plus the annular preventer while retaining at least 300 psi above precharge on the closing manifold (accumulator system shall be capable of doing so without using the closing unit pumps). The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity, and the fluid level will be maintained at the manufacturer's recommended level. Prior to connecting the closing unit to the BOP stack, an accumulator precharge pressure test shall be performed to ensure the precharge pressure is within 100 psi of the desired precharge pressure (only nitrogen gas will be used to precharge). Two independent power sources will be made available at all times to power the closing unit pumps so that the pumps can automatically start when the closing valve manifold pressure has decreased to the preset level. Closing unit pumps will be sized to allow opening of HCR and closing of annular preventer on 5" drill pipe achieving at least 200 psi above precharge pressure with the accumulator system isolated from service in less than two minutes. A valve shall be installed in the closing line as close to the annular preventer as possible to act as a locking device; the valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative. Remote controls capable of opening and closing all preventers & the HCR shall be readily accessible to the driller; master controls with the same capability will be operable at the accumulator. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing & isolation of the 133/8 x 95/8 annulus without breaking the connection between the BOP & wellhead to install an additional casing head. A wear bushing will be installed & inspected frequently to guard against internal wear to wellhead. VBRs (variablebore rams) will be run in upper rambody of BOP stack to provide redundancy to annular preventer while RIH w/ production casing;

Requesting Variance? YES

Variance request: Flex hose and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30 day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 3500 psi. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator and a multi-bowl system will be used, please see attachment in section 8 for multi-bowl procedure. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM 'witnessed BOP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible.

Choke Diagram Attachemnt: 5 M Choe Manifold
BOP Diagram Attachment: BOP Schematic

3. Casing

String	Hole Size	Casing Size	Top	Bottom	Top TVD	Bottom TVD	Length	Grade	Weight	Connection	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	12.25	9.625	0	1130	0	1130	1130	J55	40	BTC	4.60	4.72	Dry	4.92	Dry	4.34
Intermediate	8.75	7.625	0	12000	0	12000	12000	P110HS	29.7	MOFXL	2.75	2.01	Dry	1.84	Dry	3.08
Production	6.75	5.5	0	11500	0	13072	11500	P110RY	20	GEOCONN	1.21	1.54	Dry	2.06	Dry	2.06
Production	6.75	5.5	11500	24341	13072	13072	12841	P110RY	20	Bushmaster SL	1.21	1.54	Dry	2.06	Dry	2.06
BLM Min Safety Factor											1.125	1		1.6		1.6

Non API casing spec sheets and casing design assumptions attached.

4. Cement

String	Lead/Tail	Top MD	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surface	Lead	0	900	310	1.88	12.9	570	100%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Surface	Tail	900	1130	90	1.34	14.8	110	50%	Class C	Accelerator
Intermediate	Lead	0	9600	780	1.88	12.9	1450	50%	Class C	EconoCem-HLC + 5% Salt + 5% Kol-Seal
Intermediate	Tail	9600	12000	280	1.34	14.8	370	50%	Class C	Retarder
Production	Lead	11500	12620	90	2.41	11.5	210	40%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
Production	Tail	12620	24341	720	1.73	12.5	1230	25%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

Permian Resources requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Cherry Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If cement is not visually confirmed to circulate to surface, the final cement top after the second stage job will be verified by Echo-meter. If necessary, a top out consisting of 1,500 sack of Class C cement + 3% Salt + Bentonite Gel (2.30 yld, 12.9 ppg) will be executed as a contingency. If cement is still unable to circulate to surface, another Echo-meter run will be performed for cement top verification.

Permian Resources will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

Permian Resources will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Permian Resources requests to pump an Optional Lead if well conditions dictate in an attempt to bring cement inside the surface casing. If cement reaches the desired height, the BLM will be notified and the second stage bradenhead squeeze and subsequent TOC verification will be negated.

Permian Resources requests the option to conduct the bradenhead squeeze and TOC verification offline as per standard approval from BLM when unplanned remediation is needed and batch drilling is approved. In the event the bradenhead is conducted, we will ensure the first stage cement job is cemented properly and the well is static with floats holding and no pressure on the csg annulus as with all other casing strings where batch drilling operations occur before moving off the rig. The TA cap will also be installed per Cactus procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

5. Circulating Medium

Mud System Type: Closed

Will an air or gas system be used: No

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Cuttings Volume: 8540 Cu Ft

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight	Max Weight
0	1130	Spud Mud	8.6	9.5
1130	12000	Water Based Mud	10	10
12000	11500	OBM	9	13.5
11500	24341	OBM	9	13.5

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD (Gamma Ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, GAMMA RAY LOG,

Coring operation description for the well:

N/A

7. Pressure


Anticipated Bottom Hole Pressure	9180	psi
Anticipated Surface Pressure	6301	psi
Anticipated Bottom Hole Temperature	183	°F
Anticipated Abnormal pressure, temp, or geo hazards	No	

8. Waste Management


Waste Type:	Drilling
Waste content description:	Fresh water based drilling fluid
Amount of waste:	1500 bbls
Waste disposal frequency:	Weekly (after drilling all surfaces)
Safe containment description:	Steel tanks with plastic-lined containment berms
Waste disposal type:	Haul to commercial facility
Disposal location ownership:	Commercial
Waste Type:	Grey Water & Human Waste
Waste content description:	Grey Water/Human Waste
Amount of waste:	5000 gallons
Waste disposal frequency:	Weekly
Safe containment description:	Approved waste storage tanks with containment
Waste disposal type:	Haul to commercial facility
Disposal location ownership:	Commercial
Waste Type:	Garbage
Waste content description:	General trash/garbage
Amount of waste:	5000 lbs
Waste disposal frequency:	Weekly
Safe containment description:	Enclosed trash trailer
Waste disposal type:	Haul to commercial facility
Disposal location ownership:	Commercial
Waste Type:	Drilling
Waste content description:	Drill Cuttings
Amount of waste:	8540 Cu Ft
Waste disposal frequency:	Per well
Safe containment description:	Steel tanks
Waste disposal type:	Haul to commercial facility
Disposal location ownership:	Commercial
Waste Type:	Drilling
Waste content description:	Brine water based drilling fluid
Amount of waste:	1500 bbls
Waste disposal frequency:	Monthly
Safe containment description:	Steel tanks with plastic-lined containment berms
Waste disposal type:	Haul to commercial facility
Disposal location ownership:	Commercial

9. Other Information


Well Plan and AC Report: attached
Batching Drilling Procedure: attached
WBD: attached
Flex Hose Specs: attached
Offline Cementing Procedure Attached:

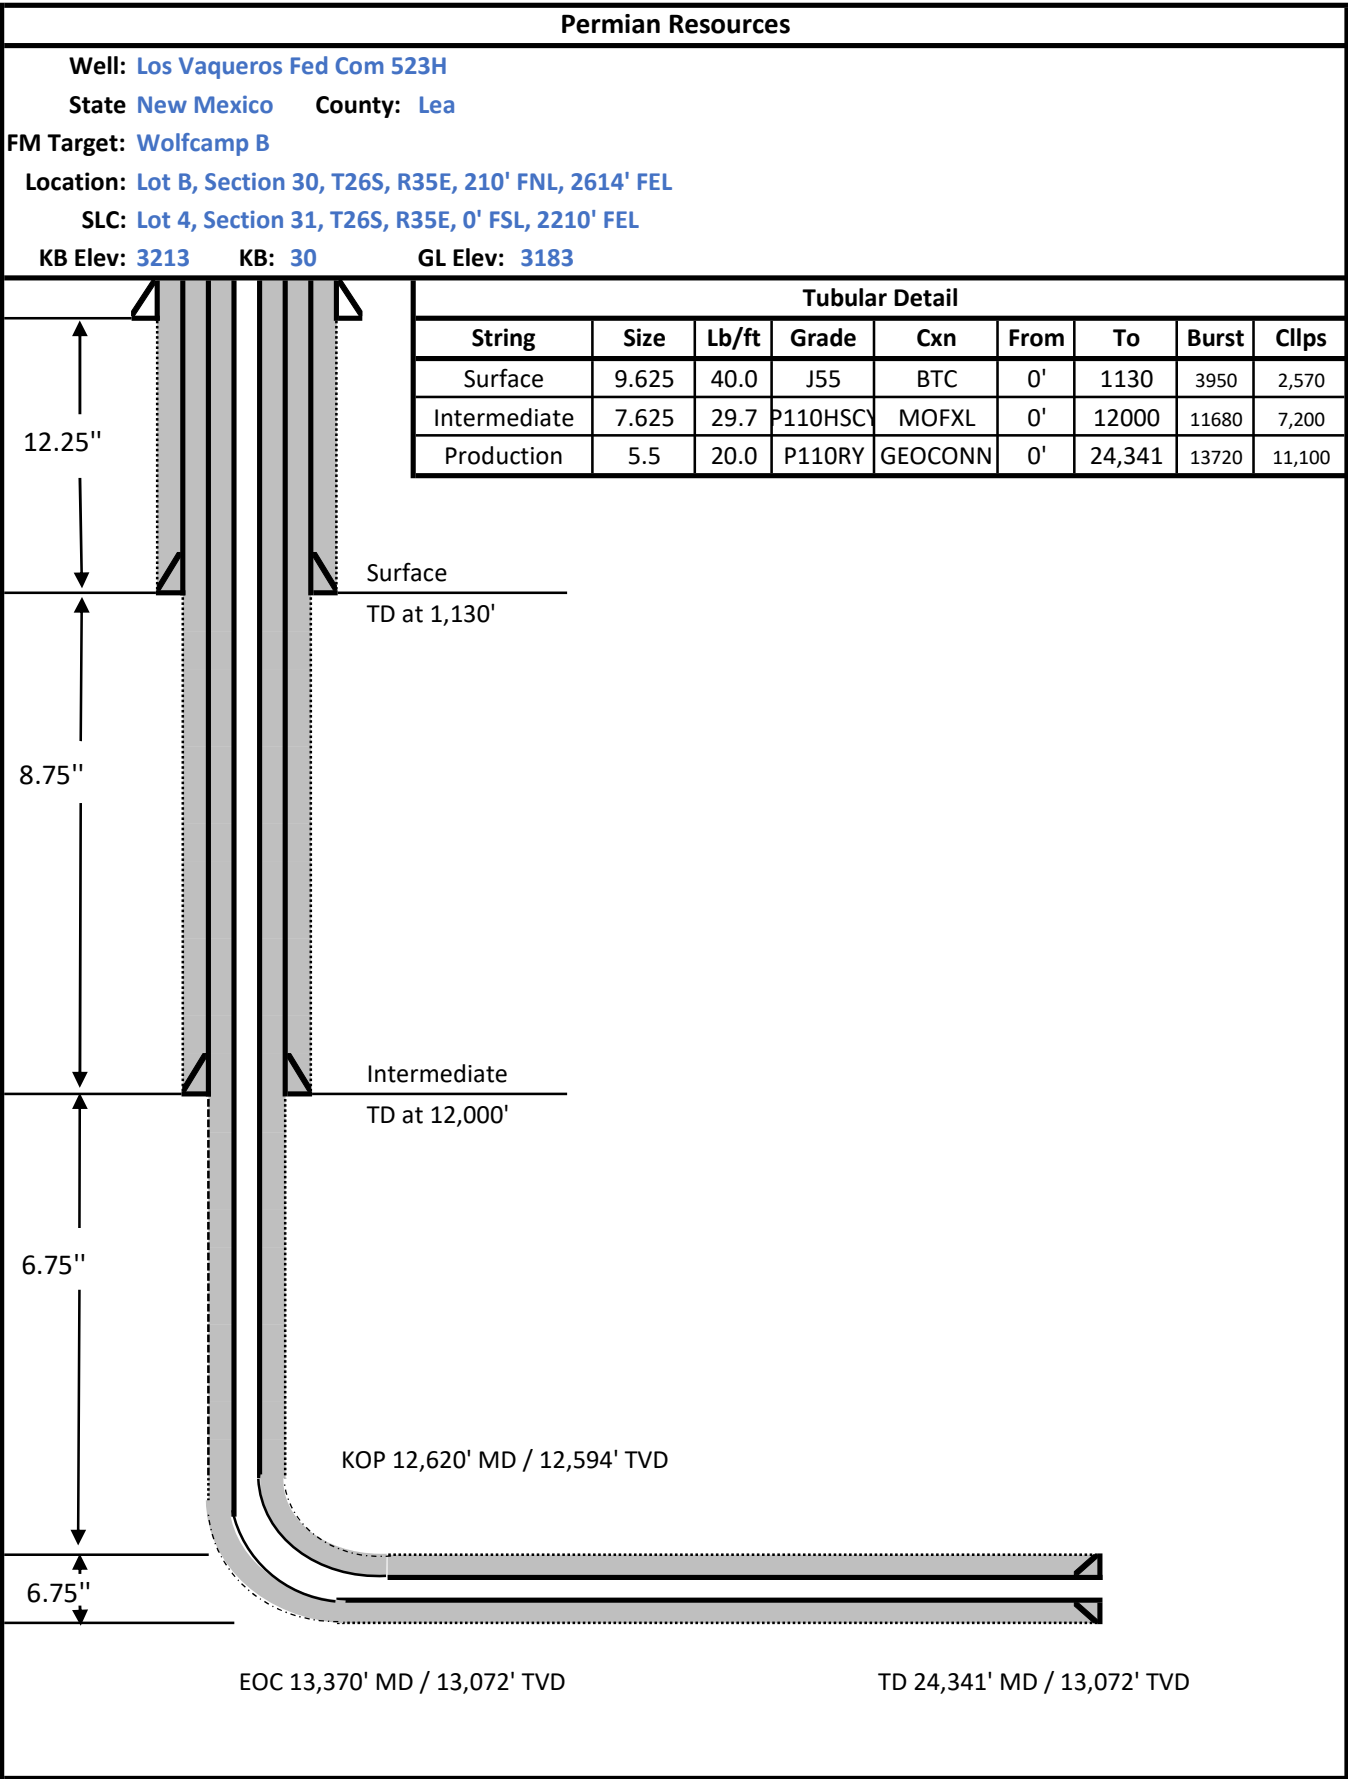

10,000 BOP Schematic

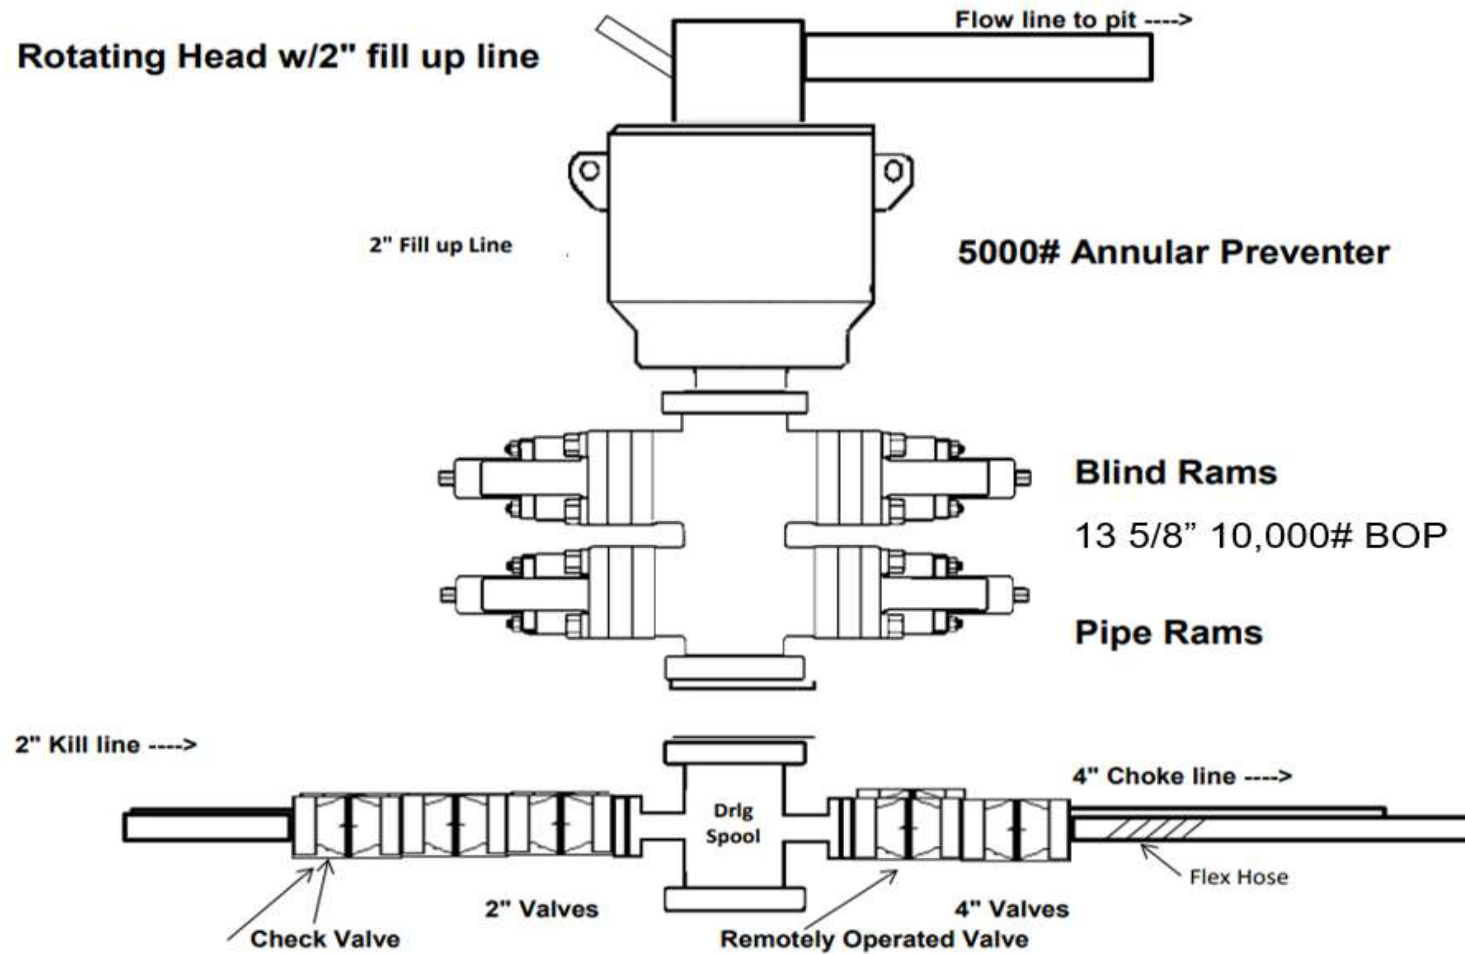

10M Choke Manifold Equipment (With MGS + Closed Loop)

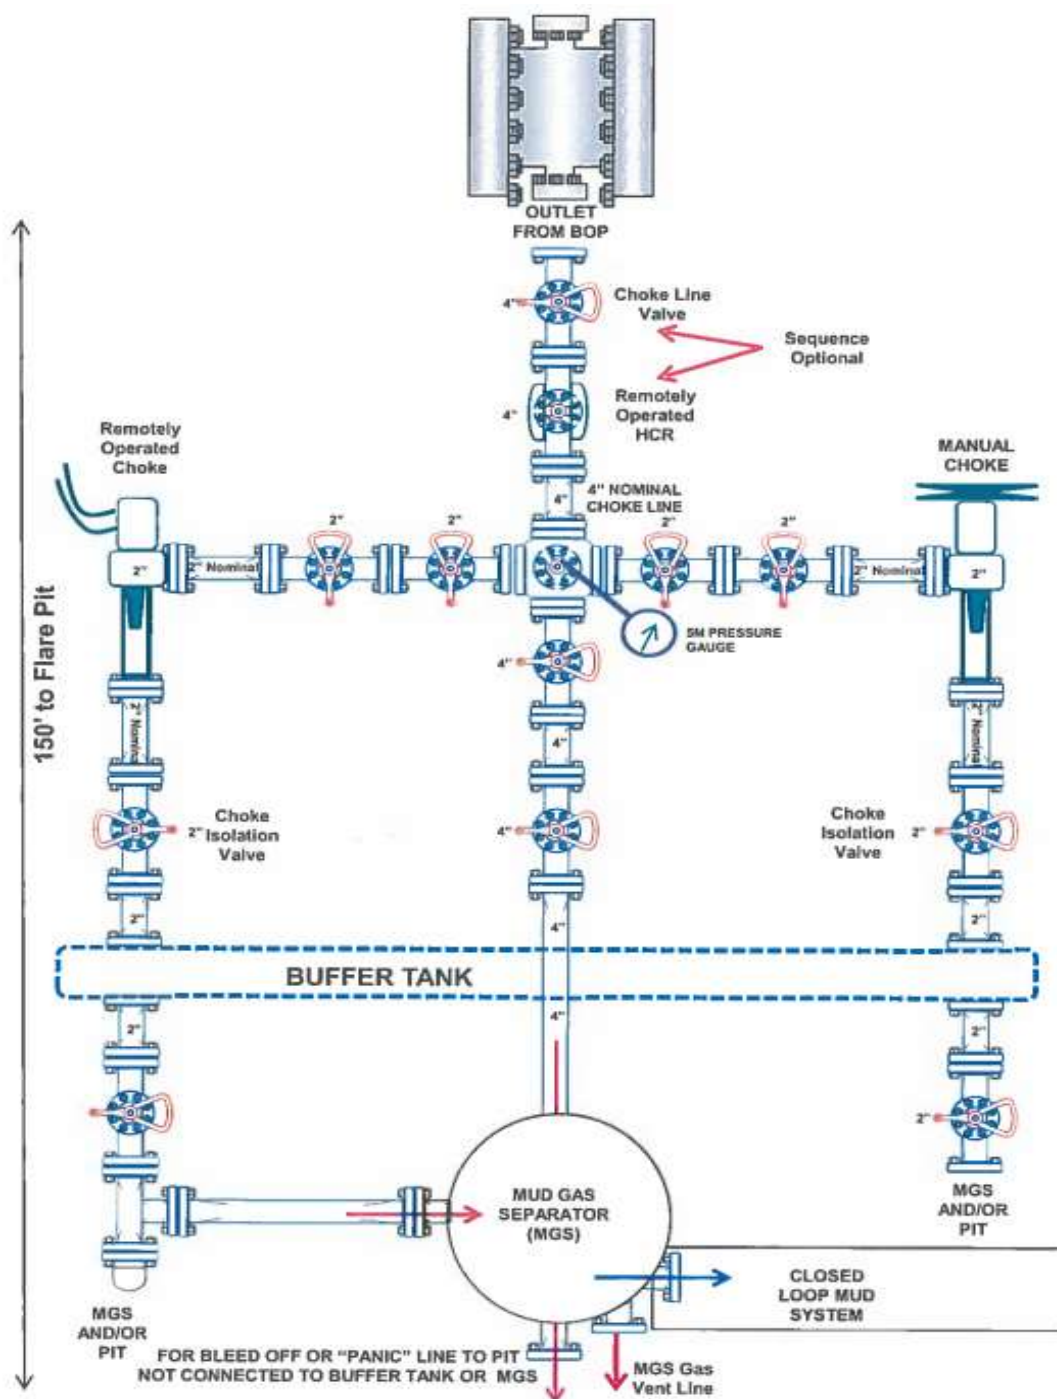



ContiTech

CONTITECH RUBBER
Industrial Kft.

No:QC-DB- 210/ 2014


Page: 9 / 113

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°:	504
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°:	4500408659
CONTITECH RUBBER order N°: 538236		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 67255		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,77 m			
W.P. 68,9 MPa	10000 psi	T.P. 103,4 MPa	15000 psi	Duration:	60 min.
Pressure test with water at ambient temperature See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 20 MPa					
COUPLINGS Type		Serial N°		Quality	Heat N°
3" coupling with		9251 9254		AISI 4130	A0579N
4 1/16" 10K API b.w. Flange-end				AISI 4130	035608
Not Designed For Well Testing				API Spec 16 C	
				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated, inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:	Inspector		Quality Control		
20. March 2014.			ContiTech Rubber Industrial Kft. Quality Control Dept.  		

ContiTech Rubber Industrial Kft. : Budapest : 10. 11 8728 Sziget | H 4701 P.O.Box 322 Sziget, Hungary
 Phone: +36 82 584 722 | Fax: +36 82 584 728 | e-mail: info@bud.contitech.hu ; info@huwww.contitech.hu ; www.contitech.hu
 The Court of Company Law of Hungary (Registry Court No. Cg.99-09-00220) | EU VAT No: HU11537208
 Belföldi Adószám: 14020101-20830003

ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE No: 501, 504, 505

Page: 1 / 1

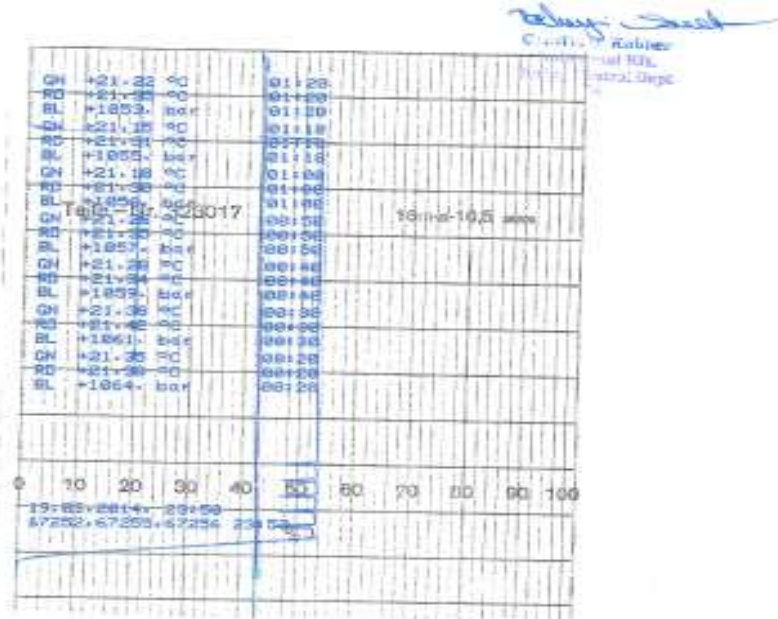



CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014
	Page: 15 / 113
	ContiTech

Hose Data Sheet

CRI Order No.	538236
Customer	ContiTech Oil & Marine Corp.
Customer Order No.	4500409659
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Printed: TIRETECHZICsontosG - 2014.03.10 15:22:17



DRAWN	DLE	26OCT23
APPRV		
DRAWING NO. HBE0001074		

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in Onshore Order II. Casing will be tested as specified in Onshore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a. Displacement to Gas
 - i. Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - ii. External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b. Casing Pressure Test
 - i. Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order II and NM NMAC 19.15.16 of NMOCD regulations.
 - ii. External: Mud weight to TOC and cement mix water (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a. Cementing
 - i. Internal: Displacement fluid density.
 - ii. External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b. Lost Returns with Mud Drop
 - i. Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - ii. External: Mud weight to TOC and cement slurry(s) density below TOC
- 3) Tension Loads
 - a. Overpull Force
 - i. Axial: Dry weight of the string plus 100,000 lbs applied in a stuck pipe situation.
 - b. Green Cement Casing Test
 - i. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a. Displacement to Gas
 - i. Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - ii. External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b. Casing Pressure Test
 - i. Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order II and NM NMAC 19.15.16 of NMOCD regulations.
 - ii. External: Mud weight to TOC and cement mix water (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a. Cementing

- i. Internal: Displacement fluid density.
 - ii. External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b. Lost Returns with Mud Drop
 - i. Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - ii. External: Mud weight to TOC and cement slurry(s) density below TOC
- 3) Tension Loads
 - a. Overpull Force
 - i. Axial: Dry weight of the string plus 50,000 lbs applied in a stuck pipe situation.
 - b. Green Cement Casing Test
 - i. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a. Gas Kick Profile
 - i. Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbls and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - ii. External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b. Casing Pressure Test
 - i. Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order II and NM NMAC 19.15.16 of NMOCD regulations.
 - ii. External: Mud weight to TOC and cement mix water (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a. Cementing
 - i. Internal: Displacement fluid density.
 - ii. External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b. Lost Returns with Mud Drop
 - i. Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - ii. External: Mud weight to TOC and cement slurry(s) density below TOC
- 3) Tension Loads
 - a. Overpull Force
 - i. Axial: Dry weight of the string plus 50,000 lbs applied in a stuck pipe situation.
 - b. Green Cement Casing Test
 - i. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a. Injection Down Casing
 - i. Internal: Surface pressure plus injection fluid gradient
 - ii. External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b. Casing Pressure Test (Drilling)

- i. Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order II and NM NMAC 19.15.16 of NMOCD regulations.
 - ii. External: Mud weight to TOC and cement mix water (8.4 ppg) below TOC.
 - c. Casing Pressure Test (Production)
 - i. Internal: The design pressure test should be the greater of the planned test pressure prior to stimulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - ii. External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d. Tubing Leak
 - i. Internal: SITP plus a packer fluid gradient to the top of packer.
 - ii. External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a. Cementing
 - i. Internal: Displacement fluid density.
 - ii. External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b. Full Evacuation
 - i. Internal: Fully void pipe.
 - ii. External: Mud weight to TOC and cement slurry(s) density below TOC
- 3) Tension Loads
 - a. Overpull Force
 - i. Axial: Dry weight of the string plus 50,000 lbs applied in a stuck pipe situation.
 - b. Green Cement Casing Test
 - i. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all surface casing to a depth approved in the APD. Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land planned surface casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is greater - not to exceed 70% casing burst.

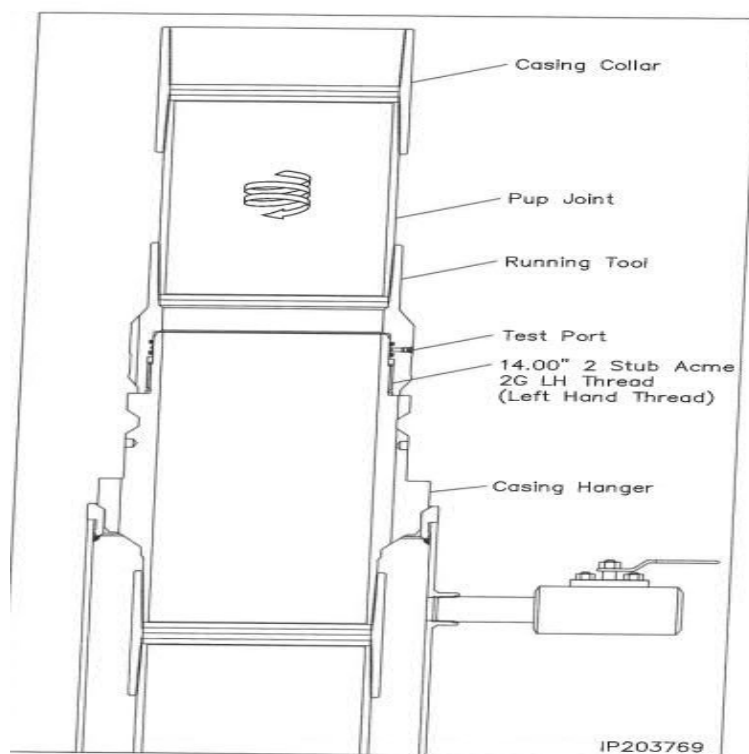


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD. Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior to testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out surface casing shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

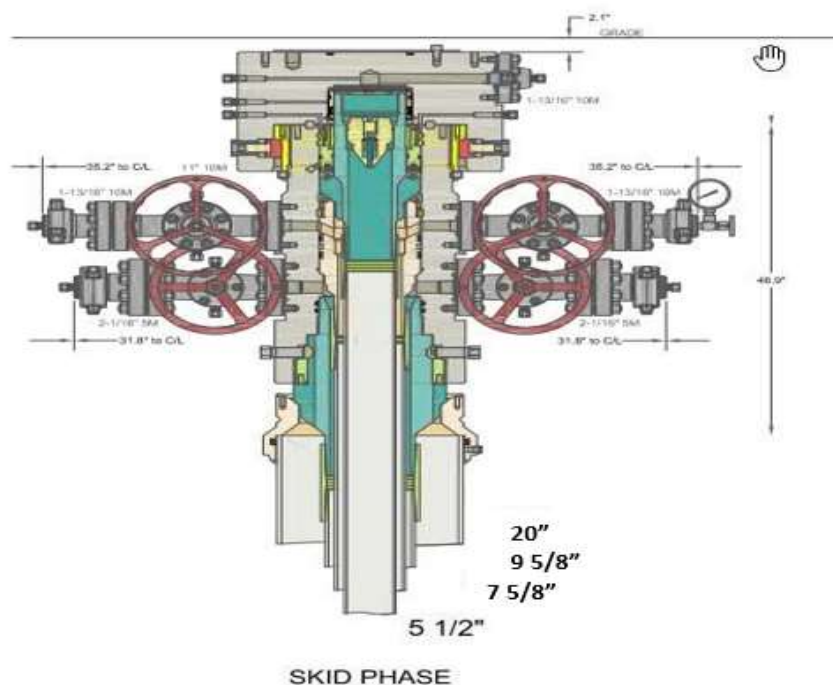



Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.


1. Drilling Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run Production Casing.
6. Remove wear bushing then run Production casing to TD landing casing mandrel in wellhead.
7. Cement Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in Production mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000 psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.

Permian Resources Offline Cementing Procedure Surface & Intermediate Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

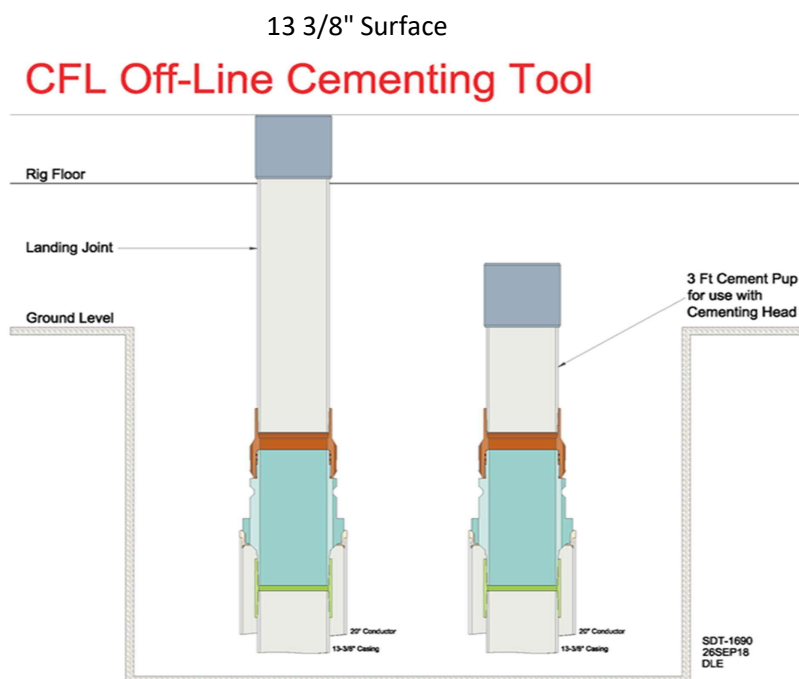


Intermediate

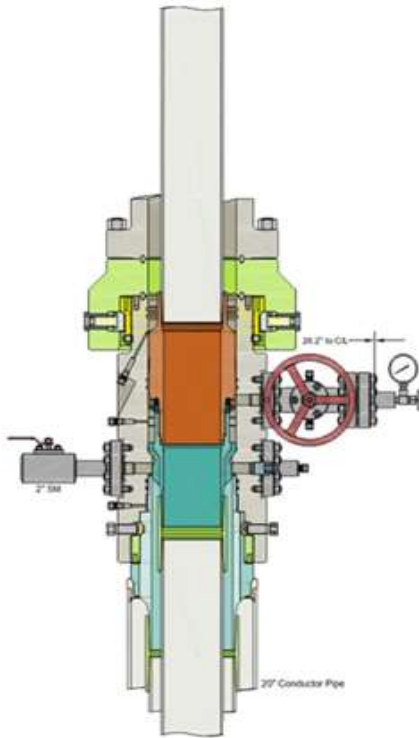

Run 7 5/8" Casing
Land Casing on 7 5/8" Mandrel Hanger
Cement 7 5/8" Casing
Retrieve Running Tool

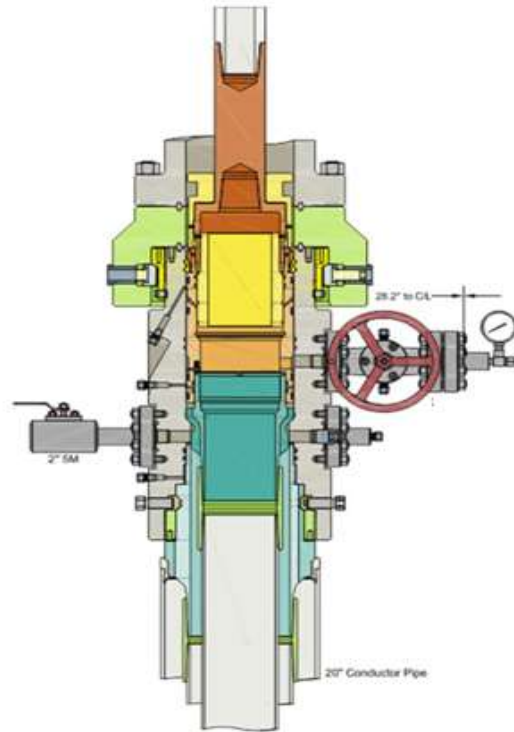

Run 9 5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

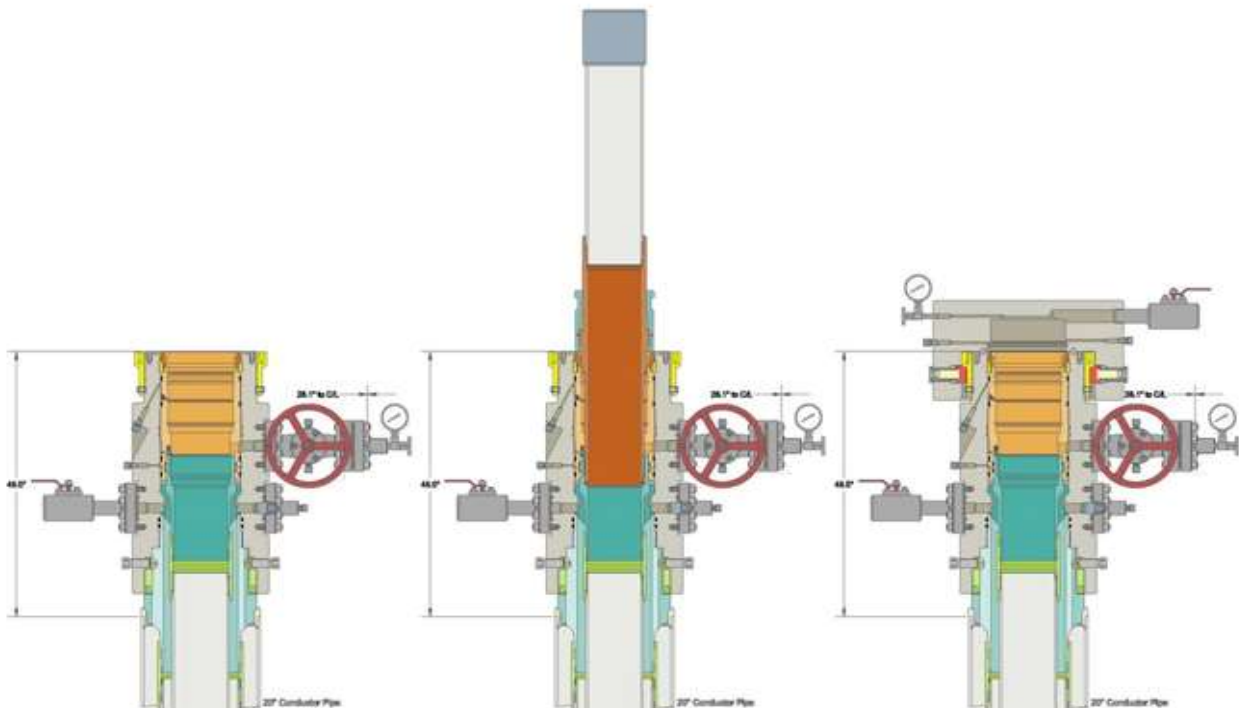



Metal One Corp.

Metal One

MO-FXL

*1 Pipe Body: BMP P110HSCY MinYS125ksi
Min95%WT

CDS#

Date

MO-FXL 7-5/8 29.7

P110HSCY

MinYS125ksi

Min95%WT

20-Sep-23

Connection Data Sheet

MO-FXL

Geometry

Imperial

S.I.

Pipe Body

Grade *

P110HSCY

P110HSCY

Pipe OD (D)

7 5/8

in

193.68

mm

Weight

29.70

lb/ft

44.25

kg/m

Actual weight

29.04

lb/ft

43.26

kg/m

Wall Thickness (t)

0.375

in

9.53

mm

Pipe ID (d)

6.875

in

174.63

mm

Pipe body cross section

8.541

in²

5,510

mm²

Drift Dia.

6.750

in

171.45

mm

Connection

Box OD (W)

7.625

in

193.68

mm

PIN ID

6.875

in

174.63

mm

Make up Loss

4.219

in

107.16

mm

Box Critical Area

5.714

in²

3686

mm²

Joint load efficiency

70

%

70

%

Thread Taper

1 / 10 (1.2" per ft)

Number of Threads

5 TPI

Performance

Performance Properties for Pipe Body

S.M.Y.S. *1

1,068

kips

4,749

kN

M.I.Y.P. *1

11,680

psi

80.55

MPa

Collapse Strength *1

7,200

psi

49.66

MPa

Note

S.M.Y.S. = Specified Minimum YIELD Strength of Pipe body

M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body

* BMP P110HSCY: MinYS125ksi, Min95%WT, Collapse Strength 7,200psi

Performance Data Sheet: 7.625" 29.7lb/ft P110HSCY Rev3, dated 9/19/2023

Performance Properties for Connection

Tensile Yield load

747

kips

70% of S.M.Y.S.)

Min.Compression Yield

747

kips

(70% of S.M.Y.S.)

Internal Pressure

9,340

psi

(80% of M.I.Y.P.)

External Pressure

100% of Collapse Strength

Max. DLS (deg. /100ft)

30

Recommended Torque

Min.

15,500

ft-lb

21,000

N-m

Opti.

17,200

ft-lb

23,300

N-m

Max.

18,900

ft-lb

25,600

N-m

Operational Max.

23,600

ft-lb

32,000

N-m

Note : Operational Max. torque can be applied for high torque application

Box critical area

d

D

Pin critical area

Make up loss

Legal Notice


The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mfco.com/images/stories/WebsiteTerms_Active_20230207_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.

Metal One Corp. 	GEOCONN-SC Pipe Body: SeAH P110RY(SMYS110ksi) & 95%RBW *1 Coupling: P110CY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 20 SeAH PRY 95%RW SC-CpigOD 6.050 P110CY 29-Sep-21 0
---	--	----------------------	--

GEOCONN-SC

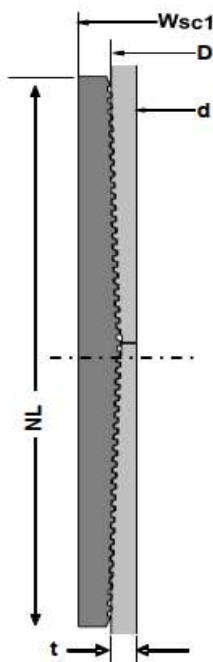

Geometry		Imperial		S.I.	
Pipe Body					
Grade *1	SeAH P110RY	-	SeAH P110RY		
SMYS	110	ksi	110		ksi
Pipe OD (D)	5.500	in	139.70		mm
Weight	20.00	lb/ft	29.80		kg/m
Wall Thickness (t)	0.361	in	9.17		mm
Pipe ID (d)	4.778	in	121.36		mm
Drift Dia.	4.653	in	118.19		mm
Connection					
Coupling SMYS	110	ksi	110		ksi
Coupling OD (Wsc1)	6.050	in	153.67		mm
Coupling Length (NL)	8.350	in	212.09		mm
Make up Loss	4.125	in	104.78		mm
Pipe Critical Area	5.83	in ²	3,760		mm ²
Box Critical Area	6.00	in ²	3,874		mm ²
Thread Taper	1 / 16 (3/4" per ft)				
Number of Threads	5 TPI				

Performance		Imperial		S.I.	
Performance Properties for Pipe Body					
S.M.Y.S.	641	kips	2,852		kN
M.I.Y.P. *1	13,720	psi	94.62		MPa
Collapse Strength	11,100	psi	76.55		MPa
Note S.M.Y.S.= Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1 Pipe: SeAH P110RY (SMYS110ksi), Min Wall Thickness of Pipe Body: 95% of Nom wall					
Performance Properties for Connection					
Min. Connection Joint Strength	100% of S.M.Y.S.				
Min. Compression Yield	100% of S.M.Y.S.				
Internal Pressure	100% of M.I.Y.P.				
External Pressure	100% of Collapse Strength				
Max. DLS (deg. /100ft)	>90				

Recommended Torque		Imperial		S.I.	
Min.	14,600	ft-lb	19,700		N-m
Opti.	16,200	ft-lb	21,900		N-m
Max.	17,800	ft-lb	24,100		N-m
Operational Max.	19,500	ft-lb	26,400		N-m

Note : Operational Max. torque can be applied for high torque application

Legal Notice
 The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.
 The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mo-cs/_images/topWebsiteTerms_Active_20332287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.



5.5" 20# .361" P-110 Restricted Yield (RY)

Dimensions (Nominal)

Outside Diameter	5.500	in.
Wall	0.361	in.
Inside Diameter	4.778	in.
Drift	4.653	in.
Weight, T&C	20.000	lbs/ft
Weight, PE	19.830	lbs/ft

Performance Properties (Minimum)

Minimum Yield Strength	110000	psi
Maximum Yield Strength	125000	psi
Collapse, PE	11100	psi
Internal Yield Pressure		
PE	12630	psi
LTC	12360	psi
BTC	12360	psi
Yield Strength, Pipe Body	641	1000 lbs
Joint Strength		
LTC	548	1000 lbs
BTC	667	1000 lbs

Note: SeAH Steel has produced this specification sheet for general information only. SeAH does not assume liability or responsibility for any loss or injury resulting from the use of information or data contained herein. All applications for the material described are at the customer's own risk and responsibility.



5.500 x 20.00# P-110 RY Bushmaster® SL (95% RBW)

Pipe Body Data		
Nominal OD	5.500	Inches
Wall Thickness	0.361	Inches
Weight	20.00	lb/ft
PE Weight	19.83	lb/ft
Nominal ID	4.778	Inches
Drift	4.653	Inches
Minimum Yield Strength	110,000	PSI
Minimum Tensile Strength	125,000	PSI
RBW	95.0%	Rating

Connection Data		
Connection OD	5.900	Inches
Connection ID	4.778	Inches
Make-Up Loss	4.892	Inches
Tension Efficiency	100%	Rating
Compression Efficiency	100%	Rating
Yield Strength in Tension	641,000	LBS.
Yield Strength in Compression	641,000	LBS.
MIYP (Burst)	13,720	PSI
Collapse*	11,110	PSI
Uniaxial Bending	92	°/100 FT

Make-Up Torque		
Yield Torque	41,000	FT-LBS.
Max Operating Torque	32,800	FT-LBS.
Max Make-Up	22,000	FT-LBS.
Optimum Make-Up	20,000	FT-LBS.
Minimum Make-Up	18,000	FT-LBS.



For Technical Support please email support@fermata-tech.com or call (281) 941-5257.

9/21/2023

This document is for general information only. It is not intended to be used or relied upon as a recommendation or professional advice for any specific application and is subject to change without notice. Anyone who uses this material does so at their own right and assumes any and all liability resulting from such use.

*Collapse value based on API collapse +10-15% depending on D/t ratio and is used for example only. The actual collapse rating is 100% of pipe body and will vary depending on the mill. Verify the collapse rating of the pipe body with the manufacturer.

NEW MEXICO

(SP) LEA

LOS VAQUEROS FED PROJECT

LOS VAQUEROS FED 523H

OWB

PWP0

Anticollision Report

13 December, 2023

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Reference	PWP0		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum centre distance of 800.0usft	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date	12/13/2023		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	24,341.1	PWP0 (OWB)	MWD	OWSG_Rev2_ MWD - Standard	

Summary						
Site Name Offset Well - Wellbore - Design	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
LOS VAQUEROS FED PROJECT						
LOS VAQUEROS FED 303H - OWB - PWP0	1,500.0	1,500.0	66.0	55.5	6.262	CC, ES
LOS VAQUEROS FED 303H - OWB - PWP0	1,700.0	1,697.6	69.4	57.5	5.818	SF
LOS VAQUEROS FED 304H - OWB - PWP0						Out of range
LOS VAQUEROS FED 443H - OWB - PWP0	2,790.1	2,794.0	19.2	-0.7	0.965	Level 3, CC
LOS VAQUEROS FED 443H - OWB - PWP0	2,800.0	2,803.8	19.2	-0.8	0.962	Level 3, ES, SF
LOS VAQUEROS FED 444H - OWB - PWP0						Out of range
LOS VAQUEROS FED 463H - OWB - PWP0	2,397.6	2,395.1	19.5	2.6	1.155	Level 3, CC
LOS VAQUEROS FED 463H - OWB - PWP0	2,400.0	2,397.5	19.5	2.6	1.154	Level 3, ES, SF
LOS VAQUEROS FED 464H - OWB - PWP0						Out of range
LOS VAQUEROS FED 524H - OWB - PWP0						Out of range

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 303H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program:		0-MWD				Rule Assigned:							Offset Well Error:	0.0 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance				Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	89.57	0.5	66.0	66.0					
100.0	100.0	100.0	100.0	0.3	0.3	89.57	0.5	66.0	66.0	65.5	0.50	131.494		
200.0	200.0	200.0	200.0	0.6	0.6	89.57	0.5	66.0	66.0	64.8	1.22	54.145		
300.0	300.0	300.0	300.0	1.0	1.0	89.57	0.5	66.0	66.0	64.1	1.94	34.091		
400.0	400.0	400.0	400.0	1.3	1.3	89.57	0.5	66.0	66.0	63.3	2.65	24.877		
500.0	500.0	500.0	500.0	1.7	1.7	89.57	0.5	66.0	66.0	62.6	3.37	19.584		
600.0	600.0	600.0	600.0	2.0	2.0	89.57	0.5	66.0	66.0	61.9	4.09	16.148		
700.0	700.0	700.0	700.0	2.4	2.4	89.57	0.5	66.0	66.0	61.2	4.80	13.738		
800.0	800.0	800.0	800.0	2.8	2.8	89.57	0.5	66.0	66.0	60.5	5.52	11.954		
900.0	900.0	900.0	900.0	3.1	3.1	89.57	0.5	66.0	66.0	59.8	6.24	10.580		
1,000.0	1,000.0	1,000.0	1,000.0	3.5	3.5	89.57	0.5	66.0	66.0	59.0	6.95	9.489		
1,100.0	1,100.0	1,100.0	1,100.0	3.8	3.8	89.57	0.5	66.0	66.0	58.3	7.67	8.602		
1,200.0	1,200.0	1,200.0	1,200.0	4.2	4.2	89.57	0.5	66.0	66.0	57.6	8.39	7.867		
1,300.0	1,300.0	1,300.0	1,300.0	4.6	4.6	89.57	0.5	66.0	66.0	56.9	9.11	7.248		
1,400.0	1,400.0	1,400.0	1,400.0	4.9	4.9	89.57	0.5	66.0	66.0	56.2	9.82	6.719		
1,500.0	1,500.0	1,500.0	1,500.0	5.3	5.3	89.57	0.5	66.0	66.0	55.5	10.54	6.262	CC, ES	
1,600.0	1,600.0	1,598.9	1,598.8	5.6	5.6	89.53	0.5	66.8	66.9	55.6	11.24	5.947		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources
Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 303H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program:	0-MWD								Rule Assigned:				Offset Well Error:	0.0 usft
Reference	Measured	Vertical	Offset	Vertical	Semi Major Axis	Highside	Offset Wellbore Centre		Distance		Minimum	Separation	Warning	
Depth (usft)	Depth (usft)	Depth (usft)	Depth (usft)	Reference	Offset	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor		
1,700.0	1,700.0	1,697.6	1,697.6	6.0	6.0	89.43	0.7	69.4	69.4	57.5	11.94	5.818 SF		
1,800.0	1,800.0	1,796.3	1,796.2	6.3	6.3	89.27	0.9	73.6	73.7	61.1	12.63	5.840		
1,900.0	1,900.0	1,894.8	1,894.5	6.7	6.6	89.08	1.3	79.6	79.8	66.5	13.31	5.991		
2,000.0	2,000.0	1,993.1	1,992.5	7.1	7.0	88.87	1.7	87.2	87.5	73.5	14.00	6.250		
2,100.0	2,100.0	2,091.2	2,090.2	7.4	7.3	20.92	2.3	96.4	95.3	80.6	14.67	6.496		
2,200.0	2,199.8	2,189.3	2,187.7	7.8	7.7	21.66	2.9	107.3	101.6	86.3	15.34	6.623		
2,300.0	2,299.5	2,287.4	2,284.9	8.1	8.1	22.96	3.6	119.9	106.4	90.4	16.00	6.647		
2,350.0	2,349.1	2,336.4	2,333.5	8.3	8.2	23.82	4.0	126.8	108.2	91.9	16.34	6.626		
2,400.0	2,398.8	2,385.4	2,381.9	8.5	8.4	24.73	4.4	134.2	110.2	93.5	16.67	6.609		
2,500.0	2,498.0	2,483.3	2,478.5	8.8	8.8	26.36	5.3	150.0	115.3	98.0	17.33	6.654		
2,600.0	2,597.3	2,582.7	2,576.4	9.2	9.2	27.80	6.3	167.2	121.7	103.6	18.03	6.747		
2,700.0	2,696.5	2,682.5	2,674.7	9.6	9.6	29.09	7.3	184.5	128.1	109.4	18.75	6.834		
2,800.0	2,795.8	2,782.3	2,772.9	9.9	10.0	30.26	8.3	201.8	134.6	115.2	19.47	6.916		
2,900.0	2,895.0	2,882.0	2,871.1	10.3	10.4	31.32	9.3	219.1	141.2	121.0	20.19	6.993		
3,000.0	2,994.3	2,981.8	2,969.4	10.7	10.8	32.28	10.3	236.4	147.8	126.9	20.92	7.066		
3,100.0	3,093.5	3,081.5	3,067.6	11.1	11.2	33.17	11.3	253.7	154.5	132.8	21.65	7.134		
3,200.0	3,192.8	3,181.3	3,165.8	11.4	11.6	33.98	12.3	271.0	161.1	138.8	22.38	7.199		
3,300.0	3,292.0	3,281.0	3,264.1	11.8	12.0	34.72	13.3	288.3	167.8	144.7	23.12	7.259		
3,400.0	3,391.3	3,380.8	3,362.3	12.2	12.5	35.41	14.3	305.6	174.6	150.7	23.86	7.317		
3,500.0	3,490.6	3,480.5	3,460.5	12.6	12.9	36.05	15.3	322.9	181.3	156.7	24.60	7.371		
3,600.0	3,589.8	3,580.3	3,558.8	13.0	13.3	36.64	16.3	340.2	188.1	162.8	25.35	7.421		
3,700.0	3,689.1	3,680.0	3,657.0	13.4	13.7	37.19	17.3	357.5	194.9	168.8	26.10	7.469		
3,800.0	3,788.3	3,779.8	3,755.3	13.8	14.2	37.70	18.3	374.8	201.7	174.9	26.84	7.515		
3,900.0	3,887.6	3,879.5	3,853.5	14.1	14.6	38.18	19.3	392.0	208.6	181.0	27.60	7.558		
4,000.0	3,986.8	3,979.3	3,951.7	14.5	15.0	38.63	20.3	409.3	215.4	187.1	28.35	7.598		
4,100.0	4,086.1	4,079.0	4,050.0	14.9	15.5	39.05	21.3	426.6	222.3	193.2	29.10	7.637		
4,200.0	4,185.3	4,178.8	4,148.2	15.3	15.9	39.45	22.3	443.9	229.1	199.3	29.86	7.673		
4,300.0	4,284.6	4,278.5	4,246.4	15.7	16.3	39.82	23.3	461.2	236.0	205.4	30.62	7.708		
4,400.0	4,383.8	4,378.3	4,344.7	16.1	16.8	40.17	24.3	478.5	242.9	211.5	31.38	7.741		
4,500.0	4,483.1	4,478.0	4,442.9	16.5	17.2	40.51	25.3	495.8	249.8	217.6	32.14	7.772		
4,600.0	4,582.4	4,577.8	4,541.1	16.9	17.6	40.82	26.3	513.1	256.7	223.8	32.90	7.802		
4,700.0	4,681.6	4,677.5	4,639.4	17.3	18.1	41.12	27.3	530.4	263.6	229.9	33.66	7.830		
4,800.0	4,780.9	4,777.3	4,737.6	17.7	18.5	41.40	28.3	547.7	270.5	236.1	34.43	7.857		
4,900.0	4,880.1	4,877.0	4,835.9	18.1	19.0	41.67	29.3	565.0	277.4	242.2	35.19	7.883		
5,000.0	4,979.4	4,976.8	4,934.1	18.5	19.4	41.93	30.3	582.3	284.4	248.4	35.96	7.908		
5,100.0	5,078.6	5,076.5	5,032.3	18.9	19.8	42.17	31.3	599.6	291.3	254.6	36.72	7.932		
5,200.0	5,177.9	5,176.3	5,130.6	19.3	20.3	42.40	32.3	616.9	298.2	260.7	37.49	7.954		
5,300.0	5,277.1	5,276.0	5,228.8	19.7	20.7	42.62	33.3	634.1	305.2	266.9	38.26	7.976		
5,400.0	5,376.4	5,375.8	5,327.0	20.1	21.2	42.84	34.3	651.4	312.1	273.1	39.03	7.997		
5,500.0	5,475.7	5,475.6	5,425.3	20.5	21.6	43.04	35.3	668.7	319.1	279.3	39.80	8.017		
5,565.0	5,540.2	5,540.4	5,489.1	20.7	21.9	43.17	35.9	680.0	323.6	283.3	40.30	8.029		
5,600.0	5,574.9	5,575.3	5,523.5	20.9	22.0	43.24	36.3	686.0	326.2	285.6	40.57	8.040		
5,700.0	5,674.5	5,674.9	5,621.6	21.2	22.5	43.20	37.3	703.3	335.3	294.0	41.32	8.115		
5,800.0	5,774.3	5,774.1	5,719.3	21.6	22.9	42.81	38.2	720.5	347.0	304.9	42.04	8.253		
5,900.0	5,874.3	5,873.0	5,816.6	22.0	23.4	42.12	39.2	737.6	361.2	318.5	42.73	8.453		
5,915.0	5,889.3	5,887.7	5,831.2	22.0	23.4	110.05	39.4	740.2	363.6	320.7	42.83	8.488		
6,000.0	5,974.3	5,971.4	5,913.6	22.3	23.8	109.16	40.2	754.7	377.2	333.8	43.41	8.690		
6,100.0	6,074.3	6,069.9	6,010.6	22.6	24.2	108.19	41.2	771.8	393.3	349.3	44.08	8.922		
6,200.0	6,174.3	6,168.4	6,107.6	23.0	24.7	107.31	42.2	788.8	409.6	364.8	44.77	9.149		
6,300.0	6,274.3	6,266.9	6,204.6	23.3	25.1	106.49	43.2	805.9	425.9	380.5	45.45	9.371		
6,400.0	6,374.3	6,365.4	6,301.6	23.6	25.6	105.73	44.2	823.0	442.3	396.2	46.14	9.586		
6,500.0	6,474.3	6,463.8	6,398.6	24.0	26.0	105.02	45.1	840.1	458.8	412.0	46.83	9.797		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 303H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program: 0-MWD													Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Rule Assigned: Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
+N/-S (usft)	+E/-W (usft)													
6,600.0	6,574.3	6,567.8	6,501.0	24.3	26.5	104.34	46.2	857.7	475.0	427.4	47.58	9.983		
6,700.0	6,674.3	6,675.3	6,607.2	24.7	26.9	103.76	47.1	874.0	489.5	441.2	48.35	10.125		
6,800.0	6,774.3	6,783.3	6,714.3	25.0	27.4	103.27	47.9	888.5	502.4	453.2	49.11	10.229		
6,900.0	6,874.3	6,891.9	6,822.1	25.3	27.8	102.87	48.7	901.0	513.4	463.6	49.86	10.296		
7,000.0	6,974.3	7,000.9	6,930.6	25.7	28.2	102.55	49.3	911.4	522.7	472.1	50.60	10.329		
7,100.0	7,074.3	7,110.3	7,039.7	26.0	28.6	102.30	49.7	919.9	530.1	478.8	51.33	10.328		
7,200.0	7,174.3	7,219.9	7,149.2	26.4	29.0	102.11	50.1	926.2	535.7	483.7	52.04	10.294		
7,300.0	7,274.3	7,329.8	7,259.0	26.7	29.4	101.99	50.4	930.5	539.5	486.8	52.74	10.230		
7,400.0	7,374.3	7,439.8	7,368.9	27.1	29.8	101.93	50.5	932.7	541.4	488.0	53.41	10.136		
7,500.0	7,474.3	7,545.2	7,474.3	27.4	30.1	101.92	50.5	933.0	541.7	487.6	54.09	10.015		
7,600.0	7,574.3	7,645.2	7,574.3	27.8	30.4	101.92	50.5	933.0	541.7	486.9	54.77	9.890		
7,700.0	7,674.3	7,745.2	7,674.3	28.1	30.7	101.92	50.5	933.0	541.7	486.2	55.46	9.767		
7,800.0	7,774.3	7,845.2	7,774.3	28.4	31.0	101.92	50.5	933.0	541.7	485.5	56.14	9.648		
7,900.0	7,874.3	7,945.2	7,874.3	28.8	31.3	101.92	50.5	933.0	541.7	484.8	56.83	9.531		
8,000.0	7,974.3	8,045.2	7,974.3	29.1	31.6	101.92	50.5	933.0	541.7	484.2	57.52	9.417		
8,100.0	8,074.3	8,145.2	8,074.3	29.5	32.0	101.92	50.5	933.0	541.7	483.5	58.21	9.306		
8,200.0	8,174.3	8,245.2	8,174.3	29.8	32.3	101.92	50.5	933.0	541.7	482.8	58.90	9.197		
8,300.0	8,274.3	8,345.2	8,274.3	30.2	32.6	101.92	50.5	933.0	541.7	482.1	59.59	9.091		
8,400.0	8,374.3	8,445.2	8,374.3	30.5	32.9	101.92	50.5	933.0	541.7	481.4	60.28	8.987		
8,500.0	8,474.3	8,545.2	8,474.3	30.9	33.2	101.92	50.5	933.0	541.7	480.7	60.97	8.885		
8,600.0	8,574.3	8,645.2	8,574.3	31.2	33.5	101.92	50.5	933.0	541.7	480.0	61.66	8.785		
8,700.0	8,674.3	8,745.2	8,674.3	31.6	33.9	101.92	50.5	933.0	541.7	479.3	62.35	8.688		
8,800.0	8,774.3	8,845.2	8,774.3	31.9	34.2	101.92	50.5	933.0	541.7	478.6	63.04	8.592		
8,900.0	8,874.3	8,945.2	8,874.3	32.3	34.5	101.92	50.5	933.0	541.7	477.9	63.74	8.499		
9,000.0	8,974.3	9,045.2	8,974.3	32.6	34.8	101.92	50.5	933.0	541.7	477.2	64.43	8.407		
9,100.0	9,074.3	9,145.2	9,074.3	33.0	35.1	101.92	50.5	933.0	541.7	476.6	65.12	8.318		
9,200.0	9,174.3	9,245.2	9,174.3	33.3	35.5	101.92	50.5	933.0	541.7	475.9	65.82	8.230		
9,300.0	9,274.3	9,345.2	9,274.3	33.7	35.8	101.92	50.5	933.0	541.7	475.2	66.51	8.144		
9,400.0	9,374.3	9,445.2	9,374.3	34.0	36.1	101.92	50.5	933.0	541.7	474.5	67.21	8.059		
9,500.0	9,474.3	9,545.2	9,474.3	34.4	36.4	101.92	50.5	933.0	541.7	473.8	67.91	7.977		
9,600.0	9,574.3	9,645.2	9,574.3	34.7	36.8	101.92	50.5	933.0	541.7	473.1	68.60	7.896		
9,700.0	9,674.3	9,745.2	9,674.3	35.1	37.1	101.92	50.5	933.0	541.7	472.4	69.30	7.816		
9,800.0	9,774.3	9,845.2	9,774.3	35.4	37.4	101.92	50.5	933.0	541.7	471.7	70.00	7.739		
9,900.0	9,874.3	9,945.2	9,874.3	35.8	37.8	101.92	50.5	933.0	541.7	471.0	70.69	7.662		
10,000.0	9,974.3	10,045.2	9,974.3	36.1	38.1	101.92	50.5	933.0	541.7	470.3	71.39	7.587		
10,100.0	10,074.3	10,145.2	10,074.3	36.5	38.4	101.92	50.5	933.0	541.7	469.6	72.09	7.514		
10,200.0	10,174.3	10,245.2	10,174.3	36.8	38.7	101.92	50.5	933.0	541.7	468.9	72.79	7.442		
10,300.0	10,274.3	10,345.2	10,274.3	37.2	39.1	101.92	50.5	933.0	541.7	468.2	73.49	7.371		
10,400.0	10,374.3	10,445.2	10,374.3	37.5	39.4	101.92	50.5	933.0	541.7	467.5	74.19	7.301		
10,500.0	10,474.3	10,545.2	10,474.3	37.9	39.7	101.92	50.5	933.0	541.7	466.8	74.89	7.233		
10,600.0	10,574.3	10,645.2	10,574.3	38.2	40.1	101.92	50.5	933.0	541.7	466.1	75.59	7.166		
10,700.0	10,674.3	10,745.2	10,674.3	38.6	40.4	101.92	50.5	933.0	541.7	465.4	76.29	7.100		
10,800.0	10,774.3	10,845.2	10,774.3	38.9	40.7	101.92	50.5	933.0	541.7	464.7	76.99	7.036		
10,900.0	10,874.3	10,945.2	10,874.3	39.3	41.1	101.92	50.5	933.0	541.7	464.0	77.69	6.972		
11,000.0	10,974.3	11,045.2	10,974.3	39.6	41.4	101.92	50.5	933.0	541.7	463.3	78.39	6.910		
11,100.0	11,074.3	11,145.2	11,074.3	40.0	41.7	101.92	50.5	933.0	541.7	462.6	79.09	6.849		
11,200.0	11,174.3	11,245.2	11,174.3	40.3	42.1	101.92	50.5	933.0	541.7	461.9	79.80	6.788		
11,300.0	11,274.3	11,345.2	11,274.3	40.7	42.4	101.92	50.5	933.0	541.7	461.2	80.50	6.729		
11,400.0	11,374.3	11,445.2	11,374.3	41.0	42.7	101.92	50.5	933.0	541.7	460.5	81.20	6.671		
11,500.0	11,474.3	11,545.2	11,474.3	41.4	43.1	101.92	50.5	933.0	541.7	459.8	81.90	6.614		
11,509.0	11,483.3	11,554.1	11,483.3	41.4	43.1	101.92	50.5	933.0	541.7	459.7	81.97	6.609		
11,600.0	11,574.3	11,641.5	11,570.6	41.7	43.4	101.95	50.3	933.0	541.7	459.1	82.61	6.558		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design:LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 303H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program: 0-MWD													Offset Well Error:	0.0 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance Between		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Centres (usft)	Ellipses (usft)				
11,700.0	11,674.3	11,720.5	11,649.0	42.1	43.6	102.87	41.3	933.1	544.3	461.0	83.30	6.534		
11,800.0	11,774.3	11,794.7	11,720.4	42.4	43.8	104.92	21.1	933.3	551.4	467.5	83.88	6.574		
11,900.0	11,874.3	11,861.3	11,781.1	42.8	44.0	107.62	-6.1	933.6	564.4	480.3	84.19	6.704		
12,000.0	11,974.3	11,919.3	11,830.4	43.1	44.2	110.55	-36.6	933.9	584.9	500.8	84.06	6.958		
12,100.0	12,074.3	11,968.9	11,869.4	43.5	44.3	113.37	-67.2	934.2	613.9	530.5	83.40	7.361		
12,200.0	12,174.3	12,010.9	11,899.7	43.8	44.4	115.94	-96.1	934.5	651.7	569.5	82.21	7.927		
12,300.0	12,274.3	12,050.0	11,925.7	44.2	44.5	118.42	-125.4	934.8	698.0	617.2	80.73	8.646		
12,400.0	12,374.3	12,075.0	11,941.0	44.6	44.5	120.04	-145.2	935.0	751.9	673.1	78.79	9.543		

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0														Offset Site Error:	0.0 usft
Survey Program: 0-MWD														Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance Between Centres (usft)		Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.0	0.0	0.0	0.0	0.0	0.0	-90.43	-0.2	-33.0	33.0						
100.0	100.0	99.0	99.0	0.3	0.2	-90.43	-0.2	-33.0	33.0	32.5	0.50	66.088			
200.0	200.0	199.0	199.0	0.6	0.6	-90.43	-0.2	-33.0	33.0	31.8	1.22	27.156			
300.0	300.0	299.0	299.0	1.0	1.0	-90.43	-0.2	-33.0	33.0	31.1	1.93	17.080			
400.0	400.0	399.0	399.0	1.3	1.3	-90.43	-0.2	-33.0	33.0	30.4	2.65	12.457			
500.0	500.0	499.0	499.0	1.7	1.7	-90.43	-0.2	-33.0	33.0	29.6	3.37	9.804			
600.0	600.0	599.0	599.0	2.0	2.0	-90.43	-0.2	-33.0	33.0	28.9	4.08	8.083			
700.0	700.0	699.0	699.0	2.4	2.4	-90.43	-0.2	-33.0	33.0	28.2	4.80	6.875			
800.0	800.0	799.0	799.0	2.8	2.8	-90.43	-0.2	-33.0	33.0	27.5	5.52	5.982			
900.0	900.0	899.0	899.0	3.1	3.1	-90.43	-0.2	-33.0	33.0	26.8	6.23	5.294			
1,000.0	1,000.0	999.0	999.0	3.5	3.5	-90.43	-0.2	-33.0	33.0	26.1	6.95	4.748			
1,100.0	1,100.0	1,099.0	1,099.0	3.8	3.8	-90.43	-0.2	-33.0	33.0	25.3	7.67	4.304			
1,200.0	1,200.0	1,199.0	1,199.0	4.2	4.2	-90.43	-0.2	-33.0	33.0	24.6	8.38	3.936			
1,300.0	1,300.0	1,299.0	1,299.0	4.6	4.5	-90.43	-0.2	-33.0	33.0	23.9	9.10	3.626			
1,400.0	1,400.0	1,399.0	1,399.0	4.9	4.9	-90.43	-0.2	-33.0	33.0	23.2	9.82	3.361			
1,500.0	1,500.0	1,499.0	1,499.0	5.3	5.3	-90.43	-0.2	-33.0	33.0	22.5	10.54	3.132			
1,600.0	1,600.0	1,599.0	1,599.0	5.6	5.6	-90.43	-0.2	-33.0	33.0	21.7	11.25	2.933			
1,700.0	1,700.0	1,699.0	1,699.0	6.0	6.0	-90.43	-0.2	-33.0	33.0	21.0	11.97	2.757			
1,800.0	1,800.0	1,799.0	1,799.0	6.3	6.3	-90.43	-0.2	-33.0	33.0	20.3	12.69	2.601			
1,900.0	1,900.0	1,899.0	1,899.0	6.7	6.7	-90.43	-0.2	-33.0	33.0	19.6	13.40	2.462			
2,000.0	2,000.0	1,999.0	1,999.0	7.1	7.1	-90.43	-0.2	-33.0	33.0	18.9	14.12	2.337			
2,100.0	2,100.0	2,100.0	2,100.0	7.4	7.4	-158.31	0.5	-31.4	33.1	18.2	14.82	2.230			
2,200.0	2,199.8	2,201.1	2,200.9	7.8	7.8	-157.74	2.8	-26.6	33.2	17.7	15.50	2.140			
2,300.0	2,299.5	2,302.1	2,301.6	8.1	8.1	-156.78	6.7	-18.7	33.4	17.2	16.17	2.064			
2,350.0	2,349.1	2,352.7	2,351.8	8.3	8.3	-156.16	9.2	-13.5	33.5	17.0	16.50	2.030			
2,400.0	2,398.8	2,403.2	2,401.9	8.5	8.5	-155.13	12.1	-7.5	33.2	16.4	16.83	1.975			
2,500.0	2,498.0	2,504.1	2,501.5	8.8	8.9	-150.47	19.0	6.8	30.5	13.0	17.50	1.745			
2,600.0	2,597.3	2,604.6	2,600.1	9.2	9.2	-139.98	27.4	24.2	25.4	7.2	18.21	1.396 Level 3			
2,700.0	2,696.5	2,704.2	2,697.5	9.6	9.6	-121.39	36.4	42.9	20.7	1.7	19.07	1.088 Level 3			
2,790.1	2,786.0	2,794.0	2,785.4	9.9	10.0	-99.04	44.5	59.7	19.2	-0.7	19.86	0.965 Level 3, CC			
2,800.0	2,795.8	2,803.8	2,795.0	9.9	10.0	-96.47	45.4	61.5	19.2	-0.8	19.94	0.962 Level 3, ES, SF			
2,900.0	2,895.0	2,903.4	2,892.4	10.3	10.4	-72.43	54.4	80.2	21.5	0.8	20.67	1.038 Level 3			
3,000.0	2,994.3	3,003.0	2,989.8	10.7	10.8	-55.29	63.4	98.9	26.6	5.3	21.31	1.248 Level 3			
3,100.0	3,093.5	3,102.6	3,087.3	11.1	11.2	-44.32	72.4	117.5	33.3	11.3	21.94	1.517			
3,200.0	3,192.8	3,202.2	3,184.7	11.4	11.7	-37.18	81.4	136.2	40.8	18.2	22.61	1.804			
3,300.0	3,292.0	3,301.9	3,282.1	11.8	12.1	-32.31	90.4	154.8	48.7	25.4	23.29	2.091			
3,400.0	3,391.3	3,401.5	3,379.6	12.2	12.5	-28.82	99.4	173.5	56.9	32.9	23.99	2.371			
3,500.0	3,490.6	3,501.1	3,477.0	12.6	12.9	-26.21	108.3	192.1	65.2	40.5	24.70	2.640			
3,600.0	3,589.8	3,600.7	3,574.5	13.0	13.4	-24.19	117.3	210.8	73.6	48.2	25.41	2.898			
3,700.0	3,689.1	3,700.3	3,671.9	13.4	13.8	-22.59	126.3	229.4	82.1	56.0	26.13	3.144			
3,800.0	3,788.3	3,800.2	3,769.6	13.8	14.3	-21.29	135.4	248.1	90.7	63.8	26.86	3.376			
3,900.0	3,887.6	3,903.2	3,870.7	14.1	14.7	-20.54	143.8	265.5	97.3	69.6	27.70	3.513			
4,000.0	3,986.8	4,006.6	3,972.9	14.5	15.1	-20.47	150.6	279.7	100.5	72.0	28.51	3.524			
4,100.0	4,086.1	4,110.0	4,075.7	14.9	15.6	-21.02	155.8	290.5	100.2	70.9	29.31	3.420			
4,200.0	4,185.3	4,213.3	4,178.6	15.3	15.9	-22.25	159.4	298.0	96.5	66.4	30.07	3.210			
4,300.0	4,284.6	4,316.2	4,281.4	15.7	16.3	-24.37	161.4	302.1	89.5	58.7	30.82	2.904			
4,400.0	4,383.8	4,417.7	4,382.8	16.1	16.7	-27.82	161.8	303.0	79.4	47.9	31.58	2.516			
4,500.0	4,483.1	4,516.9	4,482.1	16.5	17.0	-32.55	161.8	303.0	68.9	36.5	32.41	2.126			
4,600.0	4,582.4	4,616.2	4,581.4	16.9	17.3	-38.92	161.8	303.0	58.9	25.7	33.29	1.771			
4,700.0	4,681.6	4,715.4	4,680.6	17.3	17.6	-47.68	161.8	303.0	50.0	15.8	34.25	1.461 Level 3			
4,800.0	4,780.9	4,814.7	4,779.9	17.7	18.0	-59.79	161.8	303.0	42.7	7.5	35.28	1.211 Level 3			
4,900.0	4,880.1	4,913.9	4,879.1	18.1	18.3	-75.74	161.8	303.0	38.1	1.7	36.31	1.048 Level 3			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources
Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0													Offset Site Error:	0.0 usft	
Survey Program:		0-MWD								Rule Assigned:			Offset Well Error:		0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Major Axis Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
4,977.5	4,957.0	4,990.8	4,956.0	18.4	18.6	-90.00	161.8	303.0	36.9	-0.1	36.95	0.998	Level 3		
5,000.0	4,979.4	5,013.2	4,978.4	18.5	18.7	-94.23	161.8	303.0	37.0	-0.1	37.10	0.996	Level 3		
5,100.0	5,078.6	5,112.4	5,077.6	18.9	19.0	-111.90	161.8	303.0	39.8	2.2	37.60	1.058	Level 3		
5,200.0	5,177.9	5,211.7	5,176.9	19.3	19.3	-126.14	161.8	303.0	45.8	7.8	37.97	1.205	Level 3		
5,300.0	5,277.1	5,310.9	5,276.1	19.7	19.7	-136.62	161.8	303.0	53.9	15.5	38.38	1.404	Level 3		
5,400.0	5,376.4	5,410.2	5,375.4	20.1	20.0	-144.20	161.8	303.0	63.3	24.4	38.88	1.629			
5,500.0	5,475.7	5,509.5	5,474.7	20.5	20.3	-149.75	161.8	303.0	73.6	34.1	39.45	1.865			
5,565.0	5,540.2	5,574.0	5,539.2	20.7	20.6	-152.58	161.8	303.0	80.5	40.7	39.84	2.021			
5,600.0	5,574.9	5,608.7	5,573.9	20.9	20.7	-153.88	161.8	303.0	84.2	44.1	40.06	2.101			
5,700.0	5,674.5	5,708.3	5,673.5	21.2	21.0	-156.47	161.8	303.0	92.6	51.8	40.72	2.273			
5,800.0	5,774.3	5,808.1	5,773.3	21.6	21.4	-157.85	161.8	303.0	97.9	56.5	41.40	2.364			
5,900.0	5,874.3	5,908.1	5,873.3	22.0	21.7	-158.36	161.8	303.0	100.0	57.9	42.09	2.375			
5,915.0	5,889.3	5,923.1	5,888.3	22.0	21.8	-90.32	161.8	303.0	100.0	57.8	42.20	2.370			
6,000.0	5,974.3	6,008.1	5,973.3	22.3	22.0	-90.32	161.8	303.0	100.0	57.2	42.79	2.337			
6,100.0	6,074.3	6,108.1	6,073.3	22.6	22.4	-90.32	161.8	303.0	100.0	56.5	43.49	2.299			
6,200.0	6,174.3	6,208.1	6,173.3	23.0	22.7	-90.32	161.8	303.0	100.0	55.8	44.19	2.263			
6,300.0	6,274.3	6,308.1	6,273.3	23.3	23.1	-90.32	161.8	303.0	100.0	55.1	44.89	2.228			
6,400.0	6,374.3	6,408.1	6,373.3	23.6	23.4	-90.32	161.8	303.0	100.0	54.4	45.59	2.193			
6,500.0	6,474.3	6,508.1	6,473.3	24.0	23.8	-90.32	161.8	303.0	100.0	53.7	46.29	2.160			
6,600.0	6,574.3	6,608.1	6,573.3	24.3	24.1	-90.32	161.8	303.0	100.0	53.0	47.00	2.128			
6,700.0	6,674.3	6,708.1	6,673.3	24.7	24.5	-90.32	161.8	303.0	100.0	52.3	47.70	2.097			
6,800.0	6,774.3	6,808.1	6,773.3	25.0	24.8	-90.32	161.8	303.0	100.0	51.6	48.40	2.066			
6,900.0	6,874.3	6,908.1	6,873.3	25.3	25.2	-90.32	161.8	303.0	100.0	50.9	49.10	2.037			
7,000.0	6,974.3	7,008.1	6,973.3	25.7	25.5	-90.32	161.8	303.0	100.0	50.2	49.81	2.008			
7,100.0	7,074.3	7,108.1	7,073.3	26.0	25.8	-90.32	161.8	303.0	100.0	49.5	50.51	1.980			
7,200.0	7,174.3	7,208.1	7,173.3	26.4	26.2	-90.32	161.8	303.0	100.0	48.8	51.21	1.953			
7,300.0	7,274.3	7,308.1	7,273.3	26.7	26.5	-90.32	161.8	303.0	100.0	48.1	51.92	1.926			
7,400.0	7,374.3	7,408.1	7,373.3	27.1	26.9	-90.32	161.8	303.0	100.0	47.4	52.62	1.900			
7,500.0	7,474.3	7,508.1	7,473.3	27.4	27.2	-90.32	161.8	303.0	100.0	46.7	53.33	1.875			
7,600.0	7,574.3	7,608.1	7,573.3	27.8	27.6	-90.32	161.8	303.0	100.0	46.0	54.03	1.851			
7,700.0	7,674.3	7,708.1	7,673.3	28.1	27.9	-90.32	161.8	303.0	100.0	45.3	54.74	1.827			
7,800.0	7,774.3	7,808.1	7,773.3	28.4	28.3	-90.32	161.8	303.0	100.0	44.6	55.45	1.804			
7,900.0	7,874.3	7,908.1	7,873.3	28.8	28.6	-90.32	161.8	303.0	100.0	43.8	56.15	1.781			
8,000.0	7,974.3	8,008.1	7,973.3	29.1	29.0	-90.32	161.8	303.0	100.0	43.1	56.86	1.759			
8,100.0	8,074.3	8,108.1	8,073.3	29.5	29.3	-90.32	161.8	303.0	100.0	42.4	57.57	1.737			
8,200.0	8,174.3	8,208.1	8,173.3	29.8	29.7	-90.32	161.8	303.0	100.0	41.7	58.27	1.716			
8,300.0	8,274.3	8,308.1	8,273.3	30.2	30.0	-90.32	161.8	303.0	100.0	41.0	58.98	1.696			
8,400.0	8,374.3	8,408.1	8,373.3	30.5	30.4	-90.32	161.8	303.0	100.0	40.3	59.69	1.675			
8,500.0	8,474.3	8,508.1	8,473.3	30.9	30.7	-90.32	161.8	303.0	100.0	39.6	60.40	1.656			
8,600.0	8,574.3	8,608.1	8,573.3	31.2	31.1	-90.32	161.8	303.0	100.0	38.9	61.10	1.637			
8,700.0	8,674.3	8,708.1	8,673.3	31.6	31.4	-90.32	161.8	303.0	100.0	38.2	61.81	1.618			
8,800.0	8,774.3	8,808.1	8,773.3	31.9	31.8	-90.32	161.8	303.0	100.0	37.5	62.52	1.600			
8,900.0	8,874.3	8,908.1	8,873.3	32.3	32.1	-90.32	161.8	303.0	100.0	36.8	63.23	1.582			
9,000.0	8,974.3	9,008.1	8,973.3	32.6	32.5	-90.32	161.8	303.0	100.0	36.1	63.94	1.564			
9,100.0	9,074.3	9,108.1	9,073.3	33.0	32.8	-90.32	161.8	303.0	100.0	35.4	64.65	1.547			
9,200.0	9,174.3	9,208.1	9,173.3	33.3	33.2	-90.32	161.8	303.0	100.0	34.6	65.35	1.530			
9,300.0	9,274.3	9,308.1	9,273.3	33.7	33.6	-90.32	161.8	303.0	100.0	33.9	66.06	1.514			
9,400.0	9,374.3	9,408.1	9,373.3	34.0	33.9	-90.32	161.8	303.0	100.0	33.2	66.77	1.498	Level 3		
9,500.0	9,474.3	9,508.1	9,473.3	34.4	34.3	-90.32	161.8	303.0	100.0	32.5	67.48	1.482	Level 3		
9,600.0	9,574.3	9,608.1	9,573.3	34.7	34.6	-90.32	161.8	303.0	100.0	31.8	68.19	1.466	Level 3		
9,700.0	9,674.3	9,708.1	9,673.3	35.1	35.0	-90.32	161.8	303.0	100.0	31.1	68.90	1.451	Level 3		
9,800.0	9,774.3	9,808.1	9,773.3	35.4	35.3	-90.32	161.8	303.0	100.0	30.4	69.61	1.437	Level 3		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources
Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0												Offset Site Error:	0.0 usft
Survey Program: 0-MWD												Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,900.0	9,874.3	9,908.1	9,873.3	35.8	35.7	-90.32	161.8	303.0	100.0	29.7	70.32	1.422	Level 3
10,000.0	9,974.3	10,008.1	9,973.3	36.1	36.0	-90.32	161.8	303.0	100.0	29.0	71.03	1.408	Level 3
10,100.0	10,074.3	10,108.1	10,073.3	36.5	36.4	-90.32	161.8	303.0	100.0	28.3	71.74	1.394	Level 3
10,200.0	10,174.3	10,208.1	10,173.3	36.8	36.7	-90.32	161.8	303.0	100.0	27.5	72.45	1.380	Level 3
10,300.0	10,274.3	10,308.1	10,273.3	37.2	37.1	-90.32	161.8	303.0	100.0	26.8	73.17	1.367	Level 3
10,400.0	10,374.3	10,408.1	10,373.3	37.5	37.4	-90.32	161.8	303.0	100.0	26.1	73.88	1.354	Level 3
10,500.0	10,474.3	10,508.1	10,473.3	37.9	37.8	-90.32	161.8	303.0	100.0	25.4	74.59	1.341	Level 3
10,600.0	10,574.3	10,608.1	10,573.3	38.2	38.1	-90.32	161.8	303.0	100.0	24.7	75.30	1.328	Level 3
10,700.0	10,674.3	10,708.1	10,673.3	38.6	38.5	-90.32	161.8	303.0	100.0	24.0	76.01	1.316	Level 3
10,800.0	10,774.3	10,808.1	10,773.3	38.9	38.8	-90.32	161.8	303.0	100.0	23.3	76.72	1.303	Level 3
10,900.0	10,874.3	10,908.1	10,873.3	39.3	39.2	-90.32	161.8	303.0	100.0	22.6	77.43	1.291	Level 3
11,000.0	10,974.3	11,008.1	10,973.3	39.6	39.6	-90.32	161.8	303.0	100.0	21.9	78.14	1.280	Level 3
11,100.0	11,074.3	11,108.1	11,073.3	40.0	39.9	-90.32	161.8	303.0	100.0	21.1	78.85	1.268	Level 3
11,200.0	11,174.3	11,208.1	11,173.3	40.3	40.3	-90.32	161.8	303.0	100.0	20.4	79.57	1.257	Level 3
11,300.0	11,274.3	11,308.1	11,273.3	40.7	40.6	-90.32	161.8	303.0	100.0	19.7	80.28	1.246	Level 3
11,400.0	11,374.3	11,408.1	11,373.3	41.0	41.0	-90.32	161.8	303.0	100.0	19.0	80.99	1.235	Level 3
11,500.0	11,474.3	11,508.1	11,473.3	41.4	41.3	-90.32	161.8	303.0	100.0	18.3	81.70	1.224	Level 3
11,600.0	11,574.3	11,608.1	11,573.3	41.7	41.7	-90.32	161.8	303.0	100.0	17.6	82.41	1.213	Level 3
11,700.0	11,674.3	11,708.1	11,673.3	42.1	42.0	-90.32	161.8	303.0	100.0	16.9	83.13	1.203	Level 3
11,800.0	11,774.3	11,808.1	11,773.3	42.4	42.4	-90.32	161.8	303.0	100.0	16.2	83.84	1.193	Level 3
11,900.0	11,874.3	11,908.1	11,873.3	42.8	42.7	-90.32	161.8	303.0	100.0	15.5	84.55	1.183	Level 3
12,000.0	11,974.3	12,008.1	11,973.3	43.1	43.1	-90.32	161.8	303.0	100.0	14.7	85.26	1.173	Level 3
12,100.0	12,074.3	12,108.1	12,073.3	43.5	43.5	-90.32	161.8	303.0	100.0	14.0	85.98	1.163	Level 3
12,200.0	12,174.3	12,208.1	12,173.3	43.8	43.8	-90.32	161.8	303.0	100.0	13.3	86.69	1.154	Level 3
12,252.9	12,227.2	12,261.0	12,226.2	44.0	44.0	-90.57	161.4	303.0	100.0	12.9	87.06	1.149	Level 3
12,300.0	12,274.3	12,307.7	12,272.7	44.2	44.1	-93.04	157.1	303.1	100.1	12.8	87.33	1.146	Level 3
12,400.0	12,374.3	12,401.8	12,363.9	44.6	44.4	-105.47	134.8	303.3	103.9	16.4	87.51	1.187	Level 3
12,500.0	12,474.3	12,484.6	12,439.2	44.9	44.6	-121.82	100.7	303.6	121.8	36.0	85.85	1.419	Level 3
12,600.0	12,574.3	12,553.9	12,497.0	45.3	44.8	-135.25	62.5	304.0	160.0	78.0	81.97	1.952	
12,620.2	12,594.5	12,566.3	12,506.8	45.3	44.8	-137.40	54.8	304.1	170.0	88.9	81.08	2.096	
12,625.0	12,599.3	12,569.2	12,509.0	45.3	44.8	42.45	53.0	304.1	172.4	91.5	80.87	2.132	
12,650.0	12,624.3	12,584.2	12,520.4	45.4	44.8	39.02	43.3	304.2	185.2	105.5	79.77	2.322	
12,675.0	12,649.2	12,600.0	12,532.1	45.5	44.9	35.91	32.7	304.3	198.1	119.3	78.83	2.513	
12,700.0	12,673.9	12,613.8	12,542.1	45.6	44.9	33.41	23.1	304.4	210.9	133.2	77.63	2.717	
12,725.0	12,698.5	12,625.0	12,549.9	45.7	44.9	31.41	15.1	304.5	223.5	147.4	76.11	2.937	
12,750.0	12,722.7	12,643.0	12,562.1	45.7	44.9	29.10	1.8	304.6	235.9	160.3	75.54	3.122	
12,775.0	12,746.6	12,657.5	12,571.6	45.8	44.9	27.33	-9.1	304.7	248.0	173.4	74.52	3.327	
12,800.0	12,770.1	12,675.0	12,582.6	45.9	45.0	25.60	-22.7	304.9	259.8	185.9	73.89	3.516	
12,825.0	12,793.1	12,686.3	12,589.4	45.9	45.0	24.39	-31.7	305.0	271.2	198.6	72.53	3.739	
12,850.0	12,815.5	12,700.0	12,597.4	46.0	45.0	23.18	-42.9	305.1	282.2	210.7	71.50	3.947	
12,875.0	12,837.4	12,714.8	12,605.7	46.1	45.0	22.07	-55.1	305.2	292.9	222.3	70.62	4.147	
12,900.0	12,858.6	12,725.0	12,611.1	46.1	45.0	21.22	-63.7	305.3	303.1	233.9	69.29	4.375	
12,925.0	12,879.0	12,743.1	12,620.4	46.2	45.0	20.23	-79.3	305.4	312.9	244.1	68.79	4.548	
12,950.0	12,898.7	12,757.2	12,627.2	46.2	45.1	19.46	-91.7	305.6	322.2	254.3	67.91	4.744	
12,975.0	12,917.5	12,775.0	12,635.2	46.3	45.1	18.69	-107.5	305.7	331.1	263.7	67.39	4.913	
13,000.0	12,935.5	12,785.3	12,639.6	46.3	45.1	18.15	-116.8	305.8	339.4	273.1	66.25	5.122	
13,025.0	12,952.5	12,800.0	12,645.5	46.3	45.1	17.58	-130.3	305.9	347.2	281.7	65.53	5.299	
13,050.0	12,968.6	12,813.3	12,650.5	46.4	45.1	17.10	-142.6	306.1	354.6	289.8	64.74	5.477	
13,075.0	12,983.6	12,825.0	12,654.6	46.4	45.1	16.69	-153.6	306.2	361.4	297.5	63.90	5.655	
13,100.0	12,997.5	12,841.1	12,659.8	46.4	45.1	16.28	-168.8	306.3	367.7	304.3	63.40	5.799	
13,125.0	13,010.4	12,850.0	12,662.5	46.5	45.1	15.98	-177.3	306.4	373.5	311.0	62.54	5.973	
13,150.0	13,022.1	12,868.9	12,667.6	46.5	45.2	15.63	-195.5	306.6	378.7	316.4	62.26	6.082	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program: 0-MWD													Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
13,175.0	13,032.6	12,882.7	12,670.9	46.5	45.2	15.37	-208.9	306.7	383.3	321.6	61.77	6.206		
13,200.0	13,041.9	12,900.0	12,674.4	46.6	45.2	15.12	-225.8	306.9	387.5	326.0	61.47	6.304		
13,225.0	13,050.1	12,910.4	12,676.3	46.6	45.2	14.95	-236.0	307.0	391.0	330.1	60.97	6.413		
13,250.0	13,056.9	12,925.0	12,678.5	46.6	45.3	14.79	-250.5	307.1	394.1	333.4	60.69	6.493		
13,275.0	13,062.5	12,938.0	12,680.1	46.7	45.3	14.66	-263.4	307.3	396.5	336.1	60.44	6.561		
13,300.0	13,066.8	12,950.0	12,681.3	46.7	45.3	14.57	-275.3	307.4	398.4	338.2	60.24	6.613		
13,325.0	13,069.8	12,965.6	12,682.3	46.7	45.3	14.50	-290.9	307.6	399.7	339.6	60.17	6.643		
13,350.0	13,071.5	12,979.4	12,682.8	46.8	45.4	14.46	-304.7	307.7	400.5	340.3	60.15	6.658		
13,370.2	13,072.0	12,990.8	12,683.0	46.8	45.4	14.45	-316.0	307.8	400.7	340.5	60.18	6.658		
13,400.0	13,072.0	13,020.6	12,683.0	46.9	45.4	14.45	-345.8	308.1	400.7	340.4	60.23	6.652		
13,500.0	13,072.0	13,120.6	12,683.0	47.1	45.7	14.45	-445.8	309.1	400.7	340.2	60.44	6.629		
13,600.0	13,072.0	13,220.6	12,683.0	47.4	46.0	14.45	-545.8	310.1	400.7	340.0	60.69	6.602		
13,700.0	13,072.0	13,320.6	12,683.0	47.8	46.4	14.45	-645.8	311.1	400.7	339.7	61.00	6.569		
13,800.0	13,072.0	13,420.6	12,683.0	48.2	46.8	14.45	-745.8	312.1	400.7	339.3	61.35	6.532		
13,900.0	13,072.0	13,520.6	12,683.0	48.6	47.2	14.45	-845.8	313.1	400.7	338.9	61.74	6.490		
14,000.0	13,072.0	13,620.6	12,683.0	49.1	47.7	14.45	-945.8	314.1	400.7	338.5	62.18	6.444		
14,100.0	13,072.0	13,720.6	12,683.0	49.7	48.3	14.45	-1,045.8	315.1	400.7	338.0	62.67	6.394		
14,200.0	13,072.0	13,820.6	12,683.0	50.3	48.9	14.45	-1,145.8	316.1	400.7	337.5	63.20	6.340		
14,300.0	13,072.0	13,920.6	12,683.0	50.9	49.6	14.45	-1,245.8	317.1	400.7	336.9	63.77	6.283		
14,400.0	13,072.0	14,020.6	12,683.0	51.6	50.3	14.45	-1,345.8	318.1	400.7	336.3	64.38	6.223		
14,500.0	13,072.0	14,120.6	12,683.0	52.3	51.0	14.45	-1,445.8	319.1	400.7	335.6	65.04	6.161		
14,600.0	13,072.0	14,220.6	12,683.0	53.1	51.8	14.45	-1,545.8	320.1	400.7	335.0	65.73	6.096		
14,700.0	13,072.0	14,320.6	12,683.0	53.9	52.7	14.45	-1,645.8	321.1	400.7	334.2	66.46	6.029		
14,800.0	13,072.0	14,420.6	12,683.0	54.8	53.5	14.45	-1,745.8	322.1	400.7	333.5	67.22	5.960		
14,900.0	13,072.0	14,520.6	12,683.0	55.7	54.4	14.45	-1,845.8	323.1	400.7	332.7	68.02	5.890		
15,000.0	13,072.0	14,620.6	12,683.0	56.6	55.4	14.45	-1,945.8	324.1	400.7	331.8	68.86	5.819		
15,100.0	13,072.0	14,720.6	12,683.0	57.5	56.4	14.45	-2,045.8	325.1	400.7	331.0	69.73	5.746		
15,200.0	13,072.0	14,820.6	12,683.0	58.5	57.4	14.45	-2,145.7	326.1	400.7	330.1	70.63	5.673		
15,300.0	13,072.0	14,920.6	12,683.0	59.5	58.4	14.45	-2,245.7	327.1	400.7	329.1	71.56	5.599		
15,400.0	13,072.0	15,020.6	12,683.0	60.6	59.4	14.45	-2,345.7	328.1	400.7	328.2	72.52	5.525		
15,500.0	13,072.0	15,120.6	12,683.0	61.6	60.5	14.45	-2,445.7	329.1	400.7	327.2	73.51	5.451		
15,600.0	13,072.0	15,220.6	12,683.0	62.7	61.6	14.45	-2,545.7	330.1	400.7	326.2	74.52	5.377		
15,700.0	13,072.0	15,320.6	12,683.0	63.9	62.8	14.45	-2,645.7	331.1	400.7	325.1	75.56	5.303		
15,800.0	13,072.0	15,420.6	12,683.0	65.0	63.9	14.45	-2,745.7	332.1	400.7	324.1	76.62	5.229		
15,900.0	13,072.0	15,520.6	12,683.0	66.1	65.1	14.45	-2,845.7	333.1	400.7	323.0	77.71	5.156		
16,000.0	13,072.0	15,620.6	12,683.0	67.3	66.3	14.45	-2,945.7	334.1	400.7	321.9	78.83	5.083		
16,100.0	13,072.0	15,720.6	12,683.0	68.5	67.5	14.45	-3,045.7	335.1	400.7	320.7	79.96	5.011		
16,200.0	13,072.0	15,820.6	12,683.0	69.7	68.8	14.45	-3,145.7	336.1	400.7	319.6	81.11	4.940		
16,300.0	13,072.0	15,920.6	12,683.0	71.0	70.0	14.45	-3,245.7	337.1	400.7	318.4	82.29	4.869		
16,400.0	13,072.0	16,020.6	12,683.0	72.2	71.3	14.45	-3,345.7	338.1	400.7	317.2	83.48	4.800		
16,500.0	13,072.0	16,120.6	12,683.0	73.5	72.6	14.45	-3,445.7	339.1	400.7	316.0	84.69	4.731		
16,600.0	13,072.0	16,220.6	12,683.0	74.8	73.9	14.45	-3,545.7	340.0	400.7	314.8	85.92	4.663		
16,700.0	13,072.0	16,320.6	12,683.0	76.1	75.2	14.45	-3,645.7	341.0	400.7	313.5	87.17	4.596		
16,800.0	13,072.0	16,420.6	12,683.0	77.4	76.5	14.45	-3,745.7	342.0	400.7	312.2	88.43	4.531		
16,900.0	13,072.0	16,520.6	12,683.0	78.7	77.8	14.45	-3,845.7	343.0	400.7	311.0	89.71	4.466		
17,000.0	13,072.0	16,620.6	12,683.0	80.0	79.2	14.45	-3,945.7	344.0	400.7	309.7	91.00	4.403		
17,100.0	13,072.0	16,720.6	12,683.0	81.4	80.5	14.45	-4,045.7	345.0	400.7	308.4	92.31	4.340		
17,200.0	13,072.0	16,820.6	12,683.0	82.7	81.9	14.45	-4,145.6	346.0	400.7	307.0	93.63	4.279		
17,300.0	13,072.0	16,920.6	12,683.0	84.1	83.3	14.45	-4,245.6	347.0	400.7	305.7	94.97	4.219		
17,400.0	13,072.0	17,020.6	12,683.0	85.5	84.7	14.45	-4,345.6	348.0	400.7	304.4	96.31	4.160		
17,500.0	13,072.0	17,120.6	12,683.0	86.9	86.1	14.45	-4,445.6	349.0	400.7	303.0	97.67	4.102		
17,600.0	13,072.0	17,220.6	12,683.0	88.3	87.5	14.45	-4,545.6	350.0	400.7	301.6	99.04	4.046		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0														Offset Site Error:	0.0 usft
Survey Program: 0-MWD														Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
+N/-S (usft)	+E/-W (usft)														
17,700.0	13,072.0	17,320.6	12,683.0	89.7	88.9	14.45	-4,645.6	351.0	400.7	300.3	100.42	3.990			
17,800.0	13,072.0	17,420.6	12,683.0	91.1	90.3	14.45	-4,745.6	352.0	400.7	298.9	101.81	3.935			
17,900.0	13,072.0	17,520.6	12,683.0	92.5	91.7	14.45	-4,845.6	353.0	400.7	297.5	103.22	3.882			
18,000.0	13,072.0	17,620.6	12,683.0	93.9	93.2	14.45	-4,945.6	354.0	400.7	296.1	104.63	3.830			
18,100.0	13,072.0	17,720.6	12,683.0	95.4	94.6	14.45	-5,045.6	355.0	400.7	294.6	106.05	3.778			
18,200.0	13,072.0	17,820.6	12,683.0	96.8	96.1	14.45	-5,145.6	356.0	400.7	293.2	107.48	3.728			
18,300.0	13,072.0	17,920.6	12,683.0	98.3	97.5	14.45	-5,245.6	357.0	400.7	291.8	108.92	3.679			
18,400.0	13,072.0	18,020.6	12,683.0	99.7	99.0	14.45	-5,345.6	358.0	400.7	290.3	110.36	3.631			
18,500.0	13,072.0	18,120.6	12,683.0	101.2	100.5	14.45	-5,445.6	359.0	400.7	288.9	111.82	3.583			
18,600.0	13,072.0	18,220.6	12,683.0	102.6	102.0	14.45	-5,545.6	360.0	400.7	287.4	113.28	3.537			
18,700.0	13,072.0	18,320.6	12,683.0	104.1	103.4	14.45	-5,645.6	361.0	400.7	285.9	114.75	3.492			
18,800.0	13,072.0	18,420.6	12,683.0	105.6	104.9	14.45	-5,745.6	362.0	400.7	284.5	116.23	3.447			
18,900.0	13,072.0	18,520.6	12,683.0	107.1	106.4	14.45	-5,845.6	363.0	400.7	283.0	117.71	3.404			
19,000.0	13,072.0	18,620.6	12,683.0	108.6	107.9	14.45	-5,945.6	364.0	400.7	281.5	119.20	3.361			
19,100.0	13,072.0	18,720.6	12,683.0	110.0	109.4	14.45	-6,045.6	365.0	400.7	280.0	120.70	3.320			
19,200.0	13,072.0	18,820.6	12,683.0	111.5	110.9	14.45	-6,145.5	366.0	400.7	278.5	122.20	3.279			
19,300.0	13,072.0	18,920.6	12,683.0	113.0	112.4	14.45	-6,245.5	367.0	400.7	277.0	123.71	3.239			
19,400.0	13,072.0	19,020.6	12,683.0	114.5	113.9	14.45	-6,345.5	368.0	400.7	275.5	125.22	3.200			
19,500.0	13,072.0	19,120.6	12,683.0	116.1	115.4	14.45	-6,445.5	369.0	400.7	273.9	126.74	3.161			
19,600.0	13,072.0	19,220.6	12,683.0	117.6	117.0	14.45	-6,545.5	370.0	400.7	272.4	128.27	3.124			
19,700.0	13,072.0	19,320.6	12,683.0	119.1	118.5	14.45	-6,645.5	371.0	400.7	270.9	129.80	3.087			
19,800.0	13,072.0	19,420.6	12,683.0	120.6	120.0	14.45	-6,745.5	372.0	400.7	269.3	131.33	3.051			
19,900.0	13,072.0	19,520.6	12,683.0	122.1	121.5	14.45	-6,845.5	373.0	400.7	267.8	132.87	3.016			
20,000.0	13,072.0	19,620.6	12,683.0	123.6	123.1	14.45	-6,945.5	374.0	400.7	266.3	134.41	2.981			
20,100.0	13,072.0	19,720.6	12,683.0	125.2	124.6	14.45	-7,045.5	375.0	400.7	264.7	135.96	2.947			
20,200.0	13,072.0	19,820.6	12,683.0	126.7	126.1	14.45	-7,145.5	376.0	400.7	263.2	137.51	2.914			
20,300.0	13,072.0	19,920.6	12,683.0	128.2	127.7	14.45	-7,245.5	377.0	400.7	261.6	139.07	2.881			
20,400.0	13,072.0	20,020.6	12,683.0	129.8	129.2	14.45	-7,345.5	378.0	400.7	260.0	140.63	2.849			
20,500.0	13,072.0	20,120.6	12,683.0	131.3	130.8	14.45	-7,445.5	379.0	400.7	258.5	142.20	2.818			
20,578.5	13,072.0	20,199.1	12,683.0	132.5	132.0	14.45	-7,524.0	379.8	400.7	257.3	143.43	2.794			
20,600.0	13,072.0	20,220.6	12,683.0	132.9	132.3	14.45	-7,545.5	380.0	400.7	256.9	143.77	2.787			
20,618.8	13,072.0	20,239.3	12,683.0	133.1	132.6	14.45	-7,564.2	380.2	400.7	256.6	144.06	2.781			
20,637.5	13,072.0	20,258.1	12,683.0	133.4	132.9	14.45	-7,583.0	380.4	400.7	256.3	144.35	2.776			
20,700.0	13,072.0	20,320.6	12,683.0	134.4	133.9	14.45	-7,645.5	381.0	400.7	255.3	145.34	2.757			
20,800.0	13,072.0	20,420.6	12,683.0	135.9	135.4	14.45	-7,745.5	382.0	400.7	253.8	146.91	2.727			
20,900.0	13,072.0	20,520.6	12,683.0	137.5	137.0	14.45	-7,845.5	383.0	400.7	252.2	148.49	2.698			
21,000.0	13,072.0	20,620.6	12,683.0	139.0	138.5	14.45	-7,945.5	384.0	400.7	250.6	150.07	2.670			
21,100.0	13,072.0	20,720.6	12,683.0	140.6	140.1	14.45	-8,045.5	385.0	400.7	249.0	151.66	2.642			
21,200.0	13,072.0	20,820.6	12,683.0	142.2	141.6	14.45	-8,145.4	386.0	400.7	247.4	153.25	2.615			
21,300.0	13,072.0	20,920.6	12,683.0	143.7	143.2	14.45	-8,245.4	387.0	400.7	245.8	154.84	2.588			
21,400.0	13,072.0	21,020.6	12,683.0	145.3	144.8	14.45	-8,345.4	388.0	400.7	244.2	156.43	2.561			
21,500.0	13,072.0	21,120.6	12,683.0	146.8	146.3	14.45	-8,445.4	389.0	400.7	242.6	158.03	2.535			
21,600.0	13,072.0	21,220.6	12,683.0	148.4	147.9	14.45	-8,545.4	390.0	400.7	241.0	159.63	2.510			
21,700.0	13,072.0	21,320.6	12,683.0	150.0	149.5	14.45	-8,645.4	391.0	400.7	239.4	161.23	2.485			
21,800.0	13,072.0	21,420.6	12,683.0	151.5	151.0	14.45	-8,745.4	392.0	400.7	237.8	162.84	2.461			
21,900.0	13,072.0	21,520.6	12,683.0	153.1	152.6	14.45	-8,845.4	393.0	400.7	236.2	164.44	2.437			
22,000.0	13,072.0	21,620.6	12,683.0	154.7	154.2	14.45	-8,945.4	394.0	400.7	234.6	166.05	2.413			
22,100.0	13,072.0	21,720.6	12,683.0	156.2	155.8	14.45	-9,045.4	395.0	400.7	233.0	167.67	2.390			
22,200.0	13,072.0	21,820.6	12,683.0	157.8	157.4	14.45	-9,145.4	396.0	400.7	231.4	169.28	2.367			
22,300.0	13,072.0	21,920.6	12,683.0	159.4	158.9	14.45	-9,245.4	397.0	400.7	229.8	170.90	2.345			
22,400.0	13,072.0	22,020.6	12,683.0	161.0	160.5	14.45	-9,345.4	398.0	400.7	228.2	172.52	2.323			
22,500.0	13,072.0	22,120.6	12,683.0	162.6	162.1	14.45	-9,445.4	399.0	400.7	226.5	174.14	2.301			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 443H - OWB - PWP0												Offset Site Error:	0.0 usft
Survey Program: 0-MWD												Offset Well Error:	0.0 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre	Rule Assigned:								
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
22,600.0	13,072.0	22,220.6	12,683.0	164.1	163.7	14.45	-9,545.4	400.0	400.7	224.9	175.76	2.280	
22,700.0	13,072.0	22,320.6	12,683.0	165.7	165.3	14.45	-9,645.4	401.0	400.7	223.3	177.38	2.259	
22,800.0	13,072.0	22,420.6	12,683.0	167.3	166.8	14.45	-9,745.4	402.0	400.7	221.7	179.01	2.238	
22,900.0	13,072.0	22,520.6	12,683.0	168.9	168.4	14.45	-9,845.4	402.9	400.7	220.0	180.64	2.218	
23,000.0	13,072.0	22,620.6	12,683.0	170.5	170.0	14.45	-9,945.4	403.9	400.7	218.4	182.27	2.198	
23,100.0	13,072.0	22,720.6	12,683.0	172.0	171.6	14.45	-10,045.4	404.9	400.7	216.8	183.90	2.179	
23,200.0	13,072.0	22,820.6	12,683.0	173.6	173.2	14.45	-10,145.3	405.9	400.7	215.1	185.54	2.160	
23,300.0	13,072.0	22,920.6	12,683.0	175.2	174.8	14.45	-10,245.3	406.9	400.7	213.5	187.17	2.141	
23,400.0	13,072.0	23,020.6	12,683.0	176.8	176.4	14.45	-10,345.3	407.9	400.7	211.9	188.81	2.122	
23,500.0	13,072.0	23,120.6	12,683.0	178.4	178.0	14.45	-10,445.3	408.9	400.7	210.2	190.45	2.104	
23,600.0	13,072.0	23,220.6	12,683.0	180.0	179.6	14.45	-10,545.3	409.9	400.7	208.6	192.09	2.086	
23,700.0	13,072.0	23,320.6	12,683.0	181.6	181.2	14.45	-10,645.3	410.9	400.7	206.9	193.73	2.068	
23,800.0	13,072.0	23,420.6	12,683.0	183.2	182.8	14.45	-10,745.3	411.9	400.7	205.3	195.37	2.051	
23,900.0	13,072.0	23,520.6	12,683.0	184.8	184.4	14.45	-10,845.3	412.9	400.7	203.7	197.02	2.034	
24,000.0	13,072.0	23,620.6	12,683.0	186.4	186.0	14.45	-10,945.3	413.9	400.7	202.0	198.66	2.017	
24,100.0	13,072.0	23,720.6	12,683.0	188.0	187.6	14.45	-11,045.3	414.9	400.7	200.4	200.31	2.000	
24,200.0	13,072.0	23,820.6	12,683.0	189.6	189.2	14.45	-11,145.3	415.9	400.7	198.7	201.96	1.984	
24,300.0	13,072.0	23,920.6	12,683.0	191.2	190.8	14.45	-11,245.3	416.9	400.7	197.1	203.61	1.968	
24,320.6	13,072.0	23,941.1	12,683.0	191.5	191.1	14.45	-11,265.8	417.1	400.7	196.7	203.95	1.965	
24,341.1	13,072.0	23,961.7	12,683.0	191.8	191.4	14.48	-11,286.4	417.3	400.7	196.4	204.36	1.961	
24,341.6	13,072.0	23,962.2	12,683.0	191.8	191.4	14.48	-11,286.9	417.3	400.7	196.3	204.37	1.961	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program: 0-MWD													Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
0.0	0.0	0.0	0.0	0.0	0.0	89.57	0.2	33.0	33.0					
100.0	100.0	100.0	100.0	0.3	0.3	89.57	0.2	33.0	33.0	32.5	0.50	65.737		
200.0	200.0	200.0	200.0	0.6	0.6	89.57	0.2	33.0	33.0	31.8	1.22	27.068		
300.0	300.0	300.0	300.0	1.0	1.0	89.57	0.2	33.0	33.0	31.1	1.94	17.043		
400.0	400.0	400.0	400.0	1.3	1.3	89.57	0.2	33.0	33.0	30.3	2.65	12.437		
500.0	500.0	500.0	500.0	1.7	1.7	89.57	0.2	33.0	33.0	29.6	3.37	9.791		
600.0	600.0	600.0	600.0	2.0	2.0	89.57	0.2	33.0	33.0	28.9	4.09	8.073		
700.0	700.0	700.0	700.0	2.4	2.4	89.57	0.2	33.0	33.0	28.2	4.80	6.868		
800.0	800.0	800.0	800.0	2.8	2.8	89.57	0.2	33.0	33.0	27.5	5.52	5.976		
900.0	900.0	900.0	900.0	3.1	3.1	89.57	0.2	33.0	33.0	26.8	6.24	5.289		
1,000.0	1,000.0	1,000.0	1,000.0	3.5	3.5	89.57	0.2	33.0	33.0	26.0	6.95	4.744		
1,100.0	1,100.0	1,100.0	1,100.0	3.8	3.8	89.57	0.2	33.0	33.0	25.3	7.67	4.301		
1,200.0	1,200.0	1,200.0	1,200.0	4.2	4.2	89.57	0.2	33.0	33.0	24.6	8.39	3.933		
1,300.0	1,300.0	1,300.0	1,300.0	4.6	4.6	89.57	0.2	33.0	33.0	23.9	9.11	3.623		
1,400.0	1,400.0	1,400.0	1,400.0	4.9	4.9	89.57	0.2	33.0	33.0	23.2	9.82	3.359		
1,500.0	1,500.0	1,500.0	1,500.0	5.3	5.3	89.57	0.2	33.0	33.0	22.5	10.54	3.130		
1,600.0	1,600.0	1,600.0	1,600.0	5.6	5.6	89.57	0.2	33.0	33.0	21.7	11.26	2.931		
1,700.0	1,700.0	1,700.0	1,700.0	6.0	6.0	89.57	0.2	33.0	33.0	21.0	11.97	2.755		
1,800.0	1,800.0	1,800.0	1,800.0	6.3	6.3	89.57	0.2	33.0	33.0	20.3	12.69	2.600		
1,900.0	1,900.0	1,900.0	1,900.0	6.7	6.7	89.57	0.2	33.0	33.0	19.6	13.41	2.461		
2,000.0	2,000.0	2,000.0	2,000.0	7.1	7.1	89.57	0.2	33.0	33.0	18.9	14.12	2.336		
2,100.0	2,100.0	2,100.0	2,100.0	7.4	7.4	22.69	0.2	33.0	31.4	16.5	14.83	2.115		
2,200.0	2,199.8	2,199.8	2,199.8	7.8	7.8	27.09	0.2	33.0	26.6	11.1	15.54	1.713		
2,300.0	2,299.5	2,298.5	2,298.4	8.1	8.1	35.81	0.7	35.5	21.6	5.4	16.22	1.331 Level 3		
2,350.0	2,349.1	2,347.9	2,347.8	8.3	8.3	41.52	1.3	38.6	20.0	3.5	16.55	1.210 Level 3		
2,397.6	2,396.4	2,395.1	2,394.8	8.5	8.5	46.60	2.0	42.8	19.5	2.6	16.86	1.155 Level 3, CC		
2,400.0	2,398.8	2,397.5	2,397.1	8.5	8.5	46.81	2.0	43.0	19.5	2.6	16.88	1.154 Level 3, ES, SF		
2,500.0	2,498.0	2,496.6	2,495.4	8.8	8.8	50.71	4.3	55.6	21.8	4.2	17.53	1.242 Level 3		
2,600.0	2,597.3	2,595.3	2,592.5	9.2	9.2	46.85	7.4	73.1	28.2	10.1	18.12	1.555		
2,700.0	2,696.5	2,693.2	2,687.7	9.6	9.5	40.41	11.3	95.3	39.1	20.5	18.65	2.097		
2,800.0	2,795.8	2,792.0	2,783.2	9.9	9.9	35.43	15.8	120.5	52.9	33.6	19.30	2.743		
2,900.0	2,895.0	2,891.0	2,878.8	10.3	10.3	32.52	20.3	145.7	67.0	47.0	19.99	3.353		
3,000.0	2,994.3	2,990.0	2,974.4	10.7	10.8	30.61	24.8	171.0	81.2	60.5	20.69	3.925		
3,100.0	3,093.5	3,088.9	3,070.0	11.1	11.2	29.28	29.2	196.2	95.4	74.1	21.39	4.461		
3,200.0	3,192.8	3,187.9	3,165.6	11.4	11.6	28.29	33.7	221.4	109.7	87.6	22.11	4.964		
3,300.0	3,292.0	3,286.8	3,261.2	11.8	12.1	27.53	38.2	246.6	124.0	101.2	22.82	5.435		
3,400.0	3,391.3	3,385.8	3,356.7	12.2	12.5	26.93	42.7	271.8	138.4	114.8	23.55	5.876		
3,500.0	3,490.6	3,484.8	3,452.3	12.6	13.0	26.44	47.2	297.0	152.7	128.4	24.27	6.291		
3,600.0	3,589.8	3,583.7	3,547.9	13.0	13.5	26.03	51.6	322.3	167.0	142.0	25.00	6.682		
3,700.0	3,689.1	3,682.7	3,643.5	13.4	13.9	25.69	56.1	347.5	181.4	155.7	25.73	7.050		
3,800.0	3,788.3	3,781.6	3,739.1	13.8	14.4	25.40	60.6	372.7	195.8	169.3	26.46	7.397		
3,900.0	3,887.6	3,880.6	3,834.7	14.1	14.9	25.15	65.1	397.9	210.1	182.9	27.20	7.725		
4,000.0	3,986.8	3,979.6	3,930.3	14.5	15.4	24.93	69.5	423.1	224.5	196.5	27.94	8.035		
4,100.0	4,086.1	4,078.5	4,025.9	14.9	15.9	24.74	74.0	448.4	238.9	210.2	28.68	8.329		
4,200.0	4,185.3	4,177.5	4,121.4	15.3	16.4	24.56	78.5	473.6	253.2	223.8	29.42	8.607		
4,300.0	4,284.6	4,276.4	4,217.0	15.7	16.9	24.41	83.0	498.8	267.6	237.4	30.16	8.871		
4,400.0	4,383.8	4,375.4	4,312.6	16.1	17.4	24.28	87.5	524.0	282.0	251.1	30.91	9.123		
4,500.0	4,483.1	4,474.4	4,408.2	16.5	17.9	24.15	91.9	549.2	296.3	264.7	31.66	9.362		
4,600.0	4,582.4	4,573.3	4,503.8	16.9	18.4	24.04	96.4	574.4	310.7	278.3	32.40	9.589		
4,700.0	4,681.6	4,672.3	4,599.4	17.3	18.9	23.94	100.9	599.7	325.1	292.0	33.15	9.806		
4,800.0	4,780.9	4,771.2	4,695.0	17.7	19.4	23.84	105.4	624.9	339.5	305.6	33.90	10.014		
4,900.0	4,880.1	4,870.2	4,790.6	18.1	19.9	23.76	109.9	650.1	353.9	319.2	34.65	10.212		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program: 0-MWD													Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)		Ellipses (usft)				
5,000.0	4,979.4	4,969.2	4,886.1	18.5	20.5	23.68	114.3	675.3	368.2	332.8	35.40	10.401		
5,100.0	5,078.6	5,068.1	4,981.7	18.9	21.0	23.60	118.8	700.5	382.6	346.5	36.16	10.582		
5,200.0	5,177.9	5,167.1	5,077.3	19.3	21.5	23.54	123.3	725.7	397.0	360.1	36.91	10.756		
5,300.0	5,277.1	5,266.0	5,172.9	19.7	22.0	23.47	127.8	751.0	411.4	373.7	37.67	10.922		
5,400.0	5,376.4	5,365.0	5,268.5	20.1	22.5	23.41	132.3	776.2	425.8	387.4	38.42	11.082		
5,500.0	5,475.7	5,463.9	5,364.1	20.5	23.1	23.36	136.7	801.4	440.2	401.0	39.18	11.235		
5,565.0	5,540.2	5,528.3	5,426.2	20.7	23.4	23.32	139.6	817.8	449.5	409.8	39.67	11.332		
5,600.0	5,574.9	5,562.9	5,459.6	20.9	23.6	23.34	141.2	826.6	454.7	414.8	39.93	11.387		
5,700.0	5,674.5	5,661.4	5,554.8	21.2	24.1	23.28	145.7	851.7	471.8	431.1	40.68	11.598		
5,800.0	5,774.3	5,767.0	5,656.9	21.6	24.7	23.08	150.4	878.3	491.7	450.2	41.51	11.845		
5,900.0	5,874.3	5,865.3	5,772.2	22.0	25.3	22.77	155.0	904.3	511.6	469.2	42.47	12.048		
5,915.0	5,889.3	5,903.1	5,789.7	22.0	25.3	90.77	155.6	907.8	514.6	471.9	42.60	12.078		
6,000.0	5,974.3	6,005.0	5,889.9	22.3	25.8	90.39	158.8	925.8	529.6	486.2	43.35	12.215		
6,100.0	6,074.3	6,126.4	6,010.0	22.6	26.3	90.06	161.8	942.7	543.4	499.3	44.18	12.301		
6,200.0	6,174.3	6,249.0	6,132.1	23.0	26.8	89.84	163.9	954.6	553.2	508.2	44.94	12.310		
6,300.0	6,274.3	6,372.5	6,255.3	23.3	27.2	89.72	165.2	961.4	558.7	513.1	45.63	12.245		
6,400.0	6,374.3	6,491.5	6,374.3	23.6	27.6	89.69	165.4	963.1	560.0	513.8	46.26	12.107		
6,500.0	6,474.3	6,591.5	6,474.3	24.0	27.9	89.69	165.4	963.1	560.0	513.1	46.94	11.932		
6,600.0	6,574.3	6,691.5	6,574.3	24.3	28.1	89.69	165.4	963.1	560.0	512.4	47.62	11.761		
6,700.0	6,674.3	6,791.5	6,674.3	24.7	28.4	89.69	165.4	963.1	560.0	511.7	48.30	11.594		
6,800.0	6,774.3	6,891.5	6,774.3	25.0	28.7	89.69	165.4	963.1	560.0	511.1	48.99	11.432		
6,900.0	6,874.3	6,991.5	6,874.3	25.3	29.0	89.69	165.4	963.1	560.0	510.4	49.67	11.274		
7,000.0	6,974.3	7,091.5	6,974.3	25.7	29.3	89.69	165.4	963.1	560.0	509.7	50.36	11.121		
7,100.0	7,074.3	7,191.5	7,074.3	26.0	29.6	89.69	165.4	963.1	560.0	509.0	51.05	10.971		
7,200.0	7,174.3	7,291.5	7,174.3	26.4	29.9	89.69	165.4	963.1	560.0	508.3	51.74	10.825		
7,300.0	7,274.3	7,391.5	7,274.3	26.7	30.2	89.69	165.4	963.1	560.0	507.6	52.42	10.683		
7,400.0	7,374.3	7,491.5	7,374.3	27.1	30.5	89.69	165.4	963.1	560.0	506.9	53.11	10.544		
7,500.0	7,474.3	7,591.5	7,474.3	27.4	30.8	89.69	165.4	963.1	560.0	506.2	53.80	10.409		
7,600.0	7,574.3	7,691.5	7,574.3	27.8	31.2	89.69	165.4	963.1	560.0	505.6	54.49	10.277		
7,700.0	7,674.3	7,791.5	7,674.3	28.1	31.5	89.69	165.4	963.1	560.0	504.9	55.19	10.148		
7,800.0	7,774.3	7,891.5	7,774.3	28.4	31.8	89.69	165.4	963.1	560.0	504.2	55.88	10.023		
7,900.0	7,874.3	7,991.5	7,874.3	28.8	32.1	89.69	165.4	963.1	560.0	503.5	56.57	9.900		
8,000.0	7,974.3	8,091.5	7,974.3	29.1	32.4	89.69	165.4	963.1	560.0	502.8	57.26	9.780		
8,100.0	8,074.3	8,191.5	8,074.3	29.5	32.7	89.69	165.4	963.1	560.0	502.1	57.96	9.663		
8,200.0	8,174.3	8,291.5	8,174.3	29.8	33.0	89.69	165.4	963.1	560.0	501.4	58.65	9.549		
8,300.0	8,274.3	8,391.5	8,274.3	30.2	33.3	89.69	165.4	963.1	560.0	500.7	59.35	9.437		
8,400.0	8,374.3	8,491.5	8,374.3	30.5	33.6	89.69	165.4	963.1	560.0	500.0	60.04	9.327		
8,500.0	8,474.3	8,591.5	8,474.3	30.9	34.0	89.69	165.4	963.1	560.0	499.3	60.74	9.221		
8,600.0	8,574.3	8,691.5	8,574.3	31.2	34.3	89.69	165.4	963.1	560.0	498.6	61.44	9.116		
8,700.0	8,674.3	8,791.5	8,674.3	31.6	34.6	89.69	165.4	963.1	560.0	497.9	62.13	9.014		
8,800.0	8,774.3	8,891.5	8,774.3	31.9	34.9	89.69	165.4	963.1	560.0	497.2	62.83	8.914		
8,900.0	8,874.3	8,991.5	8,874.3	32.3	35.2	89.69	165.4	963.1	560.0	496.5	63.53	8.816		
9,000.0	8,974.3	9,091.5	8,974.3	32.6	35.5	89.69	165.4	963.1	560.0	495.8	64.23	8.720		
9,100.0	9,074.3	9,191.5	9,074.3	33.0	35.9	89.69	165.4	963.1	560.0	495.1	64.92	8.626		
9,200.0	9,174.3	9,291.5	9,174.3	33.3	36.2	89.69	165.4	963.1	560.0	494.4	65.62	8.534		
9,300.0	9,274.3	9,391.5	9,274.3	33.7	36.5	89.69	165.4	963.1	560.0	493.7	66.32	8.444		
9,400.0	9,374.3	9,491.5	9,374.3	34.0	36.8	89.69	165.4	963.1	560.0	493.0	67.02	8.356		
9,500.0	9,474.3	9,591.5	9,474.3	34.4	37.2	89.69	165.4	963.1	560.0	492.3	67.72	8.270		
9,600.0	9,574.3	9,691.5	9,574.3	34.7	37.5	89.69	165.4	963.1	560.0	491.6	68.42	8.185		
9,700.0	9,674.3	9,791.5	9,674.3	35.1	37.8	89.69	165.4	963.1	560.0	490.9	69.12	8.102		
9,800.0	9,774.3	9,891.5	9,774.3	35.4	38.1	89.69	165.4	963.1	560.0	490.2	69.83	8.021		
9,900.0	9,874.3	9,991.5	9,874.3	35.8	38.5	89.69	165.4	963.1	560.0	489.5	70.53	7.941		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources
Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program:	0-MWD								Rule Assigned:				Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Offset Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (usft)		Minimum Separation (usft)	Separation Factor	Warning	
							+N/-S (usft)	+E/-W (usft)						
10,000.0	9,974.3	10,091.5	9,974.3	36.1	38.8	89.69	165.4	963.1	560.0	488.8	71.23	7.863		
10,100.0	10,074.3	10,191.5	10,074.3	36.5	39.1	89.69	165.4	963.1	560.0	488.1	71.93	7.786		
10,200.0	10,174.3	10,291.5	10,174.3	36.8	39.4	89.69	165.4	963.1	560.0	487.4	72.63	7.711		
10,300.0	10,274.3	10,391.5	10,274.3	37.2	39.8	89.69	165.4	963.1	560.0	486.7	73.34	7.637		
10,400.0	10,374.3	10,491.5	10,374.3	37.5	40.1	89.69	165.4	963.1	560.0	486.0	74.04	7.564		
10,500.0	10,474.3	10,591.5	10,474.3	37.9	40.4	89.69	165.4	963.1	560.0	485.3	74.74	7.493		
10,600.0	10,574.3	10,691.5	10,574.3	38.2	40.7	89.69	165.4	963.1	560.0	484.6	75.45	7.423		
10,700.0	10,674.3	10,791.5	10,674.3	38.6	41.1	89.69	165.4	963.1	560.0	483.9	76.15	7.355		
10,800.0	10,774.3	10,891.5	10,774.3	38.9	41.4	89.69	165.4	963.1	560.0	483.2	76.85	7.287		
10,900.0	10,874.3	10,991.5	10,874.3	39.3	41.7	89.69	165.4	963.1	560.0	482.5	77.56	7.221		
11,000.0	10,974.3	11,091.5	10,974.3	39.6	42.1	89.69	165.4	963.1	560.0	481.8	78.26	7.156		
11,100.0	11,074.3	11,191.5	11,074.3	40.0	42.4	89.69	165.4	963.1	560.0	481.1	78.97	7.092		
11,200.0	11,174.3	11,291.5	11,174.3	40.3	42.7	89.69	165.4	963.1	560.0	480.4	79.67	7.030		
11,300.0	11,274.3	11,391.5	11,274.3	40.7	43.1	89.69	165.4	963.1	560.0	479.7	80.38	6.968		
11,400.0	11,374.3	11,491.5	11,374.3	41.0	43.4	89.69	165.4	963.1	560.0	479.0	81.08	6.907		
11,500.0	11,474.3	11,591.5	11,474.3	41.4	43.7	89.69	165.4	963.1	560.0	478.3	81.79	6.848		
11,600.0	11,574.3	11,691.5	11,574.3	41.7	44.1	89.69	165.4	963.1	560.0	477.6	82.49	6.789		
11,700.0	11,674.3	11,791.5	11,674.3	42.1	44.4	89.69	165.4	963.1	560.0	476.8	83.20	6.731		
11,800.0	11,774.3	11,891.5	11,774.3	42.4	44.7	89.69	165.4	963.1	560.0	476.1	83.90	6.675		
11,900.0	11,874.3	11,991.5	11,874.3	42.8	45.1	89.69	165.4	963.1	560.0	475.4	84.61	6.619		
12,000.0	11,974.3	12,091.5	11,974.3	43.1	45.4	89.69	165.4	963.1	560.0	474.7	85.32	6.564		
12,100.0	12,074.3	12,191.5	12,074.3	43.5	45.7	89.69	165.4	963.1	560.0	474.0	86.02	6.510		
12,200.0	12,174.3	12,291.5	12,174.3	43.8	46.1	89.69	165.4	963.1	560.0	473.3	86.73	6.457		
12,300.0	12,274.3	12,391.5	12,274.3	44.2	46.4	89.69	165.4	963.1	560.0	472.6	87.44	6.405		
12,304.4	12,278.7	12,395.9	12,278.7	44.2	46.4	89.69	165.4	963.1	560.0	472.6	87.47	6.403		
12,400.0	12,374.3	12,489.7	12,371.9	44.6	46.7	90.63	156.2	963.2	560.2	472.0	88.13	6.356		
12,500.0	12,474.3	12,580.6	12,458.8	44.9	46.9	93.30	130.1	963.4	561.5	472.7	88.86	6.319		
12,600.0	12,574.3	12,659.4	12,529.0	45.3	47.1	96.91	94.5	963.8	566.7	477.1	89.52	6.330		
12,620.2	12,594.5	12,675.0	12,542.2	45.3	47.2	97.75	86.1	963.9	568.4	478.8	89.63	6.342		
12,625.0	12,599.3	12,675.0	12,542.2	45.3	47.2	-81.62	86.1	963.9	568.9	479.2	89.63	6.347		
12,650.0	12,624.3	12,694.2	12,557.9	45.4	47.2	-80.29	75.1	964.0	571.4	481.7	89.74	6.367		
12,675.0	12,649.2	12,711.2	12,571.5	45.5	47.2	-79.07	65.0	964.1	574.2	484.4	89.80	6.394		
12,700.0	12,673.9	12,728.0	12,584.6	45.6	47.3	-77.88	54.4	964.2	577.1	487.3	89.84	6.424		
12,725.0	12,698.5	12,744.6	12,597.2	45.7	47.3	-76.70	43.5	964.3	580.2	490.4	89.85	6.458		
12,750.0	12,722.7	12,761.1	12,609.2	45.7	47.3	-75.56	32.3	964.4	583.5	493.7	89.82	6.496		
12,775.0	12,746.6	12,775.0	12,619.2	45.8	47.3	-74.54	22.5	964.5	586.9	497.1	89.74	6.540		
12,800.0	12,770.1	12,793.6	12,631.9	45.9	47.4	-73.35	9.0	964.6	590.3	500.6	89.69	6.582		
12,825.0	12,793.1	12,809.6	12,642.5	45.9	47.4	-72.29	-3.0	964.8	593.8	504.2	89.59	6.628		
12,850.0	12,815.5	12,825.0	12,652.3	46.0	47.4	-71.29	-14.9	964.9	597.4	507.9	89.46	6.678		
12,875.0	12,837.4	12,841.5	12,662.3	46.1	47.4	-70.29	-28.0	965.0	600.9	511.6	89.32	6.728		
12,900.0	12,858.6	12,857.2	12,671.5	46.1	47.5	-69.35	-40.8	965.1	604.4	515.3	89.16	6.779		
12,925.0	12,879.0	12,875.0	12,681.3	46.2	47.5	-68.39	-55.6	965.3	607.9	518.9	89.02	6.829		
12,950.0	12,898.7	12,888.5	12,688.4	46.2	47.5	-67.60	-67.1	965.4	611.3	522.5	88.80	6.884		
12,975.0	12,917.5	12,900.0	12,694.1	46.3	47.5	-66.90	-77.0	965.5	614.6	526.1	88.54	6.942		
13,000.0	12,935.5	12,919.5	12,703.4	46.3	47.5	-66.03	-94.2	965.7	617.8	529.4	88.41	6.988		
13,025.0	12,962.5	12,934.9	12,710.2	46.3	47.5	-65.31	-108.0	965.8	620.9	532.6	88.21	7.038		
13,050.0	12,968.6	12,950.0	12,716.4	46.4	47.5	-64.65	-121.8	965.9	623.8	535.8	88.02	7.087		
13,075.0	12,983.6	12,965.6	12,722.4	46.4	47.6	-64.03	-136.2	966.1	626.5	538.7	87.84	7.133		
13,100.0	12,997.5	12,980.9	12,727.8	46.4	47.6	-63.46	-150.4	966.2	629.1	541.5	87.66	7.177		
13,125.0	13,010.4	13,000.0	12,733.9	46.5	47.6	-62.88	-168.6	966.4	631.5	544.0	87.55	7.213		
13,150.0	13,022.1	13,011.3	12,737.2	46.5	47.6	-62.48	-179.4	966.5	633.7	546.4	87.36	7.254		
13,175.0	13,032.6	13,025.0	12,740.8	46.5	47.6	-62.08	-192.6	966.6	635.7	548.5	87.23	7.288		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources
Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0													Offset Site Error:	0.0 usft
Survey Program:		0-MWD							Rule Assigned:				Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
13,200.0	13,041.9	13,041.6	12,744.7	46.6	47.6	-61.70	-208.7	966.8	637.5	550.3	87.14	7.315		
13,225.0	13,050.1	13,056.7	12,747.7	46.6	47.6	-61.38	-223.5	967.0	639.0	551.9	87.07	7.339		
13,250.0	13,056.9	13,075.0	12,750.7	46.6	47.7	-61.09	-241.6	967.1	640.3	553.3	87.04	7.356		
13,275.0	13,062.5	13,086.8	12,752.3	46.7	47.7	-60.91	-253.3	967.2	641.3	554.3	87.00	7.371		
13,300.0	13,066.8	13,100.0	12,753.8	46.7	47.7	-60.75	-266.4	967.4	642.1	555.1	87.01	7.380		
13,325.0	13,069.8	13,116.9	12,755.1	46.7	47.7	-60.64	-283.3	967.5	642.7	555.6	87.06	7.383		
13,350.0	13,071.5	13,132.0	12,755.8	46.8	47.7	-60.58	-298.3	967.7	643.0	555.9	87.13	7.380		
13,370.2	13,072.0	13,145.7	12,756.0	46.8	47.7	-60.57	-312.0	967.8	643.0	555.8	87.21	7.374		
13,381.1	13,072.0	13,154.0	12,756.0	46.8	47.7	-60.57	-320.3	967.9	643.0	555.8	87.26	7.369		
13,400.0	13,072.0	13,172.9	12,756.0	46.9	47.8	-60.57	-339.2	968.1	643.0	555.7	87.34	7.362		
13,500.0	13,072.0	13,272.9	12,756.0	47.1	47.9	-60.57	-439.2	969.1	643.0	555.2	87.84	7.321		
13,600.0	13,072.0	13,372.9	12,756.0	47.4	48.1	-60.57	-539.2	970.1	643.0	554.6	88.43	7.272		
13,700.0	13,072.0	13,472.9	12,756.0	47.8	48.4	-60.57	-639.2	971.1	643.0	553.9	89.12	7.216		
13,800.0	13,072.0	13,572.9	12,756.0	48.2	48.8	-60.57	-739.2	972.1	643.0	553.1	89.90	7.153		
13,900.0	13,072.0	13,672.9	12,756.0	48.6	49.2	-60.57	-839.2	973.1	643.0	552.3	90.77	7.084		
14,000.0	13,072.0	13,772.9	12,756.0	49.1	49.6	-60.57	-939.2	974.1	643.0	551.3	91.73	7.010		
14,100.0	13,072.0	13,872.9	12,756.0	49.7	50.1	-60.57	-1,039.2	975.1	643.0	550.3	92.77	6.931		
14,200.0	13,072.0	13,972.9	12,756.0	50.3	50.7	-60.57	-1,139.2	976.1	643.0	549.1	93.90	6.848		
14,300.0	13,072.0	14,072.9	12,756.0	50.9	51.3	-60.57	-1,239.2	977.1	643.0	547.9	95.11	6.761		
14,400.0	13,072.0	14,172.9	12,756.0	51.6	52.0	-60.57	-1,339.2	978.1	643.0	546.6	96.39	6.671		
14,500.0	13,072.0	14,272.9	12,756.0	52.3	52.7	-60.57	-1,439.2	979.1	643.0	545.3	97.75	6.579		
14,600.0	13,072.0	14,372.9	12,756.0	53.1	53.5	-60.57	-1,539.2	980.1	643.0	543.9	99.17	6.484		
14,700.0	13,072.0	14,472.9	12,756.0	53.9	54.3	-60.57	-1,639.2	981.1	643.0	542.4	100.67	6.388		
14,800.0	13,072.0	14,572.9	12,756.0	54.8	55.1	-60.57	-1,739.2	982.1	643.0	540.8	102.23	6.290		
14,900.0	13,072.0	14,672.9	12,756.0	55.7	56.0	-60.57	-1,839.2	983.1	643.0	539.2	103.85	6.192		
15,000.0	13,072.0	14,772.9	12,756.0	56.6	56.9	-60.57	-1,939.2	984.1	643.0	537.5	105.53	6.093		
15,100.0	13,072.0	14,872.9	12,756.0	57.5	57.8	-60.57	-2,039.2	985.1	643.0	535.8	107.27	5.995		
15,200.0	13,072.0	14,972.9	12,756.0	58.5	58.8	-60.57	-2,139.2	986.1	643.0	534.0	109.06	5.896		
15,300.0	13,072.0	15,072.9	12,756.0	59.5	59.8	-60.57	-2,239.2	987.1	643.0	532.1	110.90	5.798		
15,400.0	13,072.0	15,172.9	12,756.0	60.6	60.8	-60.57	-2,339.1	988.1	643.0	530.2	112.79	5.701		
15,500.0	13,072.0	15,272.9	12,756.0	61.6	61.9	-60.57	-2,439.1	989.1	643.0	528.3	114.72	5.605		
15,600.0	13,072.0	15,372.9	12,756.0	62.7	63.0	-60.57	-2,539.1	990.1	643.0	526.3	116.70	5.510		
15,700.0	13,072.0	15,472.9	12,756.0	63.9	64.1	-60.57	-2,639.1	991.1	643.0	524.3	118.72	5.416		
15,800.0	13,072.0	15,572.9	12,756.0	65.0	65.2	-60.57	-2,739.1	992.1	643.0	522.3	120.78	5.324		
15,900.0	13,072.0	15,672.9	12,756.0	66.1	66.4	-60.57	-2,839.1	993.1	643.0	520.2	122.88	5.233		
16,000.0	13,072.0	15,772.9	12,756.0	67.3	67.6	-60.57	-2,939.1	994.0	643.0	518.0	125.01	5.144		
16,100.0	13,072.0	15,872.9	12,756.0	68.5	68.7	-60.57	-3,039.1	995.0	643.0	515.9	127.17	5.056		
16,200.0	13,072.0	15,972.9	12,756.0	69.7	70.0	-60.57	-3,139.1	996.0	643.0	513.7	129.37	4.970		
16,300.0	13,072.0	16,072.9	12,756.0	71.0	71.2	-60.57	-3,239.1	997.0	643.0	511.4	131.60	4.886		
16,400.0	13,072.0	16,172.9	12,756.0	72.2	72.4	-60.57	-3,339.1	998.0	643.0	509.2	133.86	4.804		
16,500.0	13,072.0	16,272.9	12,756.0	73.5	73.7	-60.57	-3,439.1	999.0	643.0	506.9	136.14	4.723		
16,600.0	13,072.0	16,372.9	12,756.0	74.8	75.0	-60.57	-3,539.1	1,000.0	643.0	504.6	138.46	4.644		
16,700.0	13,072.0	16,472.9	12,756.0	76.1	76.3	-60.57	-3,639.1	1,001.0	643.0	502.2	140.79	4.567		
16,800.0	13,072.0	16,572.9	12,756.0	77.4	77.6	-60.57	-3,739.1	1,002.0	643.0	499.9	143.15	4.492		
16,900.0	13,072.0	16,672.9	12,756.0	78.7	78.9	-60.57	-3,839.1	1,003.0	643.0	497.5	145.53	4.418		
17,000.0	13,072.0	16,772.9	12,756.0	80.0	80.2	-60.57	-3,939.1	1,004.0	643.0	495.1	147.94	4.347		
17,100.0	13,072.0	16,872.9	12,756.0	81.4	81.6	-60.57	-4,039.1	1,005.0	643.0	492.7	150.36	4.276		
17,200.0	13,072.0	16,972.9	12,756.0	82.7	82.9	-60.57	-4,139.1	1,006.0	643.0	490.2	152.81	4.208		
17,300.0	13,072.0	17,072.9	12,756.0	84.1	84.3	-60.57	-4,239.1	1,007.0	643.0	487.8	155.27	4.141		
17,400.0	13,072.0	17,172.9	12,756.0	85.5	85.7	-60.57	-4,339.0	1,008.0	643.0	485.3	157.75	4.076		
17,500.0	13,072.0	17,272.9	12,756.0	86.9	87.0	-60.57	-4,439.0	1,009.0	643.0	482.8	160.24	4.013		
17,600.0	13,072.0	17,372.9	12,756.0	88.3	88.4	-60.57	-4,539.0	1,010.0	643.0	480.3	162.76	3.951		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0													Offset Site Error:	0.0 usft	
Survey Program:		0-MWD				Rule Assigned:								Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
17,700.0	13,072.0	17,472.9	12,756.0	89.7	89.8	-60.57	-4,639.0	1,011.0	643.0	477.7	165.28	3.890			
17,800.0	13,072.0	17,572.9	12,756.0	91.1	91.2	-60.57	-4,739.0	1,012.0	643.0	475.2	167.83	3.831			
17,900.0	13,072.0	17,672.9	12,756.0	92.5	92.7	-60.57	-4,839.0	1,013.0	643.0	472.6	170.38	3.774			
18,000.0	13,072.0	17,772.9	12,756.0	93.9	94.1	-60.57	-4,939.0	1,014.0	643.0	470.1	172.95	3.718			
18,100.0	13,072.0	17,872.9	12,756.0	95.4	95.5	-60.57	-5,039.0	1,015.0	643.0	467.5	175.53	3.663			
18,200.0	13,072.0	17,972.9	12,756.0	96.8	97.0	-60.57	-5,139.0	1,016.0	643.0	464.9	178.13	3.610			
18,300.0	13,072.0	18,072.9	12,756.0	98.3	98.4	-60.57	-5,239.0	1,017.0	643.0	462.3	180.74	3.558			
18,400.0	13,072.0	18,172.9	12,756.0	99.7	99.9	-60.57	-5,339.0	1,018.0	643.0	459.7	183.35	3.507			
18,500.0	13,072.0	18,272.9	12,756.0	101.2	101.3	-60.57	-5,439.0	1,019.0	643.0	457.0	185.98	3.457			
18,600.0	13,072.0	18,372.9	12,756.0	102.6	102.8	-60.57	-5,539.0	1,020.0	643.0	454.4	188.62	3.409			
18,700.0	13,072.0	18,472.9	12,756.0	104.1	104.2	-60.57	-5,639.0	1,021.0	643.0	451.7	191.27	3.362			
18,800.0	13,072.0	18,572.9	12,756.0	105.6	105.7	-60.57	-5,739.0	1,022.0	643.0	449.1	193.92	3.316			
18,900.0	13,072.0	18,672.9	12,756.0	107.1	107.2	-60.57	-5,839.0	1,023.0	643.0	446.4	196.59	3.271			
19,000.0	13,072.0	18,772.9	12,756.0	108.6	108.7	-60.57	-5,939.0	1,024.0	643.0	443.7	199.27	3.227			
19,100.0	13,072.0	18,872.9	12,756.0	110.0	110.2	-60.57	-6,039.0	1,025.0	643.0	441.1	201.95	3.184			
19,200.0	13,072.0	18,972.9	12,756.0	111.5	111.7	-60.56	-6,139.0	1,026.0	643.0	438.4	204.64	3.142			
19,300.0	13,072.0	19,072.9	12,756.0	113.0	113.2	-60.56	-6,239.0	1,027.0	643.0	435.7	207.34	3.101			
19,400.0	13,072.0	19,172.9	12,756.0	114.5	114.7	-60.56	-6,338.9	1,028.0	643.0	433.0	210.05	3.061			
19,500.0	13,072.0	19,272.9	12,756.0	116.1	116.2	-60.56	-6,438.9	1,029.0	643.0	430.3	212.76	3.022			
19,600.0	13,072.0	19,372.9	12,756.0	117.6	117.7	-60.56	-6,538.9	1,030.0	643.0	427.5	215.48	2.984			
19,700.0	13,072.0	19,472.9	12,756.0	119.1	119.2	-60.56	-6,638.9	1,031.0	643.0	424.8	218.21	2.947			
19,800.0	13,072.0	19,572.9	12,756.0	120.6	120.7	-60.56	-6,738.9	1,032.0	643.0	422.1	220.94	2.910			
19,900.0	13,072.0	19,672.9	12,756.0	122.1	122.2	-60.56	-6,838.9	1,033.0	643.0	419.3	223.68	2.875			
20,000.0	13,072.0	19,772.9	12,756.0	123.6	123.8	-60.56	-6,938.9	1,034.0	643.0	416.6	226.43	2.840			
20,100.0	13,072.0	19,872.9	12,756.0	125.2	125.3	-60.56	-7,038.9	1,035.0	643.0	413.8	229.18	2.806			
20,200.0	13,072.0	19,972.9	12,756.0	126.7	126.8	-60.56	-7,138.9	1,036.0	643.0	411.1	231.94	2.772			
20,300.0	13,072.0	20,072.9	12,756.0	128.2	128.3	-60.56	-7,238.9	1,037.0	643.0	408.3	234.70	2.740			
20,400.0	13,072.0	20,172.9	12,756.0	129.8	129.9	-60.56	-7,338.9	1,038.0	643.0	405.5	237.47	2.708			
20,500.0	13,072.0	20,272.9	12,756.0	131.3	131.4	-60.56	-7,438.9	1,039.0	643.0	402.8	240.24	2.677			
20,578.5	13,072.0	20,351.4	12,756.0	132.5	132.6	-60.56	-7,517.4	1,039.7	643.0	400.6	242.42	2.652			
20,600.0	13,072.0	20,378.0	12,756.0	132.9	133.0	-60.56	-7,544.0	1,039.9	642.9	400.0	242.92	2.647			
20,637.5	13,072.0	20,415.4	12,756.0	133.4	133.6	-60.54	-7,581.4	1,039.9	642.6	398.7	243.94	2.634			
20,700.0	13,072.0	20,477.9	12,756.0	134.4	134.6	-60.52	-7,643.9	1,040.0	642.1	396.5	245.64	2.614			
20,800.0	13,072.0	20,577.9	12,756.0	135.9	136.1	-60.48	-7,743.9	1,040.1	641.4	393.0	248.36	2.582			
20,900.0	13,072.0	20,677.9	12,756.0	137.5	137.7	-60.44	-7,843.9	1,040.2	640.6	389.5	251.08	2.551			
21,000.0	13,072.0	20,777.9	12,756.0	139.0	139.2	-60.40	-7,943.9	1,040.3	639.8	386.0	253.80	2.521			
21,100.0	13,072.0	20,877.9	12,756.0	140.6	140.8	-60.36	-8,043.9	1,040.4	639.0	382.5	256.53	2.491			
21,200.0	13,072.0	20,977.9	12,756.0	142.2	142.3	-60.32	-8,143.9	1,040.5	638.3	379.0	259.26	2.462			
21,300.0	13,072.0	21,077.9	12,756.0	143.7	143.9	-60.28	-8,243.9	1,040.6	637.5	375.5	261.99	2.433			
21,400.0	13,072.0	21,177.9	12,756.0	145.3	145.4	-60.24	-8,343.9	1,040.7	636.7	372.0	264.73	2.405			
21,500.0	13,072.0	21,277.9	12,756.0	146.8	147.0	-60.20	-8,443.9	1,040.8	635.9	368.5	267.46	2.378			
21,600.0	13,072.0	21,377.9	12,756.0	148.4	148.5	-60.16	-8,543.9	1,040.9	635.2	365.0	270.20	2.351			
21,700.0	13,072.0	21,477.9	12,756.0	150.0	150.1	-60.12	-8,643.8	1,041.0	634.4	361.4	272.94	2.324			
21,800.0	13,072.0	21,577.9	12,756.0	151.5	151.7	-60.08	-8,743.8	1,041.1	633.6	357.9	275.67	2.298			
21,900.0	13,072.0	21,677.9	12,756.0	153.1	153.2	-60.04	-8,843.8	1,041.2	632.8	354.4	278.41	2.273			
22,000.0	13,072.0	21,777.9	12,756.0	154.7	154.8	-60.00	-8,943.8	1,041.3	632.1	350.9	281.16	2.248			
22,100.0	13,072.0	21,877.9	12,756.0	156.2	156.4	-59.96	-9,043.8	1,041.4	631.3	347.4	283.90	2.224			
22,200.0	13,072.0	21,977.9	12,756.0	157.8	157.9	-59.92	-9,143.8	1,041.5	630.5	343.9	286.64	2.200			
22,300.0	13,072.0	22,077.9	12,756.0	159.4	159.5	-59.88	-9,243.8	1,041.7	629.7	340.4	289.38	2.176			
22,400.0	13,072.0	22,177.9	12,756.0	161.0	161.1	-59.84	-9,343.8	1,041.8	629.0	336.8	292.13	2.153			
22,500.0	13,072.0	22,277.9	12,756.0	162.6	162.6	-59.80	-9,443.8	1,041.9	628.2	333.3	294.87	2.130			
22,600.0	13,072.0	22,377.9	12,756.0	164.1	164.2	-59.76	-9,543.8	1,042.0	627.4	329.8	297.62	2.108			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources

Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Offset Design: LOS VAQUEROS FED PROJECT - LOS VAQUEROS FED 463H - OWB - PWP0												Offset Site Error:	0.0 usft
Survey Program: 0-MWD												Offset Well Error:	0.0 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre	Rule Assigned:								
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
22,700.0	13,072.0	22,477.9	12,756.0	165.7	165.8	-59.71	-9,643.8	1,042.1	626.6	326.3	300.36	2.086	
22,800.0	13,072.0	22,577.8	12,756.0	167.3	167.4	-59.67	-9,743.8	1,042.2	625.9	322.8	303.11	2.065	
22,900.0	13,072.0	22,677.8	12,756.0	168.9	168.9	-59.63	-9,843.8	1,042.3	625.1	319.2	305.86	2.044	
23,000.0	13,072.0	22,777.8	12,756.0	170.5	170.5	-59.59	-9,943.8	1,042.4	624.3	315.7	308.60	2.023	
23,100.0	13,072.0	22,877.8	12,756.0	172.0	172.1	-59.55	-10,043.8	1,042.5	623.6	312.2	311.35	2.003	
23,200.0	13,072.0	22,977.8	12,756.0	173.6	173.7	-59.51	-10,143.8	1,042.6	622.8	308.7	314.10	1.983	
23,300.0	13,072.0	23,077.8	12,756.0	175.2	175.3	-59.47	-10,243.8	1,042.7	622.0	305.2	316.84	1.963	
23,400.0	13,072.0	23,177.8	12,756.0	176.8	176.9	-59.42	-10,343.8	1,042.8	621.2	301.7	319.59	1.944	
23,500.0	13,072.0	23,277.8	12,756.0	178.4	178.4	-59.38	-10,443.8	1,042.9	620.5	298.1	322.34	1.925	
23,600.0	13,072.0	23,377.8	12,756.0	180.0	180.0	-59.34	-10,543.8	1,043.0	619.7	294.6	325.08	1.906	
23,700.0	13,072.0	23,477.8	12,756.0	181.6	181.6	-59.30	-10,643.8	1,043.1	618.9	291.1	327.83	1.888	
23,800.0	13,072.0	23,577.8	12,756.0	183.2	183.2	-59.25	-10,743.8	1,043.2	618.2	287.6	330.57	1.870	
23,900.0	13,072.0	23,677.8	12,756.0	184.8	184.8	-59.21	-10,843.8	1,043.3	617.4	284.1	333.32	1.852	
24,000.0	13,072.0	23,777.8	12,756.0	186.4	186.4	-59.17	-10,943.8	1,043.4	616.6	280.6	336.06	1.835	
24,100.0	13,072.0	23,877.8	12,756.0	188.0	188.0	-59.13	-11,043.8	1,043.5	615.9	277.1	338.81	1.818	
24,172.3	13,072.0	23,945.4	12,756.0	189.1	189.1	-59.10	-11,111.4	1,043.6	615.3	274.4	340.89	1.805	
24,200.0	13,072.0	23,945.4	12,756.0	189.6	189.1	-59.10	-11,111.4	1,043.6	616.0	274.1	341.86	1.802	
24,300.0	13,072.0	23,945.4	12,756.0	191.2	189.1	-59.10	-11,111.4	1,043.6	628.4	288.2	340.26	1.847	
24,341.1	13,072.0	23,945.4	12,756.0	191.8	189.1	-59.09	-11,111.4	1,043.6	637.9	300.4	337.43	1.890	
24,341.6	13,072.0	23,945.4	12,756.0	191.8	189.1	-59.09	-11,111.4	1,043.6	638.0	300.7	337.26	1.892	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Permian Resources


Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB @ 3213.0usft
 Offset Depths are relative to Offset Datum
 Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: LOS VAQUEROS FED 523H
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: 0.49°

Ladder Plot

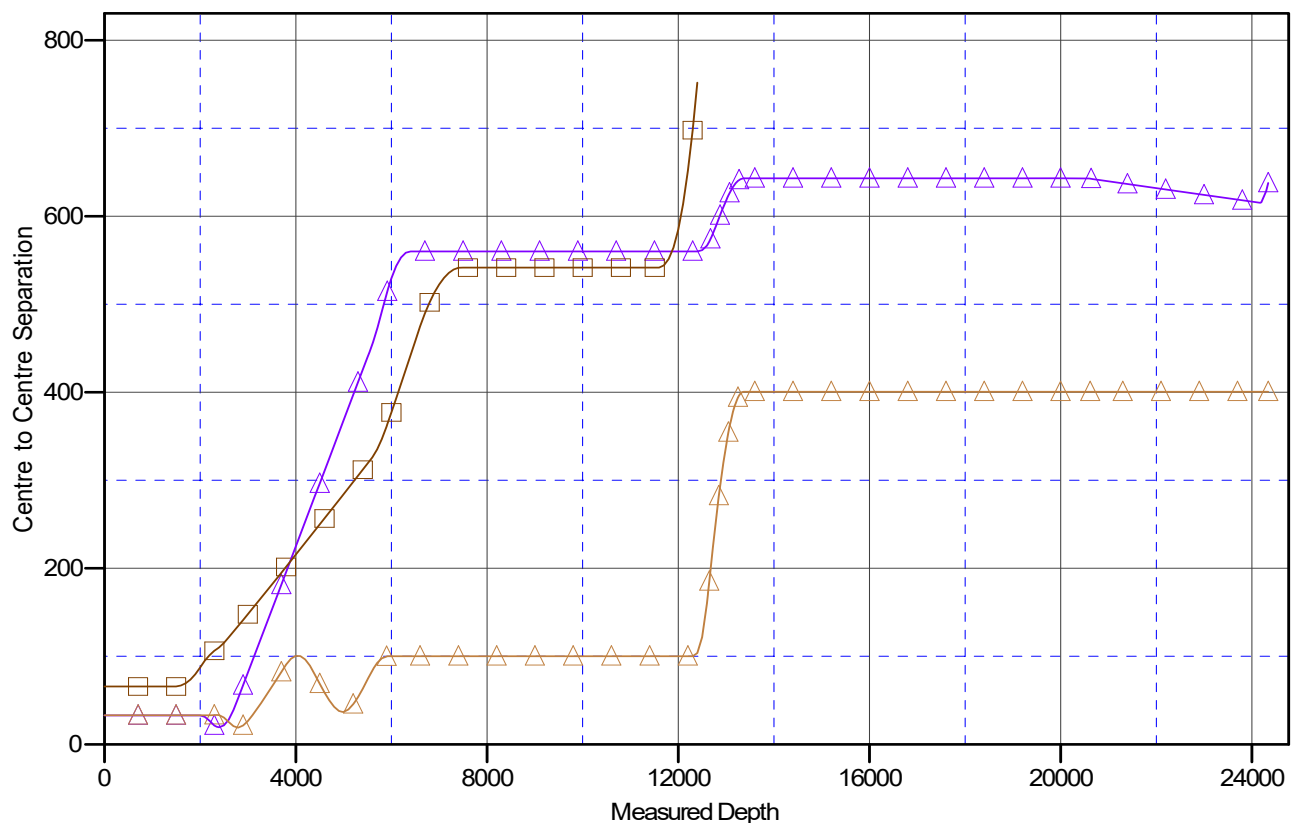

LEGEND

▲ LOSVAQUEROSFED 463H,OWB,PWP0 V0
 ■ LOSVAQUEROSFED 303H,OWB,PWP0 V0
 ▲ LOSVAQUEROSFED 443H,OWB,PWP0 V0

Permian Resources


Anticollision Report

Company:	NEW MEXICO	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Project:	(SP) LEA	TVD Reference:	KB @ 3213.0usft
Reference Site:	LOS VAQUEROS FED PROJECT	MD Reference:	KB @ 3213.0usft
Site Error:	0.0 usft	North Reference:	Grid
Reference Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	Compass
Reference Design:	PWP0	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB @ 3213.0usft
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: LOS VAQUEROS FED 523H
Coordinate System is US State Plane 1983, New Mexico Eastern Zone
Grid Convergence at Surface is: 0.49°

Separation Factor Plot

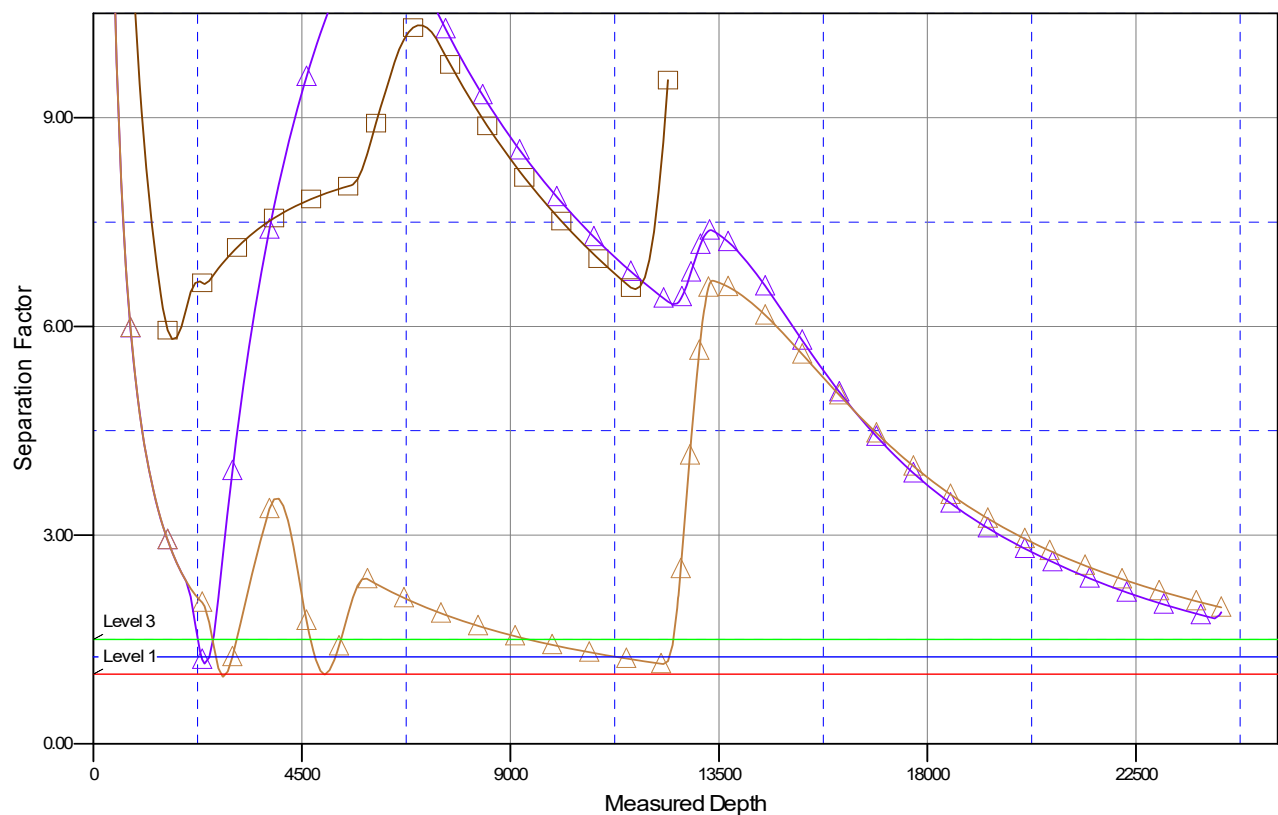

LEGEND

LOSVAQUEROSFED 463H,OWB,PWP0V0 LOSVAQUEROSFED 303H,OWB,PWP0V0 LOSVAQUEROSFED 443H,OWB,PWP0V0

NEW MEXICO

(SP) LEA

LOS VAQUEROS FED PROJECT

LOS VAQUEROS FED 523H

OWB

Plan: PWP0

Standard Planning Report - Geographic

13 December, 2023

Permian Resources
Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	(SP) LEA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	LOS VAQUEROS FED PROJECT				
Site Position:		Northing:	372,466.94 usft	Latitude:	32° 1' 14.083 N
From:	Map	Easting:	829,705.79 usft	Longitude:	103° 24' 10.395 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	LOS VAQUEROS FED 523H					
Well Position	+N/-S	0.0 usft	Northing:	372,603.43 usft	Latitude:	32° 1' 15.526 N
	+E/-W	0.0 usft	Easting:	828,623.63 usft	Longitude:	103° 24' 22.950 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,183.0 usft
Grid Convergence:		0.49 °				

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.66	60.08	48,690.61624555

Design	PWP0			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	177.37

Plan Survey Tool Program	Date	12/13/2023		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	24,341.1 PWP0 (OWB)	MWD	
			OWSG_Rev2_ MWD - Star	

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,350.0	7.00	68.05	2,349.1	8.0	19.8	2.00	2.00	0.00	68.05	
5,565.0	7.00	68.05	5,540.2	154.4	383.2	0.00	0.00	0.00	0.00	
5,915.0	0.00	0.00	5,889.3	162.4	403.0	2.00	-2.00	0.00	180.00	
12,620.2	0.00	0.00	12,594.5	162.4	403.0	0.00	0.00	0.00	0.00	
13,370.2	90.00	179.43	13,072.0	-315.0	407.8	12.00	12.00	23.92	179.43	
20,578.5	90.00	179.43	13,072.0	-7,523.0	479.8	0.00	0.00	0.00	0.00	SLC-LOS VAQUER
20,637.5	90.00	179.43	13,072.0	-7,582.0	480.4	0.00	0.00	0.00	0.00	
24,341.1	90.00	179.43	13,072.0	-11,285.4	517.5	0.00	0.00	0.00	0.00	BHL-LOS VAQUER

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
100.0	0.00	0.00	100.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
200.0	0.00	0.00	200.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
300.0	0.00	0.00	300.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
400.0	0.00	0.00	400.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
500.0	0.00	0.00	500.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
600.0	0.00	0.00	600.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
700.0	0.00	0.00	700.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
800.0	0.00	0.00	800.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
900.0	0.00	0.00	900.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,600.0	0.00	0.00	1,600.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,700.0	0.00	0.00	1,700.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,800.0	0.00	0.00	1,800.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
1,900.0	0.00	0.00	1,900.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
2,000.0	0.00	0.00	2,000.0	0.0	0.0	372,603.43	828,623.63	32° 1' 15.526 N	103° 24' 22.950 W
Start Build 2.00									
2,100.0	2.00	68.05	2,100.0	0.7	1.6	372,604.08	828,625.25	32° 1' 15.532 N	103° 24' 22.931 W
2,200.0	4.00	68.05	2,199.8	2.6	6.5	372,606.04	828,630.10	32° 1' 15.551 N	103° 24' 22.874 W
2,300.0	6.00	68.05	2,299.5	5.9	14.6	372,609.29	828,638.18	32° 1' 15.582 N	103° 24' 22.780 W
2,350.0	7.00	68.05	2,349.1	8.0	19.8	372,611.41	828,643.43	32° 1' 15.603 N	103° 24' 22.719 W
Start 3215.0 hold at 2350.0 MD									
2,400.0	7.00	68.05	2,398.8	10.3	25.5	372,613.69	828,649.09	32° 1' 15.625 N	103° 24' 22.653 W
2,500.0	7.00	68.05	2,498.0	14.8	36.8	372,618.24	828,660.39	32° 1' 15.669 N	103° 24' 22.521 W
2,600.0	7.00	68.05	2,597.3	19.4	48.1	372,622.80	828,671.69	32° 1' 15.713 N	103° 24' 22.389 W
2,700.0	7.00	68.05	2,696.5	23.9	59.4	372,627.35	828,683.00	32° 1' 15.757 N	103° 24' 22.258 W
2,800.0	7.00	68.05	2,795.8	28.5	70.7	372,631.91	828,694.30	32° 1' 15.801 N	103° 24' 22.126 W
2,900.0	7.00	68.05	2,895.0	33.0	82.0	372,636.46	828,705.61	32° 1' 15.845 N	103° 24' 21.994 W
3,000.0	7.00	68.05	2,994.3	37.6	93.3	372,641.02	828,716.91	32° 1' 15.890 N	103° 24' 21.863 W
3,100.0	7.00	68.05	3,093.5	42.1	104.6	372,645.57	828,728.21	32° 1' 15.934 N	103° 24' 21.731 W
3,200.0	7.00	68.05	3,192.8	46.7	115.9	372,650.13	828,739.52	32° 1' 15.978 N	103° 24' 21.599 W
3,300.0	7.00	68.05	3,292.0	51.3	127.2	372,654.68	828,750.82	32° 1' 16.022 N	103° 24' 21.467 W
3,400.0	7.00	68.05	3,391.3	55.8	138.5	372,659.23	828,762.12	32° 1' 16.066 N	103° 24' 21.336 W
3,500.0	7.00	68.05	3,490.6	60.4	149.8	372,663.79	828,773.43	32° 1' 16.110 N	103° 24' 21.204 W
3,600.0	7.00	68.05	3,589.8	64.9	161.1	372,668.34	828,784.73	32° 1' 16.154 N	103° 24' 21.072 W
3,700.0	7.00	68.05	3,689.1	69.5	172.4	372,672.90	828,796.04	32° 1' 16.198 N	103° 24' 20.940 W
3,800.0	7.00	68.05	3,788.3	74.0	183.7	372,677.45	828,807.34	32° 1' 16.242 N	103° 24' 20.809 W
3,900.0	7.00	68.05	3,887.6	78.6	195.0	372,682.01	828,818.64	32° 1' 16.287 N	103° 24' 20.677 W
4,000.0	7.00	68.05	3,986.8	83.1	206.3	372,686.56	828,829.95	32° 1' 16.331 N	103° 24' 20.545 W
4,100.0	7.00	68.05	4,086.1	87.7	217.6	372,691.12	828,841.25	32° 1' 16.375 N	103° 24' 20.413 W
4,200.0	7.00	68.05	4,185.3	92.2	228.9	372,695.67	828,852.55	32° 1' 16.419 N	103° 24' 20.282 W
4,300.0	7.00	68.05	4,284.6	96.8	240.2	372,700.23	828,863.86	32° 1' 16.463 N	103° 24' 20.150 W
4,400.0	7.00	68.05	4,383.8	101.4	251.5	372,704.78	828,875.16	32° 1' 16.507 N	103° 24' 20.018 W
4,500.0	7.00	68.05	4,483.1	105.9	262.8	372,709.34	828,886.47	32° 1' 16.551 N	103° 24' 19.886 W
4,600.0	7.00	68.05	4,582.4	110.5	274.1	372,713.89	828,897.77	32° 1' 16.595 N	103° 24' 19.755 W
4,700.0	7.00	68.05	4,681.6	115.0	285.4	372,718.45	828,909.07	32° 1' 16.639 N	103° 24' 19.623 W
4,800.0	7.00	68.05	4,780.9	119.6	296.7	372,723.00	828,920.38	32° 1' 16.684 N	103° 24' 19.491 W
4,900.0	7.00	68.05	4,880.1	124.1	308.1	372,727.56	828,931.68	32° 1' 16.728 N	103° 24' 19.359 W
5,000.0	7.00	68.05	4,979.4	128.7	319.4	372,732.11	828,942.98	32° 1' 16.772 N	103° 24' 19.228 W

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,100.0	7.00	68.05	5,078.6	133.2	330.7	372,736.67	828,954.29	32° 1' 16.816 N	103° 24' 19.096 W	
5,200.0	7.00	68.05	5,177.9	137.8	342.0	372,741.22	828,965.59	32° 1' 16.860 N	103° 24' 18.964 W	
5,300.0	7.00	68.05	5,277.1	142.3	353.3	372,745.78	828,976.90	32° 1' 16.904 N	103° 24' 18.832 W	
5,400.0	7.00	68.05	5,376.4	146.9	364.6	372,750.33	828,988.20	32° 1' 16.948 N	103° 24' 18.701 W	
5,500.0	7.00	68.05	5,475.7	151.5	375.9	372,754.89	828,999.50	32° 1' 16.992 N	103° 24' 18.569 W	
5,565.0	7.00	68.05	5,540.2	154.4	383.2	372,757.85	829,006.85	32° 1' 17.021 N	103° 24' 18.483 W	
Start Drop -2.00										
5,600.0	6.30	68.05	5,574.9	155.9	387.0	372,759.36	829,010.61	32° 1' 17.036 N	103° 24' 18.440 W	
5,700.0	4.30	68.05	5,674.5	159.4	395.5	372,762.81	829,019.18	32° 1' 17.069 N	103° 24' 18.340 W	
5,800.0	2.30	68.05	5,774.3	161.5	400.9	372,764.97	829,024.52	32° 1' 17.090 N	103° 24' 18.277 W	
5,900.0	0.30	68.05	5,874.3	162.4	403.0	372,765.81	829,026.62	32° 1' 17.098 N	103° 24' 18.253 W	
5,915.0	0.00	0.00	5,889.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
Start 6705.2 hold at 5915.0 MD										
6,000.0	0.00	0.00	5,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,100.0	0.00	0.00	6,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,200.0	0.00	0.00	6,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,300.0	0.00	0.00	6,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,400.0	0.00	0.00	6,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,500.0	0.00	0.00	6,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,600.0	0.00	0.00	6,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,700.0	0.00	0.00	6,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,800.0	0.00	0.00	6,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
6,900.0	0.00	0.00	6,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,000.0	0.00	0.00	6,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,100.0	0.00	0.00	7,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,200.0	0.00	0.00	7,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,300.0	0.00	0.00	7,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,400.0	0.00	0.00	7,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,500.0	0.00	0.00	7,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,600.0	0.00	0.00	7,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,700.0	0.00	0.00	7,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,800.0	0.00	0.00	7,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
7,900.0	0.00	0.00	7,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,000.0	0.00	0.00	7,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,100.0	0.00	0.00	8,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,200.0	0.00	0.00	8,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,300.0	0.00	0.00	8,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,400.0	0.00	0.00	8,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,500.0	0.00	0.00	8,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,600.0	0.00	0.00	8,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,700.0	0.00	0.00	8,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,800.0	0.00	0.00	8,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
8,900.0	0.00	0.00	8,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,000.0	0.00	0.00	8,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,100.0	0.00	0.00	9,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,200.0	0.00	0.00	9,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,300.0	0.00	0.00	9,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,400.0	0.00	0.00	9,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,500.0	0.00	0.00	9,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,600.0	0.00	0.00	9,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,700.0	0.00	0.00	9,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,800.0	0.00	0.00	9,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
9,900.0	0.00	0.00	9,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,000.0	0.00	0.00	9,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,100.0	0.00	0.00	10,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,200.0	0.00	0.00	10,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,300.0	0.00	0.00	10,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,400.0	0.00	0.00	10,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,500.0	0.00	0.00	10,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,600.0	0.00	0.00	10,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,700.0	0.00	0.00	10,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,800.0	0.00	0.00	10,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
10,900.0	0.00	0.00	10,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,000.0	0.00	0.00	10,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,100.0	0.00	0.00	11,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,200.0	0.00	0.00	11,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,300.0	0.00	0.00	11,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,400.0	0.00	0.00	11,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,500.0	0.00	0.00	11,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,600.0	0.00	0.00	11,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,700.0	0.00	0.00	11,674.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,800.0	0.00	0.00	11,774.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
11,900.0	0.00	0.00	11,874.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,000.0	0.00	0.00	11,974.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,100.0	0.00	0.00	12,074.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,200.0	0.00	0.00	12,174.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,300.0	0.00	0.00	12,274.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,400.0	0.00	0.00	12,374.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,500.0	0.00	0.00	12,474.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,600.0	0.00	0.00	12,574.3	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,620.2	0.00	0.00	12,594.5	162.4	403.0	372,765.83	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
Start DLS 12.00 TFO 179.43										
12,625.0	0.58	179.43	12,599.3	162.4	403.0	372,765.80	829,026.66	32° 1' 17.098 N	103° 24' 18.253 W	
12,650.0	3.58	179.43	12,624.3	161.5	403.0	372,764.90	829,026.67	32° 1' 17.089 N	103° 24' 18.252 W	
12,675.0	6.58	179.43	12,649.2	159.3	403.1	372,762.69	829,026.69	32° 1' 17.067 N	103° 24' 18.252 W	
12,700.0	9.58	179.43	12,673.9	155.7	403.1	372,759.18	829,026.72	32° 1' 17.032 N	103° 24' 18.252 W	
12,725.0	12.58	179.43	12,698.5	150.9	403.1	372,754.37	829,026.77	32° 1' 16.985 N	103° 24' 18.252 W	
12,750.0	15.58	179.43	12,722.7	144.9	403.2	372,748.30	829,026.83	32° 1' 16.925 N	103° 24' 18.252 W	
12,775.0	18.58	179.43	12,746.6	137.5	403.3	372,740.96	829,026.91	32° 1' 16.852 N	103° 24' 18.252 W	
12,800.0	21.58	179.43	12,770.1	128.9	403.4	372,732.38	829,026.99	32° 1' 16.767 N	103° 24' 18.252 W	
12,825.0	24.58	179.43	12,793.1	119.2	403.5	372,722.58	829,027.09	32° 1' 16.670 N	103° 24' 18.252 W	
12,850.0	27.58	179.43	12,815.5	108.2	403.6	372,711.59	829,027.20	32° 1' 16.562 N	103° 24' 18.252 W	
12,875.0	30.58	179.43	12,837.4	96.0	403.7	372,699.44	829,027.32	32° 1' 16.441 N	103° 24' 18.251 W	
12,900.0	33.58	179.43	12,858.6	82.7	403.8	372,686.17	829,027.45	32° 1' 16.310 N	103° 24' 18.251 W	
12,925.0	36.58	179.43	12,879.0	68.4	404.0	372,671.81	829,027.60	32° 1' 16.168 N	103° 24' 18.251 W	
12,950.0	39.58	179.43	12,898.7	53.0	404.1	372,656.39	829,027.75	32° 1' 16.015 N	103° 24' 18.251 W	
12,975.0	42.58	179.43	12,917.5	36.5	404.3	372,639.97	829,027.92	32° 1' 15.853 N	103° 24' 18.250 W	
13,000.0	45.58	179.43	12,935.5	19.2	404.5	372,622.58	829,028.09	32° 1' 15.681 N	103° 24' 18.250 W	
13,025.0	48.58	179.43	12,952.5	0.8	404.6	372,604.28	829,028.27	32° 1' 15.500 N	103° 24' 18.250 W	
13,050.0	51.58	179.43	12,968.6	-18.3	404.8	372,585.11	829,028.46	32° 1' 15.310 N	103° 24' 18.250 W	
13,075.0	54.58	179.43	12,983.6	-38.3	405.0	372,565.13	829,028.66	32° 1' 15.112 N	103° 24' 18.249 W	
13,100.0	57.58	179.43	12,997.5	-59.0	405.2	372,544.39	829,028.87	32° 1' 14.907 N	103° 24' 18.249 W	
13,125.0	60.58	179.43	13,010.4	-80.5	405.5	372,522.94	829,029.08	32° 1' 14.695 N	103° 24' 18.249 W	
13,150.0	63.58	179.43	13,022.1	-102.6	405.7	372,500.86	829,029.30	32° 1' 14.476 N	103° 24' 18.248 W	
13,175.0	66.58	179.43	13,032.6	-125.2	405.9	372,478.19	829,029.53	32° 1' 14.252 N	103° 24' 18.248 W	
13,200.0	69.58	179.43	13,041.9	-148.4	406.1	372,455.00	829,029.76	32° 1' 14.022 N	103° 24' 18.247 W	
13,225.0	72.58	179.43	13,050.1	-172.1	406.4	372,431.36	829,030.00	32° 1' 13.788 N	103° 24' 18.247 W	
13,250.0	75.58	179.43	13,056.9	-196.1	406.6	372,407.32	829,030.24	32° 1' 13.550 N	103° 24' 18.247 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
13,275.0	78.58	179.43	13,062.5	-220.5	406.9	372,382.96	829,030.48	32° 1' 13.309 N	103° 24' 18.246 W	
13,300.0	81.58	179.43	13,066.8	-245.1	407.1	372,358.34	829,030.73	32° 1' 13.066 N	103° 24' 18.246 W	
13,325.0	84.58	179.43	13,069.8	-269.9	407.3	372,333.52	829,030.97	32° 1' 12.820 N	103° 24' 18.246 W	
13,350.0	87.58	179.43	13,071.5	-294.8	407.6	372,308.58	829,031.22	32° 1' 12.573 N	103° 24' 18.245 W	
13,370.2	90.00	179.43	13,072.0	-315.0	407.8	372,288.39	829,031.43	32° 1' 12.374 N	103° 24' 18.245 W	
Start 7208.3 hold at 13370.2 MD										
13,400.0	90.00	179.43	13,072.0	-344.8	408.1	372,258.59	829,031.72	32° 1' 12.079 N	103° 24' 18.244 W	
13,500.0	90.00	179.43	13,072.0	-444.8	409.1	372,158.60	829,032.72	32° 1' 11.089 N	103° 24' 18.243 W	
13,600.0	90.00	179.43	13,072.0	-544.8	410.1	372,058.60	829,033.72	32° 1' 10.100 N	103° 24' 18.241 W	
13,700.0	90.00	179.43	13,072.0	-644.8	411.1	371,958.61	829,034.72	32° 1' 9.110 N	103° 24' 18.239 W	
13,800.0	90.00	179.43	13,072.0	-744.8	412.1	371,858.61	829,035.72	32° 1' 8.121 N	103° 24' 18.238 W	
13,900.0	90.00	179.43	13,072.0	-844.8	413.1	371,758.62	829,036.71	32° 1' 7.131 N	103° 24' 18.236 W	
14,000.0	90.00	179.43	13,072.0	-944.8	414.1	371,658.62	829,037.71	32° 1' 6.141 N	103° 24' 18.235 W	
14,100.0	90.00	179.43	13,072.0	-1,044.8	415.1	371,558.63	829,038.71	32° 1' 5.152 N	103° 24' 18.233 W	
14,200.0	90.00	179.43	13,072.0	-1,144.8	416.1	371,458.63	829,039.71	32° 1' 4.162 N	103° 24' 18.231 W	
14,300.0	90.00	179.43	13,072.0	-1,244.8	417.1	371,358.64	829,040.71	32° 1' 3.173 N	103° 24' 18.230 W	
14,400.0	90.00	179.43	13,072.0	-1,344.8	418.1	371,258.64	829,041.71	32° 1' 2.183 N	103° 24' 18.228 W	
14,500.0	90.00	179.43	13,072.0	-1,444.8	419.1	371,158.65	829,042.70	32° 1' 1.194 N	103° 24' 18.226 W	
14,600.0	90.00	179.43	13,072.0	-1,544.8	420.1	371,058.65	829,043.70	32° 1' 0.204 N	103° 24' 18.225 W	
14,700.0	90.00	179.43	13,072.0	-1,644.8	421.1	370,958.66	829,044.70	32° 0' 59.215 N	103° 24' 18.223 W	
14,800.0	90.00	179.43	13,072.0	-1,744.8	422.1	370,858.66	829,045.70	32° 0' 58.225 N	103° 24' 18.222 W	
14,900.0	90.00	179.43	13,072.0	-1,844.8	423.1	370,758.67	829,046.70	32° 0' 57.236 N	103° 24' 18.220 W	
15,000.0	90.00	179.43	13,072.0	-1,944.8	424.1	370,658.67	829,047.70	32° 0' 56.246 N	103° 24' 18.218 W	
15,100.0	90.00	179.43	13,072.0	-2,044.8	425.1	370,558.68	829,048.69	32° 0' 55.256 N	103° 24' 18.217 W	
15,200.0	90.00	179.43	13,072.0	-2,144.7	426.1	370,458.68	829,049.69	32° 0' 54.267 N	103° 24' 18.215 W	
15,300.0	90.00	179.43	13,072.0	-2,244.7	427.1	370,358.69	829,050.69	32° 0' 53.277 N	103° 24' 18.214 W	
15,400.0	90.00	179.43	13,072.0	-2,344.7	428.1	370,258.69	829,051.69	32° 0' 52.288 N	103° 24' 18.212 W	
15,500.0	90.00	179.43	13,072.0	-2,444.7	429.1	370,158.70	829,052.69	32° 0' 51.298 N	103° 24' 18.210 W	
15,600.0	90.00	179.43	13,072.0	-2,544.7	430.1	370,058.70	829,053.69	32° 0' 50.309 N	103° 24' 18.209 W	
15,700.0	90.00	179.43	13,072.0	-2,644.7	431.1	369,958.71	829,054.68	32° 0' 49.319 N	103° 24' 18.207 W	
15,800.0	90.00	179.43	13,072.0	-2,744.7	432.1	369,858.71	829,055.68	32° 0' 48.330 N	103° 24' 18.205 W	
15,900.0	90.00	179.43	13,072.0	-2,844.7	433.1	369,758.72	829,056.68	32° 0' 47.340 N	103° 24' 18.204 W	
16,000.0	90.00	179.43	13,072.0	-2,944.7	434.1	369,658.72	829,057.68	32° 0' 46.351 N	103° 24' 18.202 W	
16,100.0	90.00	179.43	13,072.0	-3,044.7	435.0	369,558.73	829,058.68	32° 0' 45.361 N	103° 24' 18.201 W	
16,200.0	90.00	179.43	13,072.0	-3,144.7	436.0	369,458.73	829,059.68	32° 0' 44.371 N	103° 24' 18.199 W	
16,300.0	90.00	179.43	13,072.0	-3,244.7	437.0	369,358.74	829,060.67	32° 0' 43.382 N	103° 24' 18.197 W	
16,400.0	90.00	179.43	13,072.0	-3,344.7	438.0	369,258.74	829,061.67	32° 0' 42.392 N	103° 24' 18.196 W	
16,500.0	90.00	179.43	13,072.0	-3,444.7	439.0	369,158.75	829,062.67	32° 0' 41.403 N	103° 24' 18.194 W	
16,600.0	90.00	179.43	13,072.0	-3,544.7	440.0	369,058.75	829,063.67	32° 0' 40.413 N	103° 24' 18.192 W	
16,700.0	90.00	179.43	13,072.0	-3,644.7	441.0	368,958.76	829,064.67	32° 0' 39.424 N	103° 24' 18.191 W	
16,800.0	90.00	179.43	13,072.0	-3,744.7	442.0	368,858.76	829,065.67	32° 0' 38.434 N	103° 24' 18.189 W	
16,900.0	90.00	179.43	13,072.0	-3,844.7	443.0	368,758.77	829,066.66	32° 0' 37.445 N	103° 24' 18.188 W	
17,000.0	90.00	179.43	13,072.0	-3,944.7	444.0	368,658.77	829,067.66	32° 0' 36.455 N	103° 24' 18.186 W	
17,100.0	90.00	179.43	13,072.0	-4,044.7	445.0	368,558.78	829,068.66	32° 0' 35.466 N	103° 24' 18.184 W	
17,200.0	90.00	179.43	13,072.0	-4,144.6	446.0	368,458.78	829,069.66	32° 0' 34.476 N	103° 24' 18.183 W	
17,300.0	90.00	179.43	13,072.0	-4,244.6	447.0	368,358.79	829,070.66	32° 0' 33.486 N	103° 24' 18.181 W	
17,400.0	90.00	179.43	13,072.0	-4,344.6	448.0	368,258.79	829,071.66	32° 0' 32.497 N	103° 24' 18.180 W	
17,500.0	90.00	179.43	13,072.0	-4,444.6	449.0	368,158.80	829,072.65	32° 0' 31.507 N	103° 24' 18.178 W	
17,600.0	90.00	179.43	13,072.0	-4,544.6	450.0	368,058.80	829,073.65	32° 0' 30.518 N	103° 24' 18.176 W	
17,700.0	90.00	179.43	13,072.0	-4,644.6	451.0	367,958.81	829,074.65	32° 0' 29.528 N	103° 24' 18.175 W	
17,800.0	90.00	179.43	13,072.0	-4,744.6	452.0	367,858.81	829,075.65	32° 0' 28.539 N	103° 24' 18.173 W	
17,900.0	90.00	179.43	13,072.0	-4,844.6	453.0	367,758.82	829,076.65	32° 0' 27.549 N	103° 24' 18.171 W	
18,000.0	90.00	179.43	13,072.0	-4,944.6	454.0	367,658.82	829,077.65	32° 0' 26.560 N	103° 24' 18.170 W	
18,100.0	90.00	179.43	13,072.0	-5,044.6	455.0	367,558.83	829,078.64	32° 0' 25.570 N	103° 24' 18.168 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
18,200.0	90.00	179.43	13,072.0	-5,144.6	456.0	367,458.83	829,079.64	32° 0' 24.581 N	103° 24' 18.167 W	
18,300.0	90.00	179.43	13,072.0	-5,244.6	457.0	367,358.84	829,080.64	32° 0' 23.591 N	103° 24' 18.165 W	
18,400.0	90.00	179.43	13,072.0	-5,344.6	458.0	367,258.84	829,081.64	32° 0' 22.601 N	103° 24' 18.163 W	
18,500.0	90.00	179.43	13,072.0	-5,444.6	459.0	367,158.85	829,082.64	32° 0' 21.612 N	103° 24' 18.162 W	
18,600.0	90.00	179.43	13,072.0	-5,544.6	460.0	367,058.85	829,083.64	32° 0' 20.622 N	103° 24' 18.160 W	
18,700.0	90.00	179.43	13,072.0	-5,644.6	461.0	366,958.86	829,084.63	32° 0' 19.633 N	103° 24' 18.158 W	
18,800.0	90.00	179.43	13,072.0	-5,744.6	462.0	366,858.86	829,085.63	32° 0' 18.643 N	103° 24' 18.157 W	
18,900.0	90.00	179.43	13,072.0	-5,844.6	463.0	366,758.87	829,086.63	32° 0' 17.654 N	103° 24' 18.155 W	
19,000.0	90.00	179.43	13,072.0	-5,944.6	464.0	366,658.87	829,087.63	32° 0' 16.664 N	103° 24' 18.154 W	
19,100.0	90.00	179.43	13,072.0	-6,044.6	465.0	366,558.88	829,088.63	32° 0' 15.675 N	103° 24' 18.152 W	
19,200.0	90.00	179.43	13,072.0	-6,144.5	466.0	366,458.88	829,089.63	32° 0' 14.685 N	103° 24' 18.150 W	
19,300.0	90.00	179.43	13,072.0	-6,244.5	467.0	366,358.89	829,090.62	32° 0' 13.696 N	103° 24' 18.149 W	
19,400.0	90.00	179.43	13,072.0	-6,344.5	468.0	366,258.89	829,091.62	32° 0' 12.706 N	103° 24' 18.147 W	
19,500.0	90.00	179.43	13,072.0	-6,444.5	469.0	366,158.90	829,092.62	32° 0' 11.716 N	103° 24' 18.145 W	
19,600.0	90.00	179.43	13,072.0	-6,544.5	470.0	366,058.90	829,093.62	32° 0' 10.727 N	103° 24' 18.144 W	
19,700.0	90.00	179.43	13,072.0	-6,644.5	471.0	365,958.91	829,094.62	32° 0' 9.737 N	103° 24' 18.142 W	
19,800.0	90.00	179.43	13,072.0	-6,744.5	472.0	365,858.91	829,095.62	32° 0' 8.748 N	103° 24' 18.141 W	
19,900.0	90.00	179.43	13,072.0	-6,844.5	473.0	365,758.92	829,096.61	32° 0' 7.758 N	103° 24' 18.139 W	
20,000.0	90.00	179.43	13,072.0	-6,944.5	474.0	365,658.92	829,097.61	32° 0' 6.769 N	103° 24' 18.137 W	
20,100.0	90.00	179.43	13,072.0	-7,044.5	475.0	365,558.93	829,098.61	32° 0' 5.779 N	103° 24' 18.136 W	
20,200.0	90.00	179.43	13,072.0	-7,144.5	476.0	365,458.93	829,099.61	32° 0' 4.790 N	103° 24' 18.134 W	
20,300.0	90.00	179.43	13,072.0	-7,244.5	477.0	365,358.94	829,100.61	32° 0' 3.800 N	103° 24' 18.133 W	
20,400.0	90.00	179.43	13,072.0	-7,344.5	478.0	365,258.94	829,101.61	32° 0' 2.811 N	103° 24' 18.131 W	
20,500.0	90.00	179.43	13,072.0	-7,444.5	479.0	365,158.95	829,102.60	32° 0' 1.821 N	103° 24' 18.129 W	
20,578.5	90.00	179.43	13,072.0	-7,523.0	479.8	365,080.44	829,103.39	32° 0' 1.044 N	103° 24' 18.128 W	
Start 59.0 hold at 20578.5 MD										
20,600.0	90.00	179.43	13,072.0	-7,544.5	480.0	365,058.95	829,103.60	32° 0' 0.831 N	103° 24' 18.128 W	
20,637.5	90.00	179.43	13,072.0	-7,582.0	480.3	365,021.45	829,103.98	32° 0' 0.460 N	103° 24' 18.127 W	
Start 3703.6 hold at 20637.5 MD										
20,700.0	90.00	179.43	13,072.0	-7,644.5	481.0	364,958.96	829,104.60	31° 59' 59.842 N	103° 24' 18.126 W	
20,800.0	90.00	179.43	13,072.0	-7,744.5	482.0	364,858.96	829,105.60	31° 59' 58.852 N	103° 24' 18.124 W	
20,900.0	90.00	179.43	13,072.0	-7,844.5	483.0	364,758.97	829,106.60	31° 59' 57.863 N	103° 24' 18.123 W	
21,000.0	90.00	179.43	13,072.0	-7,944.5	484.0	364,658.97	829,107.60	31° 59' 56.873 N	103° 24' 18.121 W	
21,100.0	90.00	179.43	13,072.0	-8,044.5	485.0	364,558.98	829,108.60	31° 59' 55.884 N	103° 24' 18.120 W	
21,200.0	90.00	179.43	13,072.0	-8,144.4	486.0	364,458.98	829,109.59	31° 59' 54.894 N	103° 24' 18.118 W	
21,300.0	90.00	179.43	13,072.0	-8,244.4	487.0	364,358.99	829,110.59	31° 59' 53.905 N	103° 24' 18.116 W	
21,400.0	90.00	179.43	13,072.0	-8,344.4	488.0	364,258.99	829,111.59	31° 59' 52.915 N	103° 24' 18.115 W	
21,500.0	90.00	179.43	13,072.0	-8,444.4	489.0	364,159.00	829,112.59	31° 59' 51.926 N	103° 24' 18.113 W	
21,600.0	90.00	179.43	13,072.0	-8,544.4	490.0	364,059.00	829,113.59	31° 59' 50.936 N	103° 24' 18.111 W	
21,700.0	90.00	179.43	13,072.0	-8,644.4	491.0	363,959.01	829,114.59	31° 59' 49.946 N	103° 24' 18.110 W	
21,800.0	90.00	179.43	13,072.0	-8,744.4	492.0	363,859.01	829,115.58	31° 59' 48.957 N	103° 24' 18.108 W	
21,900.0	90.00	179.43	13,072.0	-8,844.4	493.0	363,759.02	829,116.58	31° 59' 47.967 N	103° 24' 18.107 W	
22,000.0	90.00	179.43	13,072.0	-8,944.4	494.0	363,659.02	829,117.58	31° 59' 46.978 N	103° 24' 18.105 W	
22,100.0	90.00	179.43	13,072.0	-9,044.4	495.0	363,559.03	829,118.58	31° 59' 45.988 N	103° 24' 18.103 W	
22,200.0	90.00	179.43	13,072.0	-9,144.4	495.9	363,459.03	829,119.58	31° 59' 44.999 N	103° 24' 18.102 W	
22,300.0	90.00	179.43	13,072.0	-9,244.4	496.9	363,359.04	829,120.58	31° 59' 44.009 N	103° 24' 18.100 W	
22,400.0	90.00	179.43	13,072.0	-9,344.4	497.9	363,259.04	829,121.57	31° 59' 43.020 N	103° 24' 18.098 W	
22,500.0	90.00	179.43	13,072.0	-9,444.4	498.9	363,159.05	829,122.57	31° 59' 42.030 N	103° 24' 18.097 W	
22,600.0	90.00	179.43	13,072.0	-9,544.4	499.9	363,059.05	829,123.57	31° 59' 41.040 N	103° 24' 18.095 W	
22,700.0	90.00	179.43	13,072.0	-9,644.4	500.9	362,959.06	829,124.57	31° 59' 40.051 N	103° 24' 18.094 W	
22,800.0	90.00	179.43	13,072.0	-9,744.4	501.9	362,859.06	829,125.57	31° 59' 39.061 N	103° 24' 18.092 W	
22,900.0	90.00	179.43	13,072.0	-9,844.4	502.9	362,759.07	829,126.57	31° 59' 38.072 N	103° 24' 18.090 W	
23,000.0	90.00	179.43	13,072.0	-9,944.4	503.9	362,659.07	829,127.56	31° 59' 37.082 N	103° 24' 18.089 W	
23,100.0	90.00	179.43	13,072.0	-10,044.4	504.9	362,559.08	829,128.56	31° 59' 36.093 N	103° 24' 18.087 W	

Permian Resources

Planning Report - Geographic

Database:	Compass	Local Co-ordinate Reference:	Well LOS VAQUEROS FED 523H
Company:	NEW MEXICO	TVD Reference:	KB @ 3213.0usft
Project:	(SP) LEA	MD Reference:	KB @ 3213.0usft
Site:	LOS VAQUEROS FED PROJECT	North Reference:	Grid
Well:	LOS VAQUEROS FED 523H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
23,200.0	90.00	179.43	13,072.0	-10,144.3	505.9	362,459.08	829,129.56	31° 59' 35.103 N	103° 24' 18.085 W	
23,300.0	90.00	179.43	13,072.0	-10,244.3	506.9	362,359.09	829,130.56	31° 59' 34.114 N	103° 24' 18.084 W	
23,400.0	90.00	179.43	13,072.0	-10,344.3	507.9	362,259.09	829,131.56	31° 59' 33.124 N	103° 24' 18.082 W	
23,500.0	90.00	179.43	13,072.0	-10,444.3	508.9	362,159.10	829,132.56	31° 59' 32.135 N	103° 24' 18.081 W	
23,600.0	90.00	179.43	13,072.0	-10,544.3	509.9	362,059.10	829,133.55	31° 59' 31.145 N	103° 24' 18.079 W	
23,700.0	90.00	179.43	13,072.0	-10,644.3	510.9	361,959.11	829,134.55	31° 59' 30.155 N	103° 24' 18.077 W	
23,800.0	90.00	179.43	13,072.0	-10,744.3	511.9	361,859.11	829,135.55	31° 59' 29.166 N	103° 24' 18.076 W	
23,900.0	90.00	179.43	13,072.0	-10,844.3	512.9	361,759.12	829,136.55	31° 59' 28.176 N	103° 24' 18.074 W	
24,000.0	90.00	179.43	13,072.0	-10,944.3	513.9	361,659.12	829,137.55	31° 59' 27.187 N	103° 24' 18.072 W	
24,100.0	90.00	179.43	13,072.0	-11,044.3	514.9	361,559.13	829,138.55	31° 59' 26.197 N	103° 24' 18.071 W	
24,200.0	90.00	179.43	13,072.0	-11,144.3	515.9	361,459.13	829,139.55	31° 59' 25.208 N	103° 24' 18.069 W	
24,300.0	90.00	179.43	13,072.0	-11,244.3	516.9	361,359.14	829,140.54	31° 59' 24.218 N	103° 24' 18.068 W	
24,341.1	90.00	179.43	13,072.0	-11,285.4	517.3	361,318.03	829,140.95	31° 59' 23.811 N	103° 24' 18.067 W	
TD at 24341.1										

Design Targets										
Target Name	- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP-LOS VAQUERO	- plan misses target center by 163.5usft at 13024.7usft MD (12952.3 TVD, 1.1 N, 404.6 E)	0.00	0.00	13,072.0	112.4	403.0	372,715.85	829,026.66	32° 1' 16.604 N	103° 24' 18.257 W
LTP-LOS VAQUERO	- plan misses target center by 0.2usft at 24286.4usft MD (13072.0 TVD, -11230.7 N, 516.8 E)	0.00	0.00	13,072.0	-11,230.7	517.0	361,372.72	829,140.63	31° 59' 24.353 N	103° 24' 18.065 W
BHL-LOS VAQUERO	- plan misses target center by 0.2usft at 24341.1usft MD (13072.0 TVD, -11285.4 N, 517.3 E)	0.00	0.00	13,072.0	-11,285.4	517.5	361,318.03	829,141.18	31° 59' 23.811 N	103° 24' 18.064 W
SLC-LOS VAQUERO	- plan hits target center	0.00	0.00	13,072.0	-7,523.0	479.8	365,080.44	829,103.39	32° 0' 1.044 N	103° 24' 18.128 W

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
2,000.0	2,000.0	0.0	0.0	Start Build 2.00	
2,350.0	2,349.1	8.0	19.8	Start 3215.0 hold at 2350.0 MD	
5,565.0	5,540.2	154.4	383.2	Start Drop -2.00	
5,915.0	5,889.3	162.4	403.0	Start 6705.2 hold at 5915.0 MD	
12,620.2	12,594.5	162.4	403.0	Start DLS 12.00 TFO 179.43	
13,370.2	13,072.0	-315.0	407.8	Start 7208.3 hold at 13370.2 MD	
20,578.5	13,072.0	-7,523.0	479.8	Start 59.0 hold at 20578.5 MD	
20,637.5	13,072.0	-7,582.0	480.3	Start 3703.6 hold at 20637.5 MD	
24,341.1	13,072.0	-11,285.4	517.3	TD at 24341.1	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 310017

CONDITIONS

Operator: Earthstone Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 331165
	Action Number: 310017
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	PREVIOUS COA'S APPLY	3/5/2024