	State of New Me	exico	Form C-103
Office <u>District I</u> – (575) 393-6161	Energy, Minerals and Natu	ral Resources	Revised August 1, 2011
1625 N. French Dr., Hobbs, NM 88240 District II – (575) 748-1283			WELL API NO.
811 S. First St., Artesia, NM 88210	OIL CONSERVATION		30-025-38576 and 30-025-42139 5. Indicate Type of Lease
District III – (505) 334-6178	1220 South St. Fran		STATE FEE
1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> – (505) 476-3460	Santa Fe, NM 87	7505	6. State Oil & Gas Lease No.
1220 S. St. Francis Dr., Santa Fe, NM 87505			V07530-0001
	TICES AND REPORTS ON WELLS		7. Lease Name or Unit Agreement Name
	OSALS TO DRILL OR TO DEEPEN OR PLU LICATION FOR PERMIT" (FORM C-101) FO		Linam AGI
1. Type of Well: Oil Well	Gas Well 🛛 Other		8. Wells Number 1 and 2
2. Name of Operator			9. OGRID Number 36785
DCP Operating Company, LP 3. Address of Operator			10. Pool name or Wildcat
6900 E. Layton Ave, Suite 900, D	Denver CO 80237		Wildcat
4. Well Location			
	from the South line and 1980 feet from	om the West line	
Section 30	Township 18S	Range 37E	NMPM County Lea
Section 30	11. Elevation (Show whether DR,		<u> </u>
	3736 GR	,,,	
12. Check Appropriate Box to	o Indicate Nature of Notice, Re	port or Other Da	ata
		1	
NOTICE OF II PERFORM REMEDIAL WORK □	NTENTION TO:] PLUG AND ABANDON □	REMEDIAL WOR	SEQUENT REPORT OF: K ALTERING CASING
TEMPORARILY ABANDON		COMMENCE DRI	
PULL OR ALTER CASING		CASING/CEMEN	_
DOWNHOLE COMMINGLE		o, toll to, ozimizit	
OTHER:		OTHER: Monthly	Report pursuant to Workover C-103
proposed work). SEE RULE 1 recompletion.	19.15.7.14 NMAC. For Multiple Comple	etions: Attach wellbor	
Report for the Month ending Mar	ch 31, 2024 Pursuant to Workover	C-103 for Linam	AGI #1 and AGI #2
		C 100 101 Elliwill 1	
annulus pressure and bottom hole da performance of the AGI system, the	ata for Linam AGI #1. Since the data	OCD relative to inject for both wells prov	ction pressure, TAG temperature and casing ide the best overall picture of the en though that analysis is required only on a
annulus pressure and bottom hole da performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to	ata for Linam AGI #1. Since the data data for both wells are analyzed and a AGI #2. Injection parameters being rough to scf/hr, Average TAG Injection Pressure Pressure Differential: 828 psig. Both temperature of 138 °F (Figures 8 and 9)	OCD relative to inject for both wells prove presented herein even monitored for AGI feature: 1,144 psig, Autom hole (BH) senses. The BH pressure.	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures werage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the
annulus pressure and bottom hole da performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: (Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to #2. This is a very good indication of injection rates. The recorded injection parameters for this month), Average Injection Press	AGI #2. Injection parameters being r 0 scf/hr, Average TAG Injection Presse Pressure Differential: 828 psig. Bottemperature of 138 °F (Figures 8 and 9 f the continued resilience of the injector AGI #2 for the month were: Average TAGI #2 for the month were: Average AGI #2 for the month were:	pCD relative to inject for both wells prove presented herein even monitored for AGI feature: 1,144 psig, Autom hole (BH) sensely. The BH pressuration zone and the experience of the present to the present to the present for the present to the pres	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures verage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current
annulus pressure and bottom hole da performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to #2. This is a very good indication of injection rates. The recorded injection parameters for this month), Average Injection Press detected in surface flange), Average The Linam AGI #1 and AGI #2 well sequester, Class II wastes consisting this month. The two wells provide to	ata for Linam AGI #1. Since the data data for both wells are analyzed and a AGI #2. Injection parameters being r 0 scf/hr, Average TAG Injection Prese Pressure Differential: 828 psig. Both temperature of 138 °F (Figures 8 and 9 f the continued resilience of the inject or AGI #2 for the month were: Average TAG Temperature Differential: 1,359 psig (Figures 1,375 psig, Average TAG Temperersure Differential: 1,359 psig (Figures 1,375 psig, Average TAG Temperersure Differential: 1,359 psig (Figures 2) as a safe, effective, and a of H ₂ S and CO ₂ . The Linam AGI Fa	proposed for both wells prove presented herein even monitored for AGI from hole (BH) senses from hole (BH) senses from hole (BH) senses from zone and the experimental from the	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures verage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current 65,524 scf/hr (AGI #2 was the only well used erage Annulus Pressure: 16 psig (minor leak iendly system to dispose of, and permanently sequestered 5,088 Metric Tons of CO ₂ for tion with disposal to either or both wells. I
annulus pressure and bottom hole da performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to #2. This is a very good indication of injection rates. The recorded injection parameters for this month), Average Injection Press detected in surface flange), Average The Linam AGI #1 and AGI #2 well sequester, Class II wastes consisting this month. The two wells provide to	AGI #2. Injection parameters being r 0 scf/hr, Average TAG Injection Prese Pressure Differential: 828 psig. Bottemperature of 138 °F (Figures 8 and 9 f the continued resilience of the injector AGI #2 for the month were: Average TAG Temperature Differential: 1,359 psig (Figures 1,375 psig, Average TAG Temperature Differential: 1,359 psig (Figures 1,375 psig, Average TAG Temperature Differential: 1,359 psig (Figures 1,375 psig, Average TAG Temperature Differential: 1,359 psig (Figures 2) psig (Figures 3) psig (Figures 3) psig (Figures 4) psig (Figures 4) psig (Figures 4) psig (Figures 5) psig (Figures 5) psig (Figures 5) psig (Figures 6) psig (Fi	presented herein ever monitored for AGI for source: 1,144 psig, Autom hole (BH) sense source: 101°F, Avgures 5, 6, 7). environmentally fried in the example of my knowledge and the example of my knowledge and the organization.	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures werage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current 65,524 scf/hr (AGI #2 was the only well used erage Annulus Pressure: 16 psig (minor leak iendly system to dispose of, and permanently sequestered 5,088 Metric Tons of CO ₂ for tion with disposal to either or both wells. I
Annulus pressure and bottom hole dather formance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to #2. This is a very good indication of injection rates. The recorded injection parameters for this month), Average Injection Press detected in surface flange), Average The Linam AGI #1 and AGI #2 well sequester, Class II wastes consisting this month. The two wells provide the present the provide the property of the provide the prov	ata for Linam AGI #1. Since the data data for both wells are analyzed and addata for both wells are analyzed and a script of scf/hr, Average TAG Injection Pressure Pressure Differential: 828 psig. Both amperature of 138 °F (Figures 8 and 9 f the continued resilience of the injection of the continued resilien	presented herein ever monitored for AGI for source: 1,144 psig, Autom hole (BH) sense source: 101°F, Avgures 5, 6, 7). environmentally fried in the example of my knowledge and the example of my knowledge and the organization.	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures werage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current 65,524 scf/hr (AGI #2 was the only well used erage Annulus Pressure: 16 psig (minor leak iendly system to dispose of, and permanently sequestered 5,088 Metric Tons of CO ₂ for tion with disposal to either or both wells. In the belief.
annulus pressure and bottom hole da performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to 1/2. This is a very good indication of njection rates. The recorded injection parameters for his month), Average Injection Press detected in surface flange), Average The Linam AGI #1 and AGI #2 well sequester, Class II wastes consisting his month. The two wells provide the nereby certify that the information a SIGNATURE Type or print name Alberto A. Gutie	ata for Linam AGI #1. Since the data data for both wells are analyzed and addata for both wells are analyzed and a script of scf/hr, Average TAG Injection Pressure Pressure Differential: 828 psig. Both amperature of 138 °F (Figures 8 and 9 f the continued resilience of the injection of the continued resilien	presented herein ever monitored for AGI for source: 1,144 psig, Autom hole (BH) sense source: 101°F, Avgures 5, 6, 7). environmentally fried in the experimental source of my knowledge autom to the experimental source of the experiment	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures verage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current 65,524 scf/hr (AGI #2 was the only well used erage Annulus Pressure: 16 psig (minor leak iendly system to dispose of, and permanently sequestered 5,088 Metric Tons of CO ₂ for tion with disposal to either or both wells. In belief. y, LP/ Geolex, Inc. DATE 4/2/2024
All flow this month was directed to 1, 2, 3, 4): Average Injection Rate: Annulus Pressure: 316 psig, Average entire period of 4,102 psig and BH to 2. This is a very good indication of njection rates. The recorded injection parameters for his month), Average Injection Pressure this month), Average Injection Pressure this month. Average Injection Pressure the Linam AGI #1 and AGI #2 well sequester, Class II wastes consisting his month. The two wells provide the pressure that the information and SIGNATURE	ata for Linam AGI #1. Since the data data for both wells are analyzed and addata for both wells are analyzed and a script of scf/hr, Average TAG Injection Pressure Pressure Differential: 828 psig. Both amperature of 138 °F (Figures 8 and 9 f the continued resilience of the injection of the continued resilien	presented herein ever monitored for AGI for source: 1,144 psig, Autom hole (BH) sense source: 101°F, Avgures 5, 6, 7). environmentally fried in the experimental source of my knowledge autom to the experimental source of the experiment	ide the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures verage TAG Temperature: 67 °F, Average ors provided the average BH pressure for the requickly responded to the switchover to AGI access capacity available for TAG at current 65,524 scf/hr (AGI #2 was the only well used erage Annulus Pressure: 16 psig (minor leak iendly system to dispose of, and permanently sequestered 5,088 Metric Tons of CO ₂ for tion with disposal to either or both wells. In belief. y, LP/ Geolex, Inc. DATE 4/2/2024

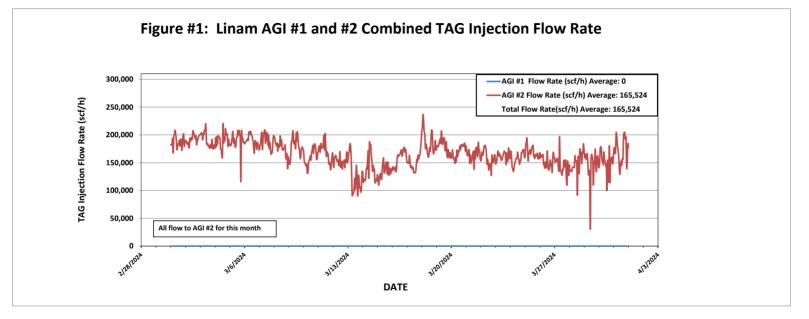
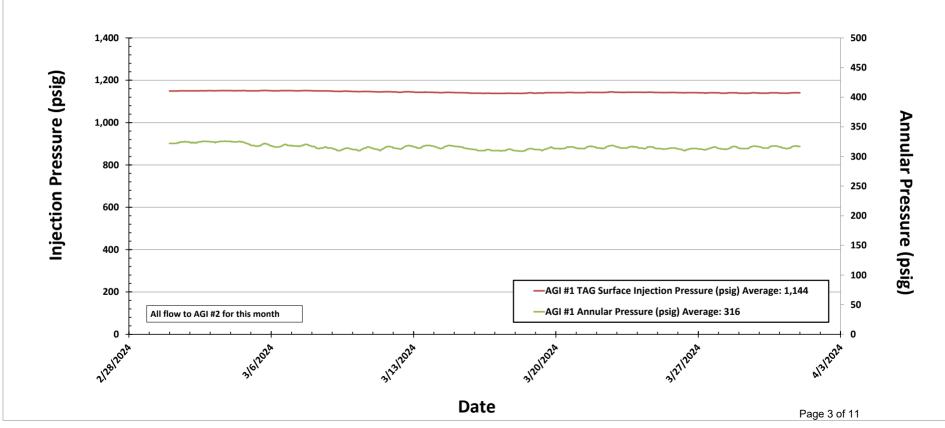
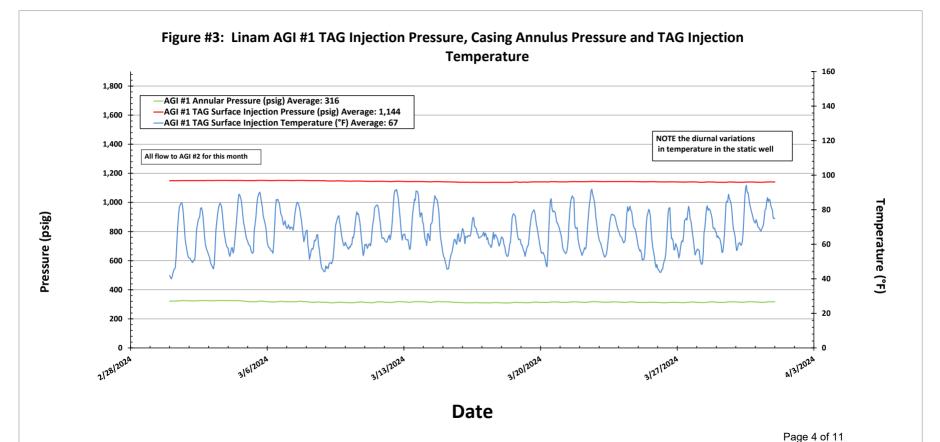


Figure #2: Linam AGI #1 Surface TAG Injection Pressure and Annular Pressure





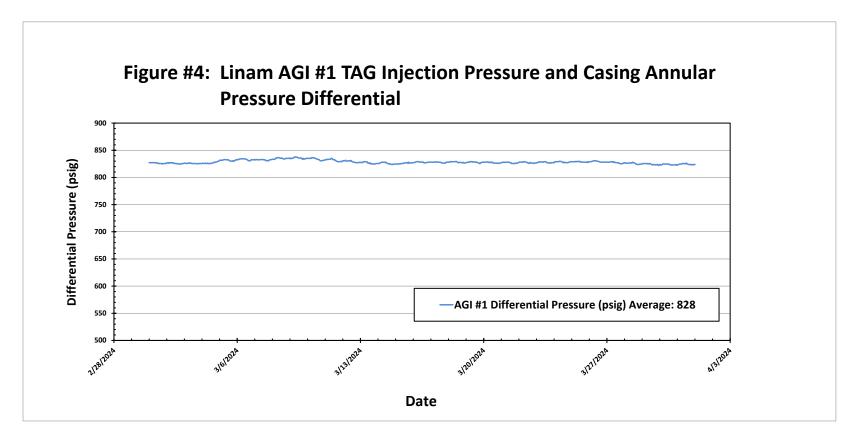


Figure #5: Linam AGI #2 Injection Pressure, Rate and Casing Annulus Pressure



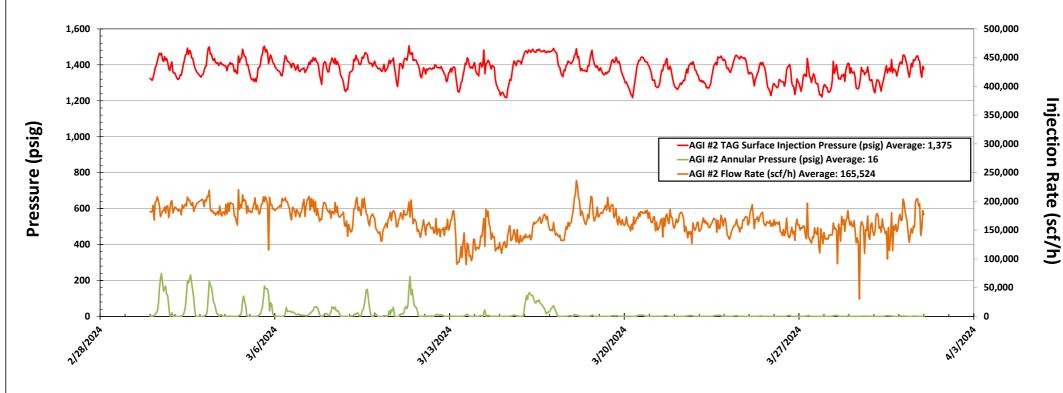


Figure #6: Linam AGI #2 TAG Injection Pressure, Casing Annulus Pressure and TAG Injection Temperature

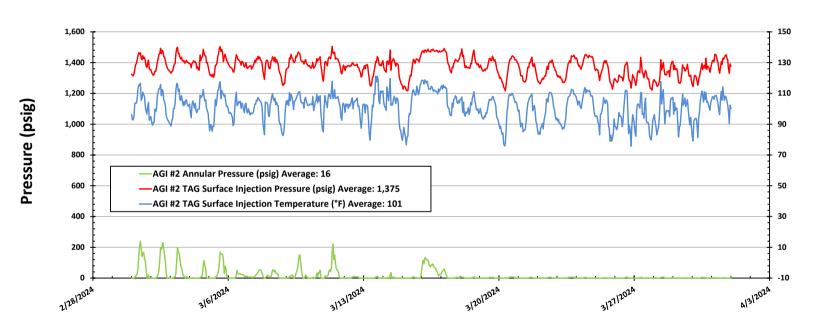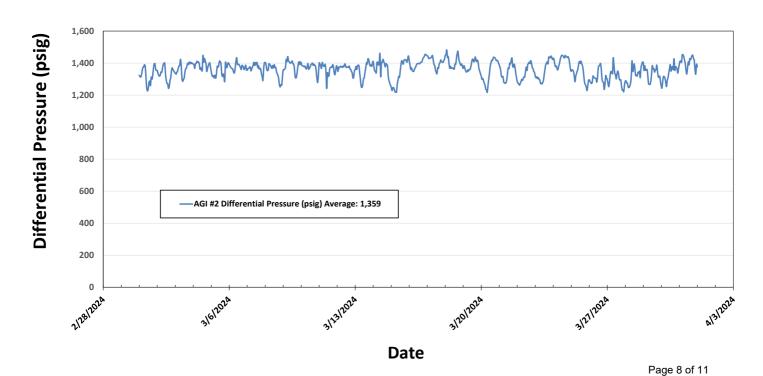

Date

Figure #7: Linam AGI #2 TAG Injection Pressure and Casing Annular Pressure Differential (psig)





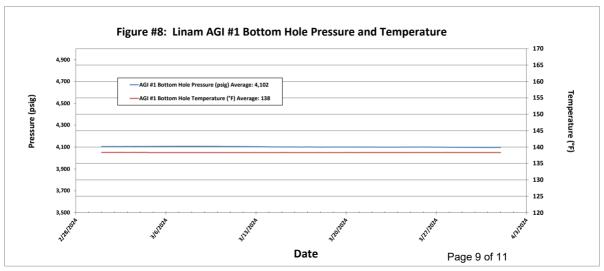


Figure #9: Linam AGI #1 Surface Injection Pressure and Bottom Hole Pressure

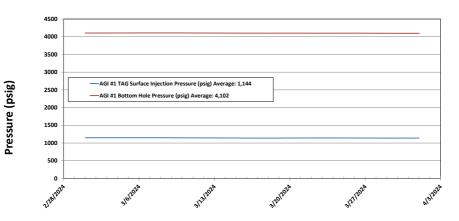

Date

Figure #10: Linam AGI Facility Daily Metric Tons of Carbon Sequestered

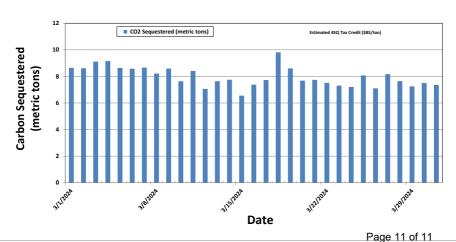

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 336573

CONDITIONS

Operator:	OGRID:
DCP OPERATING COMPANY, LP	36785
6900 E. Layton Ave	Action Number:
Denver, CO 80237	336573
	Action Type:
	[C-103] Sub. General Sundry (C-103Z)

CONDITIONS

Cre	ated By		Condition Date
m	gebremichael	None	4/25/2024