

Well Name: SJU TR-B	Well Location: T25S / R37E / SEC 11 / NENW / 32.1510917 / -103.134663	County or Parish/State: LEA / NM
Well Number: 11	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC032511F	Unit or CA Name: SOUTH JUSTIS UNIT	Unit or CA Number: NMNM87877X
US Well Number: 3002520275	Operator: LEGACY RESERVES OPERATING LP	

Accepted for Record Only

SUBJECT TO LIKE APPROVAL BY BLM

NMOCD 6/18/24

X7

Must run CBL and file on NMOCD permitting app

Notice of Intent

Sundry ID: 2791603

Type of Submission: Notice of Intent

Date Sundry Submitted: 05/21/2024

Date proposed operation will begin: 05/27/2024

Type of Action: Plug and Abandonment

Time Sundry Submitted: 06:37

Procedure Description:

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- P_and_A_procedure_South_Justis_Unit__B11_with_WBDs_20240603142441.pdf
- SBU_B11_3160_5_P_A_20240521063640.pdf

Received by OCD: 6/17/2024 12:41:02 PM

Well Name: SJO TR-B

Well Location: T25S / R37E / SEC 11 / NENW / 32.1510917 / -103.134663

County or Parish/State: LEA / NM

Well Number: 11

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC032511F

Unit or CA Name: SOUTH JUSTIS UNIT

Unit or CA Number: NMNM87877X

US Well Number: 3002520275

Operator: LEGACY RESERVES OPERATING LP

Conditions of Approval

Specialist Review

BLM_P_A_Revised_Procedure_South_Justis_Unit_B11_20240617121436.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: ERIN MAZUR

Signed on: JUN 03, 2024 02:24 PM

Name: LEGACY RESERVES OPERATING LP

Title: Regulatory Manager

Street Address: 2001 TIMBERLOCH PLACE SUITE 300

City: THE WOODLANDSState: TX

Phone: (713) 594-5843

Email address: EMAZUR@LEGACYRESERVES.COM

Field

Representative Name:

Street Address:

City:State:Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: ZOTA M STEVENS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752345998

BLM POC Email Address: ZSTEVENS@BLM.GOV

Disposition: Approved

Disposition Date: 06/17/2024

Signature: Zota Stevens

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

5. Lease Serial No. NMLC032511F

6. If Indian, Allottee or Tribe Name

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
LEGACY RESERVES OPERATING LP

3a. Address 15 SMITH ROAD SUITE 3000, MIDLAND, TX 793b. Phone No. (include area code)
(432) 689-5200

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)
SEC 11/T25S/R37E/NMP

7. If Unit of CA/Agreement, Name and/or No.
SOUTH JUSTIS UNIT/NMNM87877X

8. Well Name and No.
SJU TR-B/11

9. API Well No.
3002520275

10. Field and Pool or Exploratory Area
JUSTIS/JUSTIS

11. Country or Parish, State
LEA/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☐ Change Plans	☒ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)
ERIN MAZUR / Ph: (713) 594-5843

Title
Regulatory Manager

Signature (Electronic Submission)

Date
06/03/2024

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by
ZOTA M STEVENS / Ph: (575) 234-5998 / Approved

Title
Petroleum Engineer

Date
06/17/2024

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office
CARLSBAD

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENW / 330 FNL / 2310 FWL / TWSP: 25S / RANGE: 37E / SECTION: 11 / LAT: 32.1510917 / LONG: -103.134663 (TVD: 0 feet, MD: 0 feet)

BHL: NENW / 330 FNL / 2310 FWL / TWSP: 25S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-20275	
5. Indicate Type of Lease STATE ☐ FEE ☒	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name South Justis Unit	
8. Well Number	B11
9. OGRID Number	240974
10. Pool name or Wildcat Justis (Blincy-Tubb-Drinkard)	
4. Well Location Unit Letter <u>C</u> : <u>330</u> feet from the <u>N</u> line and <u>2310</u> feet from the <u>W</u> line Section <u>11</u> Township <u>25S</u> Range <u>37E</u> NMPM County <u>Lea County</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3170	

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Legacy Reserves Operating LP

3. Address of Operator
1400 16th St., Ste 510 Denver, CO 80202

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU rig. Pull Rods & pump.
2. ND prod tree & NU BOP's.
3. Kill well with 9.0ppg mud
4. Release TAC & POOH w/ tbg & rod pumping BHA
5. RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
6. RIH w/ dump bailer & spot 8sxs Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line.
7. RIH w/ tbg & tag cmt @ 5065'. PU tbg to 5055' and circ wellbore w/ 9.0ppg mud.
8. PU tbg to 4871' and spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool.
9. PU tbg to 3360' and spot balanced 30sxs Class C cement plug at 3360-3230' to cover the Cherry Canyon
10. PU tbg to 1192' and spot balanced 25sxs Class C cement plug at 1192-1082'. PU tbg to 700' & clear tbg & WOC. RIH w/ tbg & tag cmt plug @ 1082. POOH w/ tbg.
11. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
12. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
13. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Erin Mazur

TITLE

Regulatory Manager

DATE

6/17/2024

Type or print name

Erin Mazur

E-mail address:

emazur@revenirenergy.com

PHONE:

713-594-5843

For State Use Only

APPROVED BY:

TITLE

DATE

Conditions of Approval (if any):

P&A Procedure for the South Justis Unit #B11

1. MIRU rig. Pull Rods & pump.
2. ND prod tree & NU BOP's.
3. Kill well with 9.0ppg mud
4. Release TAC & POOH w/ tbg & rod pumping BHA
5. RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
6. RIH w/ dump bailer & spot 8sxs Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line.
7. RIH w/ tbg & tag cmt @ 5065'. PU tbg to 5055' and circ wellbore w/ 9.0ppg mud.
8. PU tbg to 4871' and spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool.
9. PU tbg to 3360' and spot balanced 30sxs Class C cement plug at 3360-3230' to cover the Cherry Canyon
10. PU tbg to 1192' and spot balanced 25sxs Class C cement plug at 1192-1082'. PU tbg to 700' & clear tbg & WOC. RIH w/ tbg & tag cmt plug @ 1082. POOH w/ tbg.
11. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
12. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
13. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

NOTE: Class C cement will be 16.4ppg & mud will be 9.0ppg.

P&A Procedure for the South Justis Unit #B11

1. MIRU rig. Pull Rods & pump.
2. ND prod tree & NU BOP's.
3. Kill well with 9.0ppg mud
4. Release TAC & POOH w/ tbg & rod pumping BHA
5. RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
6. RIH w/ dump bailer & spot 8sxs Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line.
7. RIH w/ tbg & tag cmt @ 5065'. PU tbg to 5055' and circ wellbore w/ 9.0ppg mud.
8. PU tbg to 4871' and spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool.
9. PU tbg to 3360' and spot balanced 30sxs Class C cement plug at 3360-3230' to cover the Cherry Canyon
10. PU tbg to 1192' and spot balanced 25sxs Class C cement plug at 1192-1082'. PU tbg to 700' & clear tbg & WOC. RIH w/ tbg & tag cmt plug @ 1082. POOH w/ tbg.
11. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
12. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
13. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

NOTE: Class C cement will be 16.4ppg & mud will be 9.0ppg.



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 12 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

CURRENT WELLBORE

GL Elev: 3124'
KB Elev: 3136'
DF Elev: 3135'
RKB: 12'

NOTE: All depths are RKB otherwise noted

NOTE: Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Tbg Details: 145jts (4742.00') 2-3/8" 4.7# J-55 EUE 8rd, TAC (3.00'), 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC, 2-3/8" SN (1.00') w/ ID=1-25/32", 20' 2-3/8" Desander, 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor. Tbg run @ GL. Tbg Hydro Tested during JUN 2018 workover. NOTE: Rod Pumping BHA below the SN is assumed since the WO rpt for JUN 2018 indicated that a desander was run.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Rod Details:

26'x 1-1/4" Polished Rod w/ 16' x 1-1/2" polished rod liner
6' 1" Fiberglass Pony rods w/ slim hole spray metal couplings
66 (2475') 1" Fiberglass rods w/ slim hole spray metal couplings
37 (925') 7/8" API D rods w/ slim hole spray metal couplings
74 (1850') 3/4" API D rods w/ spray metal couplings
6 (150') 1-1/2" K Sinker Bars
2.0" x 1-1/2"x 20' RHBC pump 4' plunger -.005
1" x 14' Gas Anchor

Recent WO History:

06/2018 Pump change. Pump stuck w/ sand. Installed desander.
10/2013 Long stroke pump w/ rig. Got well pumping.
10/2013 Pump stuck, strip OOH. Replaced pump. Hydro tbg, all good.
11/2010 Stuck pump, strip OOH. Replaced pump. Hydro tbg, all good

TAC (3.00') set @ 4742', 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC between TAC & SN
DV Tool set @ 4796' cmt'd w/ 310sxs

2-3/8" SN (1.00') w/ ID=1-25/32" set @ 5453.00', 20' 2-3/8" Desander set @ 5454.00', 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor set @ 5474.00', EOT @ 5506.00'

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBDT @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 28 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

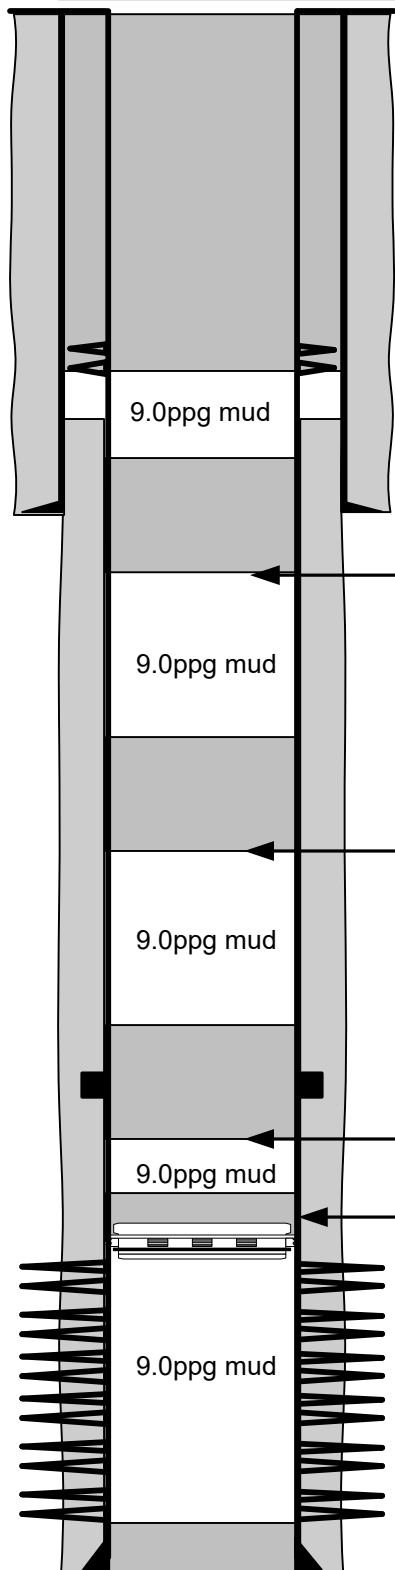
PROPOSED P&A'd WELLBORE

GL Elev: 3124'

KB Elev: 3136'

DF Elev: 3135'

RKB: 12'

NOTE: All depths are RKB otherwise noted**NOTE:** Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Perf @ 649'-650' & cmt sqz 275sxs 16.4ppg Class C cmt & circ to surface.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Spot 25sxs 16.4ppg, 110' Class C balanced cmt plug from 1192' to 1082' for cmt plug for surface shoe & tag w/ tbg @ 1082'

Spot 30sxs 16.4ppg, 130' Class C balanced cmt plug from 3360' to 3230' for the Cherry Canyon

DV Tool set @ 4796' cmt'd w/ 310sxs

Spot 33sxs 16.4ppg, 150' Class C balanced cmt plug from 4871' to 4721' for cmt plug at DV tool

CIBP set @ 5100' w/ 8sxs 16.4ppg of Class C cmt on top w/ TOC @ 5065

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBTB @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'

Form 3160-5
(June 2015)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. **300060**
6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other	8. Well Name and No. South Justis Unit #B11	
2. Name of Operator Legacy Reserves Operating LP	9. API Well No. 30-025-20275	
3a. Address 1400 16th St., Ste 510 Denver, CO 80202	3b. Phone No. (include area code) 713-594-5843	10. Field and Pool or Exploratory Area Justis (Blinebry-Tubb-Drinkard)
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) 330' FNL & 2310' FWL of Sec C 11, T25S, R37E		11. Country or Parish, State Lea County

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION
☒ Notice of Intent	☐ Acidize ☐ Deepen ☐ Production (Start/Resume) ☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing ☐ Hydraulic Fracturing ☐ Reclamation ☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair ☐ New Construction ☐ Recomplete ☐ Other
	☐ Change Plans ☒ Plug and Abandon ☐ Temporarily Abandon
	☐ Convert to Injection ☐ Plug Back ☐ Water Disposal

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

MIRU rig, Pull Rods & pump. ND prod tree & NU BOP's.
Kill well with 9.0ppg mud
Release TAC & POOH w/ tbg & rod pumping BHA RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
RIH w/ dump bailer & spot 8sxs Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line.
RIH w/ tbg & tag cmt @ 5065'. PU tbg to 5055' and circ wellbore w/ 9.0ppg mud.
PU tbg to 4871' and spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool. PU tbg to 3360' and spot balanced 30sxs Class C cement plug at 3360-3230' to cover the Cherry Canyon
0. PU tbg to 1192' and spot balanced 25sxs Class C cement plug at 1192-1082'. PU tbg to 700' & clear tbg & WOC. RIH w/ tbg & tag cmt plug @ 1082. POOH w/ tbg.
1. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
2. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
3. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) Erin Mazur	Title Regulatory Manager
Signature 	Date 5/8/2024

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

BLM Revised P&A Procedure

1. MIRU rig. Pull Rods & pump.
2. ND prod tree & NU BOP's.
3. Kill well with 9.0ppg mud
4. Release TAC & POOH w/ tbg & rod pumping BHA
5. RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
6. RIH w/ dump bailer & spot **35 ft** Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line. **WOC and TAG Pressure Test**
7. Spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool. **WOC and TAG(DV Tool, T/ Glorieta)**
8. Spot balanced 30sxs Class C cement plug at 3360-3230'.
9. Spot CI C cmt at 2400 ft to 2200ft. **WOC and TAG(T/Yates)**
10. Spot balanced 25sxs Class C cement plug at 1192-1082'.WOC and TAG (Surf. Shoe, T/Salt)
11. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
12. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
13. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

NOTE: Class C cement will be 16.4ppg & mud will be 9.0ppg.

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications,) minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.**

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

- have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Robert Duenas
Environmental Protection Specialist
575-234-2229

Doris Lauger Martinez
Environmental Protection Specialist
575-234-5926

Jaden Johnston
Environmental Protection Asst. (Intern)
575-234-6252



TEAM OPERATING, LLC.

Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 12 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

CURRENT WELLBORE

GL Elev: 3124'
KB Elev: 3136'
DF Elev: 3135'
RKB: 12'

NOTE: All depths are RKB otherwise noted

NOTE: Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Tbg Details: 145jts (4742.00') 2-3/8" 4.7# J-55 EUE 8rd, TAC (3.00'), 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC, 2-3/8" SN (1.00') w/ ID=1-25/32", 20' 2-3/8" Desander, 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor. Tbg run @ GL. Tbg Hydro Tested during JUN 2018 workover. NOTE: Rod Pumping BHA below the SN is assumed since the WO rpt for JUN 2018 indicated that a desander was run.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Rod Details:

26'x 1-1/4" Polished Rod w/ 16' x 1-1/2" polished rod liner
6' 1" Fiberglass Pony rods w/ slim hole spray metal couplings
66 (2475') 1" Fiberglass rods w/ slim hole spray metal couplings
37 (925') 7/8" API D rods w/ slim hole spray metal couplings
74 (1850') 3/4" API D rods w/ spray metal couplings
6 (150') 1-1/2" K Sinker Bars
2.0" x 1-1/2"x 20' RHBC pump 4' plunger -.005
1" x 14' Gas Anchor

Recent WO History:

06/2018 Pump change. Pump stuck w/ sand. Installed desander.
10/2013 Long stroke pump w/ rig. Got well pumping.
10/2013 Pump stuck, strip OOH. Replaced pump. Hydro tbg, all good.
11/2010 Stuck pump, strip OOH. Replaced pump. Hydro tbg, all good

TAC (3.00') set @ 4742', 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC between TAC & SN
DV Tool set @ 4796' cmt'd w/ 310sxs

2-3/8" SN (1.00') w/ ID=1-25/32" set @ 5453.00', 20' 2-3/8" Desander set @ 5454.00', 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor set @ 5474.00', EOT @ 5506.00'

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBTD @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'



Received by OCD: 6/17/2024 12:41:02 PM

Prepared by: N. P. Mares

GL Elev: 3124'
KB Elev: 3136'
DF Elev: 3135'
RKB: 12'

NOTE: Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

TOC @ 700' Determined by Temperature Survey

Spot 25sxs 16.4ppg, 110' Class C balanced cmt plug from 1192' to 1082' for cmt plug for surface shoe & tag w/ tbq @ 1082'

Spot 30sxs 16.4ppg, 130' Class C balanced cmt plug from 3360' to 3230' for the Cherry Canyon

DV Tool set @ 4796' cmt'd w/ 310sxs

Spot 33sxs 16.4ppg, 150' Class C balanced cmt plug from 4871' to 4721' for cmt plug at DV tool

CIBP set @ 5100' w/ 8sxs 16.4ppg of Class C cmt on top w/ TOC @ 5065

Blinebry perfs: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perfs: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200xxs MAY 1969

Tubb/Drinkard perfs: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perfs: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBTD @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csq @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 12 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

CURRENT WELLBORE

GL Elev: 3124'

KB Elev: 3136'

DF Elev: 3135'

RKB: 12'

NOTE: All depths are RKB otherwise noted**NOTE:** Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Tbg Details: 145jts (4742.00') 2-3/8" 4.7# J-55 EUE 8rd, TAC (3.00'), 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC, 2-3/8" SN (1.00') w/ ID=1-25/32", 20' 2-3/8" Desander, 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor. Tbg run @ GL. Tbg Hydro Tested during JUN 2018 workover. **NOTE:** Rod Pumping BHA below the SN is assumed since the WO rpt for JUN 2018 indicated that a desander was run.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Rod Details:

26'x 1-1/4" Polished Rod w/ 16' x 1-1/2" polished rod liner
 6' 1" Fiberglass Pony rods w/ slim hole spray metal couplings
 66 (2475') 1" Fiberglass rods w/ slim hole spray metal couplings
 37 (925') 7/8" API D rods w/ slim hole spray metal couplings
 74 (1850') 3/4" API D rods w/ spray metal couplings
 6 (150') 1-1/2" K Sinker Bars
 2.0" x 1-1/2"x 20' RHBC pump 4' plunger -.005
 1" x 14' Gas Anchor

Recent WO History:

06/2018 Pump change. Pump stuck w/ sand. Installed desander.
 10/2013 Long stroke pump w/ rig. Got well pumping.
 10/2013 Pump stuck, strip OOH. Replaced pump. Hydro tbg, all good.
 11/2010 Stuck pump, strip OOH. Replaced pump. Hydro tbg, all good

TAC (3.00') set @ 4742', 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC between TAC & SN
 DV Tool set @ 4796' cmt'd w/ 310sxs

2-3/8" SN (1.00') w/ ID=1-25/32" set @ 5453.00', 20' 2-3/8" Desander set @ 5454.00', 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor set @ 5474.00', EOT @ 5506.00'

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBDT @ 6138' & PBDT @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 28 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

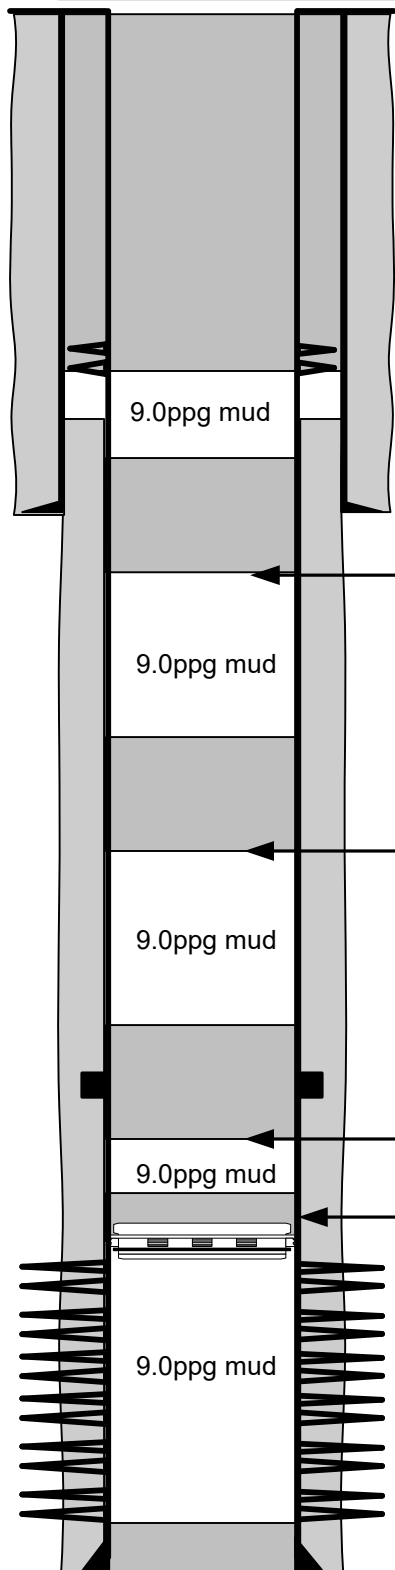
PROPOSED P&A'd WELLBORE

GL Elev: 3124'

KB Elev: 3136'

DF Elev: 3135'

RKB: 12'

NOTE: All depths are RKB otherwise noted**NOTE:** Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Perf @ 649'-650' & cmt sqz 275sxs 16.4ppg Class C cmt & circ to surface.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Spot 25sxs 16.4ppg, 110' Class C balanced cmt plug from 1192' to 1082' for cmt plug for surface shoe & tag w/ tbg @ 1082'

Spot 30sxs 16.4ppg, 130' Class C balanced cmt plug from 3360' to 3230' for the Cherry Canyon

DV Tool set @ 4796' cmt'd w/ 310sxs

Spot 33sxs 16.4ppg, 150' Class C balanced cmt plug from 4871' to 4721' for cmt plug at DV tool

CIBP set @ 5100' w/ 8sxs 16.4ppg of Class C cmt on top w/ TOC @ 5065

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBTB @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'

P&A Procedure for the South Justis Unit #B11

1. MIRU rig. Pull Rods & pump.
2. ND prod tree & NU BOP's.
3. Kill well with 9.0ppg mud
4. Release TAC & POOH w/ tbg & rod pumping BHA
5. RU e-line & RIH w/ CIBP & set CIBP @ 5100'.
6. RIH w/ dump bailer & spot 8sxs Class C cement on top of CIBP w/ TOC @ 5065'. POOH w/ dump bailer & RD e-line.
7. RIH w/ tbg & tag cmt @ 5065'. PU tbg to 5055' and circ wellbore w/ 9.0ppg mud.
8. PU tbg to 4871' and spot balanced 33sxs Class C cement plug at 4871'-4721' to cover DV Tool.
9. PU tbg to 3360' and spot balanced 30sxs Class C cement plug at 3360-3230' to cover the Cherry Canyon
10. PU tbg to 1192' and spot balanced 25sxs Class C cement plug at 1192-1082'. PU tbg to 700' & clear tbg & WOC. RIH w/ tbg & tag cmt plug @ 1082. POOH w/ tbg.
11. RU e-line & RIH w/ 1' perf gun @ 4spf & shoot cmt sqz perfs @ 649'-650'. POOH w/ spent perf gun & RD e-line.
12. Pump down 7" csg & establish circulation w/ 9.0ppg mud. Then pump 275sxs Class C cmt down 7" csg & cmt sqz cmt back to surface in the 7" x 9-5/8" annulus.
13. Cut off wellhead/all casings 3' below ground level, check all annuli for cmt to surface & top fill as necessary w/ Class C cmt back to surface. Weld a steel plate over all casings and erect a marker monument. Clear off and restore well location per BLM guidelines.

NOTE: Class C cement will be 16.4ppg & mud will be 9.0ppg.



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 12 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

CURRENT WELLBORE

GL Elev: 3124'

KB Elev: 3136'

DF Elev: 3135'

RKB: 12'

NOTE: All depths are RKB otherwise noted**NOTE:** Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Tbg Details: 145jts (4742.00') 2-3/8" 4.7# J-55 EUE 8rd, TAC (3.00'), 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC, 2-3/8" SN (1.00') w/ ID=1-25/32", 20' 2-3/8" Desander, 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor. Tbg run @ GL. Tbg Hydro Tested during JUN 2018 workover. **NOTE:** Rod Pumping BHA below the SN is assumed since the WO rpt for JUN 2018 indicated that a desander was run.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Rod Details:

26'x 1-1/4" Polished Rod w/ 16' x 1-1/2" polished rod liner
 6' 1" Fiberglass Pony rods w/ slim hole spray metal couplings
 66 (2475') 1" Fiberglass rods w/ slim hole spray metal couplings
 37 (925') 7/8" API D rods w/ slim hole spray metal couplings
 74 (1850') 3/4" API D rods w/ spray metal couplings
 6 (150') 1-1/2" K Sinker Bars
 2.0" x 1-1/2"x 20' RHBC pump 4' plunger -.005
 1" x 14' Gas Anchor

Recent WO History:

06/2018 Pump change. Pump stuck w/ sand. Installed desander.
 10/2013 Long stroke pump w/ rig. Got well pumping.
 10/2013 Pump stuck, strip OOH. Replaced pump. Hydro tbg, all good.
 11/2010 Stuck pump, strip OOH. Replaced pump. Hydro tbg, all good

TAC (3.00') set @ 4742', 21jts (644.00') 2-3/8" 4.7# J-55 EUE 8rd tbg, 2jts (64.00') 2-3/8" 4.7# J-55 EUE 8rd tbg w/ IPC between TAC & SN
 DV Tool set @ 4796' cmt'd w/ 310sxs

2-3/8" SN (1.00') w/ ID=1-25/32" set @ 5453.00', 20' 2-3/8" Desander set @ 5454.00', 1jt (32.00') 2-3/8" 4.7# J-55 EUE 8rd tbg mud anchor set @ 5474.00', EOT @ 5506.00'

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBDT @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'



TEAM OPERATING, LLC. Downhole Schematic



WELL NAME: South Justis Unit #B11	FIELD: Justis(Blinebry-Tubb-Drinkard)	API: 30-025-20275
LOCATION: 330' FNL & 2310' FWL of Sec C 11, T25S, R37E, Lea County, NM		
WP ID# 300060	DATE: 28 FEB 24	SPUD: 26 JUN 63

Prepared by: N. P. Mares

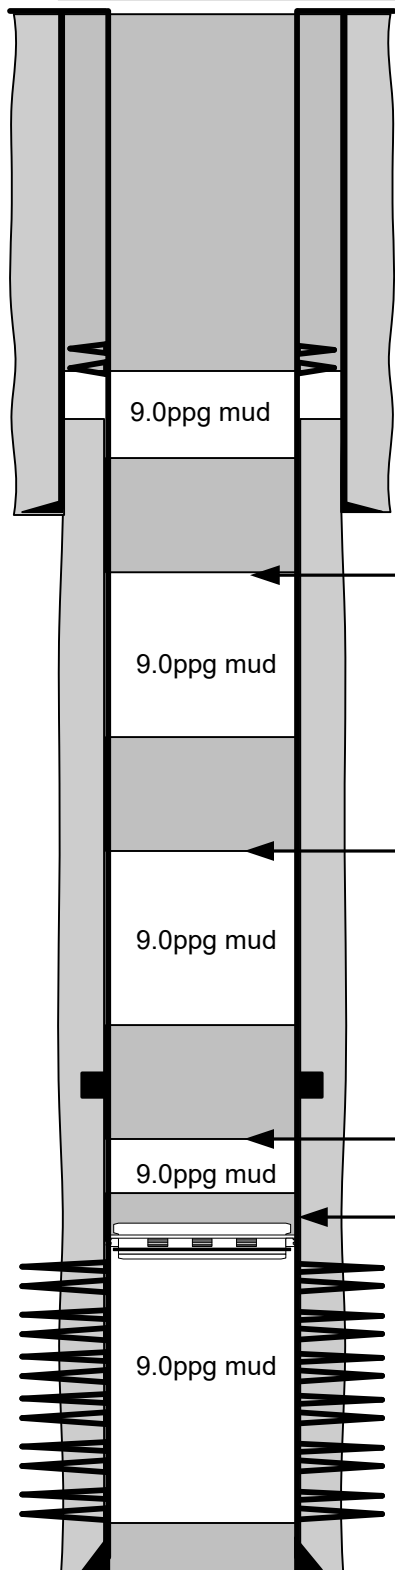
PROPOSED P&A'd WELLBORE

GL Elev: 3124'

KB Elev: 3136'

DF Elev: 3135'

RKB: 12'

NOTE: All depths are RKB otherwise noted**NOTE:** Originally the well was named the W.F. Stuart #6, named changed on 1 JAN 93 to South Justis Unit #B11

Perf @ 649'-650' & cmt sqz 275sxs 16.4ppg Class C cmt & circ to surface.

TOC @ 700' Determined by Temperature Survey

9-5/8" 36# J-55 ST&C csg @ 1137' w/ 12-1/4" hole, cmt'd w/ 395sxs circ to surface

Spot 25sxs 16.4ppg, 110' Class C balanced cmt plug from 1192' to 1082' for cmt plug for surface shoe & tag w/ tbg @ 1082'

Spot 30sxs 16.4ppg, 130' Class C balanced cmt plug from 3360' to 3230' for the Cherry Canyon

DV Tool set @ 4796' cmt'd w/ 310sxs

Spot 33sxs 16.4ppg, 150' Class C balanced cmt plug from 4871' to 4721' for cmt plug at DV tool

CIBP set @ 5100' w/ 8sxs 16.4ppg of Class C cmt on top w/ TOC @ 5065

Blinebry perms: 5114-5676 OA; Acidized w/ 2000gals 15% HCL & sand frac'd w/ 20M# 20/40 sand MAY 1969, acidized w/ 3Mgals 15% NeFeHCL JUN 1993, acidized w/ 7Mgals 15% NeFeHCL & sand frac'd w/ 226M# 20/40 sand MAY 2007

Blinebry perms: 5328-5550 OA; Acidized w/ 2Mgals acid & sand frac'd w/ 20M# sand AUG 1963. cmt sqz'd w/ 200sxs MAY 1969

Tubb/Drinkard perms: 5852-5980 OA acidized w/ 15Mgals & sand frac'd w/ 20M# sand MAY 1969

Tubb/Drinkard perms: 6025-6108 OA acidized w/ 2Mgals acid, acidized w/ 6Mgals acid sand frac'd w/ 15M# sand JUL 1963, cmt sqz'd w/ 200sxs MAY 1969

OPBTD @ 6138' & PBTB @ 6118 CO during JUN 93 workover

7" 20# & 23# J-55 LT&C csg @ 6138' w/ 8-3/4" hole, cmt'd w/ 210sxs

TD @ 6140'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 355024

COMMENTS

Operator: LEGACY RESERVES OPERATING, LP 1400 16th Street, Suite 510 Denver, CO 80202	OGRID: 240974
	Action Number: 355024
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM.	6/18/2024

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 355024

CONDITIONS

Operator: LEGACY RESERVES OPERATING, LP 1400 16th Street, Suite 510 Denver, CO 80202	OGRID: 240974
	Action Number: 355024
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Like approval from BLM	6/18/2024