

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 367700

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address LARIO OIL & GAS CO 301 S. Market St. Wichita, KS 67202		2. OGRID Number 13089
		3. API Number 30-025-53153
4. Property Code 335618	5. Property Name SKY DWELLER 14 STATE COM	6. Well No. 401H

7. Surface Location

UL - Lot E	Section 23	Township 18S	Range 34E	Lot Idn E	Feet From 2425	N/S Line N	Feet From 1135	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot D	Section 14	Township 18S	Range 34E	Lot Idn D	Feet From 100	N/S Line N	Feet From 990	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

9. Pool Information

AIRSTIP:BONE SPRING	960
AIRSTIP:BONE SPRING, NORTH	962

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 4000
16. Multiple Y	17. Proposed Depth 17503	18. Formation Bone Spring	19. Contractor	20. Spud Date 11/1/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1850	1565	0
Int1	12.25	9.625	40	6300	1080	0
Prod	8.75	5.5	20	17503	3060	0

Casing/Cement Program: Additional Comments

Production casing grade is HCP-110

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	3000	3000	TBD
Double Ram	5000	5000	TBD

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by David Thorpe	Approved By: Paul F Kautz	
Title: VP of Land	Title: Geologist	
Email Address: david@lario.net	Approved Date: 7/5/2024	Expiration Date: 7/5/2026
Date: 6/23/2024	Phone: 720-457-8557	Conditions of Approval Attached

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, N.M. 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102

Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, N.M. 87505

Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-	² Pool Code 960	³ Pool Name AIRSTRIP; BONE SPRING
⁴ Property Code 335618	⁵ Property Name SKY DWELLER 14 STATE COM	⁶ Well Number 4.0IH
⁷ GRID No. 13069	⁸ Operator Name LARIO OIL & GAS COMPANY	⁹ Elevation 4000.3'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	23	18 S	34 E		2425'	NORTH	1135'	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	14	18 S	34 E		100'	NORTH	990'	WEST	LEA

¹² Dedicated Acres 80.00 (+ 160.00 = 240.00 both pools)	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
---	-------------------------------	---------------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

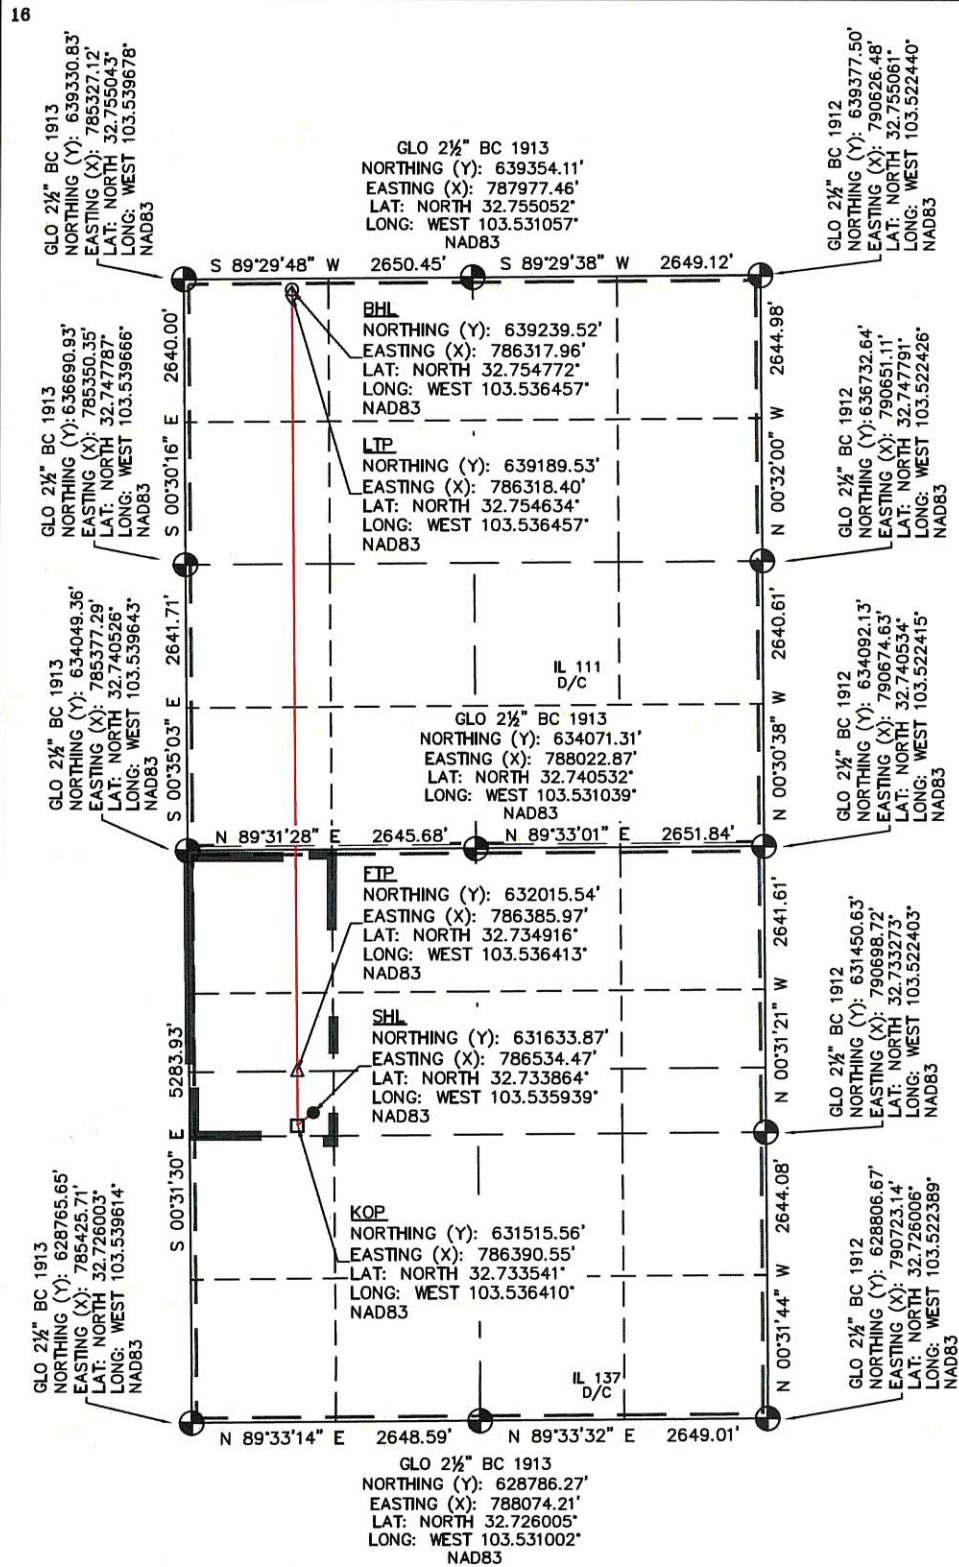

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Brian Wood
Signature
6-15-24
Date

BRIAN WOOD
Printed Name
brian@permitswest.com
E-mail Address
505 466-8120

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

5/5/24

Date of Survey
Plat Revised: N/A
Signature and Seal of Professional Surveyor:



29026
Certificate Number
6/11/2024

LEGEND:

- = SURFACE LOCATION (SHL)
- = KICK OFF POINT (KOP)
- △ = FIRST TAKE POINT (FTP)
- ◇ = LAST TAKE POINT (LTP)
- = BOTTOM HOLE (BHL)
- ⊕ = FOUND MONUMENT

FOOTAGES / SECTION			
SHL	2425' FNL	23	1135' FWL 23
KOP	2542' FNL	23	990' FWL 23
FTP	2042' FNL	23	990' FWL 23
LP	150' FNL	14	990' FWL 14
BHL	100' FNL	14	990' FWL 14

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, N.M. 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, N.M. 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-	² Pool Code 962	³ Pool Name AIRSTRIP; BONE SPRING, NORTH
⁴ Property Code 335618	⁵ Property Name SKY DWELLER 14 STATE COM	⁶ Well Number 40IH
⁷ GRID No. 13069	⁸ Operator Name LARIO OIL & GAS COMPANY	⁹ Elevation 4000.3'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	23	18 S	34 E		2425'	NORTH	1135'	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	14	18 S	34 E		100'	NORTH	990'	WEST	LEA

¹² Dedicated Acres 160.00 (+ 80.00 = 240.00 both pools)	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
---	-------------------------------	---------------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

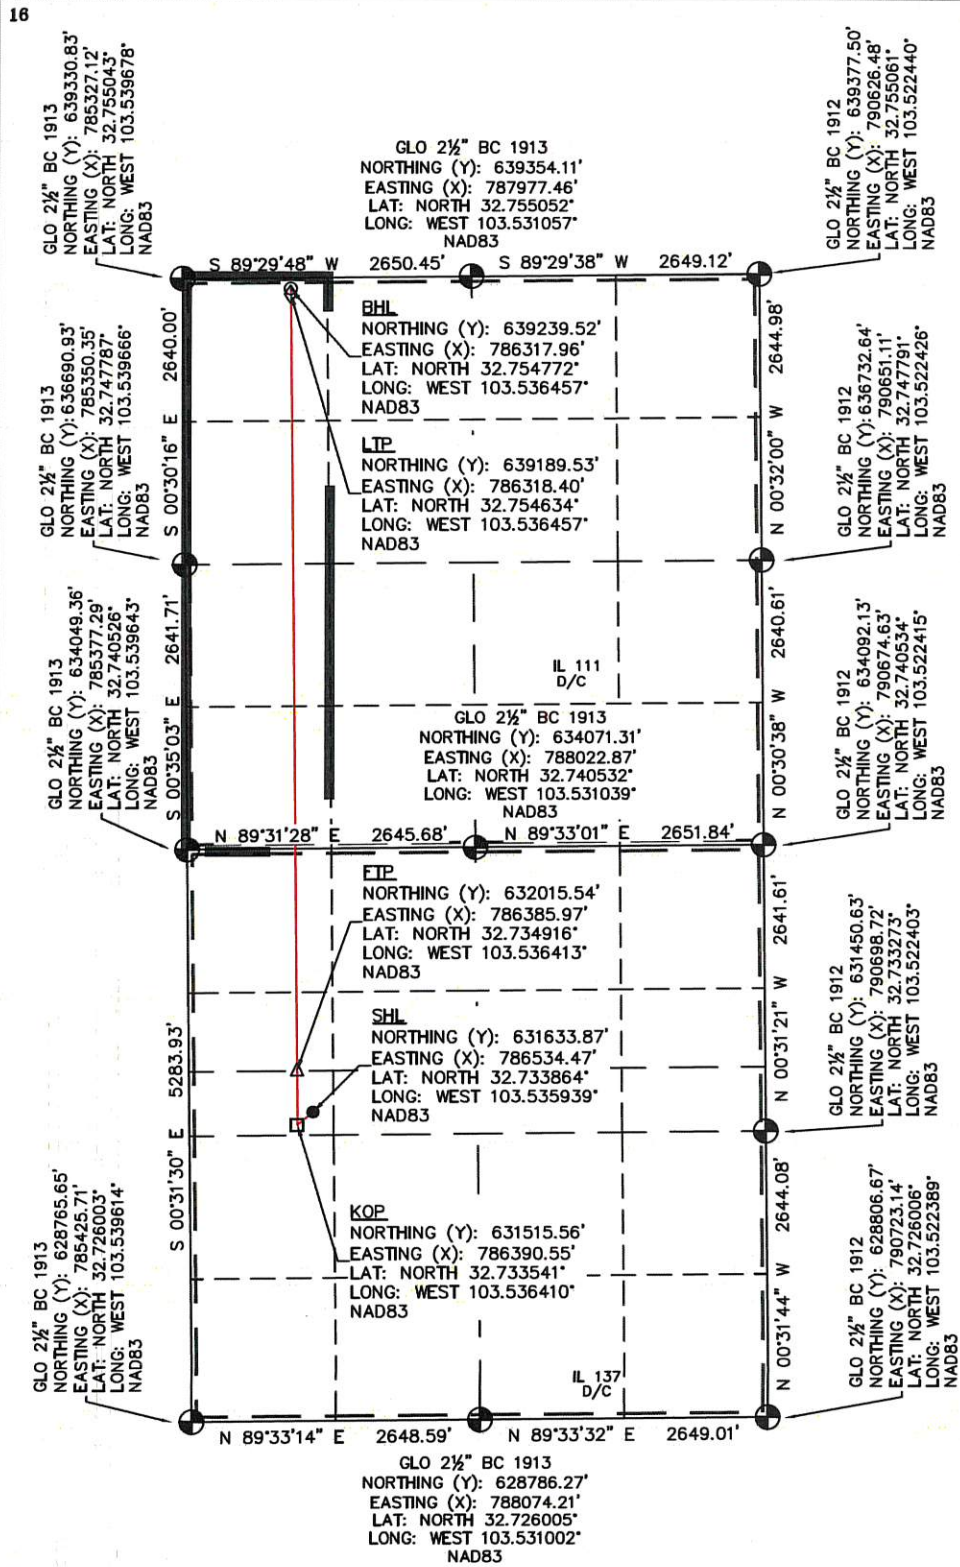

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Brian Wood 6-15-24
Signature Date
BRIAN WOOD
Printed Name
brian@permitswest.com
E-mail Address
505 466-8120

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

5/5/24
Date of Survey
Plat Revised: N/A
Signature and Seal of Professional Surveyor:
DAVID E. HENDERHAN
NEW MEXICO
29026
PROFESSIONAL SURVEYOR
29026 6/11/2024
Certificate Number

- LEGEND:
- = SURFACE LOCATION (SHL)
 - = KICK OFF POINT (KOP)
 - △ = FIRST TAKE POINT (FTP)
 - ◇ = LAST TAKE POINT (LTP)
 - = BOTTOM HOLE (BHL)
 - ⊙ = FOUND MONUMENT

	FOOTAGES / SECTION
SHL	2425' FNL 23 1135' FWL 23
KOP	2542' FNL 23 990' FWL 23
FTP	2042' FNL 23 990' FWL 23
LP	150' FNL 14 990' FWL 14
BHL	100' FNL 14 990' FWL 14

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions
Permit 367700

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: LARIO OIL & GAS CO [13089] 301 S. Market St. Wichita, KS 67202	API Number: 30-025-53153
	Well: SKY DWELLER 14 STATE COM #401H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string, a CBL is required for that string of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Lario Oil & Gas Co.

OGRID: 13089

Date: 6-15-24

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Sky Dweller 14 State Com 101H	30-025-	E-23-18S-34E	2425 FNL & 1060 FWL	600	275	1025
Sky Dweller 14 State Com 102H	30-025-	E-23-18S-34E	2425 FSL & 1085 FWL	600	275	1025
Sky Dweller 14 State Com 201H	30-025-	E-23-18S-34E	2425 FNL & 1110 FWL	600	275	1025
Sky Dweller 14 State Com 401H	30-025-	E-23-18S-34E	2425 FNL & 1135 FWL	600	275	1025

IV. Central Delivery Point Name: Franklin Mountain Energy LLC (373910) in D-35-18s-34e [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Sky Dweller 14 State Com 101H	30-025-	8-1-24	9-1-24	9-5-24	10-5-24	10-10-24
Sky Dweller 14 State Com 102H	30-025-	9-1-24	10-1-24	10-5-24	11-5-24	11-10-24
Sky Dweller 14 State Com 103H	30-025-	10-1-24	11-1-24	11-5-24	12-5-24	12-10-24
Sky Dweller 14 State Com 104H	30-025-	11-1-24	12-1-24	12-5-24	1-5-25	1-10-25

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☒ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

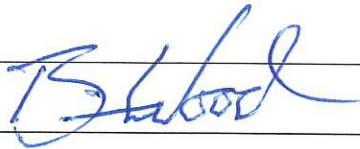Signature:	
Printed Name:	Brian Wood
Title:	Consultant
E-mail Address:	brian@permitswest.com
Date:	6-15-24
Phone:	505 466-8120
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

VI. Equipment

Lario Oil & Gas Co. tentatively plans to install:

fuel safety shut-off valves
gas scrubbers
oil tanks
meters
stack
separators
compressor
water tanks
heater-treaters
vapor recovery units
vapor recovery piping for all tanks

VII. Operational Practices

NMAC 19.15.27.8 (A) Venting & Flaring of Natural Gas

1. Lario Oil & Gas Co. (LARIO) will comply NMAC 19.15.27.8 – venting and flaring of gas during drilling, completion, or production that constitutes waste as defined in 19.15.2 is banned.

NMAC 19.15.27.8 (B) Venting & Flaring During Drilling

1. LARIO will capture or combust gas if technically feasible during drilling operations using best industry practices.
2. A flare stack with a 100% capacity for expected volume will be set on the pad ≥ 100 feet from the nearest well head and storage tank.
3. In an emergency, LARIO will vent gas in order to avoid substantial impact. LARIO will report vented or flared gas to the NMOCD.

NMAC 19.15.27.8 (C) Venting & Flaring During Completion or Recompletion

1. Facilities will be built and ready from the first day of flowback
2. Test separator will be properly separate gas and liquids. Temporary test separator will be used initially to process volumes. In addition, separator will be tied into flowback tanks which will be tied into the gas processing equipment for sale down a pipeline.
3. Should the facility not be ready to process gas, or the gas does not meet quality standards, then storage tanks will be set that are tied into gas busters or a temporary flare to manage all gas. This flare would meet the following requirements:
 - a) An appropriate-sized flare stack with an automatic igniter
 - b) LARIO analyzes gas samples twice a week

- c) LARIO flows the gas into a gathering line as soon as the pipeline specifications are met
- d) LARIO provides the NMOCD with pipeline specifications and natural gas data.

NMAC 19.15.27.8 (D) Venting & Flaring During Production

LARIO will not vent or flare natural gas except:

1. During an emergency or malfunction
2. To unload or clean-up liquid holdup in a well to atmospheric pressure, provided
 - a) LARIO does not vent after the well achieves a stabilized rate and pressure
 - b) LARIO will be on-site while unloading liquids by manual purging and take all reasonable actions to achieve a stabilized rate and pressure as soon as possible
 - c) LARIO will optimize the system to minimize gas venting if the well is equipped with a plunger lift or auto control system
 - d) Best management practices will be used during downhole well maintenance.
3. During the first year of production from an exploratory well provided
 - a) LARIO receives approval from the NMOCD
 - b) LARIO stays in compliance with NMOCD gas capture requirements
 - c) LARIO submits an updated C-129 form to the NMOCD
4. During the following activities unless prohibited
 - a) Gauging or sampling a storage tank or low-pressure production vessel
 - b) Loading out liquids from a storage tank
 - c) Repair and maintenance
 - d) Normal operation of a gas-activated pneumatic controller or pump
 - e) Normal operation of a storage tank but not including venting from a thief hatch
 - f) Normal operation of dehydration units
 - g) Normal operations of compressors, engines, turbines, valves, flanges, & connectors
 - h) During a Braden head, packer leak test, or production test lasting <24 hours
 - i) When natural gas does not meet the gathering line specifications
 - j) Commissioning of lines, equipment, or facilities only for as long as necessary to purge introduced impurities.

NMAC 19.15.27.8 (E) Performance Standards

1. LARIO used a safety factor to design the separation and storage equipment. The equipment will be routed to a vapor recovery system and uses a flare as back up for startup, shutdown, maintenance, or malfunction of the VRU system.
2. LARIO will install a flare that will handle the full facility vapor volume in case the VRU fails. It will have an auto-ignition system.
3. Flare stacks will be appropriately sized and designed to ensure proper combustion efficiency
 - a) Flare stacks installed or replaced will be equipped with an automatic ignitor or continuous pilot.

- b) Previously installed flare stacks will be retrofitted within 18 months of May 25, 2021 with an automatic ignitor, continuous pilot, or technology that alerts LARIO to flare malfunction.
 - c) Flare stacks replaced after May 25, 2021, will be equipped with an automatic ignitor or continuous pilot if at a well or facility with an average production of ≤ 60 Mcfd of natural gas.
 - d) Flare stacks will be located >100 feet from well head and storage tanks and securely anchored.
- 4. LARIO will conduct an audio/visual/olfactory inspection on all components for leaks and defects every week.
 - 5. LARIO will make and keep records of AVO inspections available to the NMOCD for at least 5 years.
 - 6. LARIO may use a remote or automated monitoring technology to detect leaks and releases in lieu of AVO inspections with prior NMOCD approval.
 - 7. Facilities will be designed to minimize waste.
 - 8. LARIO will resolve emergencies as promptly as possible.

NMAC 19.15.27.8 (F) Measuring or Estimating Vented & Flared Natural Gas

- 1. LARIO will have meters on both the low pressure and high-pressure sides of the flares. Volumes will be recorded in the SCADA system.
- 2. LARIO will install equipment to measure the volume of flared natural gas that has an average production of ≥ 60 Mcfd.
- 3. LARIO's measuring equipment will conform to industry standards.
- 4. Measurement system will be designed such that it cannot be bypassed except for inspections and servicing the meters.
- 5. LARIO will estimate the volume of vented or flared gas using a methodology that can be independently verified if metering is not practicable due to low flow rate or pressure.
- 6. LARIO will estimate the volume of vented and flared gas based on the results of an annual GOR test for wells that do not require measuring equipment reported on form C-116.
- 7. LARIO will install measuring equipment whenever the NMOCD determines that metering is necessary.

VIII. Best Management Practices


LARIO Permian LLC will minimize venting during maintenance by:

- 1. Designing and operating system to route storage tank and process equipment emissions to the VRU. If the VRU is not operable, then vapors will be routed to the flare.
- 2. Scheduling maintenance for multiple tasks to minimize the need for blowdowns.
- 3. After completion of maintenance, gas will be flared until it meets pipeline specifications.



Site: Sky Dweller pad
Well: (04) Sky Dweller 14 State Com 401H
Wellbore: 401H
Plan: Plan 2

PROJECT DETAILS: Lea County, NM (N83 - NME)
Well Name: (04) Sky Dweller 14 State Com 401H
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level
Local North: Grid
KB Elevation: 25' RKB @ 4025.00usft
Elevation: 4000.00
To convert a Magnetic Direction to a Grid Direction, Add 5.779°

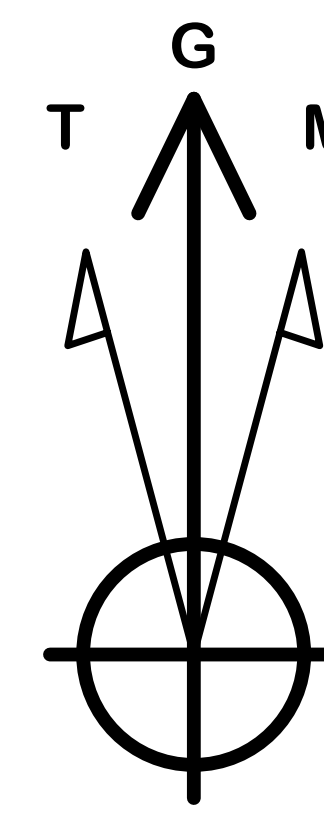

Azimuths to Grid North
True North: -0.43°
Magnetic North: 5.78°

Magnetic Field
Strength: 47476.3nT
Dip Angle: 60.26°
Date: 7/1/2024
Model: IGRF2020



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	0.00
2	2300.00	0.00	0.00	2300.00	0.00	0.00	0.00	0.000	0.00
3	2550.01	5.00	221.30	2549.69	-8.19	-7.19	2.00	221.295	-8.12
4	4106.55	5.00	221.30	4100.31	-110.12	-96.73	0.00	0.000	-109.20
5	4356.56	0.00	0.00	4350.00	-118.31	-103.92	2.00	180.000	-117.33
6	9403.60	0.00	0.00	9397.04	-118.31	-103.92	0.00	0.005	-117.33
7	10361.30	95.77	356.25	9967.09	510.90	-145.16	10.00	356.250	512.25
8	10608.44	92.05	359.51	9850.25	757.22	-154.27	2.00	138.749	758.64
9	13331.54	92.05	359.51	9853.00	3478.48	-177.59	0.00	0.000	3480.00
10	13657.54	98.57	359.46	9822.87	3802.90	-180.52	2.00	-0.445	3804.43
11	17503.37	98.57	359.46	9250.00	7605.65	-216.51	0.00	0.000	7607.35

WELL DETAILS: (04) Sky Dweller 14 State Com 401H

Northing	Easting	Latitude	Longitude
631633.87	786534.47	32.73386365	-103.53593912


DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PBHL - v2 - (04) Sky Dweller 14 State Com 401H	9250.00	7605.65	-216.51	639239.52	786317.96	32.75477159	-103.53645710
LTP - v2 - (04) Sky Dweller 14 State Com 401H	9257.53	7555.66	-216.07	639189.53	786318.40	32.75463419	-103.53645089
KOP - v2 - (04) Sky Dweller 14 State Com 401H	9397.04	-118.31	-143.92	631515.56	786390.55	32.73354146	-103.53641001
WP01 - 3480 VS - v2 - (04) Sky Dweller 14 State Co	9853.00	3478.48	-177.59	635112.35	786356.88	32.74342763	-103.53643153
FTP - v2 - (04) Sky Dweller 14 State Com 401H	9965.33	381.67	-148.50	632015.54	786385.97	32.73491570	-103.53641268
LP - v2 - (04) Sky Dweller 14 State Com 401H	9970.00	454.62	-149.30	632088.49	786385.17	32.73511623	-103.53641351


FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1842.63	1842.63	RSLR
3290.87	3294.02	BLCN
5729.34	5735.90	CRCN
6276.15	6282.71	BRSC
6818.04	6824.60	AVNS
7379.63	7386.19	BSPG
7926.44	7933.00	BSPG1
8719.56	8726.12	BSPG1_SAND
8916.61	8923.17	BSPG2
9458.49	9465.17	BSPG2_SAND
9591.50	9602.00	BSPG3
9803.32	9855.21	BSPG3_SAND


Vertical Section at 359.46° (90 usft/in)

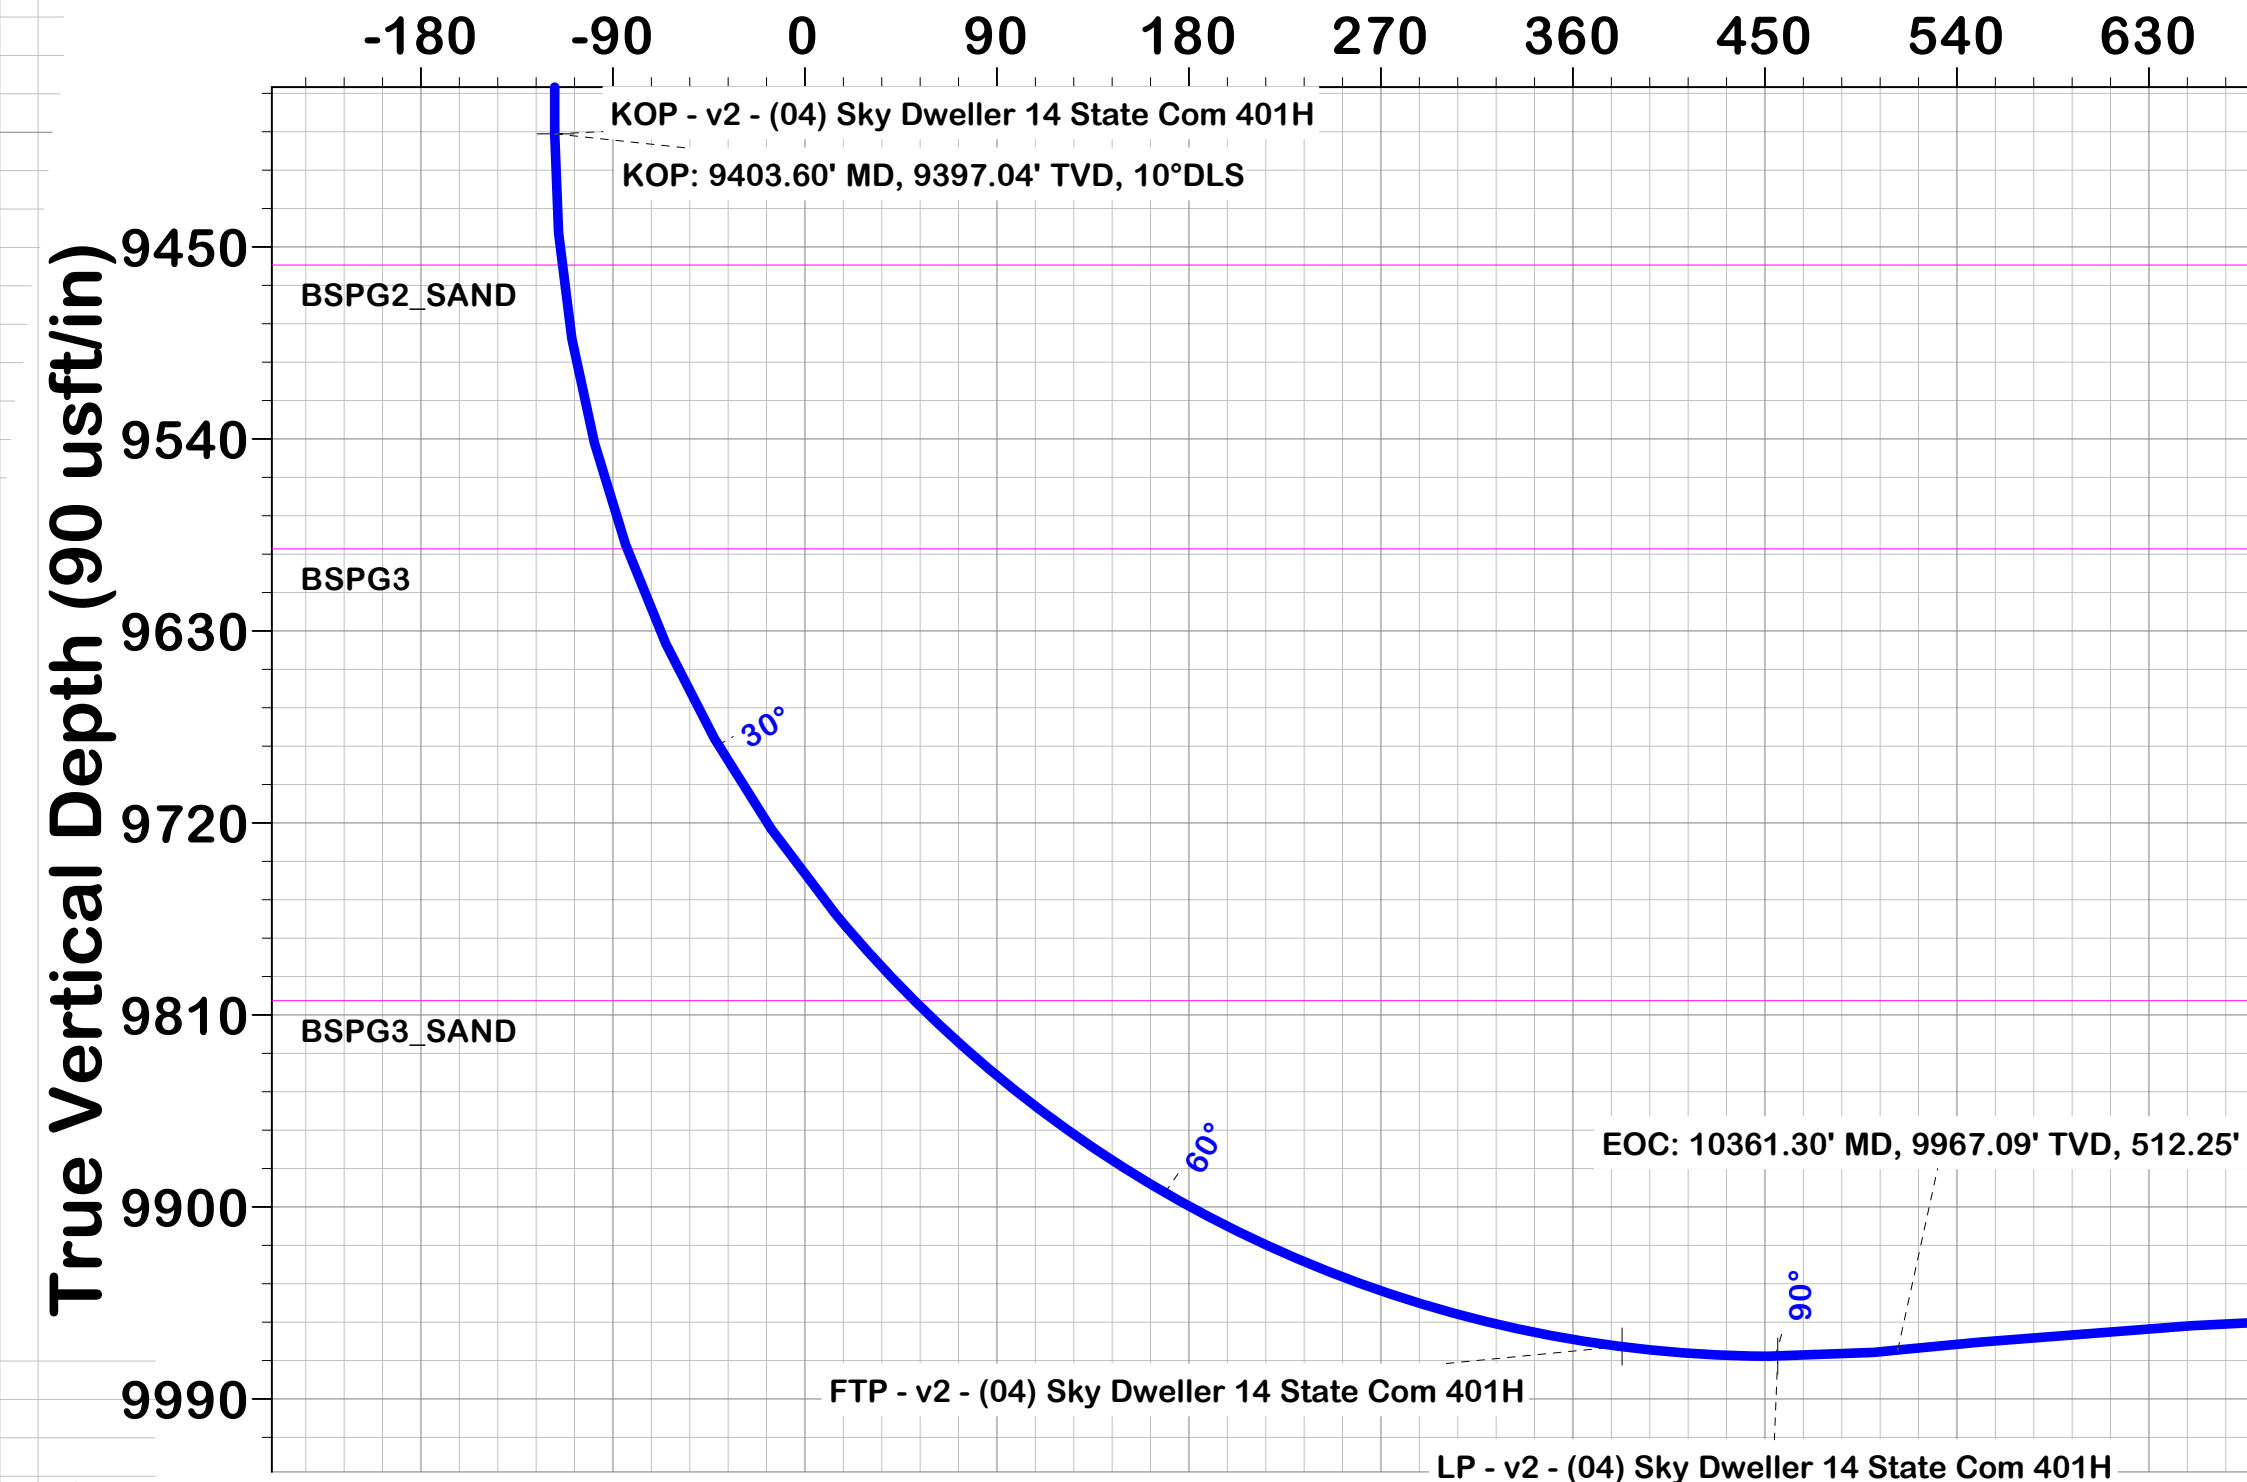


West(-)/East(+) (60 usft/in)

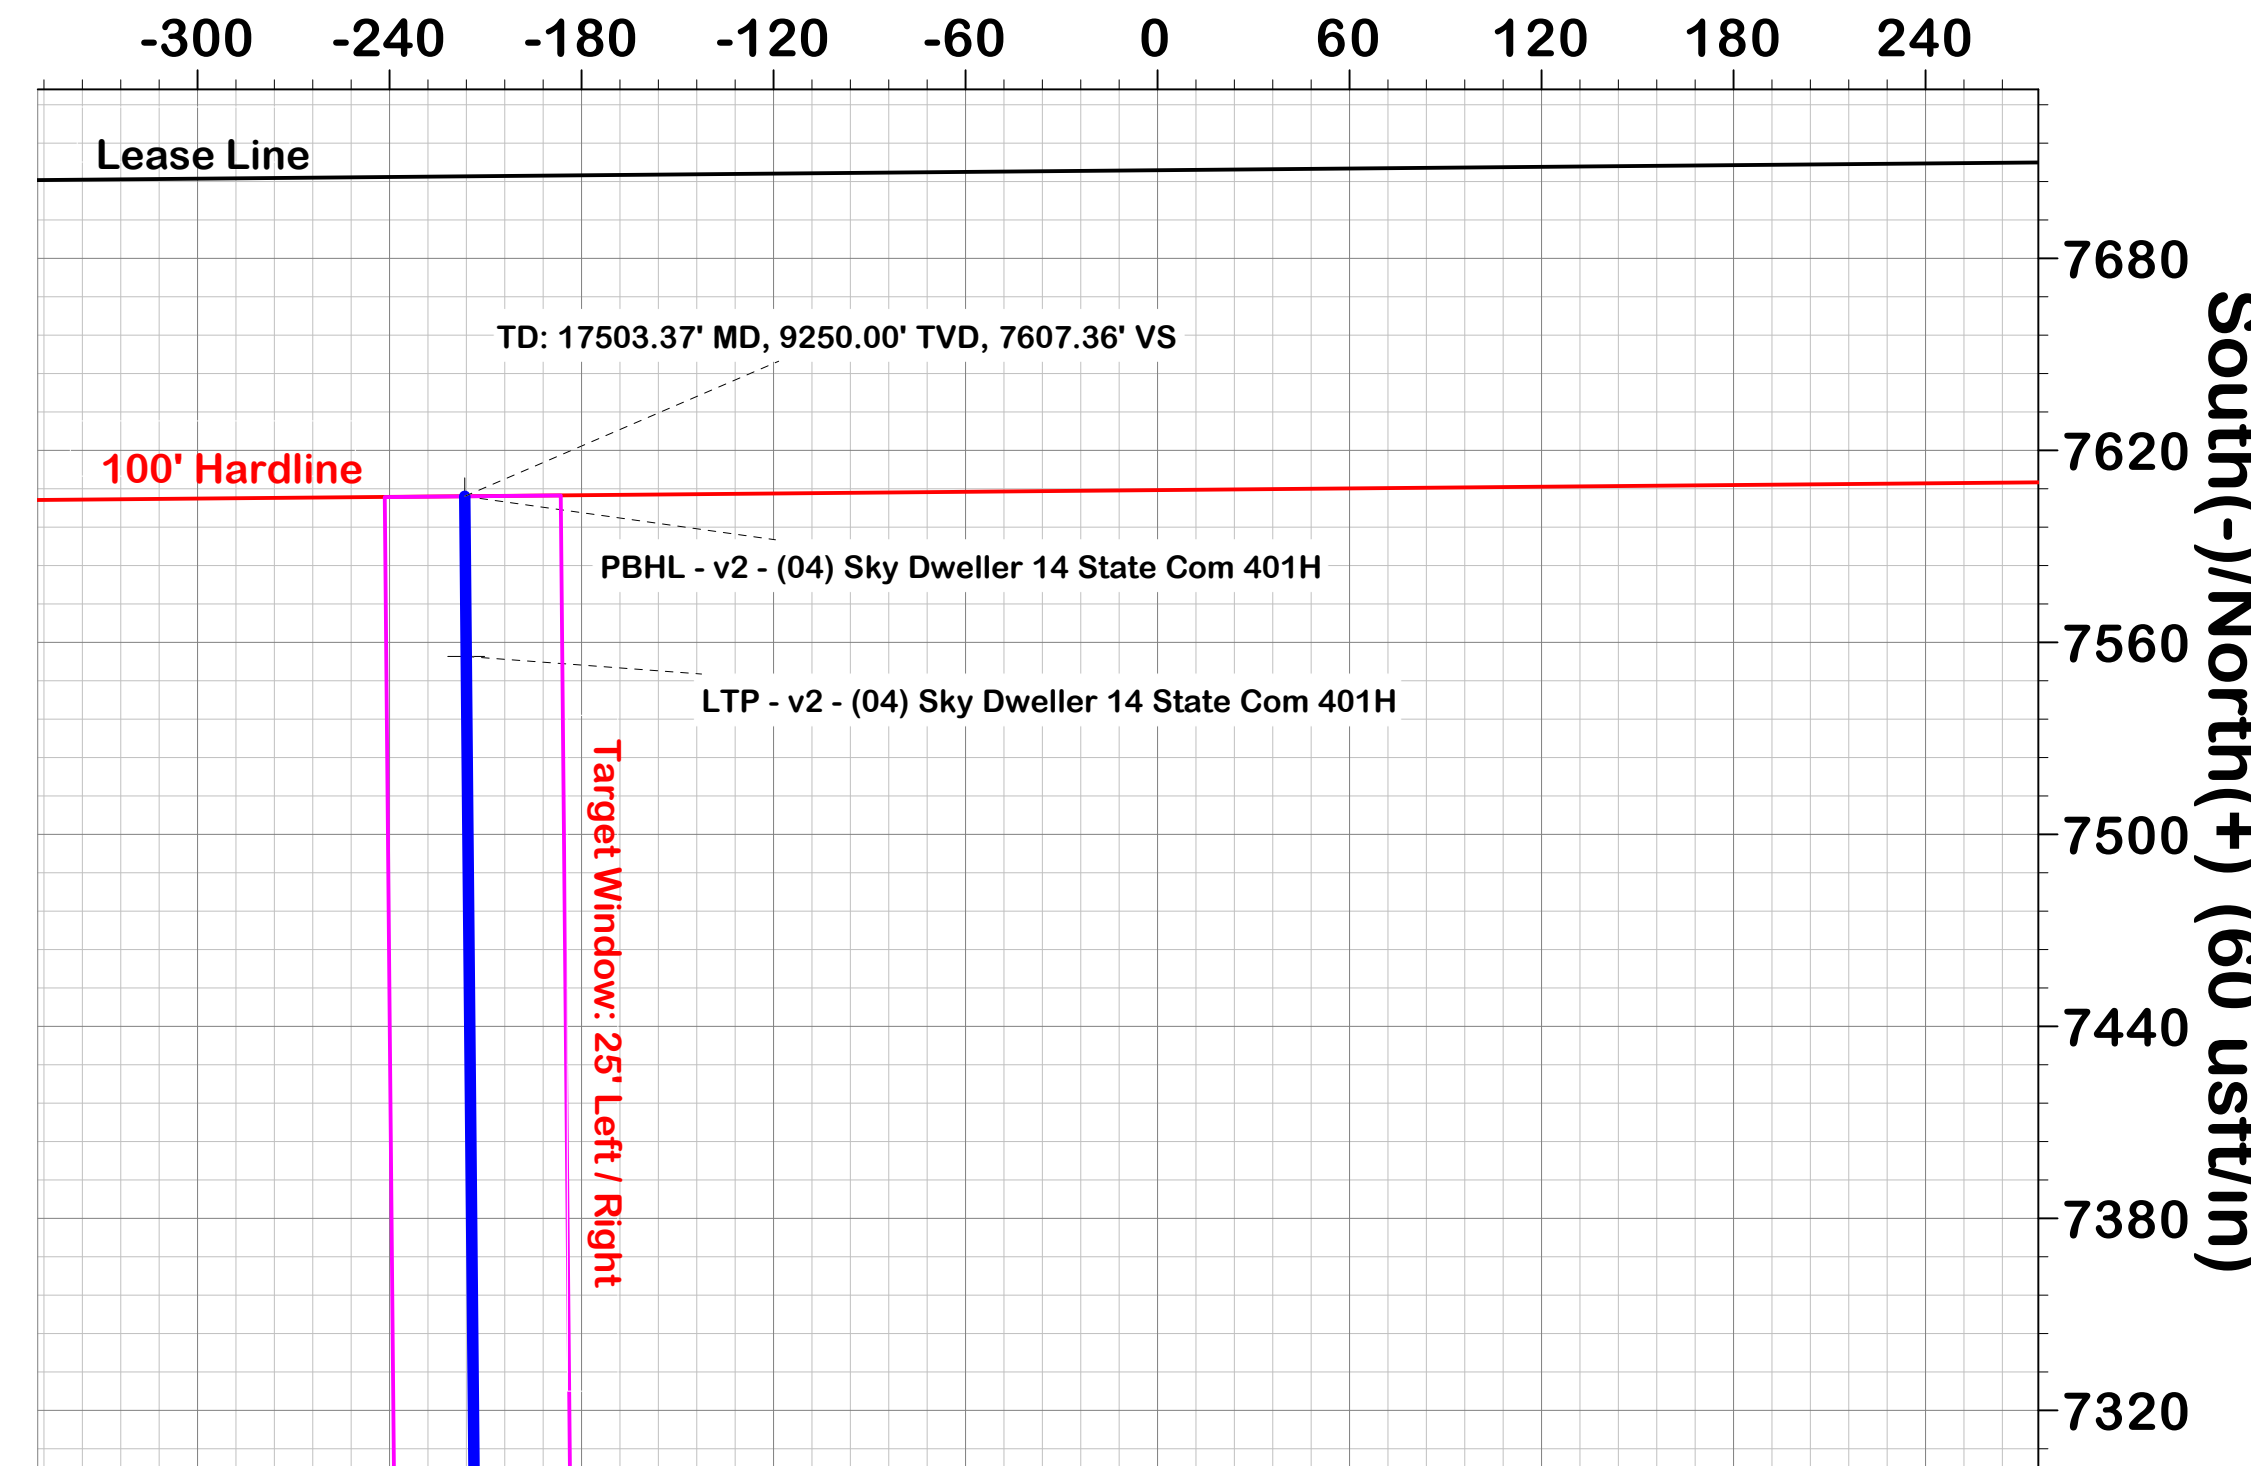

West(-)/East(+) (450 usft/in)

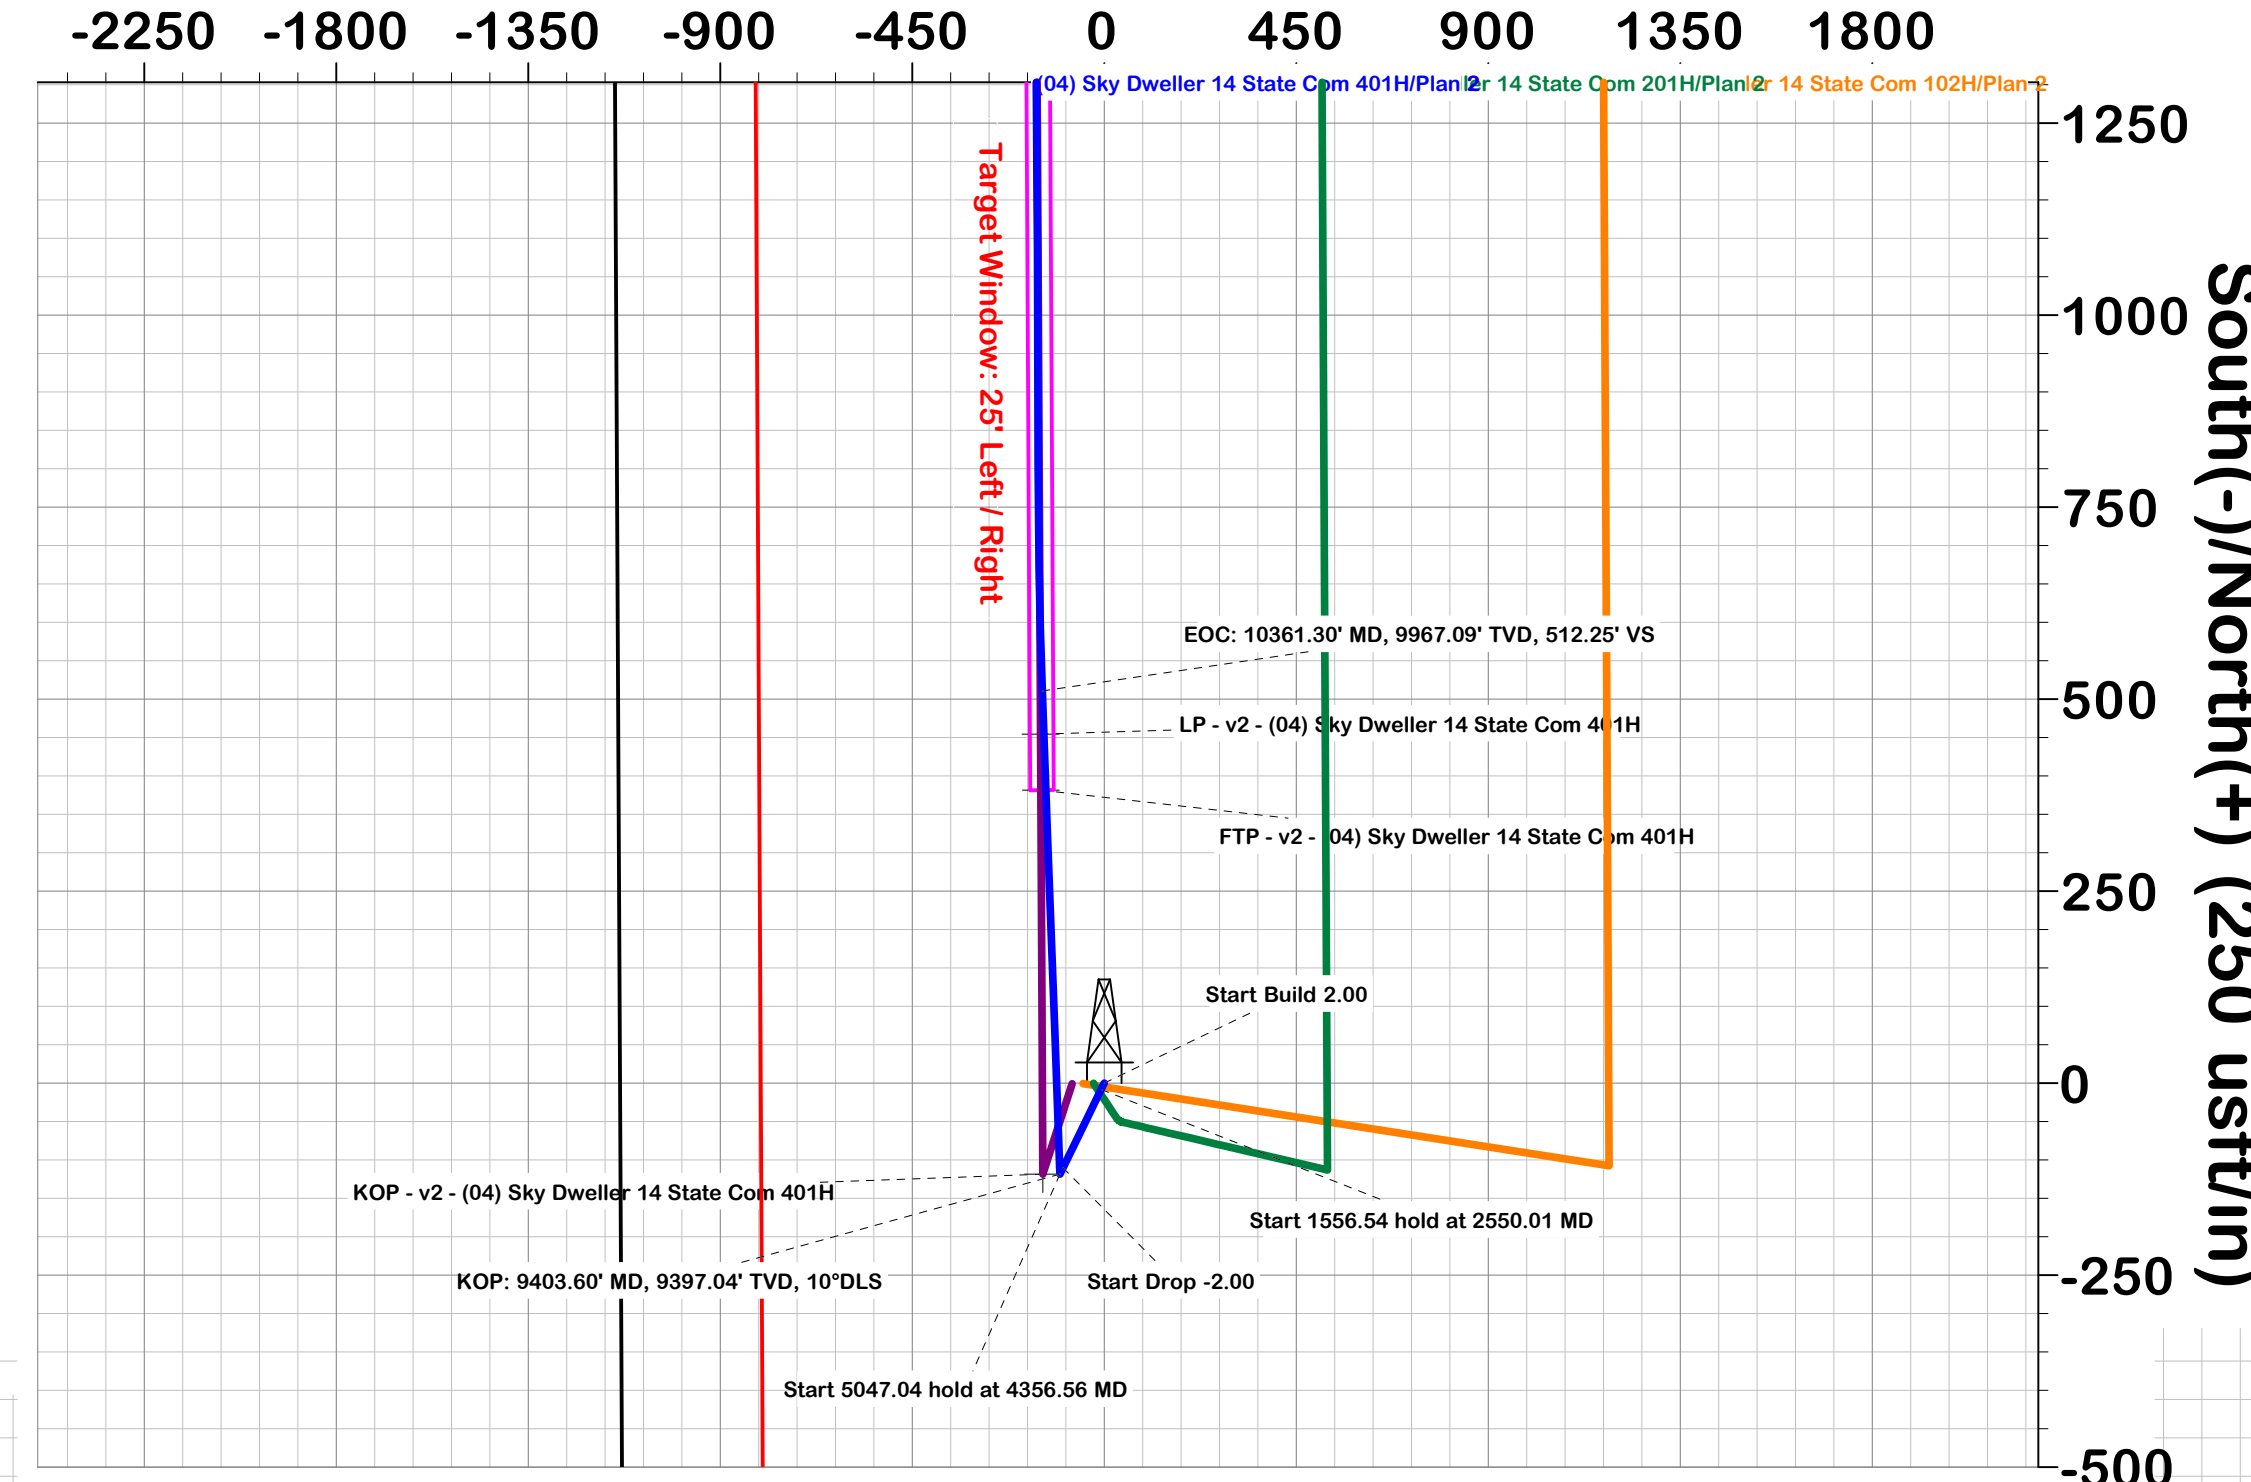

West(-)/East(+) (350 usft/in)

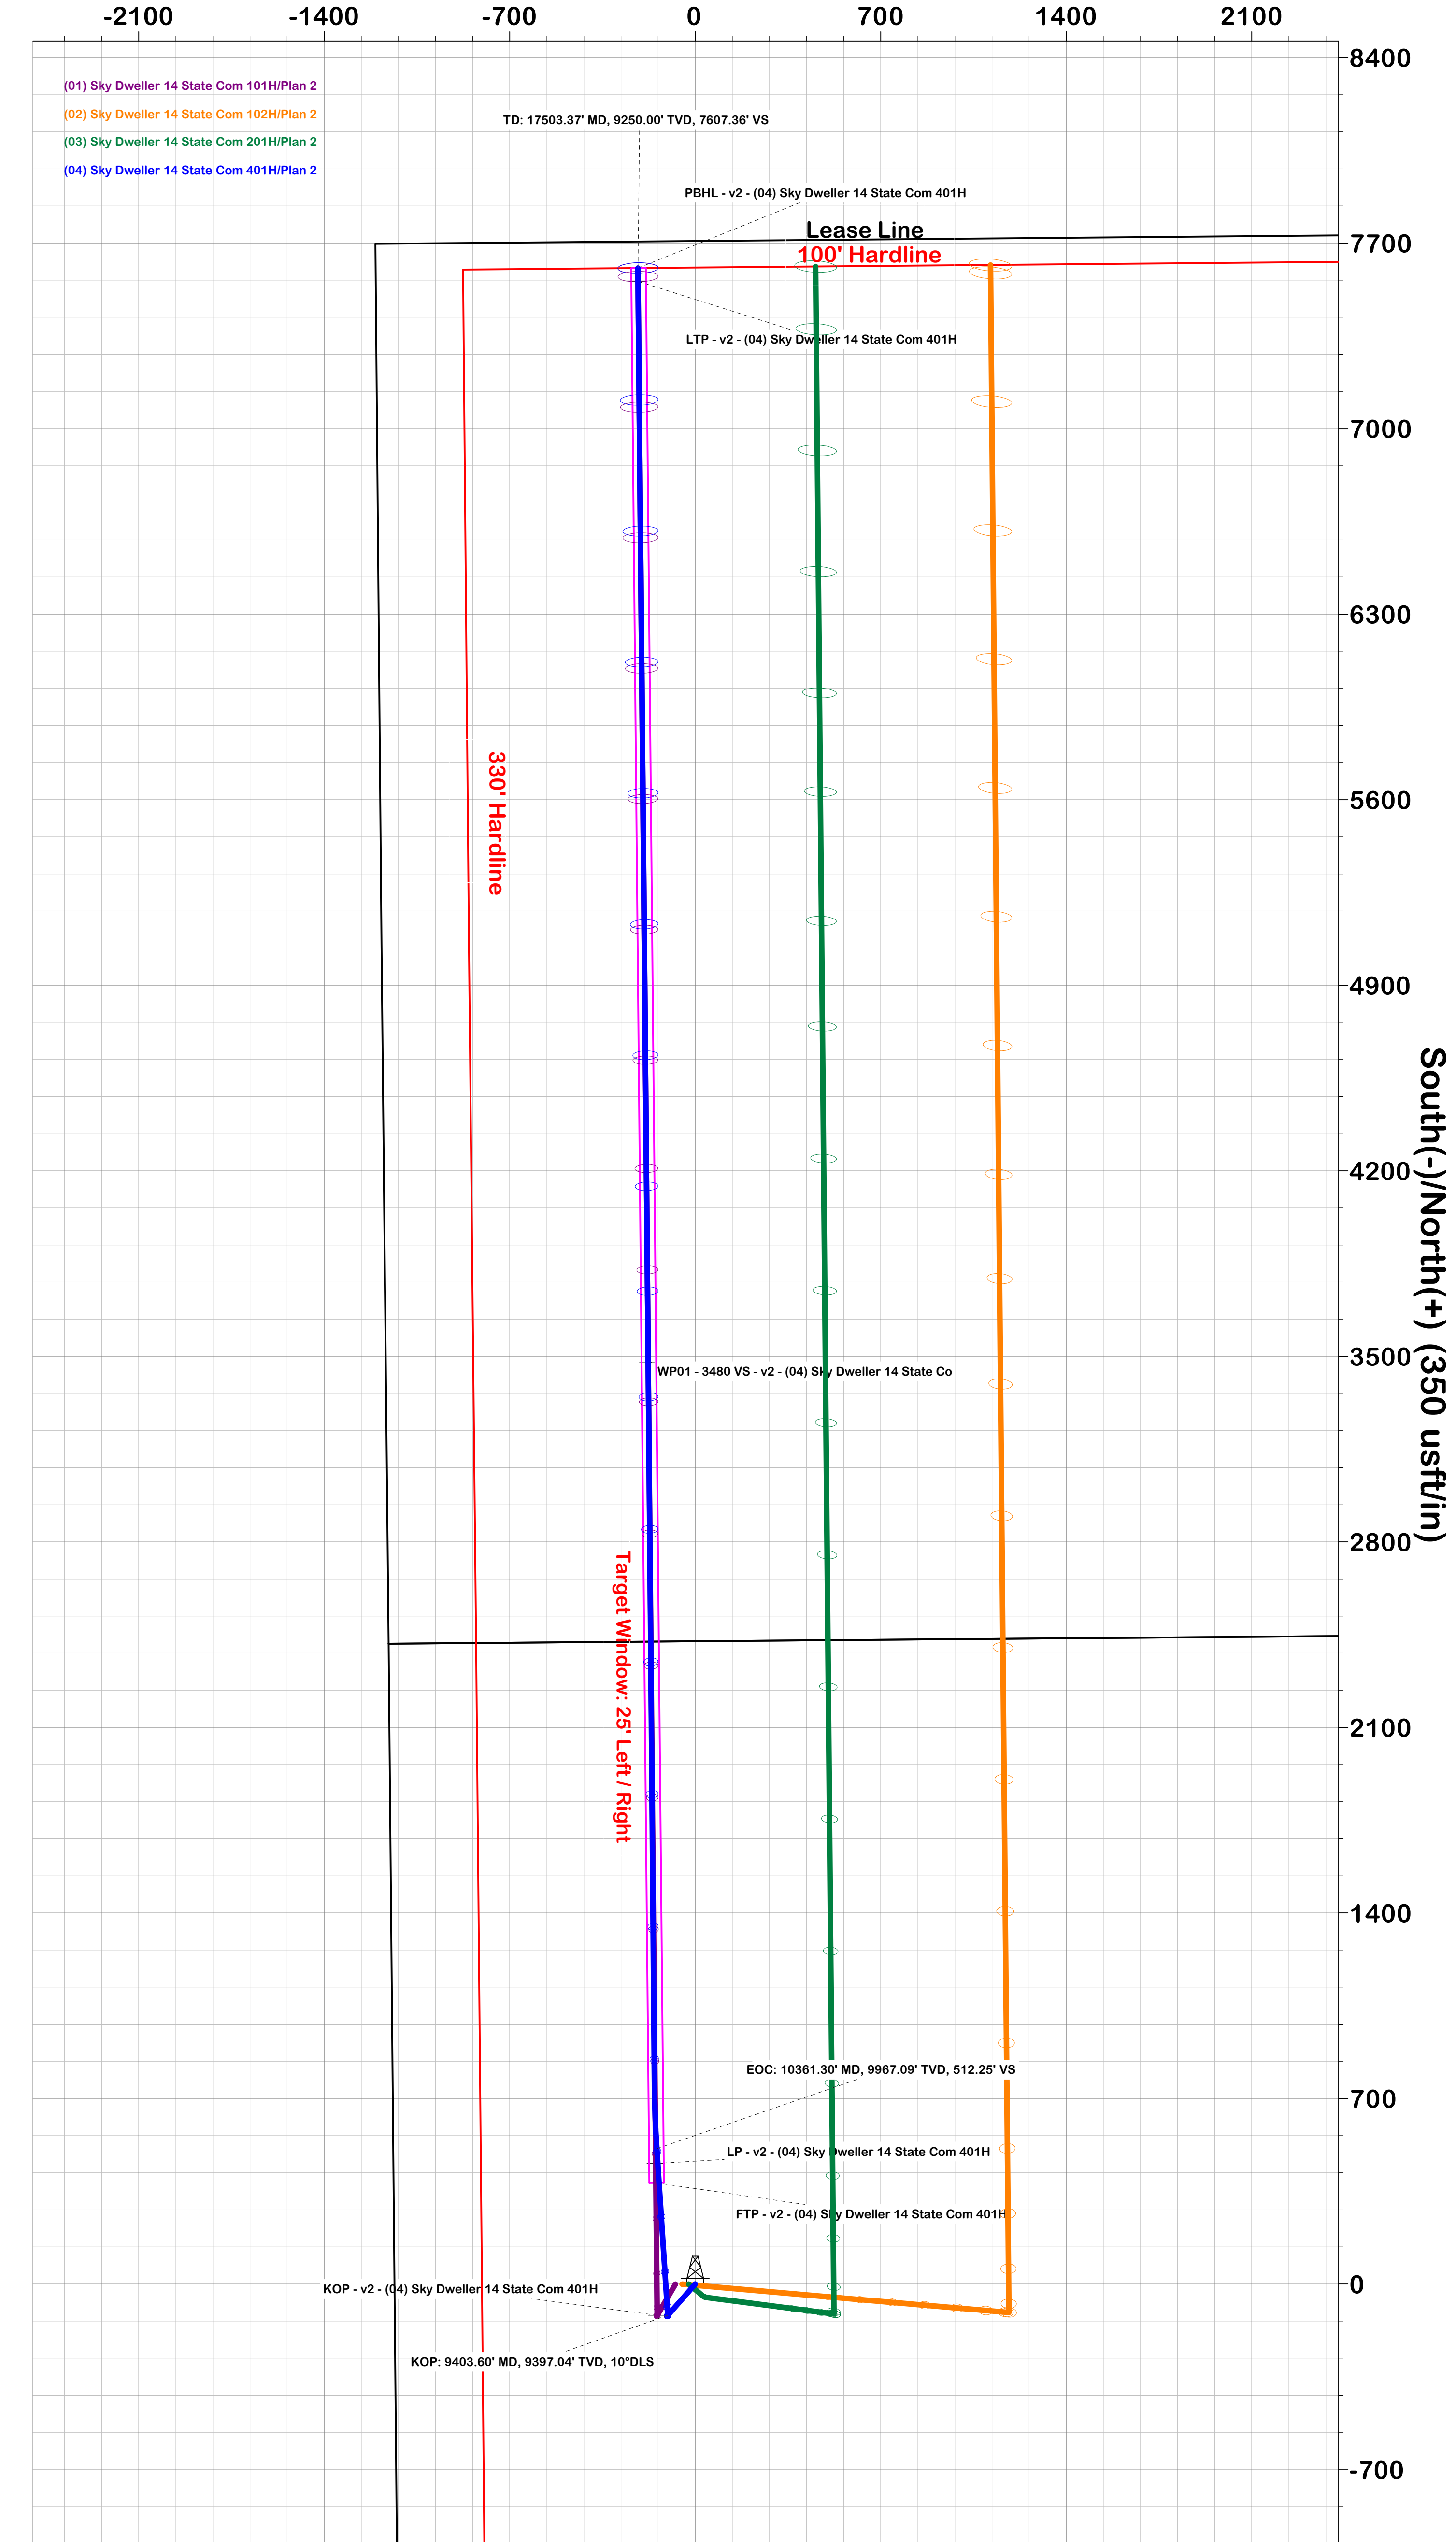



Dixon Planning Report

DIXON

Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Project	Lea County, NM (N83 - NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Sky Dweller pad				
Site Position:		Northing:	631,633.25 usft	Latitude:	32.73386349
From:	Map	Easting:	786,459.47 usft	Longitude:	-103.53618301
Position Uncertainty:		0.00 usft	Slot Radius:	13-3/16 "	

Well	(04) Sky Dweller 14 State Com 401H,					
Well Position	+N/-S	0.00 usft	Northing:	631,633.87 usft	Latitude:	32.73386364
	+E/-W	0.00 usft	Easting:	786,534.47 usft	Longitude:	-103.53593912
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	4,000.00 usft
Grid Convergence:	0.431 °					

Wellbore	401H				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	7/1/2024	6.211	60.263	47,476.29911262

Design	Plan 2				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.00	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	359.46	

Plan Survey Tool Program	Date	5/24/2024			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	17,503.37 Plan 2 (401H)	MWD+IFR1		
			OWSG MWD + IFR1		



Dixon

Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.000	
2,550.01	5.00	221.30	2,549.69	-8.19	-7.19	2.00	2.00	0.00	221.295	
4,106.55	5.00	221.30	4,100.31	-110.12	-96.73	0.00	0.00	0.00	0.000	
4,356.56	0.00	0.01	4,350.00	-118.31	-103.92	2.00	-2.00	0.00	180.000	
9,403.60	0.00	0.01	9,397.04	-118.31	-103.92	0.00	0.00	0.00	0.005	
10,361.30	95.77	356.25	9,967.10	510.90	-145.16	10.00	10.00	0.00	356.250	
10,608.44	92.05	359.51	9,950.25	757.22	-154.27	2.00	-1.51	1.32	138.749	
13,331.54	92.05	359.51	9,853.00	3,478.48	-177.59	0.00	0.00	0.00	0.000	WP01 - 3480 VS - v2
13,657.54	98.57	359.46	9,822.87	3,802.90	-180.52	2.00	2.00	-0.02	-0.445	
17,503.37	98.57	359.46	9,250.00	7,605.65	-216.51	0.00	0.00	0.00	0.000	PBHL - v2 - (04) Sky I



Dixon Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
2,400.00	2.00	221.30	2,399.98	-1.31	-1.15	-1.30	2.00	2.00	0.00
2,500.00	4.00	221.30	2,499.84	-5.24	-4.61	-5.20	2.00	2.00	0.00
2,550.01	5.00	221.30	2,549.69	-8.19	-7.19	-8.12	2.00	2.00	0.00
Start 1556.54 hold at 2550.01 MD									
2,600.00	5.00	221.30	2,599.49	-11.46	-10.07	-11.37	0.00	0.00	0.00
2,700.00	5.00	221.30	2,699.11	-18.01	-15.82	-17.86	0.00	0.00	0.00
2,800.00	5.00	221.30	2,798.73	-24.56	-21.57	-24.36	0.00	0.00	0.00
2,900.00	5.00	221.30	2,898.35	-31.11	-27.33	-30.85	0.00	0.00	0.00
3,000.00	5.00	221.30	2,997.97	-37.66	-33.08	-37.34	0.00	0.00	0.00
3,100.00	5.00	221.30	3,097.59	-44.21	-38.83	-43.84	0.00	0.00	0.00
3,200.00	5.00	221.30	3,197.21	-50.75	-44.58	-50.33	0.00	0.00	0.00
3,300.00	5.00	221.30	3,296.83	-57.30	-50.33	-56.83	0.00	0.00	0.00
3,400.00	5.00	221.30	3,396.45	-63.85	-56.09	-63.32	0.00	0.00	0.00
3,500.00	5.00	221.30	3,496.07	-70.40	-61.84	-69.81	0.00	0.00	0.00
3,600.00	5.00	221.30	3,595.69	-76.95	-67.59	-76.31	0.00	0.00	0.00
3,700.00	5.00	221.30	3,695.31	-83.50	-73.34	-82.80	0.00	0.00	0.00
3,800.00	5.00	221.30	3,794.93	-90.05	-79.09	-89.30	0.00	0.00	0.00
3,900.00	5.00	221.30	3,894.55	-96.59	-84.84	-95.79	0.00	0.00	0.00
4,000.00	5.00	221.30	3,994.16	-103.14	-90.60	-102.28	0.00	0.00	0.00
4,106.55	5.00	221.30	4,100.31	-110.12	-96.73	-109.20	0.00	0.00	0.00
Start Drop -2.00									
4,200.00	3.13	221.30	4,193.52	-115.10	-101.10	-114.14	2.00	-2.00	0.00
4,300.00	1.13	221.30	4,293.45	-117.89	-103.55	-116.91	2.00	-2.00	0.00
4,356.56	0.00	0.01	4,350.00	-118.31	-103.92	-117.33	2.00	-2.00	0.00
Start 5047.04 hold at 4356.56 MD									
4,400.00	0.00	0.00	4,393.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
4,500.00	0.00	0.00	4,493.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
4,600.00	0.00	0.00	4,593.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
4,700.00	0.00	0.00	4,693.44	-118.31	-103.92	-117.33	0.00	0.00	0.00



Dixon

Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,800.00	0.00	0.00	4,793.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
4,900.00	0.00	0.00	4,893.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,000.00	0.00	0.00	4,993.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,100.00	0.00	0.00	5,093.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,200.00	0.00	0.00	5,193.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,300.00	0.00	0.00	5,293.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,400.00	0.00	0.00	5,393.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,500.00	0.00	0.00	5,493.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,600.00	0.00	0.00	5,593.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,700.00	0.00	0.00	5,693.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,800.00	0.00	0.00	5,793.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
5,900.00	0.00	0.00	5,893.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,000.00	0.00	0.00	5,993.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,100.00	0.00	0.00	6,093.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,200.00	0.00	0.00	6,193.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,300.00	0.00	0.00	6,293.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,400.00	0.00	0.00	6,393.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,500.00	0.00	0.00	6,493.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,600.00	0.00	0.00	6,593.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,700.00	0.00	0.00	6,693.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,800.00	0.00	0.00	6,793.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
6,900.00	0.00	0.00	6,893.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,000.00	0.00	0.00	6,993.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,100.00	0.00	0.00	7,093.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,200.00	0.00	0.00	7,193.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,300.00	0.00	0.00	7,293.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,400.00	0.00	0.00	7,393.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,500.00	0.00	0.00	7,493.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,600.00	0.00	0.00	7,593.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,700.00	0.00	0.00	7,693.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,800.00	0.00	0.00	7,793.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
7,900.00	0.00	0.00	7,893.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,000.00	0.00	0.00	7,993.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,100.00	0.00	0.00	8,093.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,200.00	0.00	0.00	8,193.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,300.00	0.00	0.00	8,293.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,400.00	0.00	0.00	8,393.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,500.00	0.00	0.00	8,493.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,600.00	0.00	0.00	8,593.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,700.00	0.00	0.00	8,693.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,800.00	0.00	0.00	8,793.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
8,900.00	0.00	0.00	8,893.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
9,000.00	0.00	0.00	8,993.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
9,100.00	0.00	0.00	9,093.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
9,200.00	0.00	0.00	9,193.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
9,300.00	0.00	0.00	9,293.44	-118.31	-103.92	-117.33	0.00	0.00	0.00
9,403.60	0.00	0.00	9,397.04	-118.31	-103.92	-117.33	0.00	0.00	0.00
KOP: 9403.60' MD, 9397.04' TVD, 10°DLS									
9,450.00	4.64	356.25	9,443.39	-116.44	-104.04	-115.45	10.00	10.00	0.00
9,500.00	9.64	356.25	9,492.99	-110.24	-104.45	-109.25	10.00	10.00	0.00
9,550.00	14.64	356.25	9,541.85	-99.75	-105.14	-98.75	10.00	10.00	0.00
9,600.00	19.64	356.25	9,589.62	-85.05	-106.10	-84.04	10.00	10.00	0.00
9,650.00	24.64	356.25	9,635.92	-66.25	-107.33	-65.24	10.00	10.00	0.00



Dixon Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,700.00	29.64	356.25	9,680.40	-43.50	-108.82	-42.47	10.00	10.00	0.00
9,750.00	34.64	356.25	9,722.72	-16.96	-110.56	-15.92	10.00	10.00	0.00
9,800.00	39.64	356.25	9,762.57	13.15	-112.54	14.21	10.00	10.00	0.00
9,850.00	44.64	356.25	9,799.63	46.62	-114.73	47.69	10.00	10.00	0.00
9,900.00	49.64	356.25	9,833.63	83.18	-117.13	84.28	10.00	10.00	0.00
9,950.00	54.64	356.25	9,864.31	122.56	-119.71	123.68	10.00	10.00	0.00
10,000.00	59.64	356.25	9,891.43	164.45	-122.45	165.60	10.00	10.00	0.00
10,050.00	64.64	356.25	9,914.79	208.55	-125.34	209.72	10.00	10.00	0.00
10,100.00	69.64	356.25	9,934.20	254.51	-128.36	255.71	10.00	10.00	0.00
10,150.00	74.64	356.25	9,949.53	301.98	-131.47	303.21	10.00	10.00	0.00
10,200.00	79.64	356.25	9,960.66	350.61	-134.65	351.86	10.00	10.00	0.00
10,250.00	84.64	356.25	9,967.49	400.02	-137.89	401.30	10.00	10.00	0.00
10,300.00	89.64	356.25	9,969.99	449.83	-141.16	451.14	10.00	10.00	0.00
10,350.00	94.64	356.25	9,968.12	499.67	-144.42	501.01	10.00	10.00	0.00
10,361.30	95.77	356.25	9,967.10	510.90	-145.16	512.25	10.00	10.00	0.00
EOC: 10361.30' MD, 9967.09' TVD, 512.25' VS									
10,400.00	95.19	356.76	9,963.40	549.35	-147.51	550.72	2.00	-1.50	1.32
10,500.00	93.68	358.08	9,955.67	648.95	-151.99	650.35	2.00	-1.51	1.32
10,608.44	92.05	359.51	9,950.25	757.22	-154.27	758.64	2.00	-1.51	1.32
10,700.00	92.05	359.51	9,946.98	848.72	-155.05	850.14	0.00	0.00	0.00
10,800.00	92.05	359.51	9,943.41	948.65	-155.91	950.08	0.00	0.00	0.00
10,900.00	92.05	359.51	9,939.84	1,048.59	-156.76	1,050.02	0.00	0.00	0.00
11,000.00	92.05	359.51	9,936.26	1,148.52	-157.62	1,149.95	0.00	0.00	0.00
11,100.00	92.05	359.51	9,932.69	1,248.45	-158.48	1,249.89	0.00	0.00	0.00
11,200.00	92.05	359.51	9,929.12	1,348.38	-159.33	1,349.83	0.00	0.00	0.00
11,300.00	92.05	359.51	9,925.55	1,448.32	-160.19	1,449.76	0.00	0.00	0.00
11,400.00	92.05	359.51	9,921.98	1,548.25	-161.05	1,549.70	0.00	0.00	0.00
11,500.00	92.05	359.51	9,918.41	1,648.18	-161.90	1,649.63	0.00	0.00	0.00
11,600.00	92.05	359.51	9,914.84	1,748.11	-162.76	1,749.57	0.00	0.00	0.00
11,700.00	92.05	359.51	9,911.27	1,848.05	-163.62	1,849.51	0.00	0.00	0.00
11,800.00	92.05	359.51	9,907.70	1,947.98	-164.47	1,949.44	0.00	0.00	0.00
11,900.00	92.05	359.51	9,904.12	2,047.91	-165.33	2,049.38	0.00	0.00	0.00
12,000.00	92.05	359.51	9,900.55	2,147.84	-166.19	2,149.31	0.00	0.00	0.00
12,100.00	92.05	359.51	9,896.98	2,247.78	-167.04	2,249.25	0.00	0.00	0.00
12,200.00	92.05	359.51	9,893.41	2,347.71	-167.90	2,349.19	0.00	0.00	0.00
12,300.00	92.05	359.51	9,889.84	2,447.64	-168.76	2,449.12	0.00	0.00	0.00
12,400.00	92.05	359.51	9,886.27	2,547.57	-169.61	2,549.06	0.00	0.00	0.00
12,500.00	92.05	359.51	9,882.70	2,647.51	-170.47	2,649.00	0.00	0.00	0.00
12,600.00	92.05	359.51	9,879.13	2,747.44	-171.33	2,748.93	0.00	0.00	0.00
12,700.00	92.05	359.51	9,875.55	2,847.37	-172.18	2,848.87	0.00	0.00	0.00
12,800.00	92.05	359.51	9,871.98	2,947.30	-173.04	2,948.80	0.00	0.00	0.00
12,900.00	92.05	359.51	9,868.41	3,047.24	-173.90	3,048.74	0.00	0.00	0.00
13,000.00	92.05	359.51	9,864.84	3,147.17	-174.75	3,148.68	0.00	0.00	0.00
13,100.00	92.05	359.51	9,861.27	3,247.10	-175.61	3,248.61	0.00	0.00	0.00
13,200.00	92.05	359.51	9,857.70	3,347.03	-176.47	3,348.55	0.00	0.00	0.00
13,300.00	92.05	359.51	9,854.13	3,446.97	-177.32	3,448.48	0.00	0.00	0.00
13,331.54	92.05	359.51	9,853.00	3,478.48	-177.59	3,480.00	0.00	0.00	0.00
13,400.00	93.42	359.50	9,849.74	3,546.86	-178.19	3,548.39	2.00	2.00	-0.02
13,500.00	95.42	359.48	9,842.04	3,646.56	-179.07	3,648.08	2.00	2.00	-0.02
13,600.00	97.42	359.47	9,830.87	3,745.92	-179.98	3,747.45	2.00	2.00	-0.02
13,657.54	98.57	359.46	9,822.87	3,802.90	-180.52	3,804.43	2.00	2.00	-0.02
13,700.00	98.57	359.46	9,816.54	3,844.88	-180.91	3,846.42	0.00	0.00	0.00
13,800.00	98.57	359.46	9,801.65	3,943.76	-181.85	3,945.30	0.00	0.00	0.00
13,900.00	98.57	359.46	9,786.75	4,042.64	-182.79	4,044.19	0.00	0.00	0.00



Dixon

Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,000.00	98.57	359.46	9,771.85	4,141.52	-183.72	4,143.07	0.00	0.00	0.00
14,100.00	98.57	359.46	9,756.96	4,240.40	-184.66	4,241.96	0.00	0.00	0.00
14,200.00	98.57	359.46	9,742.06	4,339.28	-185.59	4,340.84	0.00	0.00	0.00
14,300.00	98.57	359.46	9,727.17	4,438.16	-186.53	4,439.72	0.00	0.00	0.00
14,400.00	98.57	359.46	9,712.27	4,537.04	-187.47	4,538.61	0.00	0.00	0.00
14,500.00	98.57	359.46	9,697.38	4,635.92	-188.40	4,637.49	0.00	0.00	0.00
14,600.00	98.57	359.46	9,682.48	4,734.80	-189.34	4,736.38	0.00	0.00	0.00
14,700.00	98.57	359.46	9,667.58	4,833.68	-190.27	4,835.26	0.00	0.00	0.00
14,800.00	98.57	359.46	9,652.69	4,932.56	-191.21	4,934.15	0.00	0.00	0.00
14,900.00	98.57	359.46	9,637.79	5,031.44	-192.15	5,033.03	0.00	0.00	0.00
15,000.00	98.57	359.46	9,622.90	5,130.32	-193.08	5,131.92	0.00	0.00	0.00
15,100.00	98.57	359.46	9,608.00	5,229.20	-194.02	5,230.80	0.00	0.00	0.00
15,200.00	98.57	359.46	9,593.10	5,328.08	-194.95	5,329.68	0.00	0.00	0.00
15,300.00	98.57	359.46	9,578.21	5,426.96	-195.89	5,428.57	0.00	0.00	0.00
15,400.00	98.57	359.46	9,563.31	5,525.84	-196.82	5,527.45	0.00	0.00	0.00
15,500.00	98.57	359.46	9,548.42	5,624.72	-197.76	5,626.34	0.00	0.00	0.00
15,600.00	98.57	359.46	9,533.52	5,723.60	-198.70	5,725.22	0.00	0.00	0.00
15,700.00	98.57	359.46	9,518.63	5,822.48	-199.63	5,824.11	0.00	0.00	0.00
15,800.00	98.57	359.46	9,503.73	5,921.36	-200.57	5,922.99	0.00	0.00	0.00
15,900.00	98.57	359.46	9,488.83	6,020.24	-201.50	6,021.87	0.00	0.00	0.00
16,000.00	98.57	359.46	9,473.94	6,119.12	-202.44	6,120.76	0.00	0.00	0.00
16,100.00	98.57	359.46	9,459.04	6,218.00	-203.38	6,219.64	0.00	0.00	0.00
16,200.00	98.57	359.46	9,444.15	6,316.88	-204.31	6,318.53	0.00	0.00	0.00
16,300.00	98.57	359.46	9,429.25	6,415.76	-205.25	6,417.41	0.00	0.00	0.00
16,400.00	98.57	359.46	9,414.36	6,514.64	-206.18	6,516.30	0.00	0.00	0.00
16,500.00	98.57	359.46	9,399.46	6,613.52	-207.12	6,615.18	0.00	0.00	0.00
16,600.00	98.57	359.46	9,384.56	6,712.40	-208.06	6,714.07	0.00	0.00	0.00
16,700.00	98.57	359.46	9,369.67	6,811.28	-208.99	6,812.95	0.00	0.00	0.00
16,800.00	98.57	359.46	9,354.77	6,910.16	-209.93	6,911.83	0.00	0.00	0.00
16,900.00	98.57	359.46	9,339.88	7,009.04	-210.86	7,010.72	0.00	0.00	0.00
17,000.00	98.57	359.46	9,324.98	7,107.92	-211.80	7,109.60	0.00	0.00	0.00
17,100.00	98.57	359.46	9,310.08	7,206.80	-212.73	7,208.49	0.00	0.00	0.00
17,200.00	98.57	359.46	9,295.19	7,305.68	-213.67	7,307.37	0.00	0.00	0.00
17,300.00	98.57	359.46	9,280.29	7,404.56	-214.61	7,406.26	0.00	0.00	0.00
17,400.00	98.57	359.46	9,265.40	7,503.44	-215.54	7,505.14	0.00	0.00	0.00
17,503.37	98.57	359.46	9,250.00	7,605.65	-216.51	7,607.35	0.00	0.00	0.00
TD: 17503.37' MD, 9250.00' TVD, 7607.36' VS									



Dixon Planning Report



Database:	EDM 5000.1 Dixon Directional	Local Co-ordinate Reference:	Well (04) Sky Dweller 14 State Com 401H
Company:	Lario Oil & Gas Company	TVD Reference:	25' RKB @ 4025.00usft
Project:	Lea County, NM (N83 - NME)	MD Reference:	25' RKB @ 4025.00usft
Site:	Sky Dweller pad	North Reference:	Grid
Well:	(04) Sky Dweller 14 State Com 401H	Survey Calculation Method:	Minimum Curvature
Wellbore:	401H		
Design:	Plan 2		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
PBHL - v2 - (04) Sky Dw - plan hits target center - Point	0.00	0.00	9,250.00	7,605.65	-216.51	639,239.52	786,317.96	32.75477159	-103.53645710
LTP - v2 - (04) Sky Dwel - plan misses target center by 0.03usft at 17452.81usft MD (9257.53 TVD, 7555.66 N, -216.04 E) - Point	0.00	0.00	9,257.53	7,555.66	-216.07	639,189.53	786,318.40	32.75463418	-103.53645689
KOP - v2 - (04) Sky Dwe - plan misses target center by 40.00usft at 9403.70usft MD (9397.15 TVD, -118.31 N, -103.92 E) - Point	0.00	0.01	9,397.04	-118.31	-143.92	631,515.56	786,390.55	32.73354146	-103.53641001
WP01 - 3480 VS - v2 - (l - plan hits target center - Point	0.00	0.00	9,853.00	3,478.48	-177.59	635,112.35	786,356.88	32.74342763	-103.53643153
FTP - v2 - (04) Sky Dwe - plan misses target center by 11.79usft at 10232.25usft MD (9965.56 TVD, 382.41 N, -136.74 E) - Point	0.00	0.00	9,965.33	381.67	-148.50	632,015.54	786,385.97	32.73491570	-103.53641267
LP - v2 - (04) Sky Dwell - plan misses target center by 7.82usft at 10305.31usft MD (9970.00 TVD, 455.13 N, -141.51 E) - Point	0.00	0.00	9,970.00	454.62	-149.30	632,088.50	786,385.16	32.73511622	-103.53641351

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,842.63	1,842.63	RSLR				
3,294.02	3,290.87	BLCN				
5,735.90	5,729.34	CRCN				
6,282.71	6,276.15	BRSC				
6,824.60	6,818.04	AVNS				
7,386.19	7,379.63	BSPG				
7,933.00	7,926.44	BSPG1				
8,726.12	8,719.56	BSPG1_SAND				
8,923.17	8,916.61	BSPG2				
9,465.17	9,458.49	BSPG2_SAND				
9,602.00	9,591.50	BSPG3				
9,855.21	9,803.32	BSPG3_SAND				

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,300.00	2,300.00	0.00	0.00	Start Build 2.00
2,550.01	2,549.69	-8.19	-7.19	Start 1556.54 hold at 2550.01 MD
4,106.55	4,100.31	-110.12	-96.73	Start Drop -2.00
4,356.56	4,350.00	-118.31	-103.92	Start 5047.04 hold at 4356.56 MD
9,403.60	9,397.04	-118.31	-103.92	KOP: 9403.60' MD, 9397.04' TVD, 10°DLS
10,361.30	9,967.10	510.90	-145.16	EOC: 10361.30' MD, 9967.09' TVD, 512.25' VS
17,503.37	9,250.00	7,605.65	-216.51	TD: 17503.37' MD, 9250.00' TVD, 7607.36' VS