

Submit a Copy To Appropriate District

Office  
 District I – (575) 393-6161  
 1625 N. French Dr., Hobbs, NM 88240  
 District II – (575) 748-1283  
 811 S. First St., Artesia, NM 88210  
 District III – (505) 334-6178  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV – (505) 476-3460  
 1220 S. St. Francis Dr., Santa Fe, NM  
 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

Form C-103  
 Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-05743
1. Type of Well: Oil Well      Gas Well <input checked="" type="checkbox"/> Other		5. Indicate Type of Lease STATE      X      FEE
2. Name of Operator JR Oil Ltd, Co.		6. State Oil & Gas Lease No. 330356
3. Address of Operator PO Box 2975, Hobbs, NM 88241		7. Lease Name or Unit Agreement Name State E
4. Well Location Unit Letter <u>  N  </u> : <u>  1020  </u> feet from the <u>  South  </u> line and <u>  1504  </u> feet from the <u>  West  </u> line Section <u>  30  </u> Township <u>  19S  </u> Range <u>  37E  </u> NMPM Lea County		8. Well Number 005
11. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. OGRID Number 256073
10. Pool name or Wildcat Eumont; Yates-Seven Rivers-Queen (Gas)		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON  
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
 DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
 COMMENCE DRILLING OPNS. ☐ **P AND A** XX  
 CASING/CEMENT JOB ☐ PNR

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

CBL is on file

SEE ATTACHED

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Maren Latimer TITLE Agent DATE 06/26/2024

Type or print name Maren Latimer E-mail address: mlatimer@ravenop.com PHONE: 5756916790

**For State Use Only**

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 8/28/24

Conditions of Approval (if any):

**Plugging Report**  
**JR Oil Ltd. Co**  
**State E #5**  
**API 30-025-05743**

**5/17/2025** Rigged up. Worked to remove wellhead bolts and to gain function on old wellhead valves.

5/20/2024 Killed well and installed BOP. Could not release the packer. Called in to JR Oil and OCD. Talked to David Alverado with the NMOCD. Agreed to squeeze open hole below the packer with 150 sx Class C cement. Tested backside. Good to 500#. Pumped 35 bbls fresh water down tubing. Very little pressure. Squeezed open hole with 150 sx cement. Displaced to the stuck packer at 3065'. Shut in


5/21/24 Tagged cement inside tubing at 3048' with sinker bar. Cut tubing at 3038' and POOH. Made gauge ring run and set 5.5" CIBP on wireline at 3035'. RIH with tubing and Tagged CIBP. Circulated MLF and tested casing to 500#. Good. spot 45 sx cement on top of CIBP. POOH and SION.

5/22/2024 Tagged cement at 2582'. Rigged up Renegade Wireline and ran RBL. Top of cement at surface. There is a gap from 975' to 1380'. Called and emailed OCD. Will spot across the Yates and perforate the surface shoe. RIH with tubing to 2582' and spot 25 sx. POOH and perforated at 1234'. Set packer at 697' and established a rate. Squeezed with 75 sx cement. Displaced below the packer and SION.

**5/23/2024** Tagged cement at 871'. POOH and lay down packer. RIH to 158' and circulated cement to surface inside the 5.5" casing as per OCD. Took 20 sx to get good cement to the pit. Rigged down, dug out cellar, and removed the wellhead. Good existing cement in the 5 1/2" x 8 5/8" annulus. Took less than 1 sack to fill up the 5 1/2". Installed standard marker, removed the anchors and cleaned the pit. Moved out.



State E #5

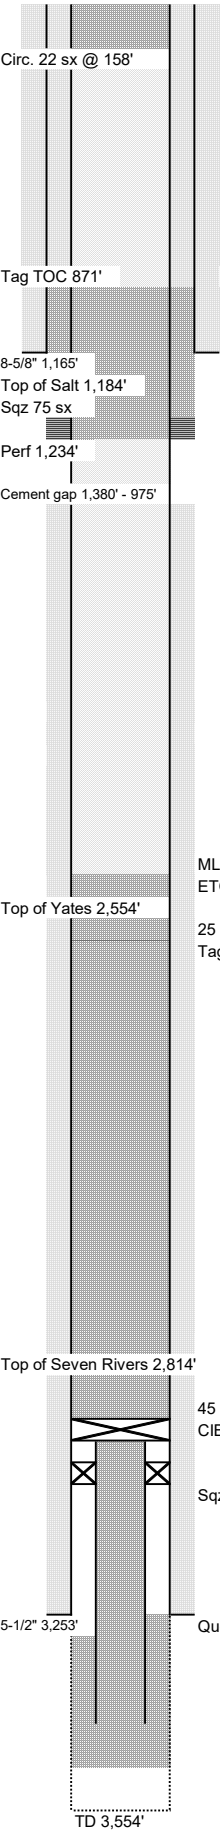

WELL NAME: State E #5					FORMATION: Queen					KB:				
API NO: 30-025-05743					FIELD: Eumont					PBTD: NA				
SPUD DATE: December 19, 1955					COUNTY: Lea					TD: 3,554				
CASING										CEMENT & HOLE DATA				
	joints	OD	lb/ft	grade	ID (in)	drift (in)	top	bottom	bit size	depth	sacks	TOC		
Surface	36	8 5/8	24, 28		8.097	7.892	0'	1,164'	11 1/4	1,165'	575	circ.		
Production	102	5 1/2	14.00	J-55	5.012	4.887	0'	3,253'	7 7/8	3,262'	600	surf. (calc.)		
History:														
12/19/1955 Spud by Cities Service Oil Co., open hole completed Queen, 1k gal MA, swab, IP 3,460 MCFD														
4/30/1982 Tbg stuck, pull 20 over, body break 29 JFS, latch, att. free point, tag 2,926', free @ 2,915', cut 2,922', jarred, recover all fish, clean bridges 3,031' - 3,229', drill salt & scale to 3,565', isolate csg leaks 698' - 729' and 509' - 540', sqz 200 sx cement, circ. up 8-5/8, drill out, held 500#, install pkr, pkr fluid, swab (2) days, rec. 2 bbls, acidize 1k gal 15%, swab, LD (3) jts, , swab, RTP														
8/2/1995 Swab, tag pkr 3,085', no fluid or gas														
5/17/2024 MIRU														
5/20/2024 Att. Release pkr, stuck, sqz'd through stuck pkr 150 sx														
5/21/2024 Tag inside tbg 3,048', cut tbg 3,038', CIBP 3,035', circ. MLF, test csg, held 500 psi, spot 45 sx on CIBP														
5/22/2024 Tag 2,582', CBL, TOC surface, gap 1,380' - 975', spot 25 sx @ 2,582', perf 1,234', sqz 75 sx														
5/23/2024 Tag 871', circ. 20 sx inside csg @ 158', cut well head, good cement in annulus, top off 5-1/2 w/ <1 sk, install marker, backfill, well P&A'd.														
PERFORATIONS														
top		bottom		zone		status		ttl shots		date				
3,253'		3,554'		Queen		plugged		(open hole)		12/19/55				
TUBING (none)														
		OD (in)		ID (in)		joints		length (ft)		depth (ft)				

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS

Action 357713

CONDITIONS

Operator: J R OIL, LTD. CO. P.O. Box 53657 Lubbock, TX 79453	OGRID: 256073
	Action Number: 357713
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
kfortner	Need C103Q and marker photo to release CBL is in files Marker in place 5/23/24	8/28/2024