

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER		5. Lease Serial No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator		8. Lease Name and Well No.
3a. Address		9. API Well No. 30-045-38384
3b. Phone No. (include area code)		10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
		13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 08/16/2024

Additional Operator Remarks

Location of Well

0. SHL: SESE / 651 FSL / 1172 FEL / TWSP: 23N / RANGE: 10W / SECTION: 1 / LAT: 36.250503 / LONG: -107.843102 (TVD: 0 feet, MD: 0 feet)

PPP: SWSE / 722 FSL / 2337 FEL / TWSP: 23N / RANGE: 10W / SECTION: 1 / LAT: 36.250687 / LONG: -107.847052 (TVD: 4462 feet, MD: 4806 feet)

PPP: SENE / 1574 FNL / 1 FEL / TWSP: 23N / RANGE: 10W / SECTION: 2 / LAT: 36.258812 / LONG: -107.856946 (TVD: 4542 feet, MD: 10941 feet)

BHL: LOT 1 / 330 FNL / 1216 FEL / TWSP: 23N / RANGE: 10W / SECTION: 2 / LAT: 36.262204 / LONG: -107.861078 (TVD: 4542 feet, MD: 10941 feet)

BLM Point of Contact

Name: CHRISTOPHER P WENMAN

Title: Natural Resource Specialist

Phone: (505) 564-7727

Email: cwenman@blm.gov

CONFIDENTIAL

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal ☐ Amended Report ☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-045-38384	Pool Code 5860	Pool Name BISTI; S-GALLUP (O)
Property Code 336273 335196	Property Name ESCRITO P01 2310 FEDERAL COM	Well Number 133H
OGRID No. 371838	Operator Name DJR OPERATING, LLC	Ground Level Elevation 6857'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location (SHL)

UL	Section	Township	Range	Lot	Ft from the N/S	Ft from the E/W	Latitude	Longitude	County
P	1	23N	10W		651' SOUTH	1172' EAST	36.250503° N	107.843102° W	SAN JUAN

Bottom Hole Location (BHL)

UL	Section	Township	Range	Lot	Ft from the N/S	Ft from the E/W	Latitude	Longitude	County
A	2	23N	10W	1	330' NORTH	1216' EAST	36.262204° N	107.861078° W	SAN JUAN

Dedicated Acres PENETRATED SPACING UNIT, SEC 1: SW/SE, NW/SE, SE/SW, NE/SW, NW/SW, SE/NW, SW/NW & LOT 4 (319.51 AC.); SEC 2: SE/NE, LOT 1 & LOT 2 (118.92 AC.) = 438.43 ACRES	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
Order Numbers:	Well Setbacks are under Common Ownership: ☐ Yes ☐ No			

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft from the N/S	Ft from the E/W	Latitude	Longitude	County
O	1	23N	10W		722' SOUTH	2337' EAST	36.250687° N	107.847052° W	SAN JUAN

Fist Take Point (FTP)

UL	Section	Township	Range	Lot	Ft from the N/S	Ft from the E/W	Latitude	Longitude	County
O	1	23N	10W		722' SOUTH	2337' EAST	36.250687° N	107.847052° W	SAN JUAN

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft from the N/S	Ft from the E/W	Latitude	Longitude	County
A	2	23N	10W	1	330' NORTH	1216' EAST	36.262204° N	107.861078° W	SAN JUAN

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation
---	--	------------------------

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Shaw-Marie Ford
Signature


9/9/2024
Date

Shaw-Marie Ford
Printed Name

sford@enduringresources.com
E-mail Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.




Signature and Seal of Professional Surveyor:

Certificate Number 11393	Date of Survey MARCH 16, 2023
------------------------------------	---

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

FND 21/2 BC
GLD 1942

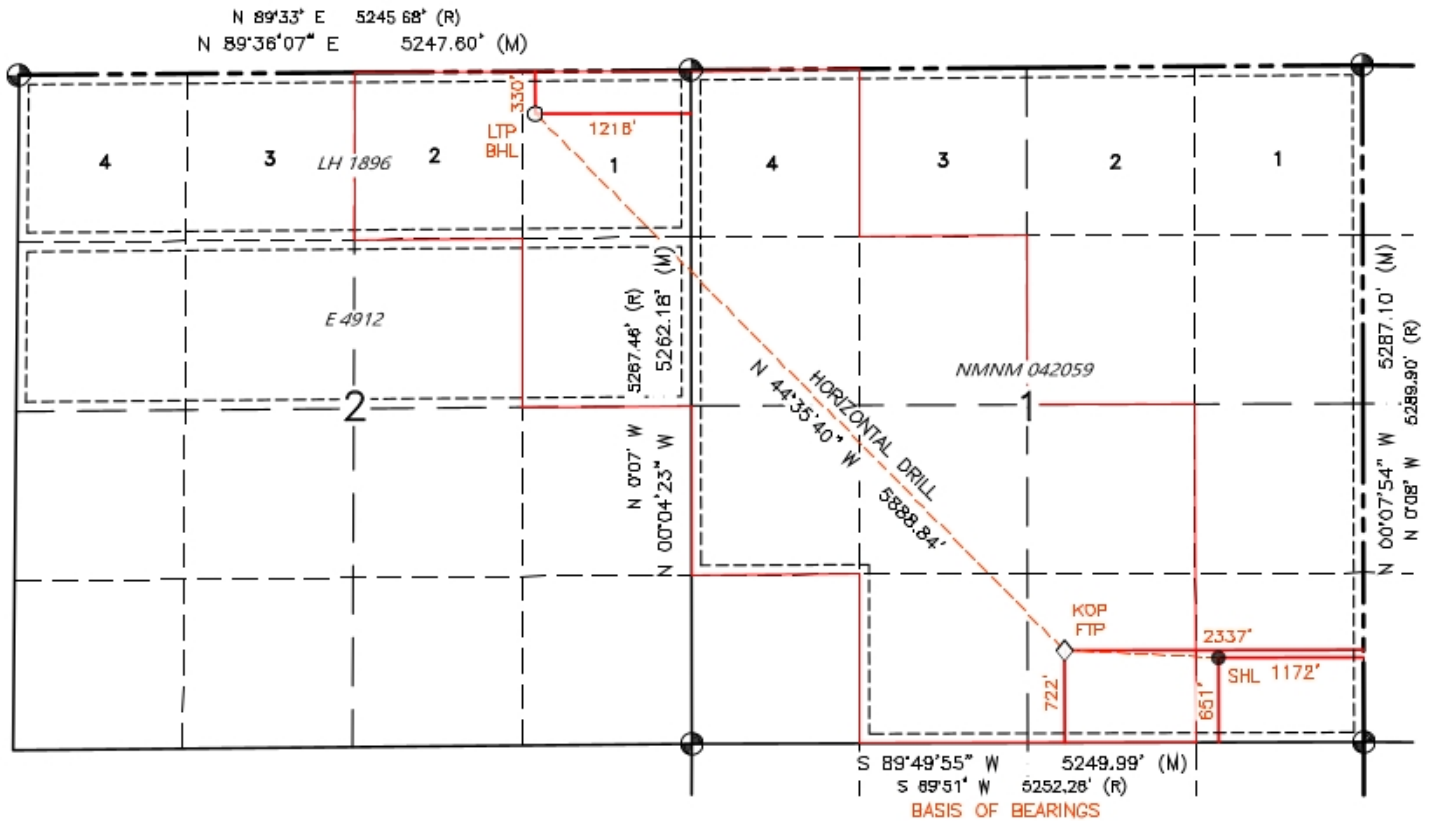

SURFACE LOCATION (SHL) ●
651' FSL 1172' FEL
SEC. 1, T23N, R10W
LAT. 36.250503° N (NAD83)
LONG. 107.843102° W (NAD83)

FIRST TAKE POINT (FTP) ◇
722' FSL 2337' FEL
SEC. 1, T23N, R10W
LAT. 36.250687° N (NAD83)
LONG. 107.847052° W (NAD83)

BOTTOM HOLE LOCATION (BHL) ○
330' FNL 1216' FEL
SEC. 2, T23N, R10W
LAT. 36.262204° N (NAD83)
LONG. 107.861078° W (NAD83)

KICK OFF POINT (KOP) △
722' FSL 2337' FEL
SEC. 1, T23N, R10W
LAT. 36.250687° N (NAD83)
LONG. 107.847052° W (NAD83)

LAST TAKE POINT (LTP) □
330' FNL 1216' FEL
SEC. 2, T23N, R10W
LAT. 36.262204° N (NAD83)
LONG. 107.861078° W (NAD83)

State of New Mexico
Energy, Minerals and Natural Resources DepartmentSubmit Electronically
Via E-permittingOil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505**NATURAL GAS MANAGEMENT PLAN**

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description
Effective May 25, 2021**I. Operator:** DJR Operating, LLC **OGRID:** 371838 **Date:** 09 / 09 / 2024**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Escrito P01 2310 FED COM 106H	TBD	P-01-23N-10W	646' FSL x 1191' FEL	309	695	124
Escrito P01 2310 FED COM 108H	TBD	P-01-23N-10W	656' FSL x 1153' FEL	369	830	148
Escrito P01 2310 FED COM 133H	TBD	P-01-23N-10W	651' FSL x 1172' FEL	200	50	80
Escrito P01 2310 FED COM 134H	TBD	P-01-23N-10W	667' FSL x 1114' FEL	204	51	82
Escrito P01 2310 137H	TBD	P-01-23N-10W	661' FSL x 1133' FEL	208	52	83

IV. Central Delivery Point Name: Chaco Processing Plant [See 19.15.27.9(D)(1) NMAC]**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Escrito P01 2310 FED COM 106H	TBD	7/11/2025	7/18/2025	8/26/2025	9/10/2025	9/13/2025
Escrito P01 2310 FED COM 108H	TBD	7/19/2025	7/27/2025	8/26/2025	9/15/2025	9/18/2025
Escrito P01 2310 FED COM 133H	TBD	7/28/2025	8/4/2025	8/26/2025	9/20/2025	9/23/2025
Escrito P01 2310 FED COM 134H	TBD	8/5/2025	8/12/2025	8/26/2025	9/25/2025	9/28/2025
Escrito P01 2310 137H	TBD	8/13/2025	8/21/2025	8/26/2025	9/30/2025	10/3/2025

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Shaw-Marie Ford</i>
Printed Name: Shaw-Marie Ford
Title: Regulatory Specialist
E-mail Address: sford@enduringresources.com
Date: 09/09/2024
Phone: 505-716-3297
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:



DJR OPERATING, LLC.
OGRID NO: 371838
NATURAL GAS MANAGEMENT PLAN
Escrito P01 2310 FED COM 106H, 108H, 133H, 134H and Escrito P01 2310 137H
SESE P-01-23N-10W

SEPARATION EQUIPMENT

DJR Operating, LLC (DJR) has pulled representative pressurized samples from wells in the same producing formation. DJR has utilized these samples in process simulations to determine the amount of gas anticipated in each stage of the process and utilized this information with a safety factor to size the equipment listed below:

Separation equipment will be set as follows:

- Individual 3-phase separator will be set for the individual well.
- The separator will be sized based on the anticipated volume of the well and the pressure of the lines utilized for oil, gas, and water takeaway.
- The 3-phase production separator will be equipped with a 0.75 MMBtu/hr indirect fired heater.

Heater treaters will be set as follows:

- Individual heater treaters will be set for the individual well.
- The heater treaters are sized based on the anticipated combined volume of oil and produced water predicted to come from the initial 3-phase separator.
- Oil will be separated from the produced water and the oil/produced water will be sent to its respective tanks.
- The combined oil and natural gas stream is routed to the Vapor Recovery Tower.

Vapor Recovery Equipment will be set as follows:

- The Vapor Recovery Tower has been sized, based on the anticipated volume of gas from the heater treater and oil and water tanks.
- The Vapor Recovery Unit has been sized, based on the anticipated volume of gas from the heater treater and oil and water tanks. The Vapor Recovery Unit is utilized to push the recovered gas into the sales pipeline.

Production storage tanks will be set as follows:

- The oil and produced water tanks utilize a closed vent capture system to ensure all breathing, working, and flashing losses are routed to the Vapor Recovery Tower and Vapor Recovery Unit.
- Each of the production storage tanks will be equipped with a 0.5 MMBtu/hr indirect heater.



DJR OPERATING, LLC.
OGRID NO: 371838
NATURAL GAS MANAGEMENT PLAN
Escrito P01 2310 FED COM 106H, 108H, 133H, 134H and Escrito P01 2310 137H
SESE P-01-23N-10W

VENTING and FLARING

DJR Operating, LLC (DJR) has a natural gas system available prior to startup of completion operations. DJR utilizes a Vapor Recovery Unit System and sells all natural gas except during periods of startup, shutdown, maintenance, or malfunction for the gas capturing equipment, including the vapor recovery tower, vapor recovery unit, storage tanks, and pipelines.

Currently, DJR utilizes the following from list A-I of Section 3 for its operations to minimize flaring:

- a) DJR utilizes natural gas-powered generators to power its leases where grid power isn't available.
- b) When electrical grid power is unavailable, natural gas generators will be used for major equipment onsite.
- c) DJR's in service compression will be natural gas powered.
- d) Should liquids removal, such as dehydration be required, units will be powered by natural gas.

DJR will only flare gas during the following times:

- Scheduled maintenance for gas capturing equipment including:
 - Vapor Recovery Tower
 - Vapor Recovery Unit
 - Storage tanks
 - Pipelines
 - Emergency flaring



DJR OPERATING, LLC.
OGRID NO: 371838
NATURAL GAS MANAGEMENT PLAN
Escrito P01 2310 FED COM 106H, 108H, 133H, 134H and Escrito P01 2310 137H
SESE P-01-23N-10W

OPERATIONAL PRACTICES

19.15.27.8 A. Venting and Flaring of Natural Gas

DJR Operating, LLC (DJR) understands the requirements of NMAC 19.15.27.8 which states that the venting and flaring of natural gas during drilling, completion or production that constitutes waste as defined in 19.15.2 are prohibited.

19.15.27.8 B. Venting and flaring during drilling operations

- DJR shall capture or combust natural gas if technically feasible during drilling operations using best industry practices.
- A flare stack with a 100% capacity for expected volumes will be set on location of the facility at least 100 feet from the nearest surface hole location, well heads, and storage tanks.
- In the event of an emergency, DJR will vent natural gas in order to avoid substantial impact. DJR shall report the vented or flared gas to the NMOCD.

19.15.27.8 E. Venting and flaring during completion or recompletion operations

During Completion Operations, DJR utilizes the following:

- DJR facilities are built and ready from day 1 of Flowback.
- Individual well test separators will be set to properly separate gas and liquids. Temporary test separator will be utilized initially to process volumes. In addition, separators will be tied into flowback tanks which will be tied into the gas processing equipment for sales down a pipeline. See Separation Equipment for details.
- Should the facility not yet be capable of processing gas, or the gas does not meet quality standards, then storage tanks will be set that are tied into gas busters or temporary flare to manage natural gas. This flare would meet the following requirements:
 - 1) An appropriately sized flare stack with an automatic igniter.
 - 2) DJR analyzes the natural gas samples twice per week.
 - 3) DJR routes the natural gas into a gathering pipeline as soon as the pipeline specifications are met.
 - 4) DJR provides the NMOCD with pipeline specifications and natural gas data.



19.15.27.8 D. Venting and flaring during production operations

During Production Operations DJR will not vent or flare natural gas except under the following circumstances:

1. During an emergency or malfunction
2. To unload or clean-up liquid holdup in a well to atmospheric pressure, provided:
 - a. DJR does not vent after the well achieves a stabilized rate and pressure.
 - b. DJR will remain present on-site during liquids unloading by manual purging and take all reasonable actions to achieve a stabilized rate and pressure at the earliest practical time.
 - c. DJR will optimize the system to minimize natural gas venting on any well equipped with a plunger lift or auto control system.
 - d. Best Management Practices will be used during downhole well maintenance.
3. During the first year of production from an exploratory well provided:
 - a. DJR receives approval from the NMOCD.
 - b. DJR remains in compliance with the NM gas capture requirements.
 - c. DJR submits an updated C-129 form to the NMOCD.
4. During the following activities unless prohibited:
 - a. Gauging or sampling a storage tank or low-pressure production vessel.
 - b. Loading out liquids from a storage tank.
 - c. Repair and maintenance.
 - d. Normal operation of gas activated pneumatic controller or pump.
 - e. Normal operation of a storage tank but not including venting from a thief hatch.
 - f. Normal operation of dehydration units.
 - g. Normal operations of compressors, compressor engines, turbines, valves, flanges, and connectors.
 - h. During a bradenhead, packer leakage test, or production test lasting less than 24-hours.
 - i. When natural gas does not meet the gathering pipeline specifications.
 - j. Commissioning of pipelines, equipment, or facilities only for as long as necessary to purge introduced impurities.

19.15.27.8 E. Performance standards

1. DJR has utilized process simulations with a safety factor to design all separation and storage equipment. The equipment is routed to a Vapor Recovery System and utilizes a flare as back up for periods of startup, shutdown, maintenance, or malfunction of the VRU System.
2. DJR will install a flare that designed to handle the full volume of vapors from the facility in case of the VRU failure and it is designed with an auto ignition system.
3. Flare stacks will appropriately sized and designed to ensure proper combustion efficiency.



- a. Flare stacks installed or replaced will be equipped with an automatic ignitor or continuous pilot.
 - b. Previously installed flare stacks will be retrofitted with an automatic ignitor, continuous pilot, or technology that alerts DJR of flare malfunction within 18 months after May 25, 2021.
 - c. Flare stacks replaced after May 25, 2021, will be equipped with an automatic ignitor or continuous pilot if located at a well or facility with average daily production of 60,000 cubic feet of natural gas or less.
 - d. Flare stacks will be located at least 100 feet from the well and storage tanks and securely anchored.
4. DJR will conduct an AVO inspection on all components for leaks and defects on a weekly basis.
 5. DJR will make and keep records of AVO inspections which will be available to the NMOCD for at least 5 years.
 6. DJR may use a remote or automated monitoring technology to detect leaks and releases in lieu of AVO inspections with prior NMOCD approval.
 7. Facilities will be designed to minimize waste.
 8. DJR will resolve emergencies as promptly as possible.

19.15.27.8 F. Measurement or estimation of vented and flared natural gas

1. DJR will have meters on both the low- and high-pressure sides of the flares and the volumes will be recorded in DJR's SCADA system.
2. DJR will install equipment to measure the volume of flared natural gas that has an average daily production of 60,000 cubic feet or greater of natural gas.
3. DJR's measuring equipment will conform to the industry standards.
4. The measurement system is designed such that it cannot be bypassed except for inspections and servicing meters.
5. DJR will estimate the volume of vented or flared natural gas using a methodology that can be independently verified if metering is not practicable due to low flow rate or pressure.
6. DJR will estimate the volume of flared and vented natural gas based on the results of an annual GOR test for wells that do not require measuring equipment reported on Form C-116.
7. DJR will install measuring equipment whenever the NMOCD determines that metering is necessary.



DJR OPERATING, LLC.
OGRID NO: 371838
NATURAL GAS MANAGEMENT PLAN
Escrito P01 2310 FED COM 106H, 108H, 133H, 134H and Escrito P01 2310 137H
SESE P-01-23N-10W

BEST MANAGEMENT PRACTICES

DJR Operating, LLC (DJR) utilizes the following Best Management Practices to minimize venting during active and planned maintenance.

DJR has a closed vent capture system to route emissions from the heater treater, tanks, and vapor recovery to the vapor recovery unit with an enclosed combustion device (ECD) for backup. The system is designed such that if the vapor recovery unit is taken out of service for any reason, the vapors will be routed to the ECD for combustion.

DJR will isolate and attempt to route all vapors to the vapor recovery unit or ECD prior to opening any lines for maintenance to minimize venting from the equipment.

DJR shall notify the NMOCD of venting or flaring that exceeds 50 MCF but less than 500 MCF in volume that either resulted from an emergency or malfunction, or an event lasting over eight hours or more cumulatively within any 24-hour period from a single event by filing a form C-129 no later than 15 days following the discovery or commencement of venting or flaring.

DJR shall notify the NMOCD verbally or by e-mail within 24-hours following discovery or commencement of venting or flaring that exceeds 500 MCF in volume or otherwise qualifies as a major release as defined in 19.15.29.7 NMAC from a single event and provide the information required in form C-129 to the NMOCD no later than 15 days that verifies, updates, or corrects the verbal or e-mail notification.

DJR will install measuring equipment to conform to industry standards such as American Petroleum Institute (API) Manual of Petroleum Measurement Standards (MPMS) Chapter 14.10 Measurement of Flow to Flares.

DJR's measuring equipment shall not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

DJR shall report the volume of vented and flared natural gas for each well or facility at which venting or flaring occurred on a monthly basis.

Rev 0



DRILLING AND CASING PLAN

Escrito P01 2310 Federal COM #133H

San Juan County, New Mexico

Surface Location

1172-ft FEL & 651-ft FSL
 Sec 1 T23N R10W
 Graded Elevation 6857' MSL
 RKB Elevation 6871' (14' KB)

SHL Geographical Coordinates (NAD-83)

Latitude 36.2505030° N
 Longitude 107.8431020° W

Kick Off Point for Horizontal Build Curve

4017-ft MD
 3948-ft TVD

Local Coordinates (from SHL)

386-ft South
 566-ft West

Heel Location (Pay zone entry)

2337-ft FEL & 722-ft FSL
 Sec 1 T23N R10W

Heel Geographical Coordinates (NAD-83)

Latitude 36.25068727° N
 Longitude 107.84705194° W

Bottom Hole Location (TD)

1216-ft FEL & 330-ft FNL
 Sec 2 T23N R10W

BHL Geographical Coordinates (NAD-83)

Latitude 36.262204° N
 Longitude 107.8610780° W

Well objectives

This well is planned as a 5890-ft lateral in the Mancos Silt sand.

Bottom Hole temperature and pressure

The temperature in the Mancos Silt horizontal objective is 131°F. Bottom hole pressure in the Mancos Silt is forecast to be 1985 psi.

Formation Tops (Sd = Sand; Sh = Shale; Siltstone = Slt, Coal = C; W = water; O = oil; G = gas; NP = no penetration)

Name	MD (ft)	TVD (ft)	Lithology	Pore fluid	Expected Pore Pressure (ppg)	Planned Mud Weight (ppg)
Ojo Alamo	471	471	Sd	W	8.3	8.4 – 8.8
Kirtland	597	597	Sh	-	8.3	8.4 – 8.8
Fruitland	1009	1003	C	G	8.3	9.0 - 9.5
Pictured Cliffs	1263	1252	Sd	W	8.3	9.0 - 9.5
Lewis	1414	1399	Sh	-		9.0 - 9.5
Chacra	2061	2033	Sd	-	8.3	9.0 - 9.5
Menefee	2691	2650	Sd, C	G	8.3	9.0 - 9.5
Point Lookout	3698	3636	Sd	-	8.3	9.0 - 9.5
Mancos	3847	3782	Sh	-		9.0 - 9.5
Mancos Silt	4174	4099	Slt	O/G	6.6	9.0 - 9.5
Gallup A	NP	4611	Slt	O/G	6.6	9.0 - 9.5
Gallup B	NP	4667	Sd	O/G	6.6	8.8 - 9.0
Gallup C	NP	NP	Sd	O/G	6.6	8.8 - 9.0
Target	4847	4485	Sd	O/G	6.6	8.8 - 9.0

Casing Program

Casing OD	Hole Size	Weight (#/ft)	Grade	Coupling	MD Top	MD Bottom	TVD Top	TVD Bottom	Top of Cement
9-5/8"	12-1/4"	36	K-55	STC	surf	350	surf	350	surface
7"	8-3/4"	26	K-55	LTC	surf	4806	surf	4462	surface
4-1/2"	6-1/8"	11.6	P-110	BTC	4562	10941	4389	4542	4562

Note: all casing will be new

Rev 0



Casing Design Load Cases

		Casing String		
Description		9-5/8" Surface	7" Intermediate	4-1/2" Production Liner
Collapse	Full internal evacuation ¹	✓	✓	✓
	Cementing	✓	✓	✓
Burst	Pressure test	✓ ²	✓ ²	✓
	Gas kick		✓ ³	
	Fracture at shoe, 1/3 BHP at surface		✓ ⁴	
	Injection down casing			✓ ⁵
Axial	Dynamic load on casing coupling ⁶	✓	✓	✓
Axial	Overpull ⁷	✓	✓	✓

Note

- 1 Fluid level at shoe, air column to surface, pore pressure outside
- 2 Tested to 80% of minimum internal yield with freshwater inside, pore pressure outside
- 3 50 bbl kick at TD, 0.50 ppg intensity, 4" drill pipe, 9.0 ppg mud, fracture gradient at shoe
- 4 2060 psi BHP, 687 psi surface pressure, 12.5 ppg EMW shoe integrity
- 5 Surface stimulation pressure of 8000 psi on 8.3 ppg fluid column. Stimulation will be down frac string, so load does not apply to 7" intermediate casing.
- 6 Shock load from abrupt pipe deceleration, evaluated against coupling rating
- 7 Overpull values as follows: Surface casing 20,000 lbs, Intermediate & Production 100,000 lbs

Casing Design Factors

		Design Factors			
Casing string	Casing OD	Burst	Collapse	Axial	Triaxial
Surface	9-5/8"	1.25	13.38	8.16	1.56
Intermediate	7"	1.25	1.50	1.68	1.34
Production liner	4-1/2"	1.37	3.68	1.88	1.69

Cement Design

9-5/8" Surface Casing

	Lead
Name	Redi-Mix
Type	I-II
Planned top	Surface
Density (ppg)	14.50
Yield (cf/sx)	1.61
Mix water (gal/sx)	7.41
Volume (sx)	114
Volume (bbls)	33
Volume (cu. ft.)	185
Excess %	50

7" Intermediate Casing

	Lead	Tail
	American	American
Type	I/II	Poz/G
Planned top	Surface	3847-ft
Density (ppg)	12.30	13.50
Yield (cf/sx)	2.34	1.51
Mix water (gal/sx)	13.22	7.13
Volume (sx)	425	101
Volume (bbls)	177	27
Volume (cu.ft.)	994	153
Excess %	78	0



Rev 0

4-1/2" Production Liner

Type	American
Planned top	Poz/G
Density (ppg)	4562-ft
Yield (cf/sx)	13.3
Mix water (gal/sx)	1.52
Volume (sx)	7.53
Volume (bbls)	551
Volume (cu.ft)	149
Excess %	838
	40

Wellhead & Pressure Control

The well head will be an 11" 5M multi-bowl system. A 3M BOPE conforming to Onshore Order #2 will be installed on the surface casing. The BOP and accumulator will meet API 16D and 16E respectively.

A PVT mud monitoring system and a trip tank will be rigged up and operational for all hole intervals. An electronic geolograph will be employed to monitor and record drilling data (ROP, WOB, SPM, Pressure, RPM and torque).

Mud Program

Surface hole will be drilled with a fresh water, native mud system. In intermediate hole, a low weight 7% KCl LSND drilling fluid will be used, with KCl providing chemical stability for the young shales and clays present in the interval. In production hole a LSND system with polymer and lubricant additives is programmed. Sufficient drill water and mud additives will be on hand to maintain adequate pit volumes and maintain well control.

Hole Section	Fluid type	Interval (MD)	Density (ppg)	Funnel Viscosity	Yield Point	Fluid Loss (cc/30 min)
Surface	Fresh water spud mud	0 – 350	8.4 – 8.8	32 – 44	2 – 12	NC
Intermediate	7% KCl Low solids, non-dispersed	350 – 4806	9.0 – 9.5	38 – 45	8 – 14	<20
Production	Low solids, non-dispersed	4806 – 10941	8.8 – 9.2	34 – 38	6 – 8	6 – 8

Cores, tests and logs

Wellbore surveying: Drift (inclination only) surveys will be obtained in surface hole. MWD directional surveys will be taken in intermediate and production hole.

Logging while drilling: None in surface hole. MWD GR in intermediate and production hole.

Mud logging: a two-person mud logging unit with C1 – C4 gas analysis will be operational in intermediate and production hole.

Electric logging: No open hole electric logs are programmed. A cased hole GR/CCL will be run during completions for perforating depth control.

Cuttings and drilling fluids management


A closed loop, steel tank-based circulating system will be used. In addition to the rig solids control equipment, a dewatering centrifuge and chemical flocculation system will be operational to strip solids from the whole mud. All solids will be collected in 3-sided bins and will then be put into transports with a bucket loader. Drying agents will be used if necessary. The solids will be taken to a licensed commercial disposal facility. Whole mud will be dewatered back to drill water and used as make up for subsequent wells or hauled off for disposal. A diagram of the closed loop system is included.

Completion

It is envisioned that this well will be completed with a multi-stage sand frac, using the plug and perf technique. After drilling out the plugs, the current plan is to install a 2-7/8" plunger-assisted gas lift tubing string. The stimulation and completion plan will be sundried at a later date.




Proposed BOP stack 11" 3M RRA

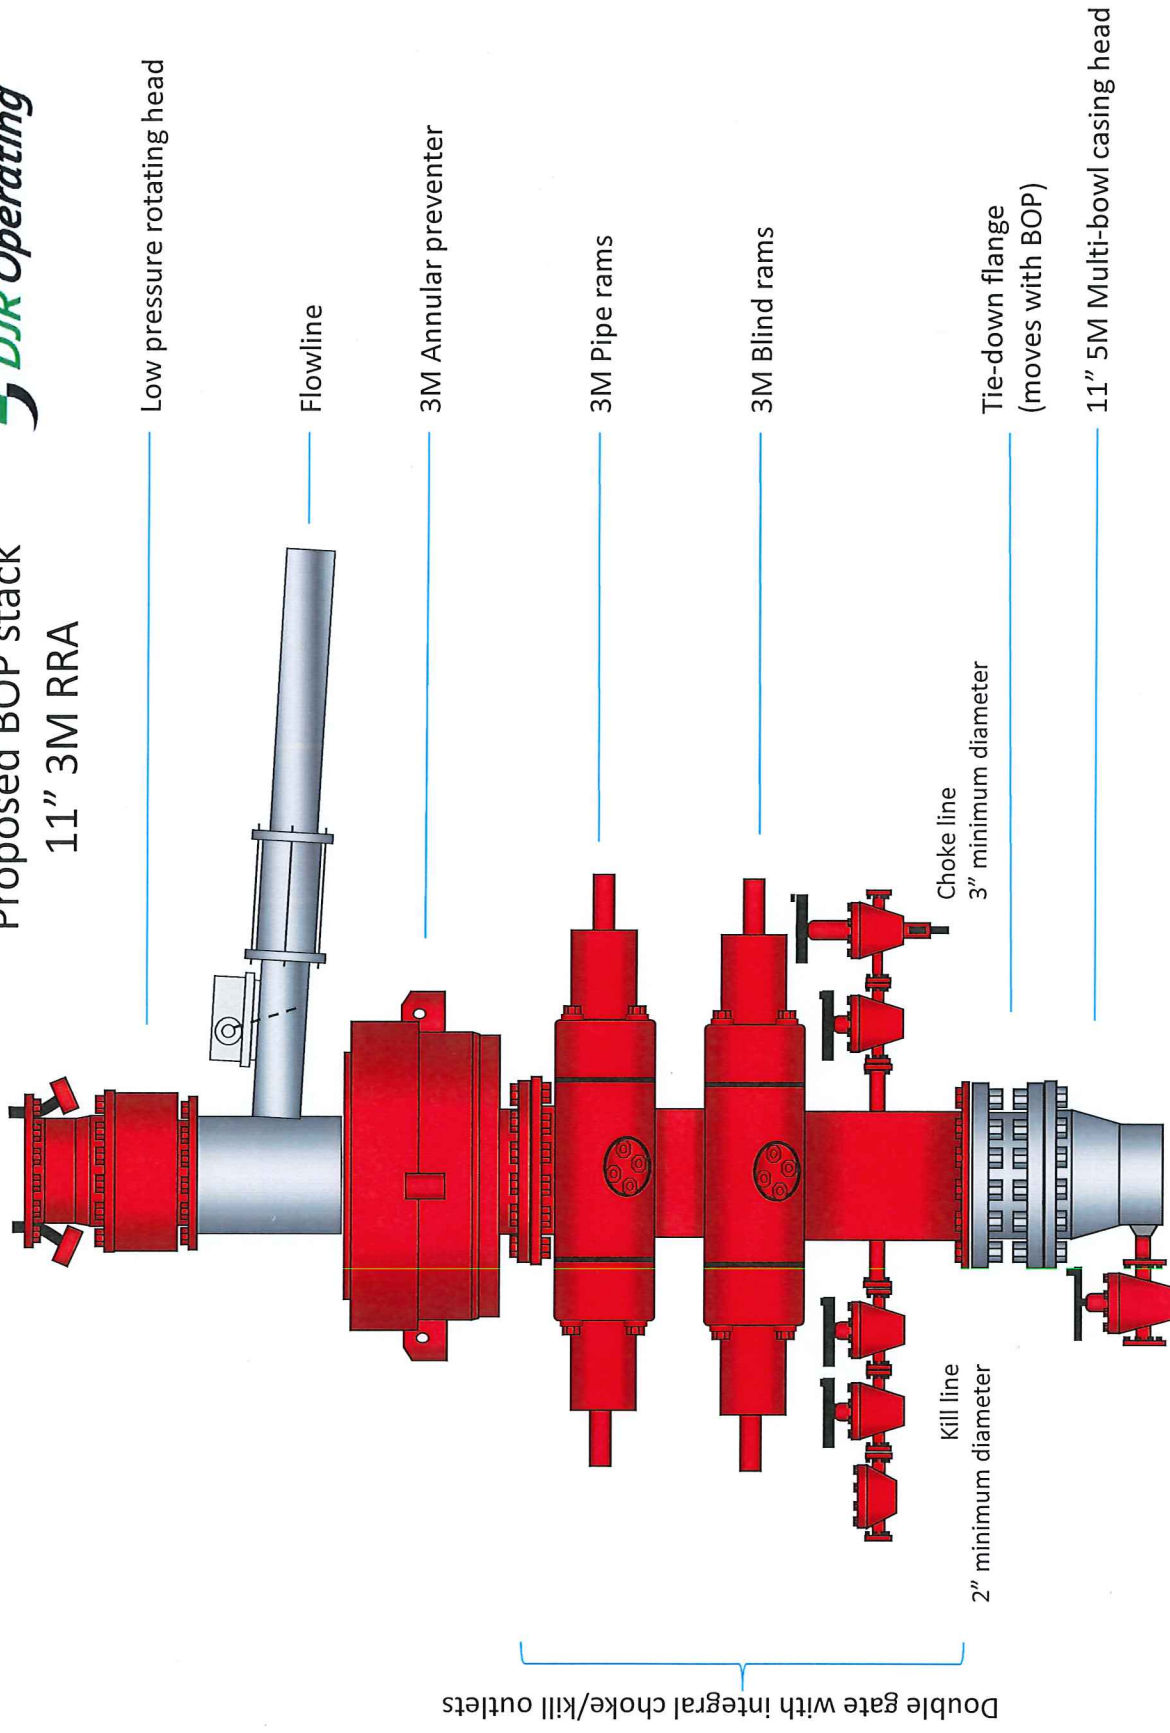



Choke Manifold

Actual system to conform with Onshore Order 2

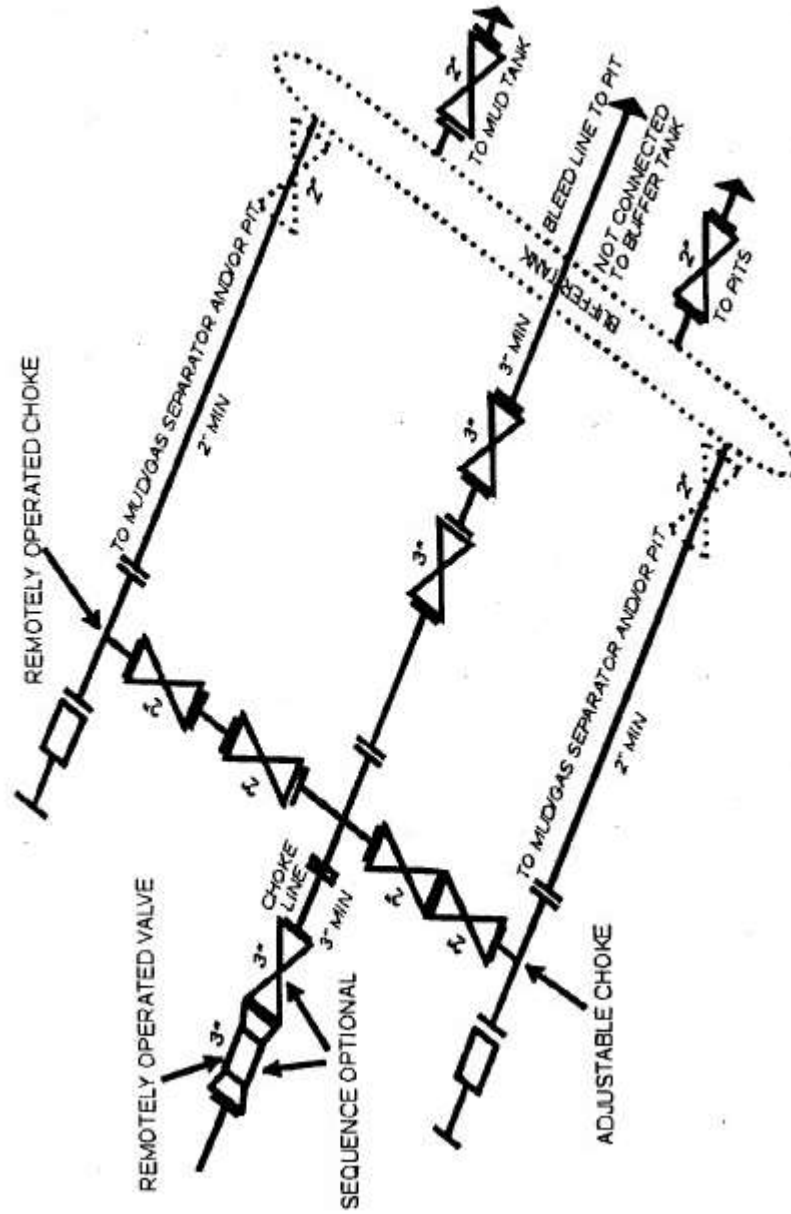



Company: DJR Operating
Project: Ponderosa Unit
Site: P01 2310 Pad
Well: Escrito P01 2310 Federal COM 133H
Wellbore: Original Drilling
Design: APD

PROJECT DETAILS: Ponderosa Unit

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Western Zone
System Datum: Mean Sea Level
Local North: True



WELL DETAILS: Escrito P01 2310 Federal COM 133H

GL 6857' & RKB 14' @ 6871.00ft
+N/-S +E/-W Northing Easting Latitude Longitude
0.00 0.00 1910481.7615 2720211.3841 36.2505030 -107.8431020 2

Plan: APD (Escrito P01 2310 Federal COM 133H/Original Drilling)


Created By: Janie Collins Date: 16:16, September 11 2023

DESIGN TARGET DETAILS

	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Escrito 133H Heel	4464.00	-76.08	-1017.77	1910405.7832	2719193.6076	36.2502940	-107.8465538
Escrito 133H Toe	4542.00	4259.94	-5299.43	1914742.2238	2714912.3963	36.2622040	-107.8610780

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00
867.26	11.68	235.66	864.03	-26.78	-39.19	2.50	235.66	13.77
4016.88	11.68	235.66	3948.41	-388.49	-565.76	0.00	0.00	198.81
4847.42	89.27	315.36	4464.00	76.08	-1017.77	10.50	80.06	745.59
10941.65	89.27	315.36	4542.00	4259.94	-5299.43	0.00	0.00	6799.34




Azimuths to True North
Magnetic North: 8.67°
Magnetic Field
Strength: 49081.0 nT
Dip Angle: 62.67°
Date: 1/9/2023
Model: HDGM2023

CASING DETAILS

TVD	MD	Name
350.00	350.00	Surface
4461.93	4805.99	Intermediate

FORMATION DETAILS

TVDPath	MDPath	Formation
471.00	471.01	Ojo Alamo
597.00	597.24	Kirtland
1003.00	1009.17	Fruitland
1252.00	1263.44	Pictured Cliffs
1399.00	1413.54	Lewis
2033.00	2060.95	Chacra
2650.00	2691.00	Menefee
3636.00	3697.86	Point Lookout
3782.00	3846.94	Mancos
4099.00	4173.59	Mancos Silt

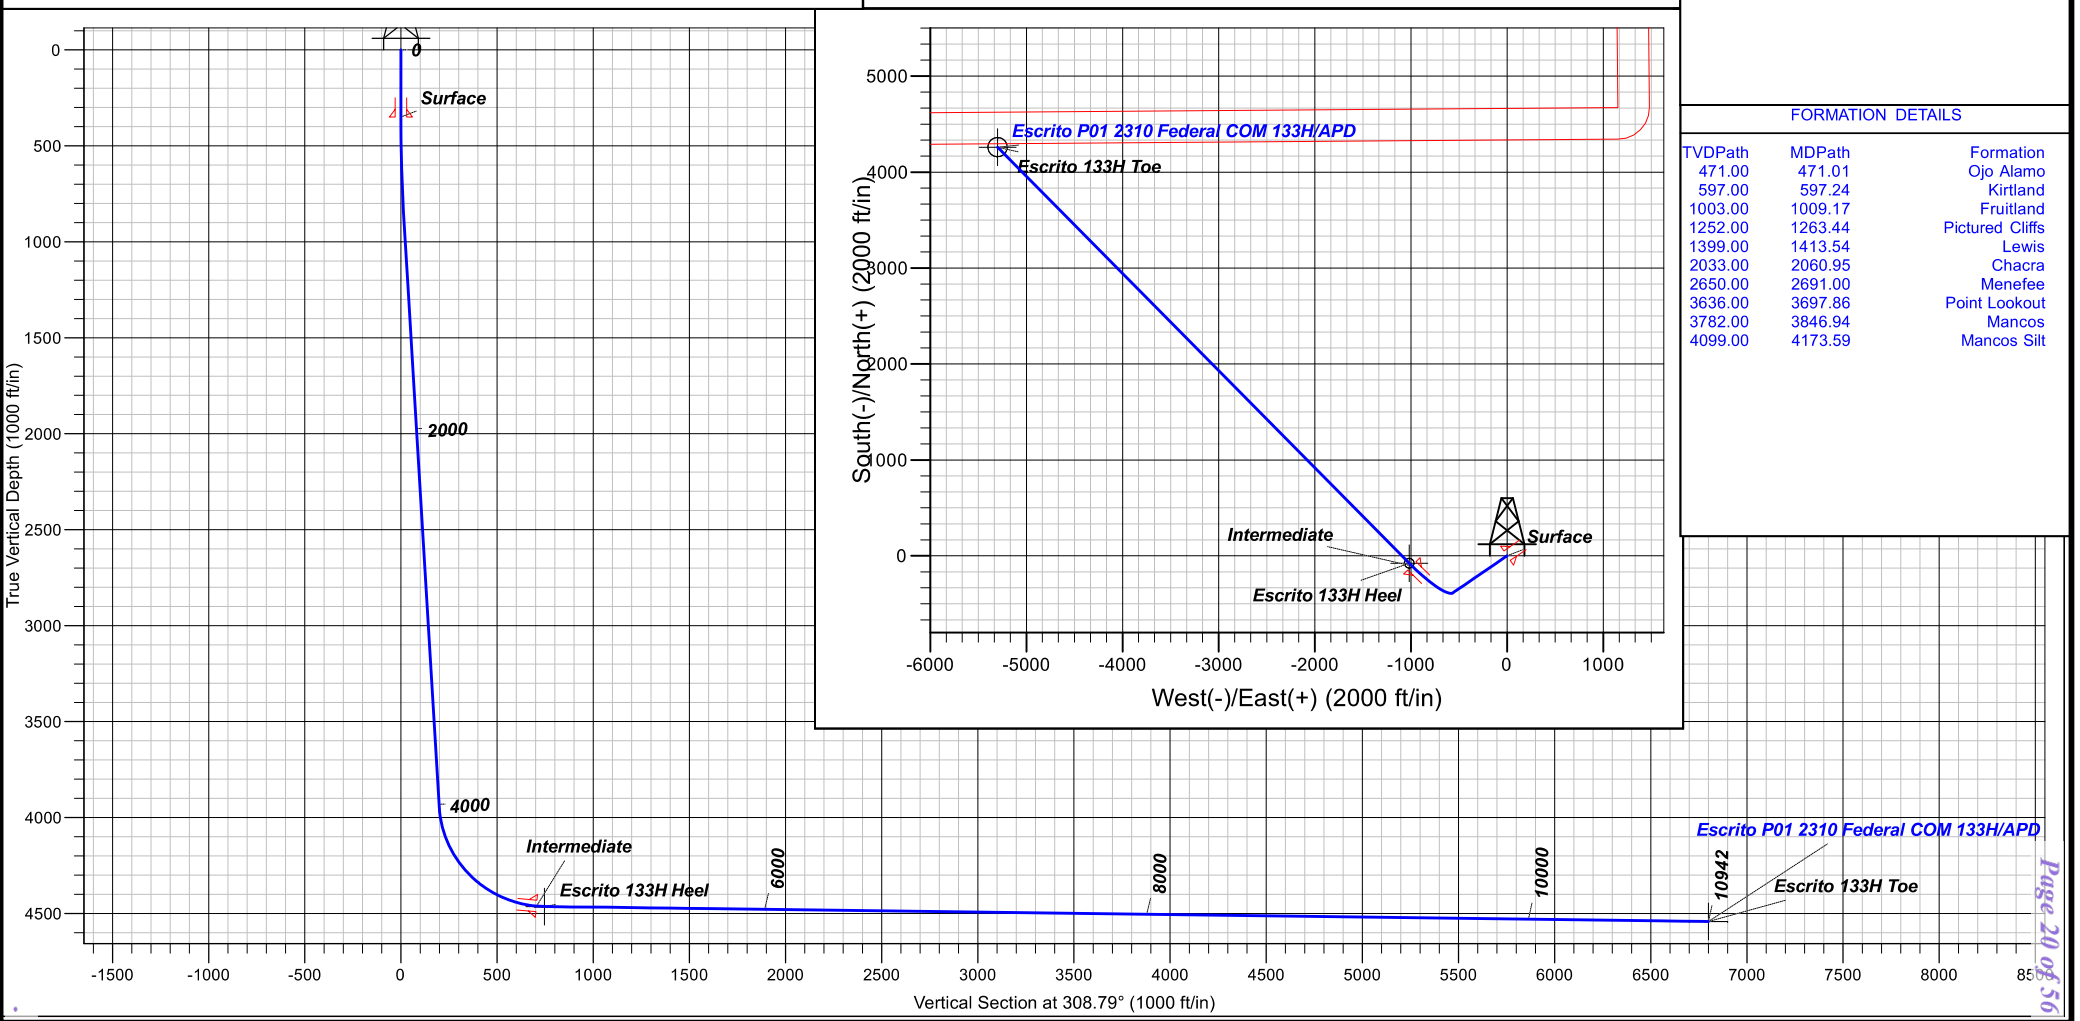

Released to Imaging: 9/17/2023 12:26:10 PM

Received by OCB: 9/28/2023 16:00 PM

Page 20 of 56



DJR Operating

Ponderosa Unit

P01 2310 Pad

Escrito P01 2310 Federal COM 133H - Slot 2

Original Drilling

Plan: APD

Standard Planning Report

11 September, 2023





Lonestar Consulting, LLC
Planning Report



Database:	Grand Junction	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Company:	DJR Operating	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Project:	Ponderosa Unit	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site:	P01 2310 Pad	North Reference:	True
Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Drilling		
Design:	APD		

Project	Ponderosa Unit		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	P01 2310 Pad				
Site Position:		Northing:	1,910,476.6671 usft	Latitude:	36.2504890
From:	Lat/Long	Easting:	2,720,191.9235 usft	Longitude:	-107.8431680
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in		

Well	Escrito P01 2310 Federal COM 133H - Slot 2					
Well Position	+N/-S	0.00 ft	Northing:	1,910,481.7614 usft	Latitude:	36.2505030
	+E/-W	0.00 ft	Easting:	2,720,211.3841 usft	Longitude:	-107.8431020
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,857.00 ft
Grid Convergence:		-0.01 °				

Wellbore	Original Drilling				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2023	1/9/2023	8.62	62.67	49,081.00000000

Design	APD			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	308.79

Plan Survey Tool Program			Date	3/9/2023	
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	10,941.65	APD (Original Drilling)	MWD+HDGM	
				OWSG MWD + HDGM	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
867.26	11.68	235.66	864.03	-26.78	-39.19	2.50	2.50	0.00	235.66	
4,016.88	11.68	235.66	3,948.41	-386.49	-565.76	0.00	0.00	0.00	0.00	
4,847.42	89.27	315.36	4,464.00	-76.08	-1,017.77	10.50	9.34	9.60	80.06	Escrito 133H Heel
10,941.65	89.27	315.36	4,542.00	4,259.94	-5,299.43	0.00	0.00	0.00	0.00	Escrito 133H Toe



Lonestar Consulting, LLC
Planning Report



Database:	Grand Junction	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Company:	DJR Operating	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Project:	Ponderosa Unit	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site:	P01 2310 Pad	North Reference:	True
Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Drilling		
Design:	APD		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	2.50	235.66	499.97	-1.23	-1.80	0.63	2.50	2.50	0.00
600.00	5.00	235.66	599.75	-4.92	-7.20	2.53	2.50	2.50	0.00
700.00	7.50	235.66	699.14	-11.06	-16.19	5.69	2.50	2.50	0.00
800.00	10.00	235.66	797.97	-19.64	-28.75	10.10	2.50	2.50	0.00
867.26	11.68	235.66	864.03	-26.78	-39.19	13.77	2.50	2.50	0.00
900.00	11.68	235.66	896.09	-30.51	-44.67	15.70	0.00	0.00	0.00
1,000.00	11.68	235.66	994.02	-41.94	-61.39	21.57	0.00	0.00	0.00
1,100.00	11.68	235.66	1,091.95	-53.36	-78.11	27.45	0.00	0.00	0.00
1,200.00	11.68	235.66	1,189.88	-64.78	-94.82	33.32	0.00	0.00	0.00
1,300.00	11.68	235.66	1,287.81	-76.20	-111.54	39.20	0.00	0.00	0.00
1,400.00	11.68	235.66	1,385.74	-87.62	-128.26	45.07	0.00	0.00	0.00
1,500.00	11.68	235.66	1,483.66	-99.04	-144.98	50.95	0.00	0.00	0.00
1,600.00	11.68	235.66	1,581.59	-110.46	-161.70	56.82	0.00	0.00	0.00
1,700.00	11.68	235.66	1,679.52	-121.88	-178.42	62.70	0.00	0.00	0.00
1,800.00	11.68	235.66	1,777.45	-133.30	-195.13	68.57	0.00	0.00	0.00
1,900.00	11.68	235.66	1,875.38	-144.72	-211.85	74.45	0.00	0.00	0.00
2,000.00	11.68	235.66	1,973.31	-156.14	-228.57	80.32	0.00	0.00	0.00
2,100.00	11.68	235.66	2,071.24	-167.57	-245.29	86.20	0.00	0.00	0.00
2,200.00	11.68	235.66	2,169.17	-178.99	-262.01	92.07	0.00	0.00	0.00
2,300.00	11.68	235.66	2,267.10	-190.41	-278.73	97.95	0.00	0.00	0.00
2,400.00	11.68	235.66	2,365.02	-201.83	-295.44	103.82	0.00	0.00	0.00
2,500.00	11.68	235.66	2,462.95	-213.25	-312.16	109.69	0.00	0.00	0.00
2,600.00	11.68	235.66	2,560.88	-224.67	-328.88	115.57	0.00	0.00	0.00
2,700.00	11.68	235.66	2,658.81	-236.09	-345.60	121.44	0.00	0.00	0.00
2,800.00	11.68	235.66	2,756.74	-247.51	-362.32	127.32	0.00	0.00	0.00
2,900.00	11.68	235.66	2,854.67	-258.93	-379.04	133.19	0.00	0.00	0.00
3,000.00	11.68	235.66	2,952.60	-270.35	-395.75	139.07	0.00	0.00	0.00
3,100.00	11.68	235.66	3,050.53	-281.77	-412.47	144.94	0.00	0.00	0.00
3,200.00	11.68	235.66	3,148.46	-293.20	-429.19	150.82	0.00	0.00	0.00
3,300.00	11.68	235.66	3,246.38	-304.62	-445.91	156.69	0.00	0.00	0.00
3,400.00	11.68	235.66	3,344.31	-316.04	-462.63	162.57	0.00	0.00	0.00
3,500.00	11.68	235.66	3,442.24	-327.46	-479.35	168.44	0.00	0.00	0.00
3,600.00	11.68	235.66	3,540.17	-338.88	-496.06	174.32	0.00	0.00	0.00
3,700.00	11.68	235.66	3,638.10	-350.30	-512.78	180.19	0.00	0.00	0.00
3,800.00	11.68	235.66	3,736.03	-361.72	-529.50	186.07	0.00	0.00	0.00
3,900.00	11.68	235.66	3,833.96	-373.14	-546.22	191.94	0.00	0.00	0.00
4,000.00	11.68	235.66	3,931.89	-384.56	-562.94	197.82	0.00	0.00	0.00
4,016.88	11.68	235.66	3,948.41	-386.49	-565.76	198.81	0.00	0.00	0.00
4,100.00	15.71	269.16	4,029.28	-391.41	-583.99	209.94	10.50	4.85	40.31
4,200.00	24.06	288.39	4,123.33	-385.16	-616.97	239.55	10.50	8.35	19.22
4,300.00	33.59	297.66	4,210.89	-365.84	-660.93	285.92	10.50	9.53	9.27
4,400.00	43.52	303.14	4,289.01	-334.08	-714.41	347.50	10.50	9.94	5.47
4,500.00	53.64	306.89	4,355.09	-290.97	-775.61	422.22	10.50	10.12	3.76
4,600.00	63.85	309.78	4,406.92	-237.93	-842.50	507.58	10.50	10.21	2.88
4,700.00	74.11	312.19	4,442.74	-176.75	-912.82	600.72	10.50	10.26	2.41
4,800.00	84.39	314.36	4,461.38	-109.47	-984.23	698.52	10.50	10.28	2.18
4,847.42	89.27	315.36	4,464.00	-76.08	-1,017.77	745.59	10.50	10.29	2.10
4,900.00	89.27	315.36	4,464.67	-38.67	-1,054.71	797.82	0.00	0.00	0.00



Lonestar Consulting, LLC

Planning Report



Database:	Grand Junction	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Company:	DJR Operating	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Project:	Ponderosa Unit	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site:	P01 2310 Pad	North Reference:	True
Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Drilling		
Design:	APD		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,000.00	89.27	315.36	4,465.95	32.48	-1,124.97	897.16	0.00	0.00	0.00	
5,100.00	89.27	315.36	4,467.23	103.63	-1,195.23	996.49	0.00	0.00	0.00	
5,200.00	89.27	315.36	4,468.51	174.78	-1,265.49	1,095.83	0.00	0.00	0.00	
5,300.00	89.27	315.36	4,469.79	245.93	-1,335.74	1,195.16	0.00	0.00	0.00	
5,400.00	89.27	315.36	4,471.07	317.08	-1,406.00	1,294.50	0.00	0.00	0.00	
5,500.00	89.27	315.36	4,472.35	388.23	-1,476.26	1,393.84	0.00	0.00	0.00	
5,600.00	89.27	315.36	4,473.63	459.38	-1,546.52	1,493.17	0.00	0.00	0.00	
5,700.00	89.27	315.36	4,474.91	530.53	-1,616.77	1,592.51	0.00	0.00	0.00	
5,800.00	89.27	315.36	4,476.19	601.68	-1,687.03	1,691.84	0.00	0.00	0.00	
5,900.00	89.27	315.36	4,477.47	672.83	-1,757.29	1,791.18	0.00	0.00	0.00	
6,000.00	89.27	315.36	4,478.75	743.98	-1,827.55	1,890.51	0.00	0.00	0.00	
6,100.00	89.27	315.36	4,480.03	815.13	-1,897.80	1,989.85	0.00	0.00	0.00	
6,200.00	89.27	315.36	4,481.31	886.28	-1,968.06	2,089.19	0.00	0.00	0.00	
6,300.00	89.27	315.36	4,482.59	957.42	-2,038.32	2,188.52	0.00	0.00	0.00	
6,400.00	89.27	315.36	4,483.87	1,028.57	-2,108.58	2,287.86	0.00	0.00	0.00	
6,500.00	89.27	315.36	4,485.15	1,099.72	-2,178.83	2,387.19	0.00	0.00	0.00	
6,600.00	89.27	315.36	4,486.43	1,170.87	-2,249.09	2,486.53	0.00	0.00	0.00	
6,700.00	89.27	315.36	4,487.71	1,242.02	-2,319.35	2,585.86	0.00	0.00	0.00	
6,800.00	89.27	315.36	4,488.99	1,313.17	-2,389.61	2,685.20	0.00	0.00	0.00	
6,900.00	89.27	315.36	4,490.27	1,384.32	-2,459.86	2,784.54	0.00	0.00	0.00	
7,000.00	89.27	315.36	4,491.55	1,455.47	-2,530.12	2,883.87	0.00	0.00	0.00	
7,100.00	89.27	315.36	4,492.83	1,526.62	-2,600.38	2,983.21	0.00	0.00	0.00	
7,200.00	89.27	315.36	4,494.11	1,597.77	-2,670.64	3,082.54	0.00	0.00	0.00	
7,300.00	89.27	315.36	4,495.39	1,668.92	-2,740.89	3,181.88	0.00	0.00	0.00	
7,400.00	89.27	315.36	4,496.67	1,740.07	-2,811.15	3,281.21	0.00	0.00	0.00	
7,500.00	89.27	315.36	4,497.95	1,811.22	-2,881.41	3,380.55	0.00	0.00	0.00	
7,600.00	89.27	315.36	4,499.23	1,882.37	-2,951.67	3,479.88	0.00	0.00	0.00	
7,700.00	89.27	315.36	4,500.51	1,953.52	-3,021.92	3,579.22	0.00	0.00	0.00	
7,800.00	89.27	315.36	4,501.79	2,024.67	-3,092.18	3,678.56	0.00	0.00	0.00	
7,900.00	89.27	315.36	4,503.07	2,095.82	-3,162.44	3,777.89	0.00	0.00	0.00	
8,000.00	89.27	315.36	4,504.35	2,166.97	-3,232.70	3,877.23	0.00	0.00	0.00	
8,100.00	89.27	315.36	4,505.63	2,238.12	-3,302.95	3,976.56	0.00	0.00	0.00	
8,200.00	89.27	315.36	4,506.91	2,309.26	-3,373.21	4,075.90	0.00	0.00	0.00	
8,300.00	89.27	315.36	4,508.19	2,380.41	-3,443.47	4,175.23	0.00	0.00	0.00	
8,400.00	89.27	315.36	4,509.47	2,451.56	-3,513.73	4,274.57	0.00	0.00	0.00	
8,500.00	89.27	315.36	4,510.75	2,522.71	-3,583.98	4,373.91	0.00	0.00	0.00	
8,600.00	89.27	315.36	4,512.03	2,593.86	-3,654.24	4,473.24	0.00	0.00	0.00	
8,700.00	89.27	315.36	4,513.31	2,665.01	-3,724.50	4,572.58	0.00	0.00	0.00	
8,800.00	89.27	315.36	4,514.59	2,736.16	-3,794.76	4,671.91	0.00	0.00	0.00	
8,900.00	89.27	315.36	4,515.87	2,807.31	-3,865.01	4,771.25	0.00	0.00	0.00	
9,000.00	89.27	315.36	4,517.15	2,878.46	-3,935.27	4,870.58	0.00	0.00	0.00	
9,100.00	89.27	315.36	4,518.43	2,949.61	-4,005.53	4,969.92	0.00	0.00	0.00	
9,200.00	89.27	315.36	4,519.71	3,020.76	-4,075.79	5,069.26	0.00	0.00	0.00	
9,300.00	89.27	315.36	4,520.99	3,091.91	-4,146.04	5,168.59	0.00	0.00	0.00	
9,400.00	89.27	315.36	4,522.27	3,163.06	-4,216.30	5,267.93	0.00	0.00	0.00	
9,500.00	89.27	315.36	4,523.55	3,234.21	-4,286.56	5,367.26	0.00	0.00	0.00	
9,600.00	89.27	315.36	4,524.83	3,305.36	-4,356.82	5,466.60	0.00	0.00	0.00	
9,700.00	89.27	315.36	4,526.11	3,376.51	-4,427.07	5,565.93	0.00	0.00	0.00	
9,800.00	89.27	315.36	4,527.39	3,447.66	-4,497.33	5,665.27	0.00	0.00	0.00	
9,900.00	89.27	315.36	4,528.67	3,518.81	-4,567.59	5,764.61	0.00	0.00	0.00	
10,000.00	89.27	315.36	4,529.95	3,589.96	-4,637.85	5,863.94	0.00	0.00	0.00	
10,100.00	89.27	315.36	4,531.23	3,661.10	-4,708.10	5,963.28	0.00	0.00	0.00	
10,200.00	89.27	315.36	4,532.51	3,732.25	-4,778.36	6,062.61	0.00	0.00	0.00	



Lonestar Consulting, LLC
Planning Report



Database:	Grand Junction	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Company:	DJR Operating	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Project:	Ponderosa Unit	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site:	P01 2310 Pad	North Reference:	True
Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Original Drilling		
Design:	APD		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
10,300.00	89.27	315.36	4,533.79	3,803.40	-4,848.62	6,161.95	0.00	0.00	0.00	
10,400.00	89.27	315.36	4,535.07	3,874.55	-4,918.88	6,261.28	0.00	0.00	0.00	
10,500.00	89.27	315.36	4,536.35	3,945.70	-4,989.13	6,360.62	0.00	0.00	0.00	
10,600.00	89.27	315.36	4,537.63	4,016.85	-5,059.39	6,459.95	0.00	0.00	0.00	
10,700.00	89.27	315.36	4,538.91	4,088.00	-5,129.65	6,559.29	0.00	0.00	0.00	
10,800.00	89.27	315.36	4,540.19	4,159.15	-5,199.91	6,658.63	0.00	0.00	0.00	
10,900.00	89.27	315.36	4,541.47	4,230.30	-5,270.16	6,757.96	0.00	0.00	0.00	
10,941.65	89.27	315.36	4,542.00	4,259.94	-5,299.43	6,799.34	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
- hit/miss target										
- Shape										
Escrito 133H Heel - plan hits target center - Circle (radius 50.00)	0.00	0.00	4,464.00	-76.08	-1,017.77	1,910,405.7832	2,719,193.6076	36.2502939	-107.8465539	
Escrito 133H Toe - plan hits target center - Circle (radius 100.00)	0.00	0.00	4,542.00	4,259.94	-5,299.43	1,914,742.2238	2,714,912.3963	36.2622040	-107.8610780	

Casing Points									
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)					
350.00	350.00	Surface	9.620	12.250					
4,805.99	4,461.93	Intermediate	7.000	8.750					

Formations									
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)				
471.01	471.00	Ojo Alamo		0.00	0.00				
597.24	597.00	Kirtland		0.00	0.00				
1,009.17	1,003.00	Fruitland		0.00	0.00				
1,263.44	1,252.00	Pictured Cliffs		0.00	0.00				
1,413.54	1,399.00	Lewis		0.00	0.00				
2,060.95	2,033.00	Chacra		0.00	0.00				
2,691.00	2,650.00	Menefee		0.00	0.00				
3,697.86	3,636.00	Point Lookout		0.00	0.00				
3,846.94	3,782.00	Mancos		0.00	0.00				
4,173.59	4,099.00	Mancos Silt		0.00	0.00				



DJR Operating

Ponderosa Unit

P01 2310 Pad

Escrito P01 2310 Federal COM 133H

Original Drilling

APD

Anticollision Report

11 September, 2023





Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Reference	APD
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	Unlimited
Results Limited by:	Maximum centre distance of 15,000.00ft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date	3/9/2023		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
0.00	10,941.65	APD (Original Drilling)	MWD+HDGM	OWSG MWD + HDGM	

Summary						
Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
P01 2310 Pad						
Champ 9 - OH - OH	4,853.15	4,431.17	301.26	145.00	1.928	CC, ES, SF
Escrito P01 2310 137H - Original Drilling - APD	400.00	400.00	39.95	37.18	14.435	CC, ES
Escrito P01 2310 137H - Original Drilling - APD	9,700.00	9,742.23	1,350.69	1,072.32	4.852	SF
Escrito P01 2310 Federal COM 106H - Original Drilling -	730.73	729.10	12.25	7.19	2.420	CC, ES
Escrito P01 2310 Federal COM 106H - Original Drilling -	800.00	797.99	13.43	7.85	2.407	SF
Escrito P01 2310 Federal COM 108H - Original Drilling -	400.00	400.00	20.12	17.35	7.269	CC, ES
Escrito P01 2310 Federal COM 108H - Original Drilling -	1,800.00	1,805.27	46.26	31.80	3.199	SF
Escrito P01 2310 Federal COM 113H - Original Drilling -	400.00	400.00	79.99	77.38	30.609	CC, ES
Escrito P01 2310 Federal COM 113H - Original Drilling -	700.00	694.13	105.67	101.00	22.592	SF
Escrito P01 2310 Federal COM 134H - Original Drilling -	1,219.36	1,231.67	53.78	44.73	5.941	CC
Escrito P01 2310 Federal COM 134H - Original Drilling -	1,300.00	1,312.07	54.14	44.28	5.491	ES
Escrito P01 2310 Federal COM 134H - Original Drilling -	1,700.00	1,710.89	65.30	51.49	4.729	SF
Good Times P36A-2410 1H - OH - OH	4,524.60	10,294.02	405.40	322.96	4.917	CC
Good Times P36A-2410 1H - OH - OH	4,552.25	10,294.02	406.90	320.69	4.720	ES
Good Times P36A-2410 1H - OH - OH	4,650.00	10,237.50	431.14	336.48	4.555	SF

Offset Design: P01 2310 Pad - Champ 9 - OH - OH												Offset Site Error:	0.00 ft				
Survey Program: 124-INCLINOMETER				Semi Major Axis				Offset Wellbore Centre				Rule Assigned:				Offset Well Error:	0.00 ft
Reference	Vertical	Offset		Reference	Offset	Highside			Distance							Warning	
Measured Depth (ft)	Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	(ft)	(ft)	Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor					
0.00	0.00	0.00	0.00	0.00	0.00	-80.23	139.07	-807.44	820.04								
100.00	100.00	66.00	66.00	0.31	2.00	-80.23	139.07	-807.44	819.33	817.02	2.31	354.272					
200.00	200.00	166.00	166.00	0.67	5.04	-80.23	139.07	-807.44	819.33	813.62	5.71	143.539					
300.00	300.00	266.01	266.00	1.03	8.08	-80.23	139.07	-807.44	819.33	810.23	9.10	89.999					
400.00	400.00	366.01	366.00	1.38	11.12	-80.23	139.07	-807.44	819.33	806.83	12.50	65.551					
500.00	499.97	466.28	466.26	1.73	14.16	44.28	139.56	-807.44	817.85	801.96	15.89	51.470					
600.00	599.75	566.64	566.62	2.08	17.21	44.66	139.16	-807.44	813.11	793.83	19.28	42.171					
700.00	699.14	665.20	665.14	2.43	20.20	45.33	139.07	-807.44	805.37	782.74	22.63	35.590					
800.00	797.97	764.03	763.97	2.81	23.20	46.30	139.07	-807.44	794.70	768.70	26.00	30.568					
867.26	864.03	830.08	830.03	3.07	25.21	47.12	139.07	-807.44	785.94	757.68	28.26	27.810					
900.00	896.09	862.27	862.21	3.21	26.19	47.55	140.20	-807.44	781.64	752.28	29.37	26.616					
1,000.00	994.02	960.83	960.76	3.63	29.18	48.64	139.96	-807.44	767.91	735.16	32.75	23.446					

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Champ 9 - OH - OH													Offset Site Error:	0.00 ft
Survey Program: 124-INCLINOMETER													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
1,100.00	1,091.95	1,059.47	1,059.39	4.05	32.17	49.75	139.40	-807.44	754.38	718.23	36.15	20.868		
1,200.00	1,189.88	1,156.03	1,155.88	4.49	35.11	50.89	139.07	-807.44	741.20	701.70	39.50	18.767		
1,300.00	1,287.81	1,253.96	1,253.81	4.93	38.08	52.11	139.07	-807.44	728.43	685.54	42.89	16.984		
1,400.00	1,385.74	1,351.90	1,351.73	5.38	41.06	53.47	140.43	-807.44	716.45	670.15	46.29	15.476		
1,500.00	1,483.66	1,450.89	1,450.71	5.83	44.06	54.78	140.21	-807.44	704.34	654.61	49.73	14.162		
1,600.00	1,581.59	1,549.99	1,549.80	6.29	47.07	56.09	139.57	-807.44	692.46	639.28	53.18	13.021		
1,700.00	1,679.52	1,645.75	1,645.52	6.74	49.98	57.42	139.07	-807.44	681.01	624.47	56.54	12.045		
1,800.00	1,777.45	1,743.68	1,743.45	7.20	52.95	58.85	139.07	-807.44	670.15	610.19	59.96	11.176		
1,900.00	1,875.38	1,841.61	1,841.38	7.66	55.93	60.33	139.07	-807.44	659.75	596.35	63.39	10.407		
2,000.00	1,973.31	1,940.25	1,940.01	8.11	58.92	61.93	139.78	-807.44	650.12	583.28	66.85	9.725		
2,100.00	2,071.24	2,039.02	2,038.78	8.57	61.92	63.48	139.41	-807.44	640.51	570.20	70.31	9.110		
2,200.00	2,169.17	2,135.44	2,135.17	9.04	64.85	65.05	139.07	-807.44	631.39	557.68	73.71	8.566		
2,300.00	2,267.10	2,233.37	2,233.10	9.50	67.82	66.71	139.07	-807.44	622.97	545.82	77.16	8.074		
2,400.00	2,365.02	2,331.30	2,331.02	9.96	70.80	68.41	139.07	-807.44	615.10	534.50	80.61	7.631		
2,500.00	2,462.95	2,429.97	2,429.69	10.42	73.79	70.22	139.81	-807.44	608.24	524.15	84.08	7.234		
2,600.00	2,560.88	2,528.88	2,528.59	10.88	76.80	71.99	139.47	-807.44	601.35	513.79	87.56	6.868		
2,700.00	2,658.81	2,625.14	2,624.81	11.35	79.72	73.75	139.07	-807.44	595.02	504.05	90.97	6.541		
2,800.00	2,756.74	2,723.07	2,722.74	11.81	82.70	75.60	139.07	-807.44	589.56	495.13	94.43	6.244		
2,900.00	2,854.67	2,821.00	2,820.67	12.28	85.67	77.49	139.07	-807.44	584.75	486.87	97.88	5.974		
3,000.00	2,952.60	2,919.67	2,919.33	12.74	88.67	79.49	140.17	-807.44	581.40	480.03	101.36	5.736		
3,100.00	3,050.53	3,019.03	3,018.67	13.21	91.68	81.43	139.83	-807.44	577.72	472.86	104.86	5.510		
3,200.00	3,148.46	3,118.46	3,118.10	13.67	94.70	83.37	139.17	-807.44	574.48	466.12	108.35	5.302		
3,300.00	3,246.38	3,212.82	3,212.38	14.14	97.57	85.26	139.07	-807.44	572.33	460.63	111.70	5.124		
3,400.00	3,344.31	3,310.75	3,310.31	14.60	100.54	87.25	139.07	-807.44	570.98	455.84	115.14	4.959		
3,460.50	3,403.56	3,370.00	3,369.56	14.88	102.34	88.45	139.07	-807.44	570.51	453.29	117.22	4.867		
3,500.00	3,442.24	3,409.31	3,408.85	15.07	103.54	89.32	140.41	-807.44	571.44	452.84	118.60	4.818		
3,600.00	3,540.17	3,509.38	3,508.92	15.53	106.57	91.34	140.05	-807.44	571.26	449.16	122.10	4.679		
3,604.45	3,544.53	3,513.84	3,513.38	15.55	106.71	91.43	140.03	-807.44	571.26	449.01	122.26	4.673		
3,700.00	3,638.10	3,609.57	3,609.10	16.00	109.62	93.33	139.26	-807.44	571.42	445.82	125.60	4.550		
3,800.00	3,736.03	3,702.54	3,702.03	16.46	112.44	95.20	139.07	-807.44	572.75	443.88	128.87	4.444		
3,900.00	3,833.96	3,800.47	3,799.96	16.93	115.41	97.17	139.07	-807.44	574.98	442.69	132.29	4.346		
4,000.00	3,931.89	3,898.68	3,898.17	17.40	118.40	99.16	139.88	-807.44	578.64	442.93	135.71	4.264		
4,016.88	3,948.41	3,915.45	3,914.93	17.47	118.91	99.49	139.87	-807.44	579.19	442.90	136.29	4.250		
4,050.00	3,980.80	3,948.29	3,947.77	17.63	119.90	84.80	139.82	-807.44	579.37	441.94	137.43	4.216		
4,100.00	4,029.28	3,997.47	3,996.94	17.87	121.40	68.81	139.70	-807.44	576.20	437.05	139.15	4.141		
4,150.00	4,076.93	4,045.78	4,045.26	18.12	122.86	59.38	139.52	-807.44	569.01	428.16	140.85	4.040		
4,200.00	4,123.33	4,092.82	4,092.30	18.37	124.29	54.26	139.28	-807.44	557.97	415.46	142.51	3.915		
4,250.00	4,168.11	4,134.67	4,134.11	18.62	125.56	51.77	139.07	-807.44	543.38	399.35	144.02	3.773		
4,300.00	4,210.89	4,177.44	4,176.89	18.87	126.86	51.34	139.07	-807.44	525.73	380.16	145.57	3.612		
4,350.00	4,251.30	4,217.86	4,217.30	19.14	128.09	52.41	139.07	-807.44	505.19	358.14	147.06	3.435		
4,400.00	4,289.01	4,255.57	4,255.01	19.42	129.24	54.75	139.07	-807.44	482.21	333.74	148.47	3.248		
4,450.00	4,323.71	4,290.26	4,289.71	19.71	130.29	58.22	139.07	-807.44	457.33	307.52	149.81	3.053		
4,500.00	4,355.09	4,321.65	4,321.09	20.03	131.24	62.63	139.07	-807.44	431.21	280.14	151.07	2.854		
4,550.00	4,382.91	4,349.49	4,348.93	20.38	132.09	67.74	139.79	-807.44	405.37	253.13	152.24	2.663		
4,600.00	4,406.92	4,373.77	4,373.21	20.78	132.82	73.21	139.78	-807.44	379.33	226.00	153.33	2.474		
4,650.00	4,426.92	4,393.96	4,393.40	21.23	133.44	78.53	139.75	-807.44	354.94	200.64	154.31	2.300		
4,700.00	4,442.74	4,409.89	4,409.33	21.73	133.92	83.23	139.73	-807.44	333.56	178.42	155.14	2.150		
4,750.00	4,454.26	4,421.45	4,420.89	22.30	134.27	86.89	139.71	-807.44	316.61	160.83	155.79	2.032		
4,800.00	4,461.38	4,428.54	4,427.98	22.92	134.49	89.23	139.69	-807.44	305.50	149.32	156.18	1.956		
4,847.42	4,464.00	4,431.10	4,430.54	23.55	134.57	90.09	139.68	-807.44	301.32	145.04	156.27	1.928		
4,853.15	4,464.07	4,431.17	4,430.60	23.63	134.57	90.10	139.68	-807.44	301.26	145.00	156.27	1.928	CC, ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Champ 9 - OH - OH													Offset Site Error:	0.00 ft
Survey Program: 124-INCLINOMETER													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,900.00	4,464.67	4,431.68	4,431.12	24.30	134.58	90.20	139.68	-807.44	304.88	148.76	156.12	1.953		
5,000.00	4,465.95	4,432.79	4,432.23	25.87	134.62	90.41	139.68	-807.44	335.14	179.65	155.48	2.155		
5,100.00	4,467.23	4,433.89	4,433.33	27.62	134.65	90.62	139.68	-807.44	389.46	234.68	154.78	2.516		
5,200.00	4,468.51	4,434.99	4,434.42	29.51	134.68	90.83	139.67	-807.44	459.39	305.14	154.25	2.978		
5,300.00	4,469.79	4,436.08	4,435.51	31.50	134.72	91.03	139.67	-807.44	538.88	384.98	153.90	3.501		
5,400.00	4,471.07	4,437.16	4,436.60	33.57	134.75	91.24	139.67	-807.44	624.30	470.60	153.70	4.062		
5,500.00	4,472.35	4,438.24	4,437.68	35.72	134.78	91.45	139.66	-807.44	713.51	559.94	153.58	4.646		
5,600.00	4,473.63	4,439.32	4,438.76	37.93	134.82	91.65	139.66	-807.44	805.27	651.75	153.51	5.246		
5,700.00	4,474.91	4,440.39	4,439.83	40.18	134.85	91.86	139.66	-807.44	898.78	745.30	153.48	5.856		
5,800.00	4,476.19	4,441.46	4,440.90	42.47	134.88	92.06	139.66	-807.44	993.55	840.08	153.48	6.474		
5,900.00	4,477.47	4,442.53	4,441.96	44.79	134.91	92.26	139.65	-807.44	1,089.26	935.77	153.49	7.097		
6,000.00	4,478.75	4,443.59	4,443.02	47.14	134.95	92.46	139.65	-807.44	1,185.68	1,032.17	153.51	7.724		
6,100.00	4,480.03	4,444.64	4,444.08	49.52	134.98	92.66	139.65	-807.44	1,282.64	1,129.10	153.54	8.354		
6,200.00	4,481.31	4,445.69	4,445.13	51.91	135.01	92.86	139.64	-807.44	1,380.04	1,226.47	153.57	8.986		
6,300.00	4,482.59	4,446.74	4,446.17	54.33	135.04	93.06	139.64	-807.44	1,477.78	1,324.17	153.61	9.620		
6,400.00	4,483.87	4,447.78	4,447.22	56.75	135.07	93.26	139.64	-807.44	1,575.81	1,422.15	153.66	10.255		
6,500.00	4,485.15	4,448.82	4,448.25	59.20	135.10	93.45	139.63	-807.44	1,674.07	1,520.36	153.70	10.892		
6,600.00	4,486.43	4,449.85	4,449.29	61.65	135.14	93.65	139.63	-807.44	1,772.52	1,618.77	153.75	11.528		
6,700.00	4,487.71	4,450.88	4,450.32	64.11	135.17	93.84	139.63	-807.44	1,871.14	1,717.33	153.80	12.166		
6,800.00	4,488.99	4,451.90	4,451.34	66.58	135.20	94.04	139.62	-807.44	1,969.89	1,816.03	153.86	12.803		
6,900.00	4,490.27	4,452.92	4,452.36	69.07	135.23	94.23	139.62	-807.44	2,068.77	1,914.85	153.91	13.441		
7,000.00	4,491.55	4,453.94	4,453.38	71.55	135.26	94.42	139.62	-807.44	2,167.74	2,013.77	153.97	14.079		
7,100.00	4,492.83	4,454.95	4,454.39	74.05	135.29	94.62	139.61	-807.44	2,266.81	2,112.78	154.03	14.717		
7,200.00	4,494.11	4,455.96	4,455.40	76.55	135.32	94.81	139.61	-807.44	2,365.96	2,211.87	154.09	15.355		
7,300.00	4,495.39	4,456.97	4,456.40	79.05	135.35	95.00	139.61	-807.44	2,465.17	2,311.02	154.15	15.992		
7,400.00	4,496.67	4,457.97	4,457.40	81.56	135.38	95.18	139.60	-807.44	2,564.44	2,410.24	154.21	16.630		
7,500.00	4,497.95	4,458.96	4,458.40	84.08	135.41	95.37	139.60	-807.44	2,663.77	2,509.50	154.27	17.267		
7,600.00	4,499.23	4,459.95	4,459.39	86.60	135.44	95.56	139.60	-807.44	2,763.15	2,608.82	154.33	17.904		
7,700.00	4,500.51	4,460.94	4,460.38	89.12	135.47	95.74	139.59	-807.44	2,862.57	2,708.17	154.39	18.541		
7,800.00	4,501.79	4,461.93	4,461.36	91.65	135.50	95.93	139.59	-807.44	2,962.02	2,807.57	154.46	19.177		
7,900.00	4,503.07	4,462.91	4,462.34	94.17	135.53	96.11	139.59	-807.44	3,061.52	2,906.99	154.52	19.813		
8,000.00	4,504.35	4,463.88	4,463.32	96.71	135.56	96.30	139.58	-807.44	3,161.04	3,006.45	154.59	20.448		
8,100.00	4,505.63	4,464.85	4,464.29	99.24	135.59	96.48	139.58	-807.44	3,260.60	3,105.94	154.66	21.083		
8,200.00	4,506.91	4,465.82	4,465.26	101.78	135.62	96.66	139.58	-807.44	3,360.17	3,205.45	154.72	21.717		
8,300.00	4,508.19	4,466.79	4,466.22	104.32	135.65	96.84	139.57	-807.44	3,459.78	3,304.99	154.79	22.351		
8,400.00	4,509.47	4,467.75	4,467.18	106.86	135.68	97.02	139.57	-807.44	3,559.40	3,404.54	154.86	22.984		
8,500.00	4,510.75	4,468.70	4,468.14	109.40	135.71	97.20	139.57	-807.44	3,659.05	3,504.12	154.93	23.617		
8,600.00	4,512.03	4,469.66	4,469.09	111.95	135.74	97.38	139.56	-807.44	3,758.71	3,603.71	155.00	24.249		
8,700.00	4,513.31	4,470.61	4,470.04	114.49	135.77	97.56	139.56	-807.44	3,858.40	3,703.32	155.07	24.881		
8,800.00	4,514.59	4,471.55	4,470.99	117.04	135.79	97.74	139.56	-807.44	3,958.09	3,802.95	155.15	25.512		
8,900.00	4,515.87	4,472.49	4,471.93	119.59	135.82	97.91	139.55	-807.44	4,057.80	3,902.58	155.22	26.142		
9,000.00	4,517.15	4,473.43	4,472.87	122.14	135.85	98.09	139.55	-807.44	4,157.53	4,002.24	155.29	26.772		
9,100.00	4,518.43	4,474.37	4,473.80	124.69	135.88	98.26	139.55	-807.44	4,257.27	4,101.90	155.37	27.401		
9,200.00	4,519.71	4,475.30	4,474.73	127.25	135.91	98.43	139.54	-807.44	4,357.02	4,201.58	155.44	28.030		
9,300.00	4,520.99	4,476.23	4,475.66	129.80	135.94	98.61	139.54	-807.44	4,456.78	4,301.26	155.52	28.658		
9,400.00	4,522.27	4,477.15	4,476.58	132.36	135.96	98.78	139.54	-807.44	4,556.55	4,400.96	155.59	29.285		
9,500.00	4,523.55	4,478.07	4,477.50	134.91	135.99	98.95	139.53	-807.44	4,656.33	4,500.66	155.67	29.911		
9,600.00	4,524.83	4,478.99	4,478.42	137.47	136.02	99.12	139.53	-807.44	4,756.12	4,600.37	155.75	30.537		
9,700.00	4,526.11	4,479.90	4,479.33	140.03	136.05	99.29	139.53	-807.44	4,855.92	4,700.09	155.83	31.162		
9,800.00	4,527.39	4,480.81	4,480.24	142.59	136.08	99.46	139.52	-807.44	4,955.73	4,799.82	155.91	31.787		
9,900.00	4,528.67	4,481.71	4,481.15	145.15	136.10	99.63	139.52	-807.44	5,055.54	4,899.55	155.99	32.410		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC
Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Champ 9 - OH - OH													Offset Site Error:	0.00 ft
Survey Program: 124-INCLINOMETER													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Rule Assigned:		Distance		Minimum	Separation	Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)			
10,000.00	4,529.95	4,482.62	4,482.05	147.71	136.13	99.79	139.51	-807.44	5,155.36	4,999.29	156.07	33.033		
10,100.00	4,531.23	4,483.52	4,482.95	150.27	136.16	99.96	139.51	-807.44	5,255.19	5,099.04	156.15	33.655		
10,200.00	4,532.51	4,484.41	4,483.85	152.83	136.18	100.12	139.51	-807.44	5,355.02	5,198.79	156.23	34.277		
10,300.00	4,533.79	4,485.30	4,484.74	155.40	136.21	100.29	139.50	-807.44	5,454.86	5,298.55	156.31	34.897		
10,400.00	4,535.07	4,486.19	4,485.63	157.96	136.24	100.45	139.50	-807.44	5,554.71	5,398.31	156.39	35.517		
10,500.00	4,536.35	4,487.08	4,486.51	160.52	136.27	100.61	139.50	-807.44	5,654.56	5,498.08	156.48	36.137		
10,600.00	4,537.63	4,487.96	4,487.39	163.09	136.29	100.78	139.49	-807.44	5,754.41	5,597.85	156.56	36.755		
10,700.00	4,538.91	4,488.84	4,488.27	165.65	136.32	100.94	139.49	-807.44	5,854.27	5,697.63	156.65	37.373		
10,800.00	4,540.19	4,489.71	4,489.15	168.22	136.35	101.10	139.49	-807.44	5,954.14	5,797.41	156.73	37.990		
10,900.00	4,541.47	4,490.58	4,490.02	170.79	136.37	101.26	139.48	-807.44	6,054.01	5,897.19	156.82	38.606		
10,941.65	4,542.00	4,490.95	4,490.38	171.86	136.38	101.32	139.48	-807.44	6,095.61	5,938.75	156.85	38.862		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 137H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Vertical Depth (ft)	Semi Reference (ft)	Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.22	10.19	38.63	39.95					
100.00	100.00	100.00	100.00	0.31	0.31	75.22	10.19	38.63	39.95	39.33	0.62	64.790		
200.00	200.00	200.00	200.00	0.67	0.67	75.22	10.19	38.63	39.95	38.61	1.33	29.957		
300.00	300.00	300.00	300.00	1.03	1.03	75.22	10.19	38.63	39.95	37.90	2.05	19.482		
400.00	400.00	400.00	400.00	1.38	1.38	75.22	10.19	38.63	39.95	37.18	2.77	14.435 CC, ES		
500.00	499.97	499.97	499.97	1.73	1.74	-161.42	10.19	38.63	42.01	38.54	3.47	12.099		
600.00	599.75	598.85	598.84	2.08	2.10	-164.13	10.58	38.97	48.72	44.54	4.17	11.675		
700.00	699.14	695.61	695.51	2.43	2.44	-168.57	13.62	41.72	63.06	58.19	4.87	12.937		
800.00	797.97	790.02	789.58	2.81	2.78	-172.75	19.51	47.04	85.72	80.15	5.57	15.394		
867.26	864.03	851.73	850.86	3.07	3.01	-175.00	24.91	51.92	105.58	99.55	6.03	17.511		
900.00	896.09	881.24	880.09	3.21	3.12	-175.94	27.93	54.64	116.33	110.09	6.25	18.620		
1,000.00	994.02	974.45	972.25	3.63	3.46	-178.18	38.27	63.98	150.41	143.49	6.92	21.741		
1,100.00	1,091.95	1,068.32	1,065.06	4.05	3.82	-179.61	48.72	73.41	184.66	177.07	7.60	24.308		
1,200.00	1,189.88	1,162.19	1,157.87	4.49	4.19	-179.41	59.17	82.85	218.98	210.70	8.28	26.449		
1,300.00	1,287.81	1,256.06	1,250.67	4.93	4.55	-178.69	69.61	92.28	253.35	244.37	8.97	28.237		
1,400.00	1,385.74	1,349.93	1,343.48	5.38	4.92	-178.15	80.06	101.72	287.73	278.07	9.67	29.766		
1,500.00	1,483.66	1,443.80	1,436.29	5.83	5.30	-177.72	90.51	111.15	322.14	311.78	10.36	31.082		
1,600.00	1,581.59	1,537.67	1,529.10	6.29	5.67	-177.37	100.96	120.58	356.56	345.50	11.06	32.227		
1,700.00	1,679.52	1,631.54	1,621.91	6.74	6.05	-177.09	111.41	130.02	390.99	379.22	11.77	33.230		
1,800.00	1,777.45	1,725.41	1,714.72	7.20	6.43	-176.85	121.85	139.45	425.43	412.96	12.47	34.116		
1,900.00	1,875.38	1,819.28	1,807.53	7.66	6.80	-176.65	132.30	148.88	459.87	446.69	13.18	34.904		
2,000.00	1,973.31	1,913.15	1,900.34	8.11	7.18	-176.47	142.75	158.32	494.31	480.43	13.88	35.610		
2,100.00	2,071.24	2,007.02	1,993.14	8.57	7.56	-176.32	153.20	167.75	528.76	514.17	14.59	36.244		
2,200.00	2,169.17	2,100.89	2,085.95	9.04	7.95	-176.19	163.64	177.19	563.21	547.92	15.30	36.818		
2,300.00	2,267.10	2,194.76	2,178.76	9.50	8.33	-176.07	174.09	186.62	597.67	581.66	16.01	37.339		
2,400.00	2,365.02	2,288.63	2,271.57	9.96	8.71	-175.96	184.54	196.05	632.13	615.41	16.72	37.815		
2,500.00	2,462.95	2,382.50	2,364.38	10.42	9.09	-175.87	194.99	205.49	666.58	649.16	17.43	38.250		
2,600.00	2,560.88	2,476.37	2,457.19	10.88	9.47	-175.78	205.43	214.92	701.04	682.91	18.14	38.651		
2,700.00	2,658.81	2,570.24	2,550.00	11.35	9.86	-175.71	215.88	224.36	735.51	716.66	18.85	39.020		
2,800.00	2,756.74	2,664.11	2,642.81	11.81	10.24	-175.64	226.33	233.79	769.97	750.41	19.56	39.361		
2,900.00	2,854.67	2,757.98	2,735.61	12.28	10.62	-175.57	236.78	243.22	804.43	784.16	20.27	39.678		
3,000.00	2,952.60	2,851.85	2,828.42	12.74	11.01	-175.51	247.22	252.66	838.89	817.91	20.99	39.972		
3,100.00	3,050.53	2,945.72	2,921.23	13.21	11.39	-175.46	257.67	262.09	873.36	851.66	21.70	40.247		
3,200.00	3,148.46	3,039.59	3,014.04	13.67	11.78	-175.41	268.12	271.53	907.82	885.41	22.41	40.503		
3,300.00	3,246.38	3,133.46	3,106.85	14.14	12.16	-175.36	278.57	280.96	942.29	919.16	23.13	40.743		
3,400.00	3,344.31	3,227.33	3,199.66	14.60	12.55	-175.32	289.02	290.39	976.76	952.91	23.84	40.968		
3,500.00	3,442.24	3,321.20	3,292.47	15.07	12.93	-175.28	299.46	299.83	1,011.22	986.67	24.56	41.180		
3,600.00	3,540.17	3,415.07	3,385.28	15.53	13.31	-175.24	309.91	309.26	1,045.69	1,020.42	25.27	41.379		
3,700.00	3,638.10	3,508.94	3,478.08	16.00	13.70	-175.21	320.36	318.69	1,080.16	1,054.17	25.99	41.567		
3,800.00	3,736.03	3,602.81	3,570.89	16.46	14.08	-175.17	330.81	328.13	1,114.63	1,087.92	26.70	41.745		
3,900.00	3,833.96	3,696.68	3,663.70	16.93	14.47	-175.14	341.25	337.56	1,149.09	1,121.68	27.42	41.913		
4,000.00	3,931.89	3,790.55	3,756.51	17.40	14.85	-175.11	351.70	347.00	1,183.56	1,155.43	28.13	42.072		
4,016.88	3,948.41	3,806.40	3,772.17	17.47	14.92	-175.11	353.46	348.59	1,189.38	1,161.13	28.25	42.098		
4,050.00	3,980.80	3,837.44	3,802.87	17.63	15.05	-175.10	356.92	351.71	1,200.87	1,172.38	28.49	42.150		
4,100.00	4,029.28	3,883.97	3,848.87	17.87	15.24	-175.07	362.10	356.38	1,218.46	1,189.61	28.85	42.237		
4,150.00	4,076.93	3,929.73	3,894.11	18.12	15.43	-175.05	367.19	360.98	1,236.24	1,207.04	29.20	42.334		
4,200.00	4,123.33	3,974.34	3,938.22	18.37	15.61	-175.03	372.16	365.47	1,254.18	1,224.63	29.55	42.441		
4,250.00	4,168.11	4,025.60	3,988.89	18.62	15.82	-175.01	378.25	370.22	1,272.20	1,242.25	29.95	42.471		
4,300.00	4,210.89	4,092.52	4,054.58	18.87	16.09	-175.00	390.67	371.86	1,289.73	1,259.25	30.48	42.510		
4,350.00	4,251.30	4,164.64	4,123.77	19.14	16.37	-175.00	410.26	367.07	1,306.39	1,275.34	31.05	42.076		
4,400.00	4,289.01	4,242.45	4,195.19	19.42	16.66	-175.00	438.21	354.35	1,321.93	1,290.26	31.67	41.743		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 137H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis		Rule Assigned:		Distance		Minimum Separation		Separation		Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
4,450.00	4,323.71	4,326.14	4,266.65	19.71	16.96	100.68	475.56	332.23	1,336.07	1,303.70	32.36	41.284		
4,500.00	4,355.09	4,415.43	4,334.93	20.03	17.27	98.94	522.73	299.57	1,348.53	1,315.36	33.17	40.652		
4,550.00	4,382.91	4,509.36	4,395.93	20.38	17.61	97.39	579.18	256.05	1,359.05	1,324.88	34.17	39.775		
4,600.00	4,406.92	4,606.25	4,445.35	20.78	18.10	95.94	642.98	202.67	1,367.42	1,331.97	35.46	38.565		
4,650.00	4,426.92	4,703.84	4,479.72	21.23	18.89	94.56	710.96	141.87	1,373.52	1,336.49	37.03	37.093		
4,700.00	4,442.74	4,799.71	4,497.35	21.73	19.99	93.23	779.27	77.14	1,377.31	1,338.37	38.94	35.369		
4,750.00	4,454.26	4,872.14	4,500.20	22.30	20.98	92.20	830.66	26.22	1,379.02	1,338.29	40.73	33.855		
4,752.25	4,454.68	4,874.35	4,500.22	22.33	21.02	92.17	832.22	24.65	1,379.07	1,338.27	40.80	33.804		
4,800.00	4,461.38	4,921.66	4,500.64	22.92	21.74	91.69	865.67	-8.80	1,379.81	1,337.54	42.27	32.643		
4,802.13	4,461.58	4,923.79	4,500.66	22.95	21.77	91.67	867.17	-10.30	1,379.83	1,337.50	42.34	32.592		
4,847.42	4,464.00	4,969.01	4,501.05	23.55	22.50	91.53	899.15	-42.28	1,379.86	1,336.05	43.81	31.497		
4,900.00	4,464.67	5,021.59	4,501.52	24.30	23.40	91.53	936.32	-79.47	1,379.52	1,333.92	45.60	30.253		
5,000.00	4,465.95	5,121.59	4,502.39	25.87	25.23	91.51	1,007.02	-150.18	1,378.87	1,329.62	49.24	28.002		
5,100.00	4,467.23	5,221.59	4,503.27	27.62	27.18	91.49	1,077.72	-220.89	1,378.22	1,325.08	53.14	25.936		
5,200.00	4,468.51	5,321.58	4,504.15	29.51	29.23	91.48	1,148.42	-291.61	1,377.56	1,320.33	57.24	24.068		
5,300.00	4,469.79	5,421.58	4,505.03	31.50	31.37	91.46	1,219.12	-362.32	1,376.91	1,315.41	61.50	22.390		
5,400.00	4,471.07	5,521.58	4,505.91	33.57	33.57	91.45	1,289.82	-433.03	1,376.26	1,310.37	65.89	20.888		
5,500.00	4,472.35	5,621.58	4,506.79	35.72	35.82	91.43	1,360.51	-503.75	1,375.61	1,305.22	70.39	19.544		
5,600.00	4,473.63	5,721.57	4,507.67	37.93	38.11	91.41	1,431.21	-574.46	1,374.96	1,299.99	74.97	18.340		
5,700.00	4,474.91	5,821.57	4,508.55	40.18	40.44	91.40	1,501.91	-645.17	1,374.31	1,294.68	79.63	17.259		
5,800.00	4,476.19	5,921.57	4,509.42	42.47	42.80	91.38	1,572.61	-715.89	1,373.66	1,289.32	84.34	16.287		
5,900.00	4,477.47	6,021.56	4,510.30	44.79	45.19	91.37	1,643.31	-786.60	1,373.01	1,283.90	89.11	15.408		
6,000.00	4,478.75	6,121.56	4,511.18	47.14	47.60	91.35	1,714.01	-857.31	1,372.36	1,278.44	93.92	14.612		
6,100.00	4,480.03	6,221.56	4,512.06	49.52	50.02	91.33	1,784.71	-928.03	1,371.71	1,272.94	98.77	13.889		
6,200.00	4,481.31	6,321.56	4,512.94	51.91	52.47	91.32	1,855.40	-998.74	1,371.06	1,267.41	103.64	13.225		
6,300.00	4,482.59	6,421.55	4,513.82	54.33	54.92	91.30	1,926.10	-1,069.45	1,370.41	1,261.86	108.55	12.629		
6,400.00	4,483.87	6,521.55	4,514.70	56.75	57.39	91.28	1,996.80	-1,140.17	1,369.76	1,256.28	113.48	12.071		
6,500.00	4,485.15	6,621.55	4,515.58	59.20	59.87	91.27	2,067.50	-1,210.88	1,369.11	1,250.68	118.43	11.561		
6,600.00	4,486.43	6,721.54	4,516.45	61.65	62.35	91.25	2,138.20	-1,281.59	1,368.46	1,245.06	123.39	11.090		
6,700.00	4,487.71	6,821.54	4,517.33	64.11	64.85	91.24	2,208.90	-1,352.31	1,367.81	1,239.43	128.38	10.655		
6,800.00	4,488.99	6,921.54	4,518.21	66.58	67.35	91.22	2,279.60	-1,423.02	1,367.16	1,233.78	133.38	10.250		
6,900.00	4,490.27	7,021.54	4,519.09	69.07	69.86	91.20	2,350.29	-1,493.73	1,366.51	1,228.12	138.39	9.874		
7,000.00	4,491.55	7,121.53	4,519.97	71.55	72.37	91.19	2,420.99	-1,564.45	1,365.86	1,222.45	143.41	9.524		
7,100.00	4,492.83	7,221.53	4,520.85	74.05	74.89	91.17	2,491.69	-1,635.16	1,365.21	1,216.77	148.44	9.197		
7,200.00	4,494.11	7,321.53	4,521.73	76.55	77.42	91.16	2,562.39	-1,705.87	1,364.56	1,211.08	153.49	8.891		
7,300.00	4,495.39	7,421.52	4,522.61	79.05	79.94	91.14	2,633.09	-1,776.59	1,363.91	1,205.38	158.54	8.603		
7,400.00	4,496.67	7,521.52	4,523.48	81.56	82.48	91.12	2,703.79	-1,847.30	1,363.26	1,199.67	163.59	8.333		
7,500.00	4,497.95	7,621.52	4,524.36	84.08	85.01	91.11	2,774.49	-1,918.01	1,362.61	1,193.96	168.66	8.079		
7,600.00	4,499.23	7,721.52	4,525.24	86.60	87.55	91.09	2,845.19	-1,988.73	1,361.97	1,188.24	173.73	7.840		
7,700.00	4,500.51	7,821.51	4,526.12	89.12	90.09	91.07	2,915.88	-2,059.44	1,361.32	1,182.51	178.81	7.613		
7,800.00	4,501.79	7,921.51	4,527.00	91.65	92.64	91.06	2,986.58	-2,130.15	1,360.67	1,176.78	183.89	7.399		
7,900.00	4,503.07	8,021.51	4,527.88	94.17	95.18	91.04	3,057.28	-2,200.86	1,360.02	1,171.04	188.98	7.197		
8,000.00	4,504.35	8,121.50	4,528.76	96.71	97.73	91.02	3,127.98	-2,271.58	1,359.37	1,165.30	194.07	7.005		
8,100.00	4,505.63	8,221.50	4,529.64	99.24	100.29	91.01	3,198.68	-2,342.29	1,358.72	1,159.56	199.17	6.822		
8,200.00	4,506.91	8,321.50	4,530.51	101.78	102.84	90.99	3,269.38	-2,413.00	1,358.08	1,153.81	204.27	6.649		
8,300.00	4,508.19	8,421.50	4,531.39	104.32	105.39	90.97	3,340.08	-2,483.72	1,357.43	1,148.06	209.37	6.483		
8,400.00	4,509.47	8,521.49	4,532.27	106.86	107.95	90.96	3,410.77	-2,554.43	1,356.78	1,142.30	214.48	6.326		
8,500.00	4,510.75	8,621.49	4,533.15	109.40	110.51	90.94	3,481.47	-2,625.14	1,356.13	1,136.55	219.59	6.176		
8,600.00	4,512.03	8,721.49	4,534.03	111.95	113.07	90.93	3,552.17	-2,695.86	1,355.49	1,130.79	224.70	6.032		
8,700.00	4,513.31	8,821.48	4,534.91	114.49	115.63	90.91	3,622.87	-2,766.57	1,354.84	1,125.02	229.81	5.895		
8,800.00	4,514.59	8,921.48	4,535.79	117.04	118.19	90.89	3,693.57	-2,837.28	1,354.19	1,119.26	234.93	5.764		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 137H - Original Drilling - APD													Offset Site Error:	0.00 ft	
Survey Program:		0-MWD+HDGM		Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Rule Assigned:		Offset Well Error:	0.00 ft
Measured	Vertical	Measured	Vertical	Reference	Offset	Highside				Distance					
Depth	Depth	Depth	Depth			Toolface	+N/-S	+E/-W	Between	Between	Minimum	Separation		Warning	
(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(°)	(ft)	(ft)	Centres	Ellipses	Separation	Factor			
(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)				
8,900.00	4,515.87	9,021.48	4,536.67	119.59	120.76	90.88	3,764.27	-2,908.00	1,353.54	1,113.49	240.05	5.639			
9,000.00	4,517.15	9,121.48	4,537.54	122.14	123.32	90.86	3,834.97	-2,978.71	1,352.90	1,107.72	245.18	5.518			
9,100.00	4,518.43	9,221.47	4,538.42	124.69	125.89	90.84	3,905.66	-3,049.42	1,352.25	1,101.95	250.30	5.403			
9,200.00	4,519.71	9,321.47	4,539.30	127.25	128.45	90.83	3,976.36	-3,120.14	1,351.60	1,096.18	255.43	5.292			
9,300.00	4,520.99	9,421.47	4,540.18	129.80	131.02	90.81	4,047.06	-3,190.85	1,350.96	1,090.40	260.56	5.185			
9,400.00	4,522.27	9,521.46	4,541.06	132.36	133.59	90.79	4,117.76	-3,261.56	1,350.31	1,084.62	265.69	5.082			
9,500.00	4,523.55	9,621.46	4,541.94	134.91	136.16	90.78	4,188.46	-3,332.28	1,349.66	1,078.84	270.82	4.984			
9,600.00	4,524.83	9,721.46	4,542.82	137.47	138.73	90.76	4,259.16	-3,402.99	1,349.02	1,073.06	275.95	4.889			
9,629.40	4,525.20	9,742.23	4,543.00	138.22	139.26	90.76	4,273.85	-3,417.68	1,348.85	1,071.64	277.21	4.866			
9,700.00	4,526.11	9,742.23	4,543.00	140.03	139.26	90.76	4,273.85	-3,417.68	1,350.69	1,072.32	278.37	4.852 SF			
9,800.00	4,527.39	9,742.23	4,543.00	142.59	139.26	90.76	4,273.85	-3,417.68	1,359.59	1,080.84	278.75	4.878			
9,900.00	4,528.67	9,742.23	4,543.00	145.15	139.26	90.76	4,273.85	-3,417.68	1,375.71	1,098.03	277.68	4.954			
10,000.00	4,529.95	9,742.23	4,543.00	147.71	139.26	90.76	4,273.85	-3,417.68	1,398.81	1,123.54	275.28	5.081			
10,100.00	4,531.23	9,742.23	4,543.00	150.27	139.26	90.76	4,273.85	-3,417.68	1,428.56	1,156.84	271.71	5.258			
10,200.00	4,532.51	9,742.23	4,543.00	152.83	139.26	90.76	4,273.85	-3,417.68	1,464.54	1,197.36	267.18	5.481			
10,300.00	4,533.79	9,742.23	4,543.00	155.40	139.26	90.76	4,273.85	-3,417.68	1,506.31	1,244.44	261.88	5.752			
10,400.00	4,535.07	9,742.23	4,543.00	157.96	139.26	90.76	4,273.85	-3,417.68	1,553.41	1,297.41	256.00	6.068			
10,500.00	4,536.35	9,742.23	4,543.00	160.52	139.26	90.76	4,273.85	-3,417.68	1,605.36	1,355.62	249.74	6.428			
10,600.00	4,537.63	9,742.23	4,543.00	163.09	139.26	90.76	4,273.85	-3,417.68	1,661.71	1,418.46	243.25	6.831			
10,700.00	4,538.91	9,742.23	4,543.00	165.65	139.26	90.76	4,273.85	-3,417.68	1,722.03	1,485.38	236.65	7.277			
10,800.00	4,540.19	9,742.23	4,543.00	168.22	139.26	90.76	4,273.85	-3,417.68	1,785.91	1,555.85	230.07	7.763			
10,900.00	4,541.47	9,742.23	4,543.00	170.79	139.26	90.76	4,273.85	-3,417.68	1,852.99	1,629.43	223.56	8.288			
10,941.65	4,542.00	9,742.23	4,543.00	171.86	139.26	90.76	4,273.85	-3,417.68	1,881.80	1,660.90	220.90	8.519			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 106H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM				Offset					Rule Assigned:				Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	-104.68	-5.10	-19.46	20.12					
100.00	100.00	100.00	100.00	0.31	0.31	-104.68	-5.10	-19.46	20.12	19.50	0.62	32.626		
200.00	200.00	200.00	200.00	0.67	0.67	-104.68	-5.10	-19.46	20.12	18.78	1.33	15.085		
300.00	300.00	300.00	300.00	1.03	1.03	-104.68	-5.10	-19.46	20.12	18.07	2.05	9.811		
400.00	400.00	400.00	400.00	1.38	1.38	-104.68	-5.10	-19.46	20.12	17.35	2.77	7.269		
500.00	499.97	499.81	499.81	1.73	1.74	22.00	-5.12	-19.56	18.19	14.72	3.47	5.243		
600.00	599.75	599.15	599.11	2.08	2.08	31.31	-5.70	-22.08	14.91	10.77	4.15	3.597		
700.00	699.14	698.55	698.32	2.43	2.43	52.94	-7.06	-27.95	12.45	7.61	4.84	2.572		
730.73	729.58	729.10	728.77	2.54	2.53	62.41	-7.64	-30.43	12.25	7.19	5.06	2.420 CC, ES		
800.00	797.97	797.99	797.31	2.81	2.78	84.99	-9.20	-37.18	13.43	7.85	5.58	2.407 SF		
867.26	864.03	864.90	863.70	3.07	3.03	102.70	-11.08	-45.27	16.84	10.73	6.10	2.760		
900.00	896.09	897.50	895.97	3.21	3.15	108.45	-12.12	-49.76	19.09	12.74	6.35	3.005		
1,000.00	994.02	997.22	994.33	3.63	3.54	114.63	-15.81	-65.70	26.48	19.34	7.14	3.708		
1,100.00	1,091.95	1,096.98	1,092.15	4.05	3.94	112.58	-20.23	-84.78	33.79	25.82	7.97	4.240		
1,200.00	1,189.88	1,196.70	1,189.78	4.49	4.37	110.23	-24.82	-104.56	41.13	32.31	8.82	4.661		
1,300.00	1,287.81	1,296.42	1,287.41	4.93	4.79	108.59	-29.40	-124.34	48.52	38.83	9.69	5.006		
1,400.00	1,385.74	1,396.14	1,385.04	5.38	5.23	107.38	-33.98	-144.12	55.93	45.36	10.57	5.292		
1,500.00	1,483.66	1,495.86	1,482.67	5.83	5.67	106.46	-38.57	-163.90	63.37	51.91	11.46	5.531		
1,600.00	1,581.59	1,595.58	1,580.30	6.29	6.12	105.73	-43.15	-183.68	70.82	58.47	12.35	5.734		
1,700.00	1,679.52	1,695.30	1,677.93	6.74	6.57	105.14	-47.74	-203.46	78.28	65.03	13.25	5.908		
1,800.00	1,777.45	1,795.01	1,775.56	7.20	7.02	104.65	-52.32	-223.24	85.74	71.59	14.15	6.058		
1,900.00	1,875.38	1,894.73	1,873.19	7.66	7.47	104.24	-56.90	-243.02	93.21	78.15	15.06	6.190		
2,000.00	1,973.31	1,994.45	1,970.82	8.11	7.93	103.89	-61.49	-262.79	100.69	84.72	15.97	6.305		
2,100.00	2,071.24	2,094.17	2,068.45	8.57	8.39	103.59	-66.07	-282.57	108.16	91.28	16.88	6.408		
2,200.00	2,169.17	2,193.89	2,166.08	9.04	8.84	103.33	-70.65	-302.35	115.64	97.85	17.79	6.499		
2,300.00	2,267.10	2,293.61	2,263.71	9.50	9.30	103.10	-75.24	-322.13	123.13	104.42	18.71	6.581		
2,400.00	2,365.02	2,393.33	2,361.34	9.96	9.76	102.90	-79.82	-341.91	130.61	110.98	19.63	6.655		
2,500.00	2,462.95	2,493.04	2,458.97	10.42	10.22	102.72	-84.40	-361.69	138.09	117.55	20.54	6.722		
2,600.00	2,560.88	2,592.76	2,556.60	10.88	10.69	102.55	-88.99	-381.47	145.58	124.12	21.46	6.783		
2,700.00	2,658.81	2,692.48	2,654.23	11.35	11.15	102.41	-93.57	-401.25	153.07	130.69	22.38	6.839		
2,800.00	2,756.74	2,792.20	2,751.86	11.81	11.61	102.28	-98.16	-421.03	160.56	137.25	23.30	6.890		
2,900.00	2,854.67	2,891.92	2,849.49	12.28	12.07	102.15	-102.74	-440.81	168.05	143.82	24.23	6.937		
3,000.00	2,952.60	2,991.64	2,947.12	12.74	12.54	102.04	-107.32	-460.59	175.54	150.39	25.15	6.980		
3,100.00	3,050.53	3,091.36	3,044.75	13.21	13.00	101.94	-111.91	-480.37	183.03	156.95	26.07	7.020		
3,200.00	3,148.46	3,191.07	3,142.38	13.67	13.47	101.85	-116.49	-500.15	190.52	163.52	26.99	7.058		
3,300.00	3,246.38	3,290.79	3,240.01	14.14	13.93	101.76	-121.07	-519.93	198.01	170.09	27.92	7.092		
3,400.00	3,344.31	3,390.51	3,337.64	14.60	14.40	101.68	-125.66	-539.71	205.50	176.66	28.84	7.125		
3,500.00	3,442.24	3,490.23	3,435.27	15.07	14.86	101.61	-130.24	-559.49	212.99	183.22	29.77	7.155		
3,600.00	3,540.17	3,589.95	3,532.89	15.53	15.33	101.54	-134.82	-579.26	220.48	189.79	30.69	7.183		
3,700.00	3,638.10	3,689.67	3,630.52	16.00	15.79	101.47	-139.41	-599.04	227.98	196.36	31.62	7.210		
3,800.00	3,736.03	3,789.39	3,728.15	16.46	16.26	101.41	-143.99	-618.82	235.47	202.93	32.54	7.235		
3,900.00	3,833.96	3,889.10	3,825.78	16.93	16.72	101.35	-148.58	-638.60	242.96	209.49	33.47	7.259		
4,000.00	3,931.89	3,988.82	3,923.41	17.40	17.19	101.30	-153.16	-658.38	250.46	216.06	34.40	7.281		
4,016.88	3,948.41	4,005.65	3,939.89	17.47	17.27	101.29	-153.93	-661.72	251.72	217.17	34.55	7.285		
4,050.00	3,980.80	4,038.73	3,972.28	17.63	17.42	85.93	-155.45	-668.28	253.27	218.41	34.86	7.265		
4,100.00	4,029.28	4,088.67	4,021.17	17.87	17.66	69.13	-157.75	-678.19	252.06	216.72	35.34	7.133		
4,150.00	4,076.93	4,138.23	4,069.69	18.12	17.89	59.13	-160.03	-688.02	246.64	210.82	35.82	6.886		
4,200.00	4,123.33	4,187.00	4,117.44	18.37	18.12	53.72	-162.27	-697.69	237.13	200.83	36.30	6.532		
4,250.00	4,168.11	4,234.58	4,164.02	18.62	18.34	51.47	-164.46	-707.13	223.75	186.97	36.78	6.084		
4,300.00	4,210.89	4,280.56	4,209.04	18.87	18.56	51.74	-166.57	-716.25	206.81	169.57	37.24	5.553		
4,350.00	4,251.30	4,324.55	4,252.11	19.14	18.76	54.45	-168.59	-724.97	186.85	149.18	37.67	4.960		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 106H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,400.00	4,289.01	4,366.19	4,292.88	19.42	18.96	59.84	-170.50	-733.23	164.70	126.68	38.02	4.332		
4,450.00	4,323.71	4,405.13	4,331.01	19.71	19.14	68.32	-172.29	-740.96	141.79	103.62	38.17	3.714		
4,500.00	4,355.09	4,441.05	4,366.17	20.03	19.31	79.87	-173.95	-748.08	120.72	82.84	37.89	3.186		
4,550.00	4,382.91	4,473.11	4,397.55	20.38	19.46	92.94	-175.34	-754.51	106.16	69.37	36.79	2.885		
4,582.00	4,398.73	4,492.55	4,416.48	20.63	19.55	101.20	-175.71	-758.86	103.15	67.36	35.79	2.882		
4,600.00	4,406.92	4,503.62	4,427.23	20.78	19.61	105.76	-175.70	-761.55	104.10	68.84	35.26	2.953		
4,602.25	4,407.90	4,505.01	4,428.58	20.80	19.61	106.31	-175.69	-761.90	104.36	69.16	35.20	2.964		
4,650.00	4,426.92	4,535.03	4,457.46	21.23	19.77	117.44	-174.78	-769.99	116.55	82.07	34.47	3.381		
4,700.00	4,442.74	4,567.59	4,488.36	21.73	19.95	127.16	-172.45	-779.98	140.52	105.97	34.54	4.068		
4,750.00	4,454.26	4,601.70	4,520.12	22.30	20.14	134.90	-168.52	-791.77	171.83	137.03	34.81	4.937		
4,800.00	4,461.38	4,637.93	4,553.03	22.92	20.36	141.05	-162.70	-805.73	207.59	172.69	34.90	5.948		
4,847.42	4,464.00	4,675.04	4,585.73	23.55	20.59	145.86	-154.99	-821.49	244.07	209.34	34.73	7.027		
4,900.00	4,464.67	4,725.03	4,627.87	24.30	20.93	155.19	-141.89	-844.93	285.13	251.01	34.11	8.358		
5,000.00	4,465.95	4,877.02	4,739.28	25.87	22.11	168.34	-84.10	-929.79	355.52	325.11	30.42	11.688		
5,004.45	4,466.01	4,886.24	4,745.10	25.95	22.20	168.77	-79.79	-935.50	358.21	328.07	30.14	11.887		
5,100.00	4,467.23	5,148.52	4,855.61	27.62	25.17	174.68	73.06	-1,114.09	397.94	376.33	21.62	18.409		
5,104.45	4,467.29	5,136.28	4,852.58	27.70	25.00	174.56	65.02	-1,105.39	398.54	376.20	22.34	17.838		
5,200.00	4,468.51	5,324.22	4,867.67	29.51	27.80	175.13	195.96	-1,238.56	400.63	380.11	20.52	19.523		
5,221.20	4,468.78	5,345.42	4,867.88	29.92	28.14	175.13	211.01	-1,253.48	400.56	379.81	20.75	19.302		
5,300.00	4,469.79	5,424.22	4,868.66	31.50	29.49	175.15	266.95	-1,308.97	400.32	378.69	21.63	18.511		
5,321.20	4,470.06	5,445.42	4,868.87	31.93	29.86	175.16	282.00	-1,323.90	400.25	378.38	21.87	18.301		
5,400.00	4,471.07	5,524.22	4,869.64	33.57	31.30	175.18	337.95	-1,379.39	400.00	377.21	22.79	17.552		
5,421.20	4,471.34	5,545.41	4,869.85	34.03	31.71	175.19	353.00	-1,394.31	399.94	376.89	23.05	17.354		
5,500.00	4,472.35	5,624.22	4,870.63	35.72	33.23	175.21	408.95	-1,449.81	399.69	375.68	24.01	16.650		
5,521.20	4,472.62	5,645.41	4,870.83	36.19	33.65	175.22	424.00	-1,464.73	399.62	375.35	24.27	16.465		
5,600.00	4,473.63	5,724.22	4,871.61	37.93	35.25	175.24	479.94	-1,520.22	399.37	374.11	25.26	15.808		
5,621.20	4,473.90	5,745.41	4,871.82	38.40	35.68	175.24	494.99	-1,535.15	399.31	373.77	25.54	15.636		
5,700.00	4,474.91	5,824.22	4,872.59	40.18	37.33	175.27	550.94	-1,590.64	399.06	372.50	26.56	15.025		
5,721.20	4,475.18	5,845.41	4,872.80	40.66	37.78	175.27	565.99	-1,605.56	399.00	372.15	26.84	14.865		
5,800.00	4,476.19	5,924.22	4,873.58	42.47	39.48	175.29	621.94	-1,661.05	398.75	370.86	27.89	14.298		
5,821.20	4,476.46	5,945.41	4,873.79	42.96	39.94	175.30	636.98	-1,675.98	398.68	370.51	28.17	14.150		
5,900.00	4,477.47	6,024.22	4,874.56	44.79	41.68	175.32	692.93	-1,731.47	398.44	369.19	29.24	13.625		
5,921.20	4,477.74	6,045.41	4,874.77	45.29	42.15	175.33	707.98	-1,746.39	398.37	368.83	29.53	13.488		
6,000.00	4,478.75	6,124.22	4,875.55	47.14	43.92	175.35	763.93	-1,801.88	398.12	367.50	30.62	13.001		
6,021.20	4,479.02	6,145.41	4,875.75	47.65	44.41	175.36	778.98	-1,816.81	398.06	367.14	30.92	12.875		
6,100.00	4,480.03	6,224.21	4,876.53	49.52	46.20	175.38	834.93	-1,872.30	397.81	365.79	32.02	12.424		
6,121.20	4,480.30	6,245.41	4,876.74	50.03	46.69	175.38	849.97	-1,887.23	397.74	365.42	32.32	12.306		
6,200.00	4,481.31	6,324.21	4,877.51	51.91	48.51	175.41	905.92	-1,942.72	397.50	364.06	33.44	11.888		
6,221.20	4,481.58	6,345.41	4,877.72	52.42	49.01	175.41	920.97	-1,957.64	397.43	363.69	33.74	11.779		
6,300.00	4,482.59	6,424.21	4,878.50	54.33	50.85	175.43	976.92	-2,013.13	397.18	362.32	34.87	11.391		
6,321.20	4,482.86	6,445.41	4,878.71	54.84	51.35	175.44	991.97	-2,028.06	397.12	361.94	35.17	11.290		
6,400.00	4,483.87	6,524.21	4,879.48	56.75	53.21	175.46	1,047.92	-2,083.55	396.87	360.56	36.31	10.929		
6,421.20	4,484.14	6,545.41	4,879.69	57.27	53.72	175.47	1,062.96	-2,098.47	396.81	360.19	36.62	10.836		
6,500.00	4,485.15	6,624.21	4,880.46	59.20	55.59	175.49	1,118.91	-2,153.96	396.56	358.79	37.77	10.500		
6,521.20	4,485.42	6,645.41	4,880.67	59.72	56.10	175.50	1,133.96	-2,168.89	396.49	358.41	38.08	10.412		
6,600.00	4,486.43	6,724.21	4,881.45	61.65	57.99	175.52	1,189.91	-2,224.38	396.25	357.01	39.23	10.099		
6,621.20	4,486.70	6,745.41	4,881.66	62.17	58.50	175.52	1,204.96	-2,239.30	396.18	356.63	39.55	10.018		
6,700.00	4,487.71	6,824.21	4,882.43	64.11	60.41	175.55	1,260.91	-2,294.80	395.93	355.23	40.71	9.726		
6,721.20	4,487.98	6,845.41	4,882.64	64.64	60.92	175.55	1,275.95	-2,309.72	395.87	354.84	41.02	9.650		
6,800.00	4,488.99	6,924.21	4,883.42	66.58	62.83	175.58	1,331.90	-2,365.21	395.62	353.43	42.19	9.377		
6,821.20	4,489.26	6,945.40	4,883.63	67.11	63.35	175.58	1,346.95	-2,380.14	395.56	353.05	42.51	9.305		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 106H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
6,900.00	4,490.27	7,024.21	4,884.40	69.07	65.27	175.60	1,402.90	-2,435.63	395.31	351.63	43.68	9.050	
6,921.20	4,490.54	7,045.40	4,884.61	69.59	65.79	175.61	1,417.95	-2,450.55	395.24	351.24	44.00	8.983	
7,000.00	4,491.55	7,124.21	4,885.38	71.55	67.72	175.63	1,473.90	-2,506.04	395.00	349.82	45.18	8.743	
7,021.20	4,491.82	7,145.40	4,885.59	72.08	68.24	175.64	1,488.94	-2,520.97	394.93	349.44	45.50	8.680	
7,100.00	4,492.83	7,224.21	4,886.37	74.05	70.18	175.66	1,544.89	-2,576.46	394.69	348.01	46.68	8.455	
7,121.20	4,493.10	7,245.40	4,886.58	74.58	70.71	175.67	1,559.94	-2,591.38	394.62	347.62	47.00	8.396	
7,200.00	4,494.11	7,324.21	4,887.35	76.55	72.65	175.69	1,615.89	-2,646.87	394.38	346.19	48.19	8.184	
7,221.20	4,494.38	7,345.40	4,887.56	77.08	73.18	175.70	1,630.94	-2,661.80	394.31	345.80	48.51	8.129	
7,300.00	4,495.39	7,424.21	4,888.34	79.05	75.13	175.72	1,686.88	-2,717.29	394.06	344.37	49.70	7.929	
7,321.20	4,495.66	7,445.40	4,888.54	79.59	75.65	175.72	1,701.93	-2,732.22	394.00	343.98	50.02	7.877	
7,400.00	4,496.67	7,524.21	4,889.32	81.56	77.61	175.75	1,757.88	-2,787.71	393.75	342.54	51.21	7.689	
7,421.20	4,496.94	7,545.40	4,889.53	82.10	78.14	175.75	1,772.93	-2,802.63	393.69	342.15	51.53	7.639	
7,500.00	4,497.95	7,624.21	4,890.30	84.08	80.10	175.78	1,828.88	-2,858.12	393.44	340.71	52.73	7.461	
7,521.20	4,498.22	7,645.40	4,890.51	84.61	80.63	175.78	1,843.93	-2,873.05	393.37	340.32	53.05	7.415	
7,600.00	4,499.23	7,724.20	4,891.29	86.60	82.60	175.80	1,899.87	-2,928.54	393.13	338.88	54.25	7.246	
7,621.20	4,499.50	7,745.40	4,891.50	87.13	83.13	175.81	1,914.92	-2,943.46	393.06	338.49	54.57	7.202	
7,700.00	4,500.51	7,824.20	4,892.27	89.12	85.10	175.83	1,970.87	-2,998.95	392.82	337.04	55.78	7.043	
7,721.20	4,500.78	7,845.40	4,892.48	89.66	85.63	175.84	1,985.92	-3,013.88	392.75	336.65	56.10	7.001	
7,800.00	4,501.79	7,924.20	4,893.26	91.65	87.60	175.86	2,041.87	-3,069.37	392.51	335.21	57.30	6.850	
7,821.20	4,502.06	7,945.40	4,893.46	92.18	88.13	175.87	2,056.91	-3,084.29	392.44	334.82	57.63	6.810	
7,900.00	4,503.07	8,024.20	4,894.24	94.17	90.11	175.89	2,112.86	-3,139.79	392.20	333.37	58.83	6.667	
7,921.20	4,503.34	8,045.40	4,894.45	94.71	90.64	175.90	2,127.91	-3,154.71	392.13	332.98	59.15	6.629	
8,000.00	4,504.35	8,124.20	4,895.22	96.71	92.62	175.92	2,183.86	-3,210.20	391.88	331.52	60.36	6.492	
8,021.20	4,504.62	8,145.40	4,895.43	97.24	93.16	175.93	2,198.91	-3,225.13	391.82	331.13	60.69	6.457	
8,100.00	4,505.63	8,224.20	4,896.21	99.24	95.14	175.95	2,254.86	-3,280.62	391.57	329.68	61.89	6.327	
8,121.19	4,505.90	8,245.40	4,896.42	99.78	95.67	175.96	2,269.90	-3,295.54	391.51	329.29	62.22	6.293	
8,200.00	4,506.91	8,324.20	4,897.19	101.78	97.66	175.98	2,325.85	-3,351.03	391.26	327.84	63.43	6.169	
8,221.19	4,507.18	8,345.40	4,897.40	102.32	98.20	175.99	2,340.90	-3,365.96	391.20	327.45	63.75	6.136	
8,300.00	4,508.19	8,424.20	4,898.18	104.32	100.18	176.01	2,396.85	-3,421.45	390.95	325.99	64.96	6.018	
8,321.19	4,508.46	8,445.39	4,898.38	104.86	100.72	176.01	2,411.90	-3,436.37	390.89	325.60	65.29	5.987	
8,400.00	4,509.47	8,524.20	4,899.16	106.86	102.71	176.04	2,467.85	-3,491.86	390.64	324.15	66.50	5.875	
8,421.19	4,509.74	8,545.39	4,899.37	107.40	103.25	176.04	2,482.89	-3,506.79	390.58	323.75	66.82	5.845	
8,500.00	4,510.75	8,624.20	4,900.14	109.40	105.24	176.07	2,538.84	-3,562.28	390.33	322.30	68.03	5.737	
8,521.19	4,511.02	8,645.39	4,900.35	109.94	105.78	176.07	2,553.89	-3,577.20	390.27	321.91	68.36	5.709	
8,600.00	4,512.03	8,724.20	4,901.13	111.95	107.77	176.10	2,609.84	-3,632.70	390.02	320.45	69.57	5.606	
8,621.19	4,512.30	8,745.39	4,901.34	112.49	108.31	176.10	2,624.89	-3,647.62	389.96	320.06	69.90	5.579	
8,700.00	4,513.31	8,824.20	4,902.11	114.49	110.31	176.13	2,680.84	-3,703.11	389.71	318.60	71.11	5.480	
8,721.19	4,513.58	8,845.39	4,902.32	115.03	110.84	176.13	2,695.88	-3,718.04	389.65	318.21	71.44	5.454	
8,800.00	4,514.59	8,924.20	4,903.09	117.04	112.84	176.15	2,751.83	-3,773.53	389.40	316.75	72.65	5.360	
8,821.19	4,514.86	8,945.39	4,903.30	117.58	113.38	176.16	2,766.88	-3,788.45	389.34	316.36	72.98	5.335	
8,900.00	4,515.87	9,024.20	4,904.08	119.59	115.38	176.18	2,822.83	-3,843.94	389.09	314.90	74.19	5.244	
8,921.19	4,516.14	9,045.39	4,904.29	120.13	115.92	176.19	2,837.88	-3,858.87	389.03	314.51	74.52	5.221	
9,000.00	4,517.15	9,124.19	4,905.06	122.14	117.92	176.21	2,893.83	-3,914.36	388.78	313.05	75.73	5.134	
9,021.19	4,517.42	9,145.39	4,905.27	122.68	118.46	176.22	2,908.87	-3,929.28	388.72	312.66	76.06	5.111	
9,100.00	4,518.43	9,224.19	4,906.05	124.69	120.46	176.24	2,964.82	-3,984.78	388.47	311.20	77.27	5.027	
9,121.19	4,518.70	9,245.39	4,906.26	125.23	121.00	176.25	2,979.87	-3,999.70	388.41	310.81	77.60	5.005	
9,200.00	4,519.71	9,324.19	4,907.03	127.25	123.00	176.27	3,035.82	-4,055.19	388.16	309.35	78.81	4.925	
9,221.19	4,519.98	9,345.39	4,907.24	127.79	123.54	176.28	3,050.87	-4,070.12	388.10	308.95	79.14	4.904	
9,300.00	4,520.99	9,424.19	4,908.01	129.80	125.55	176.30	3,106.82	-4,125.61	387.85	307.50	80.36	4.827	
9,321.19	4,521.26	9,445.39	4,908.22	130.34	126.09	176.31	3,121.86	-4,140.53	387.79	307.10	80.68	4.806	
9,400.00	4,522.27	9,524.19	4,909.00	132.36	128.10	176.33	3,177.81	-4,196.02	387.54	305.64	81.90	4.732	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 106H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Reference	Offset	Semi Major Axis	Reference	Offset	Highside	Offset Wellbore Centre	Distance	Rule Assigned:	Minimum	Separation	Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation Factor		
9,421.19	4,522.54	9,545.39	4,909.21	132.90	128.64	176.34	3,192.86	-4,210.95	387.48	305.25	82.23	4.712	
9,500.00	4,523.55	9,624.19	4,909.98	134.91	130.64	176.36	3,248.81	-4,266.44	387.23	303.79	83.44	4.641	
9,521.19	4,523.82	9,645.39	4,910.19	135.45	131.18	176.37	3,263.86	-4,281.36	387.17	303.40	83.77	4.622	
9,600.00	4,524.83	9,724.19	4,910.97	137.47	133.19	176.39	3,319.80	-4,336.85	386.92	301.94	84.98	4.553	
9,621.19	4,525.10	9,745.39	4,911.17	138.01	133.73	176.40	3,334.85	-4,351.78	386.86	301.55	85.31	4.535	
9,700.00	4,526.11	9,824.19	4,911.95	140.03	135.74	176.42	3,390.80	-4,407.27	386.61	300.09	86.53	4.468	
9,721.19	4,526.38	9,845.38	4,912.16	140.57	136.28	176.43	3,405.85	-4,422.19	386.55	299.69	86.85	4.451	
9,800.00	4,527.39	9,924.19	4,912.93	142.59	138.29	176.45	3,461.80	-4,477.69	386.31	298.24	88.07	4.386	
9,821.19	4,527.66	9,945.38	4,913.14	143.13	138.84	176.46	3,476.85	-4,492.61	386.24	297.84	88.40	4.369	
9,900.00	4,528.67	10,024.19	4,913.92	145.15	140.85	176.48	3,532.79	-4,548.10	386.00	296.38	89.61	4.307	
9,921.19	4,528.94	10,045.38	4,914.13	145.69	141.39	176.49	3,547.84	-4,563.03	385.93	295.99	89.94	4.291	
10,000.00	4,529.95	10,124.19	4,914.90	147.71	143.40	176.51	3,603.79	-4,618.52	385.69	294.53	91.16	4.231	
10,021.19	4,530.22	10,145.38	4,915.11	148.25	143.94	176.52	3,618.84	-4,633.44	385.62	294.14	91.48	4.215	
10,100.00	4,531.23	10,224.19	4,915.89	150.27	145.96	176.54	3,674.79	-4,688.93	385.38	292.68	92.70	4.157	
10,121.19	4,531.50	10,245.38	4,916.09	150.81	146.50	176.55	3,689.83	-4,703.86	385.31	292.29	93.03	4.142	
10,200.00	4,532.51	10,324.19	4,916.87	152.83	148.51	176.57	3,745.78	-4,759.35	385.07	290.83	94.24	4.086	
10,221.19	4,532.78	10,345.38	4,917.08	153.38	149.05	176.58	3,760.83	-4,774.27	385.00	290.44	94.57	4.071	
10,300.00	4,533.79	10,424.19	4,917.85	155.40	151.07	176.60	3,816.78	-4,829.77	384.76	288.98	95.78	4.017	
10,321.19	4,534.06	10,445.38	4,918.06	155.94	151.61	176.61	3,831.83	-4,844.69	384.70	288.58	96.11	4.003	
10,400.00	4,535.07	10,524.19	4,918.84	157.96	153.62	176.63	3,887.78	-4,900.18	384.45	287.13	97.33	3.950	
10,421.19	4,535.34	10,545.38	4,919.05	158.50	154.17	176.64	3,902.82	-4,915.11	384.39	286.73	97.65	3.936	
10,500.00	4,536.35	10,624.18	4,919.82	160.52	156.18	176.66	3,958.77	-4,970.60	384.14	285.27	98.87	3.885	
10,521.19	4,536.62	10,645.38	4,920.03	161.07	156.72	176.67	3,973.82	-4,985.52	384.08	284.88	99.20	3.872	
10,600.00	4,537.63	10,724.18	4,920.81	163.09	158.74	176.69	4,029.77	-5,041.01	383.84	283.42	100.41	3.823	
10,621.19	4,537.90	10,745.38	4,921.01	163.63	159.28	176.70	4,044.82	-5,055.94	383.77	283.03	100.74	3.810	
10,700.00	4,538.91	10,824.18	4,921.79	165.65	161.30	176.72	4,100.77	-5,111.43	383.53	281.57	101.95	3.762	
10,721.19	4,539.18	10,845.38	4,922.00	166.20	161.84	176.73	4,115.81	-5,126.35	383.46	281.18	102.28	3.749	
10,800.00	4,540.19	10,924.18	4,922.77	168.22	163.86	176.75	4,171.76	-5,181.84	383.22	279.72	103.50	3.703	
10,821.19	4,540.46	10,945.38	4,922.98	168.76	164.40	176.76	4,186.81	-5,196.77	383.15	279.33	103.82	3.690	
10,900.00	4,541.47	11,024.18	4,923.76	170.79	166.42	176.78	4,242.76	-5,252.26	382.91	277.87	105.04	3.645	
10,925.87	4,541.80	11,048.88	4,924.00	171.45	167.05	176.79	4,260.30	-5,269.65	382.83	277.39	105.44	3.631	
10,941.65	4,542.00	11,048.88	4,924.00	171.86	167.05	176.79	4,260.30	-5,269.65	383.16	277.49	105.66	3.626	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 108H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.32	5.10	19.46	20.12				
100.00	100.00	100.00	100.00	0.31	0.31	75.32	5.10	19.46	20.12	19.50	0.62	32.626	
200.00	200.00	200.00	200.00	0.67	0.67	75.32	5.10	19.46	20.12	18.78	1.33	15.085	
300.00	300.00	300.00	300.00	1.03	1.03	75.32	5.10	19.46	20.12	18.07	2.05	9.811	
400.00	400.00	400.00	400.00	1.38	1.38	75.32	5.10	19.46	20.12	17.35	2.77	7.269	CC, ES
500.00	499.97	500.55	500.53	1.73	1.73	-160.33	4.04	18.34	20.82	17.36	3.46	6.020	
600.00	599.75	601.11	600.98	2.08	2.07	-160.31	0.87	14.96	22.94	18.80	4.14	5.545	
700.00	699.14	701.71	701.28	2.43	2.42	-160.29	-4.42	9.34	26.47	21.64	4.83	5.481	
800.00	797.97	802.37	801.35	2.81	2.79	-160.25	-11.82	1.47	31.40	25.87	5.53	5.676	
867.26	864.03	870.10	868.49	3.07	3.04	-160.23	-17.99	-5.08	35.51	29.49	6.01	5.904	
900.00	896.09	903.11	901.13	3.21	3.17	-160.11	-21.34	-8.64	37.52	31.27	6.25	6.004	
1,000.00	994.02	1,004.08	1,000.65	3.63	3.56	-158.45	-32.98	-21.02	41.88	34.90	6.98	5.999	
1,100.00	1,091.95	1,105.15	1,099.71	4.05	3.98	-154.97	-46.73	-35.64	43.67	35.93	7.74	5.641	
1,200.00	1,189.88	1,206.14	1,198.01	4.49	4.42	-149.28	-62.56	-52.47	43.19	34.64	8.55	5.050	
1,300.00	1,287.81	1,306.20	1,294.90	4.93	4.88	-141.43	-79.71	-70.70	41.60	32.15	9.45	4.402	
1,400.00	1,385.74	1,406.02	1,391.52	5.38	5.35	-133.03	-96.88	-88.96	40.79	30.38	10.41	3.918	
1,439.80	1,424.71	1,445.74	1,429.97	5.56	5.54	-129.63	-103.71	-96.23	40.72	29.91	10.81	3.767	
1,500.00	1,483.66	1,505.83	1,488.13	5.83	5.82	-124.49	-114.05	-107.22	40.88	29.46	11.42	3.580	
1,600.00	1,581.59	1,605.65	1,584.75	6.29	6.31	-116.17	-131.22	-125.47	41.87	29.43	12.45	3.364	
1,700.00	1,679.52	1,705.46	1,681.36	6.74	6.79	-108.38	-148.39	-143.73	43.70	30.23	13.47	3.245	
1,800.00	1,777.45	1,805.27	1,777.98	7.20	7.29	-101.34	-165.57	-161.98	46.26	31.80	14.46	3.199	SF
1,900.00	1,875.38	1,905.09	1,874.60	7.66	7.78	-95.11	-182.74	-180.24	49.45	34.02	15.43	3.205	
2,000.00	1,973.31	2,004.90	1,971.21	8.11	8.28	-89.70	-199.91	-198.50	53.14	36.78	16.36	3.248	
2,100.00	2,071.24	2,104.72	2,067.83	8.57	8.78	-85.02	-217.08	-216.75	57.25	39.98	17.27	3.315	
2,200.00	2,169.17	2,204.53	2,164.45	9.04	9.28	-80.99	-234.25	-235.01	61.69	43.53	18.16	3.398	
2,300.00	2,267.10	2,304.34	2,261.06	9.50	9.79	-77.51	-251.42	-253.27	66.39	47.36	19.03	3.489	
2,400.00	2,365.02	2,404.16	2,357.68	9.96	10.29	-74.50	-268.59	-271.52	71.30	51.41	19.89	3.585	
2,500.00	2,462.95	2,503.97	2,454.29	10.42	10.80	-71.89	-285.77	-289.78	76.38	55.64	20.74	3.682	
2,600.00	2,560.88	2,603.79	2,550.91	10.88	11.31	-69.61	-302.94	-308.04	81.61	60.02	21.59	3.780	
2,700.00	2,658.81	2,703.60	2,647.53	11.35	11.81	-67.60	-320.11	-326.29	86.94	64.51	22.44	3.875	
2,800.00	2,756.74	2,803.41	2,744.14	11.81	12.32	-65.83	-337.28	-344.55	92.37	69.10	23.28	3.968	
2,900.00	2,854.67	2,903.23	2,840.76	12.28	12.83	-64.25	-354.45	-362.81	97.88	73.76	24.12	4.058	
3,000.00	2,952.60	3,003.04	2,937.38	12.74	13.34	-62.84	-371.62	-381.06	103.46	78.50	24.96	4.145	
3,100.00	3,050.53	3,102.86	3,033.99	13.21	13.85	-61.58	-388.79	-399.32	109.09	83.29	25.80	4.229	
3,200.00	3,148.46	3,202.67	3,130.61	13.67	14.37	-60.45	-405.97	-417.57	114.76	88.13	26.63	4.309	
3,300.00	3,246.38	3,302.48	3,227.22	14.14	14.88	-59.42	-423.14	-435.83	120.48	93.01	27.47	4.385	
3,400.00	3,344.31	3,402.30	3,323.84	14.60	15.39	-58.48	-440.31	-454.09	126.24	97.92	28.31	4.459	
3,500.00	3,442.24	3,502.11	3,420.46	15.07	15.90	-57.62	-457.48	-472.34	132.02	102.87	29.15	4.529	
3,600.00	3,540.17	3,601.93	3,517.07	15.53	16.41	-56.84	-474.65	-490.60	137.83	107.84	29.99	4.596	
3,700.00	3,638.10	3,701.74	3,613.69	16.00	16.93	-56.12	-491.82	-508.86	143.67	112.84	30.83	4.660	
3,800.00	3,736.03	3,801.55	3,710.30	16.46	17.44	-55.46	-508.99	-527.11	149.52	117.85	31.67	4.721	
3,900.00	3,833.96	3,901.37	3,806.92	16.93	17.95	-54.85	-526.17	-545.37	155.40	122.89	32.51	4.780	
4,000.00	3,931.89	4,001.18	3,903.54	17.40	18.47	-54.28	-543.34	-563.63	161.29	127.94	33.35	4.836	
4,016.88	3,948.41	4,018.03	3,919.84	17.47	18.55	-54.19	-546.24	-566.71	162.28	128.79	33.49	4.845	
4,050.00	3,980.80	4,051.04	3,951.80	17.63	18.72	-69.43	-551.91	-572.75	164.94	131.13	33.80	4.879	
4,100.00	4,029.28	4,100.49	3,999.66	17.87	18.98	-87.20	-560.42	-581.79	171.60	137.23	34.37	4.992	
4,150.00	4,076.93	4,149.10	4,046.72	18.12	19.23	-99.44	-568.78	-590.68	181.57	146.51	35.05	5.180	
4,200.00	4,123.33	4,196.48	4,092.58	18.37	19.47	-108.19	-576.94	-599.35	195.02	159.21	35.81	5.446	
4,250.00	4,168.11	4,242.22	4,136.86	18.62	19.71	-114.80	-584.80	-607.71	212.16	175.56	36.60	5.796	
4,300.00	4,210.89	4,285.95	4,179.18	18.87	19.93	-119.93	-592.33	-615.71	233.13	195.73	37.40	6.234	
4,350.00	4,251.30	4,327.28	4,219.19	19.14	20.15	-123.92	-599.44	-623.27	257.94	219.78	38.16	6.759	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 108H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,400.00	4,289.01	4,365.89	4,256.56	19.42	20.35	-126.90	-606.08	-630.33	286.54	247.66	38.88	7.370		
4,450.00	4,323.71	4,401.44	4,290.97	19.71	20.53	-128.96	-612.19	-636.83	318.74	279.20	39.54	8.062		
4,500.00	4,355.09	4,431.70	4,320.26	20.03	20.68	-129.88	-617.40	-642.37	354.30	314.20	40.10	8.835		
4,550.00	4,382.91	4,450.00	4,337.98	20.38	20.78	-128.81	-620.76	-645.50	393.37	352.87	40.49	9.714		
4,600.00	4,406.92	4,463.25	4,350.80	20.78	20.84	-125.95	-623.47	-647.49	435.68	394.90	40.78	10.683		
4,650.00	4,426.92	4,473.04	4,360.25	21.23	20.89	-120.71	-625.60	-648.81	480.51	439.50	41.00	11.719		
4,700.00	4,442.74	4,479.67	4,366.66	21.73	20.93	-111.89	-627.12	-649.63	527.16	485.99	41.17	12.805		
4,750.00	4,454.26	4,483.49	4,370.34	22.30	20.95	-97.73	-628.02	-650.08	575.03	533.73	41.30	13.923		
4,800.00	4,461.38	4,484.82	4,371.63	22.92	20.95	-77.49	-628.34	-650.23	623.57	582.16	41.40	15.061		
4,847.42	4,464.00	4,484.06	4,370.89	23.55	20.95	-56.14	-628.15	-650.14	669.78	628.30	41.48	16.148		
4,900.00	4,464.67	4,482.28	4,369.18	24.30	20.94	-55.51	-627.73	-649.94	721.08	679.54	41.55	17.356		
5,000.00	4,465.95	4,479.28	4,366.28	25.87	20.92	-54.46	-627.03	-649.58	819.08	777.43	41.65	19.666		
5,100.00	4,467.23	4,476.70	4,363.79	27.62	20.91	-53.57	-626.43	-649.27	917.48	875.75	41.73	21.988		
5,200.00	4,468.51	4,474.45	4,361.61	29.51	20.90	-52.80	-625.92	-648.99	1,016.18	974.40	41.78	24.319		
5,300.00	4,469.79	4,472.47	4,359.70	31.50	20.89	-52.13	-625.47	-648.73	1,115.10	1,073.27	41.83	26.656		
5,400.00	4,471.07	4,470.71	4,358.01	33.57	20.88	-51.55	-625.08	-648.51	1,214.19	1,172.32	41.87	28.998		
5,500.00	4,472.35	4,469.15	4,356.50	35.72	20.87	-51.03	-624.74	-648.30	1,313.41	1,271.50	41.91	31.342		
5,600.00	4,473.63	4,450.00	4,337.98	37.93	20.78	-45.03	-620.76	-645.50	1,413.13	1,371.39	41.74	33.853		
5,700.00	4,474.91	4,450.00	4,337.98	40.18	20.78	-45.03	-620.76	-645.50	1,512.48	1,470.69	41.79	36.194		
5,800.00	4,476.19	4,450.00	4,337.98	42.47	20.78	-45.03	-620.76	-645.50	1,611.91	1,570.08	41.83	38.535		
5,900.00	4,477.47	4,450.00	4,337.98	44.79	20.78	-45.03	-620.76	-645.50	1,711.41	1,669.54	41.87	40.877		
6,000.00	4,478.75	4,450.00	4,337.98	47.14	20.78	-45.03	-620.76	-645.50	1,810.96	1,769.06	41.90	43.219		
6,100.00	4,480.03	4,450.00	4,337.98	49.52	20.78	-45.03	-620.76	-645.50	1,910.56	1,868.62	41.94	45.559		
6,200.00	4,481.31	4,450.00	4,337.98	51.91	20.78	-45.03	-620.76	-645.50	2,010.20	1,968.23	41.97	47.898		
6,300.00	4,482.59	4,450.00	4,337.98	54.33	20.78	-45.03	-620.76	-645.50	2,109.87	2,067.87	42.00	50.236		
6,400.00	4,483.87	4,450.00	4,337.98	56.75	20.78	-45.03	-620.76	-645.50	2,209.57	2,167.54	42.03	52.572		
6,500.00	4,485.15	4,450.00	4,337.98	59.20	20.78	-45.03	-620.76	-645.50	2,309.30	2,267.24	42.06	54.905		
6,600.00	4,486.43	4,450.00	4,337.98	61.65	20.78	-45.03	-620.76	-645.50	2,409.05	2,366.96	42.09	57.237		
6,700.00	4,487.71	4,450.00	4,337.98	64.11	20.78	-45.03	-620.76	-645.50	2,508.82	2,466.70	42.12	59.565		
6,800.00	4,488.99	4,450.00	4,337.98	66.58	20.78	-45.03	-620.76	-645.50	2,608.61	2,566.46	42.15	61.891		
6,900.00	4,490.27	4,450.00	4,337.98	69.07	20.78	-45.03	-620.76	-645.50	2,708.41	2,666.23	42.18	64.214		
7,000.00	4,491.55	4,450.00	4,337.98	71.55	20.78	-45.03	-620.76	-645.50	2,808.23	2,766.02	42.21	66.533		
7,100.00	4,492.83	4,450.00	4,337.98	74.05	20.78	-45.03	-620.76	-645.50	2,908.06	2,865.82	42.24	68.850		
7,200.00	4,494.11	4,450.00	4,337.98	76.55	20.78	-45.03	-620.76	-645.50	3,007.90	2,965.63	42.27	71.162		
7,300.00	4,495.39	4,450.00	4,337.98	79.05	20.78	-45.03	-620.76	-645.50	3,107.75	3,065.45	42.30	73.471		
7,400.00	4,496.67	4,450.00	4,337.98	81.56	20.78	-45.03	-620.76	-645.50	3,207.61	3,165.28	42.33	75.776		
7,500.00	4,497.95	4,450.00	4,337.98	84.08	20.78	-45.03	-620.76	-645.50	3,307.48	3,265.12	42.36	78.077		
7,600.00	4,499.23	4,450.00	4,337.98	86.60	20.78	-45.03	-620.76	-645.50	3,407.36	3,364.96	42.39	80.374		
7,700.00	4,500.51	4,450.00	4,337.98	89.12	20.78	-45.03	-620.76	-645.50	3,507.24	3,464.82	42.43	82.667		
7,800.00	4,501.79	4,450.00	4,337.98	91.65	20.78	-45.03	-620.76	-645.50	3,607.13	3,564.67	42.46	84.955		
7,900.00	4,503.07	4,450.00	4,337.98	94.17	20.78	-45.03	-620.76	-645.50	3,707.03	3,664.54	42.49	87.239		
8,000.00	4,504.35	4,450.00	4,337.98	96.71	20.78	-45.03	-620.76	-645.50	3,806.93	3,764.40	42.53	89.518		
8,100.00	4,505.63	4,450.00	4,337.98	99.24	20.78	-45.03	-620.76	-645.50	3,906.84	3,864.28	42.56	91.793		
8,200.00	4,506.91	4,450.00	4,337.98	101.78	20.78	-45.03	-620.76	-645.50	4,006.75	3,964.15	42.60	94.062		
8,300.00	4,508.19	4,450.00	4,337.98	104.32	20.78	-45.03	-620.76	-645.50	4,106.66	4,064.03	42.63	96.327		
8,400.00	4,509.47	4,450.00	4,337.98	106.86	20.78	-45.03	-620.76	-645.50	4,206.58	4,163.91	42.67	98.586		
8,500.00	4,510.75	4,450.00	4,337.98	109.40	20.78	-45.03	-620.76	-645.50	4,306.51	4,263.80	42.71	100.840		
8,600.00	4,512.03	4,450.00	4,337.98	111.95	20.78	-45.03	-620.76	-645.50	4,406.43	4,363.69	42.74	103.089		
8,700.00	4,513.31	4,450.00	4,337.98	114.49	20.78	-45.03	-620.76	-645.50	4,506.36	4,463.58	42.78	105.332		
8,800.00	4,514.59	4,450.00	4,337.98	117.04	20.78	-45.03	-620.76	-645.50	4,606.30	4,563.48	42.82	107.570		
8,900.00	4,515.87	4,450.00	4,337.98	119.59	20.78	-45.03	-620.76	-645.50	4,706.23	4,663.37	42.86	109.802		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 108H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Reference	Vertical	Offset	Semi Major Axis	Reference	Offset	Highside	Offset Wellbore Centre		Distance		Minimum	Separation	Warning
Measured Depth (ft)	Depth (ft)	Measured Depth (ft)	Depth (ft)	(ft)	(ft)	Toolface (°)	+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Separation (ft)	Factor	
9,000.00	4,517.15	4,450.00	4,337.98	122.14	20.78	-45.03	-620.76	-645.50	4,806.17	4,763.27	42.90	112.028	
9,100.00	4,518.43	4,450.00	4,337.98	124.69	20.78	-45.03	-620.76	-645.50	4,906.11	4,863.17	42.94	114.249	
9,200.00	4,519.71	4,450.00	4,337.98	127.25	20.78	-45.03	-620.76	-645.50	5,006.06	4,963.07	42.98	116.463	
9,300.00	4,520.99	4,450.00	4,337.98	129.80	20.78	-45.03	-620.76	-645.50	5,106.00	5,062.98	43.03	118.672	
9,400.00	4,522.27	4,450.00	4,337.98	132.36	20.78	-45.03	-620.76	-645.50	5,205.95	5,162.88	43.07	120.875	
9,500.00	4,523.55	4,450.00	4,337.98	134.91	20.78	-45.03	-620.76	-645.50	5,305.90	5,262.79	43.11	123.071	
9,600.00	4,524.83	4,450.00	4,337.98	137.47	20.78	-45.03	-620.76	-645.50	5,405.85	5,362.69	43.16	125.261	
9,700.00	4,526.11	4,450.00	4,337.98	140.03	20.78	-45.03	-620.76	-645.50	5,505.80	5,462.60	43.20	127.445	
9,800.00	4,527.39	4,450.00	4,337.98	142.59	20.78	-45.03	-620.76	-645.50	5,605.76	5,562.51	43.25	129.622	
9,900.00	4,528.67	4,450.00	4,337.98	145.15	20.78	-45.03	-620.76	-645.50	5,705.72	5,662.42	43.29	131.793	
10,000.00	4,529.95	4,450.00	4,337.98	147.71	20.78	-45.03	-620.76	-645.50	5,805.67	5,762.33	43.34	133.957	
10,100.00	4,531.23	4,450.00	4,337.98	150.27	20.78	-45.03	-620.76	-645.50	5,905.63	5,862.25	43.39	136.114	
10,200.00	4,532.51	4,450.00	4,337.98	152.83	20.78	-45.03	-620.76	-645.50	6,005.60	5,962.16	43.44	138.265	
10,300.00	4,533.79	4,450.00	4,337.98	155.40	20.78	-45.03	-620.76	-645.50	6,105.56	6,062.07	43.48	140.409	
10,400.00	4,535.07	4,450.00	4,337.98	157.96	20.78	-45.03	-620.76	-645.50	6,205.52	6,161.99	43.53	142.546	
10,500.00	4,536.35	4,450.00	4,337.98	160.52	20.78	-45.03	-620.76	-645.50	6,305.49	6,261.90	43.58	144.676	
10,600.00	4,537.63	4,450.00	4,337.98	163.09	20.78	-45.03	-620.76	-645.50	6,405.45	6,361.82	43.63	146.799	
10,700.00	4,538.91	4,450.00	4,337.98	165.65	20.78	-45.03	-620.76	-645.50	6,505.42	6,461.73	43.69	148.915	
10,800.00	4,540.19	4,450.00	4,337.98	168.22	20.78	-45.03	-620.76	-645.50	6,605.39	6,561.65	43.74	151.024	
10,900.00	4,541.47	4,450.00	4,337.98	170.79	20.78	-45.03	-620.76	-645.50	6,705.35	6,661.56	43.79	153.126	
10,941.65	4,542.00	4,450.00	4,337.98	171.86	20.78	-45.03	-620.76	-645.50	6,746.99	6,703.18	43.81	153.999	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 113H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Reference Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Vertical Depth (ft)	Semi Reference (ft)	Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre		Distance Between Centres (ft)		Minimum Separation (ft)	Separation Factor	Warning
+N/-S (ft)	+E/-W (ft)												
0.00	0.00	0.00	0.00	0.00	0.00	74.97	20.75	77.25	79.99				
100.00	100.00	100.00	100.00	0.31	0.15	74.97	20.75	77.25	79.99	79.53	0.46	172.975	
200.00	200.00	200.00	200.00	0.67	0.51	74.97	20.75	77.25	79.99	78.81	1.18	67.823	
300.00	300.00	300.00	300.00	1.03	0.87	74.97	20.75	77.25	79.99	78.09	1.90	42.181	
400.00	400.00	400.00	400.00	1.38	1.23	74.97	20.75	77.25	79.99	77.38	2.61	30.609 CC, ES	
500.00	499.97	498.68	498.66	1.73	1.57	-160.12	19.48	78.38	82.83	79.53	3.30	25.098	
600.00	599.75	596.87	596.72	2.08	1.91	-158.58	15.71	81.76	91.37	87.39	3.98	22.953	
700.00	699.14	694.13	693.61	2.43	2.25	-156.57	9.51	87.31	105.67	101.00	4.68	22.592 SF	
800.00	797.97	789.98	788.78	2.81	2.60	-154.48	1.01	94.93	125.73	120.34	5.38	23.348	
867.26	864.03	853.45	851.56	3.07	2.84	-153.17	-5.93	101.14	142.42	136.55	5.87	24.260	
900.00	896.09	884.07	881.77	3.21	2.96	-152.63	-9.65	104.47	151.27	145.16	6.11	24.774	
1,000.00	994.02	976.76	972.87	3.63	3.33	-150.78	-22.36	115.85	179.57	172.75	6.82	26.338	
1,100.00	1,091.95	1,068.07	1,062.03	4.05	3.72	-148.77	-37.02	128.98	209.87	202.34	7.54	27.846	
1,200.00	1,189.88	1,162.33	1,153.69	4.49	4.14	-146.88	-53.42	143.66	241.48	233.19	8.29	29.115	
1,300.00	1,287.81	1,256.93	1,245.67	4.93	4.57	-145.41	-69.88	158.41	273.29	264.22	9.07	30.135	
1,400.00	1,385.74	1,351.54	1,337.66	5.38	5.01	-144.25	-86.35	173.15	305.22	295.37	9.85	30.983	
1,500.00	1,483.66	1,446.14	1,429.64	5.83	5.45	-143.31	-102.81	187.89	337.25	326.61	10.64	31.693	
1,600.00	1,581.59	1,540.74	1,521.62	6.29	5.90	-142.53	-119.27	202.63	369.34	357.90	11.44	32.295	
1,700.00	1,679.52	1,635.34	1,613.61	6.74	6.36	-141.87	-135.74	217.38	401.48	389.25	12.24	32.811	
1,800.00	1,777.45	1,729.94	1,705.59	7.20	6.81	-141.32	-152.20	232.12	433.67	420.63	13.04	33.257	
1,900.00	1,875.38	1,824.54	1,797.57	7.66	7.27	-140.84	-168.67	246.86	465.88	452.04	13.85	33.647	
2,000.00	1,973.31	1,919.14	1,889.56	8.11	7.73	-140.42	-185.13	261.61	498.12	483.47	14.66	33.989	
2,100.00	2,071.24	2,013.75	1,981.54	8.57	8.19	-140.05	-201.59	276.35	530.39	514.92	15.47	34.292	
2,200.00	2,169.17	2,108.35	2,073.53	9.04	8.66	-139.73	-218.06	291.09	562.66	546.38	16.28	34.562	
2,300.00	2,267.10	2,202.95	2,165.51	9.50	9.12	-139.44	-234.52	305.83	594.96	577.86	17.09	34.804	
2,400.00	2,365.02	2,297.55	2,257.49	9.96	9.59	-139.18	-250.99	320.58	627.26	609.35	17.91	35.022	
2,500.00	2,462.95	2,392.15	2,349.48	10.42	10.05	-138.94	-267.45	335.32	659.58	640.85	18.73	35.219	
2,600.00	2,560.88	2,486.75	2,441.46	10.88	10.52	-138.73	-283.91	350.06	691.91	672.36	19.55	35.398	
2,700.00	2,658.81	2,581.35	2,533.44	11.35	10.99	-138.53	-300.38	364.80	724.24	703.87	20.37	35.562	
2,800.00	2,756.74	2,675.95	2,625.43	11.81	11.45	-138.36	-316.84	379.55	756.58	735.39	21.19	35.712	
2,900.00	2,854.67	2,770.56	2,717.41	12.28	11.92	-138.19	-333.31	394.29	788.93	766.92	22.01	35.850	
3,000.00	2,952.60	2,865.16	2,809.40	12.74	12.39	-138.04	-349.77	409.03	821.28	798.45	22.83	35.977	
3,100.00	3,050.53	2,959.76	2,901.38	13.21	12.86	-137.91	-366.24	423.78	853.63	829.98	23.65	36.095	
3,200.00	3,148.46	3,054.36	2,993.36	13.67	13.33	-137.78	-382.70	438.52	885.99	861.52	24.47	36.204	
3,300.00	3,246.38	3,148.96	3,085.35	14.14	13.80	-137.66	-399.16	453.26	918.36	893.06	25.30	36.305	
3,400.00	3,344.31	3,243.56	3,177.33	14.60	14.27	-137.55	-415.63	468.00	950.72	924.60	26.12	36.400	
3,500.00	3,442.24	3,338.16	3,269.31	15.07	14.74	-137.44	-432.09	482.75	983.09	956.15	26.94	36.488	
3,600.00	3,540.17	3,432.77	3,361.30	15.53	15.21	-137.35	-448.56	497.49	1,015.47	987.70	27.77	36.570	
3,700.00	3,638.10	3,527.37	3,453.28	16.00	15.68	-137.25	-465.02	512.23	1,047.84	1,019.25	28.59	36.648	
3,800.00	3,736.03	3,621.97	3,545.27	16.46	16.15	-137.17	-481.48	526.97	1,080.22	1,050.80	29.42	36.721	
3,900.00	3,833.96	3,716.57	3,637.25	16.93	16.63	-137.09	-497.95	541.72	1,112.60	1,082.36	30.24	36.789	
4,000.00	3,931.89	3,811.17	3,729.23	17.40	17.10	-137.01	-514.41	556.46	1,144.98	1,113.91	31.07	36.854	
4,016.88	3,948.41	3,827.14	3,744.76	17.47	17.18	-137.00	-517.19	558.95	1,150.44	1,119.24	31.21	36.864	
4,050.00	3,980.80	3,858.18	3,774.94	17.63	17.33	-153.09	-522.59	563.79	1,161.92	1,130.45	31.48	36.911	
4,100.00	4,029.28	3,903.78	3,819.28	17.87	17.56	-171.57	-530.53	570.89	1,182.04	1,150.17	31.87	37.091	
4,150.00	4,076.93	3,947.51	3,861.80	18.12	17.78	175.97	-538.14	577.71	1,205.38	1,173.15	32.23	37.398	
4,200.00	4,123.33	3,989.00	3,902.15	18.37	17.98	167.18	-545.36	584.17	1,231.80	1,199.24	32.56	37.832	
4,250.00	4,168.11	4,027.92	3,939.98	18.62	18.18	160.40	-552.13	590.24	1,261.11	1,228.26	32.85	38.387	
4,300.00	4,210.89	4,063.92	3,974.99	18.87	18.36	154.64	-558.40	595.85	1,293.14	1,260.03	33.11	39.060	
4,350.00	4,251.30	4,096.72	4,006.88	19.14	18.52	149.29	-564.11	600.96	1,327.68	1,294.36	33.32	39.844	
4,400.00	4,289.01	4,126.03	4,035.38	19.42	18.67	143.92	-569.21	605.53	1,364.49	1,331.00	33.50	40.735	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 113H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,450.00	4,323.71	4,151.61	4,060.25	19.71	18.79	138.17	-573.66	609.51	1,403.34	1,369.71	33.63	41.725		
4,500.00	4,355.09	4,173.24	4,081.28	20.03	18.90	131.76	-577.42	612.88	1,443.94	1,410.21	33.73	42.808		
4,550.00	4,382.91	4,190.74	4,098.30	20.38	18.99	124.42	-580.47	615.61	1,486.00	1,452.21	33.79	43.974		
4,600.00	4,406.92	4,203.97	4,111.16	20.78	19.06	116.00	-582.77	617.67	1,529.21	1,495.39	33.82	45.215		
4,650.00	4,426.92	4,212.82	4,119.76	21.23	19.10	106.50	-584.31	619.05	1,573.24	1,539.42	33.82	46.520		
4,700.00	4,442.74	4,217.20	4,124.03	21.73	19.12	96.24	-585.08	619.74	1,617.73	1,583.94	33.79	47.879		
4,750.00	4,454.26	4,217.09	4,123.92	22.30	19.12	85.82	-585.06	619.72	1,662.32	1,628.59	33.73	49.278		
4,800.00	4,461.38	4,212.48	4,119.44	22.92	19.10	75.94	-584.25	619.00	1,706.66	1,673.00	33.66	50.706		
4,847.42	4,464.00	4,203.99	4,111.18	23.55	19.06	67.57	-582.78	617.68	1,748.12	1,714.55	33.57	52.075		
4,900.00	4,464.67	4,192.38	4,099.89	24.30	19.00	66.89	-580.76	615.87	1,793.81	1,760.34	33.47	53.590		
5,000.00	4,465.95	4,170.29	4,078.42	25.87	18.89	65.61	-576.91	612.43	1,881.51	1,848.19	33.33	56.453		
5,100.00	4,467.23	4,148.21	4,056.94	27.62	18.78	64.37	-573.07	608.98	1,970.14	1,936.92	33.22	59.303		
5,200.00	4,468.51	4,126.12	4,035.46	29.51	18.67	63.15	-569.22	605.54	2,059.57	2,026.43	33.14	62.144		
5,300.00	4,469.79	4,104.03	4,013.99	31.50	18.56	61.95	-565.38	602.10	2,149.70	2,116.62	33.08	64.975		
5,400.00	4,471.07	4,081.94	3,992.51	33.57	18.45	60.78	-561.54	598.66	2,240.46	2,207.41	33.04	67.800		
5,500.00	4,472.35	4,059.86	3,971.04	35.72	18.34	59.64	-557.69	595.22	2,331.76	2,298.74	33.02	70.620		
5,600.00	4,473.63	4,037.77	3,949.56	37.93	18.23	58.53	-553.85	591.77	2,423.54	2,390.54	33.00	73.435		
5,700.00	4,474.91	4,015.68	3,928.08	40.18	18.12	57.44	-550.00	588.33	2,515.76	2,482.77	32.99	76.247		
5,800.00	4,476.19	3,993.60	3,906.61	42.47	18.01	56.38	-546.16	584.89	2,608.37	2,575.37	32.99	79.057		
5,900.00	4,477.47	3,971.51	3,885.13	44.79	17.90	55.34	-542.32	581.45	2,701.32	2,668.32	33.00	81.864		
6,000.00	4,478.75	3,949.42	3,863.66	47.14	17.79	54.33	-538.47	578.00	2,794.58	2,761.58	33.01	84.671		
6,100.00	4,480.03	3,927.33	3,842.18	49.52	17.68	53.35	-534.63	574.56	2,888.13	2,855.11	33.02	87.476		
6,200.00	4,481.31	3,905.25	3,820.71	51.91	17.57	52.39	-530.78	571.12	2,981.93	2,948.90	33.03	90.281		
6,300.00	4,482.59	3,883.16	3,799.23	54.33	17.46	51.46	-526.94	567.68	3,075.96	3,042.92	33.04	93.085		
6,400.00	4,483.87	3,861.07	3,777.75	56.75	17.35	50.55	-523.10	564.24	3,170.21	3,137.15	33.06	95.888		
6,500.00	4,485.15	3,838.99	3,756.28	59.20	17.24	49.66	-519.25	560.79	3,264.65	3,231.57	33.08	98.690		
6,600.00	4,486.43	3,816.90	3,734.80	61.65	17.13	48.80	-515.41	557.35	3,359.26	3,326.16	33.10	101.492		
6,700.00	4,487.71	3,794.81	3,713.33	64.11	17.02	47.96	-511.56	553.91	3,454.04	3,420.92	33.12	104.293		
6,800.00	4,488.99	3,772.72	3,691.85	66.58	16.91	47.14	-507.72	550.47	3,548.96	3,515.82	33.14	107.093		
6,900.00	4,490.27	3,750.64	3,670.37	69.07	16.80	46.34	-503.88	547.03	3,644.02	3,610.86	33.16	109.891		
7,000.00	4,491.55	3,728.55	3,648.90	71.55	16.69	45.57	-500.03	543.58	3,739.22	3,706.03	33.18	112.688		
7,100.00	4,492.83	3,706.46	3,627.42	74.05	16.58	44.81	-496.19	540.14	3,834.52	3,801.32	33.20	115.482		
7,200.00	4,494.11	3,684.38	3,605.95	76.55	16.47	44.08	-492.34	536.70	3,929.94	3,896.71	33.23	118.275		
7,300.00	4,495.39	3,662.29	3,584.47	79.05	16.36	43.36	-488.50	533.26	4,025.46	3,992.21	33.25	121.065		
7,400.00	4,496.67	3,640.20	3,562.99	81.56	16.25	42.67	-484.66	529.82	4,121.07	4,087.80	33.27	123.852		
7,500.00	4,497.95	3,618.12	3,541.52	84.08	16.14	41.99	-480.81	526.37	4,216.77	4,183.47	33.30	126.636		
7,600.00	4,499.23	3,596.03	3,520.04	86.60	16.03	41.33	-476.97	522.93	4,312.55	4,279.23	33.32	129.417		
7,700.00	4,500.51	3,573.94	3,498.57	89.12	15.92	40.68	-473.13	519.49	4,408.41	4,375.06	33.35	132.194		
7,800.00	4,501.79	3,551.85	3,477.09	91.65	15.81	40.06	-469.28	516.05	4,504.34	4,470.97	33.37	134.967		
7,900.00	4,503.07	3,529.77	3,455.61	94.17	15.70	39.45	-465.44	512.61	4,600.34	4,566.94	33.40	137.735		
8,000.00	4,504.35	3,507.68	3,434.14	96.71	15.59	38.85	-461.59	509.16	4,696.40	4,662.98	33.43	140.499		
8,100.00	4,505.63	3,485.59	3,412.66	99.24	15.48	38.27	-457.75	505.72	4,792.52	4,759.07	33.45	143.257		
8,200.00	4,506.91	3,463.51	3,391.19	101.78	15.37	37.71	-453.91	502.28	4,888.70	4,855.22	33.48	146.010		
8,300.00	4,508.19	3,441.42	3,369.71	104.32	15.26	37.16	-450.06	498.84	4,984.93	4,951.42	33.51	148.757		
8,400.00	4,509.47	3,419.33	3,348.24	106.86	15.15	36.62	-446.22	495.40	5,081.21	5,047.67	33.54	151.499		
8,500.00	4,510.75	3,397.24	3,326.76	109.40	15.04	36.10	-442.37	491.95	5,177.53	5,143.96	33.57	154.234		
8,600.00	4,512.03	3,375.16	3,305.28	111.95	14.93	35.59	-438.53	488.51	5,273.90	5,240.30	33.60	156.962		
8,700.00	4,513.31	3,353.07	3,283.81	114.49	14.82	35.09	-434.69	485.07	5,370.31	5,336.68	33.63	159.683		
8,800.00	4,514.59	3,330.98	3,262.33	117.04	14.71	34.61	-430.84	481.63	5,466.76	5,433.10	33.66	162.396		
8,900.00	4,515.87	3,308.90	3,240.86	119.59	14.60	34.14	-427.00	478.19	5,563.25	5,529.56	33.70	165.103		
9,000.00	4,517.15	3,286.81	3,219.38	122.14	14.49	33.67	-423.15	474.74	5,659.78	5,626.05	33.73	167.801		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 113H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Reference Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
9,100.00	4,518.43	3,264.72	3,197.90	124.69	14.38	33.22	-419.31	471.30	5,756.34	5,722.57	33.76	170.491		
9,200.00	4,519.71	3,242.64	3,176.43	127.25	14.27	32.78	-415.47	467.86	5,852.93	5,819.13	33.80	173.173		
9,300.00	4,520.99	3,220.55	3,154.95	129.80	14.16	32.36	-411.62	464.42	5,949.55	5,915.72	33.83	175.846		
9,400.00	4,522.27	3,198.46	3,133.48	132.36	14.05	31.94	-407.78	460.97	6,046.20	6,012.33	33.87	178.511		
9,500.00	4,523.55	3,176.37	3,112.00	134.91	13.94	31.53	-403.93	457.53	6,142.88	6,108.97	33.91	181.165		
9,600.00	4,524.83	3,154.29	3,090.52	137.47	13.83	31.13	-400.09	454.09	6,239.58	6,205.64	33.95	183.811		
9,700.00	4,526.11	3,132.20	3,069.05	140.03	13.72	30.74	-396.25	450.65	6,336.31	6,302.33	33.98	186.447		
9,800.00	4,527.39	3,110.11	3,047.57	142.59	13.61	30.36	-392.40	447.21	6,433.07	6,399.04	34.02	189.073		
9,900.00	4,528.67	3,088.03	3,026.10	145.15	13.50	29.99	-388.56	443.76	6,529.85	6,495.78	34.06	191.689		
10,000.00	4,529.95	3,065.94	3,004.62	147.71	13.39	29.62	-384.71	440.32	6,626.64	6,592.54	34.11	194.295		
10,100.00	4,531.23	3,043.85	2,983.14	150.27	13.28	29.27	-380.87	436.88	6,723.47	6,689.32	34.15	196.890		
10,200.00	4,532.51	3,021.76	2,961.67	152.83	13.17	28.92	-377.03	433.44	6,820.31	6,786.12	34.19	199.474		
10,300.00	4,533.79	2,999.68	2,940.19	155.40	13.06	28.58	-373.18	430.00	6,917.17	6,882.93	34.24	202.048		
10,400.00	4,535.07	2,977.59	2,918.72	157.96	12.95	28.25	-369.34	426.55	7,014.05	6,979.77	34.28	204.610		
10,500.00	4,536.35	2,955.50	2,897.24	160.52	12.84	27.92	-365.49	423.11	7,110.94	7,076.62	34.33	207.161		
10,600.00	4,537.63	2,933.42	2,875.76	163.09	12.73	27.60	-361.65	419.67	7,207.86	7,173.48	34.37	209.701		
10,700.00	4,538.91	2,911.33	2,854.29	165.65	12.62	27.29	-357.81	416.23	7,304.79	7,270.37	34.42	212.230		
10,800.00	4,540.19	2,889.24	2,832.81	168.22	12.51	26.98	-353.96	412.79	7,401.73	7,367.26	34.47	214.746		
10,900.00	4,541.47	2,867.15	2,811.34	170.79	12.40	26.69	-350.12	409.34	7,498.69	7,464.18	34.52	217.251		
10,941.65	4,542.00	2,857.95	2,802.39	171.86	12.36	26.56	-348.52	407.91	7,539.08	7,504.55	34.54	218.291		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 134H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	74.92	15.65	58.09	60.16				
100.00	100.00	100.00	100.00	0.31	0.15	74.92	15.65	58.09	60.16	59.70	0.46	130.090	
200.00	200.00	200.00	200.00	0.67	0.51	74.92	15.65	58.09	60.16	58.98	1.18	51.008	
300.00	300.00	300.00	300.00	1.03	0.87	74.92	15.65	58.09	60.16	58.26	1.90	31.723	
400.00	400.00	400.00	400.00	1.38	1.23	74.92	15.65	58.09	60.16	57.54	2.61	23.020	
500.00	499.97	502.59	502.55	1.73	1.58	-160.29	13.90	56.26	60.06	56.75	3.31	18.134	
600.00	599.75	605.14	604.81	2.08	1.94	-158.92	8.67	50.80	59.79	55.79	4.00	14.964	
700.00	699.14	707.61	706.49	2.43	2.31	-156.62	-0.04	41.73	59.42	54.72	4.69	12.660	
800.00	797.97	809.96	807.32	2.81	2.70	-153.38	-12.18	29.08	59.05	53.64	5.41	10.913	
867.26	864.03	878.71	874.51	3.07	2.98	-150.66	-22.26	18.58	58.89	52.98	5.91	9.959	
900.00	896.09	912.14	907.00	3.21	3.13	-149.06	-27.71	12.90	58.66	52.49	6.16	9.515	
1,000.00	994.02	1,012.97	1,004.32	3.63	3.59	-142.26	-45.95	-6.11	56.37	49.38	7.00	8.057	
1,100.00	1,091.95	1,112.67	1,100.39	4.05	4.06	-134.54	-64.41	-25.35	54.56	46.66	7.90	6.908	
1,200.00	1,189.88	1,212.37	1,196.46	4.49	4.55	-126.45	-82.87	-44.58	53.80	44.94	8.86	6.072	
1,219.36	1,208.84	1,231.67	1,215.06	4.58	4.65	-124.87	-86.44	-48.31	53.78	44.73	9.05	5.941 CC	
1,300.00	1,287.81	1,312.07	1,292.53	4.93	5.05	-118.30	-101.33	-63.82	54.14	44.28	9.86	5.491 ES	
1,400.00	1,385.74	1,411.78	1,388.61	5.38	5.56	-110.40	-119.79	-83.06	55.55	44.68	10.87	5.109	
1,500.00	1,483.66	1,511.48	1,484.68	5.83	6.07	-103.03	-138.25	-102.30	57.96	46.09	11.88	4.880	
1,600.00	1,581.59	1,611.18	1,580.75	6.29	6.58	-96.34	-156.71	-121.54	61.26	48.40	12.86	4.764	
1,700.00	1,679.52	1,710.89	1,676.82	6.74	7.10	-90.40	-175.17	-140.78	65.30	51.49	13.81	4.729 SF	
1,800.00	1,777.45	1,810.59	1,772.89	7.20	7.62	-85.20	-193.63	-160.01	69.95	55.22	14.73	4.749	
1,900.00	1,875.38	1,910.29	1,868.96	7.66	8.14	-80.68	-212.09	-179.25	75.11	59.49	15.63	4.807	
2,000.00	1,973.31	2,009.99	1,965.04	8.11	8.67	-76.76	-230.55	-198.49	80.68	64.18	16.51	4.888	
2,100.00	2,071.24	2,109.70	2,061.11	8.57	9.19	-73.35	-249.01	-217.73	86.58	69.21	17.37	4.985	
2,200.00	2,169.17	2,209.40	2,157.18	9.04	9.72	-70.39	-267.47	-236.97	92.74	74.52	18.22	5.089	
2,300.00	2,267.10	2,309.10	2,253.25	9.50	10.25	-67.81	-285.93	-256.21	99.11	80.05	19.07	5.198	
2,400.00	2,365.02	2,408.80	2,349.32	9.96	10.77	-65.54	-304.39	-275.44	105.67	85.76	19.91	5.308	
2,500.00	2,462.95	2,508.51	2,445.39	10.42	11.30	-63.53	-322.85	-294.68	112.37	91.63	20.74	5.417	
2,600.00	2,560.88	2,608.21	2,541.46	10.88	11.83	-61.76	-341.31	-313.92	119.19	97.61	21.58	5.524	
2,700.00	2,658.81	2,707.91	2,637.54	11.35	12.36	-60.18	-359.77	-333.16	126.11	103.71	22.41	5.628	
2,800.00	2,756.74	2,807.62	2,733.61	11.81	12.89	-58.76	-378.23	-352.40	133.12	109.88	23.24	5.729	
2,900.00	2,854.67	2,907.32	2,829.68	12.28	13.42	-57.48	-396.69	-371.64	140.21	116.14	24.07	5.825	
3,000.00	2,952.60	3,007.02	2,925.75	12.74	13.95	-56.33	-415.15	-390.87	147.35	122.45	24.90	5.918	
3,100.00	3,050.53	3,106.72	3,021.82	13.21	14.49	-55.29	-433.62	-410.11	154.55	128.82	25.73	6.007	
3,200.00	3,148.46	3,206.43	3,117.89	13.67	15.02	-54.34	-452.08	-429.35	161.79	135.23	26.56	6.092	
3,300.00	3,246.38	3,306.13	3,213.97	14.14	15.55	-53.47	-470.54	-448.59	169.08	141.69	27.39	6.173	
3,400.00	3,344.31	3,405.83	3,310.04	14.60	16.08	-52.67	-489.00	-467.83	176.40	148.18	28.22	6.251	
3,500.00	3,442.24	3,505.54	3,406.11	15.07	16.61	-51.93	-507.46	-487.06	183.75	154.70	29.05	6.325	
3,600.00	3,540.17	3,605.24	3,502.18	15.53	17.15	-51.26	-525.92	-506.30	191.13	161.25	29.88	6.396	
3,700.00	3,638.10	3,704.94	3,598.25	16.00	17.68	-50.63	-544.38	-525.54	198.54	167.82	30.71	6.464	
3,800.00	3,736.03	3,804.64	3,694.32	16.46	18.21	-50.05	-562.84	-544.78	205.96	174.42	31.55	6.529	
3,900.00	3,833.96	3,904.35	3,790.39	16.93	18.75	-49.51	-581.30	-564.02	213.41	181.03	32.38	6.591	
4,000.00	3,931.89	4,004.05	3,886.47	17.40	19.28	-49.00	-599.76	-583.26	220.87	187.66	33.21	6.651	
4,016.88	3,948.41	4,020.88	3,902.68	17.47	19.37	-48.92	-602.87	-586.50	222.14	188.79	33.35	6.661	
4,050.00	3,980.80	4,053.85	3,934.45	17.63	19.55	-64.07	-608.98	-592.86	225.24	191.59	33.65	6.693	
4,100.00	4,029.28	4,094.40	3,973.52	17.87	19.76	-81.51	-617.18	-599.98	233.10	199.00	34.10	6.835	
4,150.00	4,076.93	4,131.23	4,008.87	18.12	19.95	-93.30	-626.39	-604.59	246.11	211.51	34.60	7.113	
4,200.00	4,123.33	4,164.75	4,040.80	18.37	20.12	-101.33	-636.23	-607.20	264.47	229.36	35.11	7.533	
4,250.00	4,168.11	4,199.99	4,073.99	18.62	20.29	-107.37	-648.02	-608.32	288.30	252.56	35.75	8.065	
4,300.00	4,210.89	4,219.28	4,091.93	18.87	20.37	-110.14	-655.09	-608.22	317.17	281.24	35.94	8.826	
4,350.00	4,251.30	4,239.89	4,110.90	19.14	20.47	-111.62	-663.11	-607.55	350.84	314.61	36.22	9.685	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 134H - Original Drilling - APD													Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,400.00	4,289.01	4,249.99	4,120.12	19.42	20.51	-110.18	-667.21	-607.02	388.63	352.41	36.22	10.731		
4,450.00	4,323.71	4,268.60	4,136.94	19.71	20.59	-108.60	-675.06	-605.67	429.57	392.95	36.62	11.730		
4,500.00	4,355.09	4,277.39	4,144.80	20.03	20.63	-103.44	-678.89	-604.87	473.14	436.37	36.78	12.865		
4,550.00	4,382.91	4,282.98	4,149.78	20.38	20.65	-95.11	-681.38	-604.31	518.58	481.65	36.93	14.042		
4,600.00	4,406.92	4,285.74	4,152.23	20.78	20.67	-83.23	-682.62	-604.02	565.23	528.14	37.09	15.240		
4,650.00	4,426.92	4,286.04	4,152.50	21.23	20.67	-68.48	-682.75	-603.99	612.55	575.29	37.26	16.441		
4,700.00	4,442.74	4,284.18	4,150.85	21.73	20.66	-53.14	-681.92	-604.18	660.04	622.60	37.44	17.629		
4,750.00	4,454.26	4,280.44	4,147.52	22.30	20.64	-39.74	-680.25	-604.57	707.28	669.65	37.64	18.792		
4,800.00	4,461.38	4,275.06	4,142.72	22.92	20.62	-29.30	-677.87	-605.09	753.90	716.05	37.85	19.920		
4,847.42	4,464.00	4,268.63	4,136.97	23.55	20.59	-21.88	-675.07	-605.67	797.23	759.18	38.05	20.951		
4,900.00	4,464.67	4,249.99	4,120.12	24.30	20.51	-20.19	-667.21	-607.02	845.11	807.09	38.02	22.227		
5,000.00	4,465.95	4,249.99	4,120.12	25.87	20.51	-20.19	-667.21	-607.02	936.72	898.05	38.67	24.221		
5,100.00	4,467.23	4,249.99	4,120.12	27.62	20.51	-20.19	-667.21	-607.02	1,029.89	990.72	39.17	26.292		
5,200.00	4,468.51	4,227.04	4,099.10	29.51	20.41	-18.25	-658.05	-608.03	1,123.53	1,084.36	39.17	28.682		
5,300.00	4,469.79	4,218.17	4,090.90	31.50	20.37	-17.55	-654.67	-608.24	1,218.16	1,178.79	39.37	30.941		
5,400.00	4,471.07	4,199.99	4,073.99	33.57	20.29	-16.17	-648.02	-608.32	1,313.55	1,274.16	39.38	33.354		
5,500.00	4,472.35	4,199.99	4,073.99	35.72	20.29	-16.17	-648.02	-608.32	1,409.20	1,369.56	39.63	35.555		
5,600.00	4,473.63	4,199.99	4,073.99	37.93	20.29	-16.17	-648.02	-608.32	1,505.42	1,465.57	39.85	37.781		
5,700.00	4,474.91	4,199.99	4,073.99	40.18	20.29	-16.17	-648.02	-608.32	1,602.10	1,562.07	40.03	40.026		
5,800.00	4,476.19	4,199.99	4,073.99	42.47	20.29	-16.17	-648.02	-608.32	1,699.16	1,658.98	40.18	42.288		
5,900.00	4,477.47	4,180.46	4,055.65	44.79	20.19	-14.79	-641.31	-607.91	1,796.10	1,756.02	40.08	44.816		
6,000.00	4,478.75	4,175.95	4,051.39	47.14	20.17	-14.49	-639.82	-607.74	1,893.53	1,853.38	40.15	47.161		
6,100.00	4,480.03	4,171.79	4,047.46	49.52	20.15	-14.21	-638.47	-607.56	1,991.18	1,950.96	40.22	49.511		
6,200.00	4,481.31	4,149.99	4,026.78	51.91	20.05	-12.83	-631.73	-606.24	2,089.38	2,049.30	40.07	52.137		
6,300.00	4,482.59	4,149.99	4,026.78	54.33	20.05	-12.83	-631.73	-606.24	2,187.24	2,147.07	40.18	54.442		
6,400.00	4,483.87	4,149.99	4,026.78	56.75	20.05	-12.83	-631.73	-606.24	2,285.29	2,245.03	40.27	56.753		
6,500.00	4,485.15	4,149.99	4,026.78	59.20	20.05	-12.83	-631.73	-606.24	2,383.51	2,343.15	40.35	59.069		
6,600.00	4,486.43	4,149.99	4,026.78	61.65	20.05	-12.83	-631.73	-606.24	2,481.86	2,441.43	40.43	61.388		
6,700.00	4,487.71	4,149.99	4,026.78	64.11	20.05	-12.83	-631.73	-606.24	2,580.34	2,539.84	40.50	63.709		
6,800.00	4,488.99	4,149.99	4,026.78	66.58	20.05	-12.83	-631.73	-606.24	2,678.93	2,638.36	40.57	66.031		
6,900.00	4,490.27	4,149.99	4,026.78	69.07	20.05	-12.83	-631.73	-606.24	2,777.63	2,736.99	40.64	68.355		
7,000.00	4,491.55	4,149.99	4,026.78	71.55	20.05	-12.83	-631.73	-606.24	2,876.41	2,835.72	40.70	70.678		
7,100.00	4,492.83	4,149.99	4,026.78	74.05	20.05	-12.83	-631.73	-606.24	2,975.28	2,934.52	40.76	73.002		
7,200.00	4,494.11	4,149.99	4,026.78	76.55	20.05	-12.83	-631.73	-606.24	3,074.22	3,033.40	40.81	75.324		
7,300.00	4,495.39	4,149.99	4,026.78	79.05	20.05	-12.83	-631.73	-606.24	3,173.22	3,132.36	40.87	77.645		
7,400.00	4,496.67	4,149.99	4,026.78	81.56	20.05	-12.83	-631.73	-606.24	3,272.29	3,231.37	40.92	79.965		
7,500.00	4,497.95	4,149.99	4,026.78	84.08	20.05	-12.83	-631.73	-606.24	3,371.41	3,330.44	40.97	82.283		
7,600.00	4,499.23	4,149.99	4,026.78	86.60	20.05	-12.83	-631.73	-606.24	3,470.58	3,429.56	41.02	84.598		
7,700.00	4,500.51	4,149.99	4,026.78	89.12	20.05	-12.83	-631.73	-606.24	3,569.80	3,528.73	41.07	86.910		
7,800.00	4,501.79	4,149.99	4,026.78	91.65	20.05	-12.83	-631.73	-606.24	3,669.06	3,627.94	41.12	89.219		
7,900.00	4,503.07	4,149.99	4,026.78	94.17	20.05	-12.83	-631.73	-606.24	3,768.36	3,727.19	41.17	91.526		
8,000.00	4,504.35	4,149.99	4,026.78	96.71	20.05	-12.83	-631.73	-606.24	3,867.69	3,826.47	41.22	93.828		
8,100.00	4,505.63	4,126.93	4,004.75	99.24	19.93	-11.49	-625.23	-604.14	3,966.51	3,925.45	41.06	96.601		
8,200.00	4,506.91	4,125.70	4,003.57	101.78	19.92	-11.42	-624.90	-604.01	4,065.85	4,024.75	41.10	98.929		
8,300.00	4,508.19	4,124.52	4,002.45	104.32	19.92	-11.35	-624.59	-603.88	4,165.22	4,124.08	41.14	101.253		
8,400.00	4,509.47	4,123.40	4,001.37	106.86	19.91	-11.29	-624.29	-603.76	4,264.62	4,223.44	41.18	103.572		
8,500.00	4,510.75	4,122.32	4,000.33	109.40	19.90	-11.23	-624.01	-603.64	4,364.04	4,322.82	41.21	105.886		
8,600.00	4,512.03	4,099.99	3,978.90	111.95	19.79	-10.05	-618.47	-600.80	4,463.95	4,422.88	41.07	108.698		
8,700.00	4,513.31	4,099.99	3,978.90	114.49	19.79	-10.05	-618.47	-600.80	4,563.37	4,522.26	41.12	110.985		
8,800.00	4,514.59	4,099.99	3,978.90	117.04	19.79	-10.05	-618.47	-600.80	4,662.82	4,621.66	41.17	113.267		
8,900.00	4,515.87	4,099.99	3,978.90	119.59	19.79	-10.05	-618.47	-600.80	4,762.29	4,721.08	41.22	115.544		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Escrito P01 2310 Federal COM 134H - Original Drilling - APD												Offset Site Error:	0.00 ft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Reference Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Distance Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
9,000.00	4,517.15	4,099.99	3,978.90	122.14	19.79	-10.05	-618.47	-600.80	4,861.79	4,820.52	41.27	117.815	
9,100.00	4,518.43	4,099.99	3,978.90	124.69	19.79	-10.05	-618.47	-600.80	4,961.30	4,919.98	41.32	120.081	
9,200.00	4,519.71	4,099.99	3,978.90	127.25	19.79	-10.05	-618.47	-600.80	5,060.83	5,019.47	41.37	122.341	
9,300.00	4,520.99	4,099.99	3,978.90	129.80	19.79	-10.05	-618.47	-600.80	5,160.38	5,118.97	41.42	124.596	
9,400.00	4,522.27	4,099.99	3,978.90	132.36	19.79	-10.05	-618.47	-600.80	5,259.95	5,218.48	41.47	126.844	
9,500.00	4,523.55	4,099.99	3,978.90	134.91	19.79	-10.05	-618.47	-600.80	5,359.54	5,318.02	41.52	129.087	
9,600.00	4,524.83	4,099.99	3,978.90	137.47	19.79	-10.05	-618.47	-600.80	5,459.14	5,417.56	41.57	131.323	
9,700.00	4,526.11	4,099.99	3,978.90	140.03	19.79	-10.05	-618.47	-600.80	5,558.75	5,517.13	41.62	133.553	
9,800.00	4,527.39	4,099.99	3,978.90	142.59	19.79	-10.05	-618.47	-600.80	5,658.38	5,616.70	41.67	135.777	
9,900.00	4,528.67	4,099.99	3,978.90	145.15	19.79	-10.05	-618.47	-600.80	5,758.02	5,716.29	41.73	137.994	
10,000.00	4,529.95	4,099.99	3,978.90	147.71	19.79	-10.05	-618.47	-600.80	5,857.67	5,815.89	41.78	140.204	
10,100.00	4,531.23	4,099.99	3,978.90	150.27	19.79	-10.05	-618.47	-600.80	5,957.33	5,915.50	41.83	142.408	
10,200.00	4,532.51	4,099.99	3,978.90	152.83	19.79	-10.05	-618.47	-600.80	6,057.01	6,015.12	41.89	144.605	
10,300.00	4,533.79	4,099.99	3,978.90	155.40	19.79	-10.05	-618.47	-600.80	6,156.69	6,114.75	41.94	146.795	
10,400.00	4,535.07	4,099.99	3,978.90	157.96	19.79	-10.05	-618.47	-600.80	6,256.39	6,214.39	42.00	148.978	
10,500.00	4,536.35	4,099.99	3,978.90	160.52	19.79	-10.05	-618.47	-600.80	6,356.09	6,314.04	42.05	151.154	
10,600.00	4,537.63	4,099.99	3,978.90	163.09	19.79	-10.05	-618.47	-600.80	6,455.81	6,413.70	42.11	153.322	
10,700.00	4,538.91	4,099.99	3,978.90	165.65	19.79	-10.05	-618.47	-600.80	6,555.53	6,513.37	42.16	155.484	
10,800.00	4,540.19	4,099.99	3,978.90	168.22	19.79	-10.05	-618.47	-600.80	6,655.26	6,613.04	42.22	157.638	
10,900.00	4,541.47	4,099.99	3,978.90	170.79	19.79	-10.05	-618.47	-600.80	6,755.00	6,712.73	42.28	159.784	
10,941.65	4,542.00	4,099.99	3,978.90	171.86	19.79	-10.05	-618.47	-600.80	6,796.55	6,754.25	42.30	160.676	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Good Times P36A-2410 1H - OH - OH													Offset Site Error:	0.00 ft
Survey Program: 587-MWD													Offset Well Error:	0.00 ft
Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
0.00	0.00	10,278.30	4,689.12	0.00	92.49	-116.19	-259.84	-528.25	4,715.00					
100.00	100.00	10,272.89	4,689.41	0.31	92.40	-115.72	-254.44	-528.32	4,615.80	4,571.08	44.72	103.220		
200.00	200.00	10,267.49	4,689.70	0.67	92.30	-115.24	-249.04	-528.39	4,516.62	4,471.90	44.72	100.995		
300.00	300.00	10,262.08	4,690.00	1.03	92.21	-114.75	-243.64	-528.45	4,417.48	4,372.75	44.73	98.752		
400.00	400.00	10,256.67	4,690.29	1.38	92.11	-114.26	-238.24	-528.52	4,318.37	4,273.61	44.75	96.491		
500.00	499.97	10,252.47	4,690.52	1.73	92.04	15.30	-234.04	-528.57	4,219.03	4,174.24	44.79	94.192		
600.00	599.75	10,250.69	4,690.61	2.08	92.01	27.88	-232.27	-528.59	4,119.31	4,074.47	44.84	91.857		
700.00	699.14	10,251.34	4,690.58	2.43	92.02	77.23	-232.91	-528.58	4,019.39	3,974.49	44.90	89.512		
800.00	797.97	10,254.41	4,690.41	2.81	92.07	144.98	-235.98	-528.55	3,919.45	3,874.48	44.97	87.164		
867.26	864.03	10,257.83	4,690.23	3.07	92.13	158.83	-239.40	-528.50	3,852.31	3,807.30	45.01	85.588		
900.00	896.09	10,259.76	4,690.12	3.21	92.17	159.06	-241.33	-528.48	3,819.65	3,774.62	45.03	84.822		
1,000.00	994.02	10,265.67	4,689.80	3.63	92.27	159.78	-247.22	-528.41	3,719.92	3,674.81	45.10	82.472		
1,100.00	1,091.95	10,271.57	4,689.48	4.05	92.38	160.53	-253.12	-528.34	3,620.19	3,575.00	45.18	80.124		
1,200.00	1,189.88	10,277.47	4,689.16	4.49	92.48	161.30	-259.01	-528.26	3,520.46	3,475.20	45.26	77.776		
1,300.00	1,287.81	10,283.38	4,688.85	4.93	92.58	162.10	-264.90	-528.19	3,420.74	3,375.39	45.35	75.432		
1,400.00	1,385.74	10,289.28	4,688.53	5.38	92.69	162.93	-270.80	-528.12	3,321.03	3,275.59	45.44	73.091		
1,500.00	1,483.66	10,294.02	4,688.27	5.83	92.77	163.62	-275.53	-528.06	3,221.32	3,175.80	45.52	70.765		
1,600.00	1,581.59	10,294.02	4,688.27	6.29	92.77	163.62	-275.53	-528.06	3,121.63	3,076.05	45.58	68.488		
1,700.00	1,679.52	10,294.02	4,688.27	6.74	92.77	163.62	-275.53	-528.06	3,021.96	2,976.32	45.64	66.212		
1,800.00	1,777.45	10,294.02	4,688.27	7.20	92.77	163.62	-275.53	-528.06	2,922.32	2,876.61	45.71	63.938		
1,900.00	1,875.38	10,294.02	4,688.27	7.66	92.77	163.62	-275.53	-528.06	2,822.70	2,776.92	45.77	61.666		
2,000.00	1,973.31	10,294.02	4,688.27	8.11	92.77	163.62	-275.53	-528.06	2,723.10	2,677.26	45.84	59.398		
2,100.00	2,071.24	10,294.02	4,688.27	8.57	92.77	163.62	-275.53	-528.06	2,623.54	2,577.62	45.92	57.134		
2,200.00	2,169.17	10,294.02	4,688.27	9.04	92.77	163.62	-275.53	-528.06	2,524.01	2,478.01	46.00	54.875		
2,300.00	2,267.10	10,294.02	4,688.27	9.50	92.77	163.62	-275.53	-528.06	2,424.52	2,378.44	46.08	52.620		
2,400.00	2,365.02	10,294.02	4,688.27	9.96	92.77	163.62	-275.53	-528.06	2,325.07	2,278.91	46.16	50.371		
2,500.00	2,462.95	10,294.02	4,688.27	10.42	92.77	163.62	-275.53	-528.06	2,225.68	2,179.43	46.24	48.128		
2,600.00	2,560.88	10,294.02	4,688.27	10.88	92.77	163.62	-275.53	-528.06	2,126.33	2,080.00	46.33	45.891		
2,700.00	2,658.81	10,294.02	4,688.27	11.35	92.77	163.62	-275.53	-528.06	2,027.06	1,980.63	46.43	43.661		
2,800.00	2,756.74	10,294.02	4,688.27	11.81	92.77	163.62	-275.53	-528.06	1,927.86	1,881.34	46.52	41.439		
2,900.00	2,854.67	10,294.02	4,688.27	12.28	92.77	163.62	-275.53	-528.06	1,828.75	1,782.12	46.62	39.224		
3,000.00	2,952.60	10,294.02	4,688.27	12.74	92.77	163.62	-275.53	-528.06	1,729.73	1,683.01	46.73	37.016		
3,100.00	3,050.53	10,294.02	4,688.27	13.21	92.77	163.62	-275.53	-528.06	1,630.84	1,584.00	46.84	34.817		
3,200.00	3,148.46	10,294.02	4,688.27	13.67	92.77	163.62	-275.53	-528.06	1,532.10	1,485.14	46.96	32.627		
3,300.00	3,246.38	10,294.02	4,688.27	14.14	92.77	163.62	-275.53	-528.06	1,433.52	1,386.44	47.09	30.445		
3,400.00	3,344.31	10,294.02	4,688.27	14.60	92.77	163.62	-275.53	-528.06	1,335.16	1,287.94	47.23	28.272		
3,500.00	3,442.24	10,294.02	4,688.27	15.07	92.77	163.62	-275.53	-528.06	1,237.07	1,189.68	47.38	26.109		
3,600.00	3,540.17	10,294.02	4,688.27	15.53	92.77	163.62	-275.53	-528.06	1,139.30	1,091.74	47.56	23.956		
3,700.00	3,638.10	10,294.02	4,688.27	16.00	92.77	163.62	-275.53	-528.06	1,041.96	994.19	47.77	21.813		
3,800.00	3,736.03	10,294.02	4,688.27	16.46	92.77	163.62	-275.53	-528.06	945.17	897.14	48.02	19.682		
3,900.00	3,833.96	10,294.02	4,688.27	16.93	92.77	163.62	-275.53	-528.06	849.12	800.78	48.35	17.563		
4,000.00	3,931.89	10,294.02	4,688.27	17.40	92.77	163.62	-275.53	-528.06	754.11	705.33	48.78	15.460		
4,016.88	3,948.41	10,294.02	4,688.27	17.47	92.77	163.62	-275.53	-528.06	738.20	689.34	48.86	15.107		
4,050.00	3,980.80	10,294.02	4,688.27	17.63	92.77	157.74	-275.53	-528.06	707.10	658.03	49.06	14.412		
4,100.00	4,029.28	10,294.02	4,688.27	17.87	92.77	153.52	-275.53	-528.06	660.63	611.14	49.49	13.349		
4,150.00	4,076.93	10,294.02	4,688.27	18.12	92.77	153.07	-275.53	-528.06	615.24	565.08	50.16	12.266		
4,200.00	4,123.33	10,294.02	4,688.27	18.37	92.77	154.04	-275.53	-528.06	571.62	520.37	51.25	11.153		
4,250.00	4,168.11	10,294.02	4,688.27	18.62	92.77	155.22	-275.53	-528.06	530.62	477.60	53.02	10.008		
4,300.00	4,210.89	10,294.02	4,688.27	18.87	92.77	156.19	-275.53	-528.06	493.26	437.49	55.77	8.845		
4,350.00	4,251.30	10,294.02	4,688.27	19.14	92.77	156.83	-275.53	-528.06	460.79	401.01	59.78	7.708		
4,400.00	4,289.01	10,294.02	4,688.27	19.42	92.77	157.10	-275.53	-528.06	434.61	369.44	65.17	6.669		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Good Times P36A-2410 1H - OH - OH													Offset Site Error:	0.00 ft
Survey Program: 587-MWD													Offset Well Error:	0.00 ft
Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning	
4,450.00	4,323.71	10,294.02	4,688.27	19.71	92.77	157.02	-275.53	-528.06	416.13	344.39	71.75	5.800		
4,500.00	4,355.09	10,294.02	4,688.27	20.03	92.77	156.56	-275.53	-528.06	406.58	327.65	78.93	5.151		
4,524.60	4,369.24	10,294.02	4,688.27	20.20	92.77	156.20	-275.53	-528.06	405.40	322.96	82.44	4.917 CC		
4,550.00	4,382.91	10,294.02	4,688.27	20.38	92.77	155.71	-275.53	-528.06	406.66	320.75	85.91	4.734		
4,552.25	4,384.07	10,294.02	4,688.27	20.40	92.77	155.66	-275.53	-528.06	406.90	320.69	86.21	4.720 ES		
4,600.00	4,406.92	10,267.26	4,689.72	20.78	92.30	151.41	-248.81	-528.39	415.51	324.66	90.85	4.574		
4,602.25	4,407.90	10,265.89	4,689.79	20.80	92.28	151.19	-247.44	-528.41	416.08	325.03	91.04	4.570		
4,650.00	4,426.92	10,237.50	4,691.34	21.23	91.78	146.51	-219.09	-528.74	431.14	336.48	94.66	4.555 SF		
4,652.25	4,427.72	10,236.22	4,691.41	21.25	91.76	146.29	-217.81	-528.75	431.99	337.18	94.81	4.557		
4,700.00	4,442.74	10,208.73	4,692.99	21.73	91.28	141.41	-190.37	-528.90	452.56	355.06	97.51	4.641		
4,750.00	4,454.26	10,169.95	4,695.17	22.30	90.60	135.20	-151.65	-529.12	478.35	379.25	99.10	4.827		
4,800.00	4,461.38	10,133.19	4,697.03	22.92	89.96	129.16	-114.94	-529.62	507.11	406.98	100.12	5.065		
4,847.42	4,464.00	10,103.53	4,698.65	23.55	89.45	123.81	-85.34	-529.93	536.74	435.90	100.84	5.323		
4,900.00	4,464.67	10,068.48	4,700.79	24.30	88.84	122.20	-50.35	-530.10	570.99	469.72	101.27	5.638		
5,000.00	4,465.95	9,993.59	4,705.22	25.87	87.56	119.25	24.41	-530.59	636.76	535.14	101.62	6.266		
5,100.00	4,467.23	9,925.85	4,709.40	27.62	86.40	117.06	92.01	-531.25	703.16	601.15	102.00	6.894		
5,200.00	4,468.51	9,863.30	4,713.96	29.51	85.33	115.39	154.39	-531.28	771.00	668.63	102.37	7.531		
5,300.00	4,469.79	9,767.02	4,721.43	31.50	83.67	113.31	250.37	-531.87	839.13	737.09	102.04	8.224		
5,400.00	4,471.07	9,703.36	4,723.65	33.57	82.56	111.94	313.99	-532.58	906.21	803.80	102.41	8.849		
5,500.00	4,472.35	9,624.04	4,724.31	35.72	81.17	110.29	393.30	-533.30	973.27	870.70	102.57	9.489		
5,600.00	4,473.63	9,579.02	4,724.55	37.93	80.39	109.43	438.32	-533.07	1,041.67	938.54	103.13	10.100		
5,700.00	4,474.91	9,524.55	4,724.96	40.18	79.46	108.48	492.77	-531.72	1,111.71	1,008.17	103.54	10.737		
5,800.00	4,476.19	9,461.04	4,725.43	42.47	78.37	107.46	556.23	-529.41	1,182.76	1,078.88	103.87	11.387		
5,900.00	4,477.47	9,418.35	4,726.08	44.79	77.63	106.85	598.88	-527.49	1,254.72	1,150.45	104.27	12.034		
6,000.00	4,478.75	9,376.31	4,726.83	47.14	76.90	106.29	640.80	-524.63	1,328.32	1,223.71	104.61	12.698		
6,100.00	4,480.03	9,316.95	4,727.55	49.52	75.89	105.53	699.97	-519.81	1,402.87	1,297.95	104.93	13.370		
6,200.00	4,481.31	9,169.34	4,728.53	51.91	73.40	103.89	847.32	-511.38	1,476.22	1,370.98	105.24	14.027		
6,300.00	4,482.59	9,089.17	4,729.57	54.33	72.04	103.19	927.47	-510.40	1,546.32	1,440.69	105.63	14.639		
6,400.00	4,483.87	8,955.83	4,731.27	56.75	69.80	102.19	1,060.78	-510.42	1,615.87	1,509.94	105.93	15.254		
6,500.00	4,485.15	8,904.88	4,731.90	59.20	68.94	101.84	1,111.73	-511.31	1,684.15	1,577.71	106.43	15.823		
6,600.00	4,486.43	8,866.02	4,734.68	61.65	65.48	100.67	1,320.26	-520.88	1,750.81	1,644.30	106.50	16.439		
6,700.00	4,487.71	8,833.02	4,735.56	64.11	64.41	100.37	1,383.02	-526.26	1,814.15	1,707.10	107.05	16.947		
6,800.00	4,488.99	8,542.88	4,736.83	66.58	62.93	99.98	1,472.86	-533.37	1,878.08	1,770.56	107.53	17.466		
6,900.00	4,490.27	8,398.39	4,739.84	69.07	60.54	99.45	1,616.56	-548.07	1,940.57	1,832.85	107.72	18.015		
7,000.00	4,491.55	8,345.41	4,740.04	71.55	59.67	99.25	1,669.15	-554.48	2,001.30	1,892.93	108.38	18.466		
7,100.00	4,492.83	8,297.56	4,741.13	74.05	58.88	99.09	1,716.76	-559.20	2,063.70	1,954.68	109.02	18.929		
7,200.00	4,494.11	8,234.26	4,741.97	76.55	57.83	98.88	1,779.76	-565.22	2,126.50	2,016.91	109.59	19.404		
7,300.00	4,495.39	8,192.02	4,742.49	79.05	57.14	98.74	1,821.87	-568.46	2,190.57	2,080.37	110.19	19.879		
7,400.00	4,496.67	8,137.99	4,743.20	81.56	56.24	98.57	1,875.79	-571.92	2,255.67	2,144.91	110.75	20.366		
7,500.00	4,497.95	8,077.48	4,743.94	84.08	55.25	98.38	1,936.19	-575.48	2,321.24	2,209.94	111.30	20.856		
7,600.00	4,499.23	8,035.15	4,744.43	86.60	54.55	98.25	1,978.46	-577.58	2,387.55	2,275.72	111.83	21.350		
7,700.00	4,500.51	8,002.02	4,744.75	89.12	54.01	98.15	2,011.57	-578.73	2,454.99	2,342.67	112.32	21.857		
7,800.00	4,501.79	8,002.02	4,744.75	91.65	54.01	98.15	2,011.57	-578.73	2,524.17	2,411.48	112.69	22.399		
7,900.00	4,503.07	7,940.02	4,745.40	94.17	52.98	97.95	2,073.56	-578.35	2,594.52	2,481.33	113.19	22.922		
8,000.00	4,504.35	7,940.02	4,745.40	96.71	52.98	97.95	2,073.56	-578.35	2,665.93	2,552.49	113.45	23.500		
8,100.00	4,505.63	7,915.86	4,745.74	99.24	52.58	97.88	2,097.69	-577.26	2,738.91	2,625.16	113.75	24.078		
8,200.00	4,506.91	7,877.02	4,746.45	101.78	51.93	97.77	2,136.46	-575.00	2,812.84	2,698.74	114.11	24.651		
8,300.00	4,508.19	7,825.51	4,747.19	104.32	51.07	97.63	2,187.84	-571.59	2,887.35	2,772.82	114.53	25.210		
8,400.00	4,509.47	7,734.61	4,747.00	106.86	49.56	97.34	2,278.57	-566.10	2,961.37	2,846.17	115.20	25.707		
8,500.00	4,510.75	7,687.02	4,746.32	109.40	48.78	97.18	2,326.06	-562.90	3,035.79	2,920.18	115.61	26.258		
8,600.00	4,512.03	7,668.56	4,746.13	111.95	48.48	97.12	2,344.45	-561.47	3,110.82	2,994.99	115.83	26.857		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Offset Design: P01 2310 Pad - Good Times P36A-2410 1H - OH - OH												Offset Site Error:	0.00 ft
Survey Program: 587-MWD												Offset Well Error:	0.00 ft
Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
8,700.00	4,513.31	7,468.74	4,748.71	114.49	45.25	96.66	2,543.84	-549.18	3,185.54	3,068.33	117.22	27.176	
8,800.00	4,514.59	7,309.01	4,747.32	117.04	42.76	96.26	2,703.51	-546.07	3,256.40	3,138.10	118.30	27.526	
8,900.00	4,515.87	7,273.51	4,747.04	119.59	42.21	96.18	2,739.01	-545.65	3,327.36	3,208.65	118.71	28.030	
9,000.00	4,517.15	7,247.01	4,747.26	122.14	41.80	96.13	2,765.49	-544.94	3,399.28	3,280.24	119.04	28.556	
9,100.00	4,518.43	7,195.00	4,748.56	124.69	41.00	96.05	2,817.46	-543.14	3,471.83	3,352.31	119.52	29.048	
9,200.00	4,519.71	7,138.85	4,750.74	127.25	40.13	95.99	2,873.53	-541.04	3,544.65	3,424.64	120.01	29.536	
9,300.00	4,520.99	6,870.01	4,758.75	129.80	36.17	95.68	3,142.12	-538.39	3,615.13	3,493.37	121.76	29.691	
9,400.00	4,522.27	6,804.26	4,759.78	132.36	35.27	95.59	3,207.87	-539.19	3,684.35	3,561.96	122.39	30.104	
9,500.00	4,523.55	6,575.39	4,763.64	134.91	32.32	95.32	3,436.54	-546.67	3,752.35	3,628.52	123.83	30.301	
9,600.00	4,524.83	6,536.22	4,764.32	137.47	31.85	95.27	3,475.66	-548.68	3,818.78	3,694.42	124.36	30.707	
9,700.00	4,526.11	6,487.04	4,765.42	140.03	31.28	95.23	3,524.78	-550.65	3,885.97	3,761.02	124.95	31.100	
9,800.00	4,527.39	6,340.64	4,767.89	142.59	29.73	95.07	3,670.98	-557.95	3,952.37	3,826.16	126.21	31.315	
9,900.00	4,528.67	6,259.01	4,769.15	145.15	28.91	94.99	3,752.45	-562.88	4,018.08	3,891.04	127.03	31.630	
10,000.00	4,529.95	6,221.89	4,769.68	147.71	28.54	94.96	3,789.51	-564.97	4,084.17	3,956.61	127.56	32.017	
10,100.00	4,531.23	6,199.01	4,770.09	150.27	28.31	94.94	3,812.36	-566.02	4,151.10	4,023.11	127.99	32.432	
10,200.00	4,532.51	6,137.01	4,771.01	152.83	27.70	94.88	3,874.31	-568.18	4,218.71	4,090.06	128.65	32.791	
10,300.00	4,533.79	6,137.01	4,771.01	155.40	27.70	94.88	3,874.31	-568.18	4,286.99	4,158.08	128.91	33.256	
10,400.00	4,535.07	6,100.66	4,771.52	157.96	27.37	94.84	3,910.65	-568.86	4,356.00	4,226.57	129.43	33.655	
10,500.00	4,536.35	6,016.01	4,772.65	160.52	26.63	94.76	3,995.28	-569.72	4,425.43	4,295.07	130.37	33.946	
10,600.00	4,537.63	5,955.01	4,773.13	163.09	26.11	94.69	4,056.27	-570.30	4,494.87	4,363.81	131.06	34.295	
10,700.00	4,538.91	5,955.01	4,773.13	165.65	26.11	94.69	4,056.27	-570.30	4,564.92	4,433.66	131.26	34.779	
10,800.00	4,540.19	5,955.01	4,773.13	168.22	26.11	94.69	4,056.27	-570.30	4,636.06	4,504.65	131.41	35.278	
10,900.00	4,541.47	5,916.01	4,773.64	170.79	25.77	94.66	4,095.27	-569.55	4,707.75	4,575.85	131.90	35.692	
10,941.65	4,542.00	5,894.01	4,773.77	171.86	25.58	94.63	4,117.25	-568.81	4,737.91	4,605.76	132.15	35.851	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report




Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Reference Depths are relative to GL 6857' & RKB 14' @ 6871.00ft
 Offset Depths are relative to Offset Datum
 Central Meridian is -107.8333334

Coordinates are relative to: Escrito P01 2310 Federal COM 133H - Slot 2
 Coordinate System is US State Plane 1983, New Mexico Western Zone
 Grid Convergence at Surface is: -0.01°

Ladder Plot

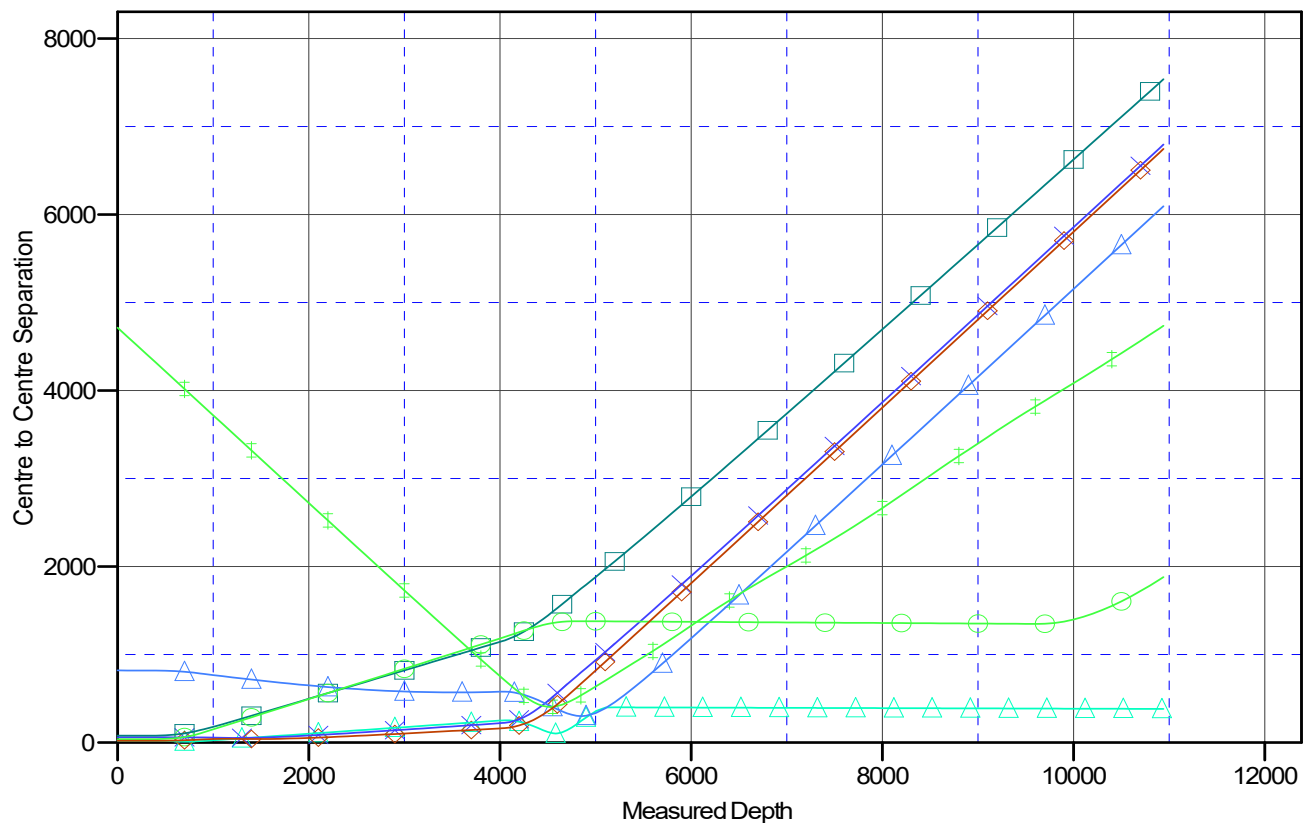

LEGEND

- Escrito P01 2310 Federal COM 108H Original Drilling, APD/V0
- Good Times 96A-241 0 14CH OH/V0
- Escrito P01 2310 Federal COM 134H Original Drilling, APD/V0
- Escrito P01 2310 Federal COM 113H Original Drilling, APD/V0
- Champ 9 OH OH/V0
- Escrito P01 2310 137H Original Drilling, APD/V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Lonestar Consulting, LLC

Anticollision Report




Company:	DJR Operating	Local Co-ordinate Reference:	Well Escrito P01 2310 Federal COM 133H - Slot 2
Project:	Ponderosa Unit	TVD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Reference Site:	P01 2310 Pad	MD Reference:	GL 6857' & RKB 14' @ 6871.00ft
Site Error:	0.00 ft	North Reference:	True
Reference Well:	Escrito P01 2310 Federal COM 133H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Original Drilling	Database:	Grand Junction
Reference Design:	APD	Offset TVD Reference:	Offset Datum

Reference Depths are relative to GL 6857' & RKB 14' @ 6871.00ft
 Offset Depths are relative to Offset Datum
 Central Meridian is -107.8333334

Coordinates are relative to: Escrito P01 2310 Federal COM 133H - Slot 2
 Coordinate System is US State Plane 1983, New Mexico Western Zone
 Grid Convergence at Surface is: -0.01°

Separation Factor Plot

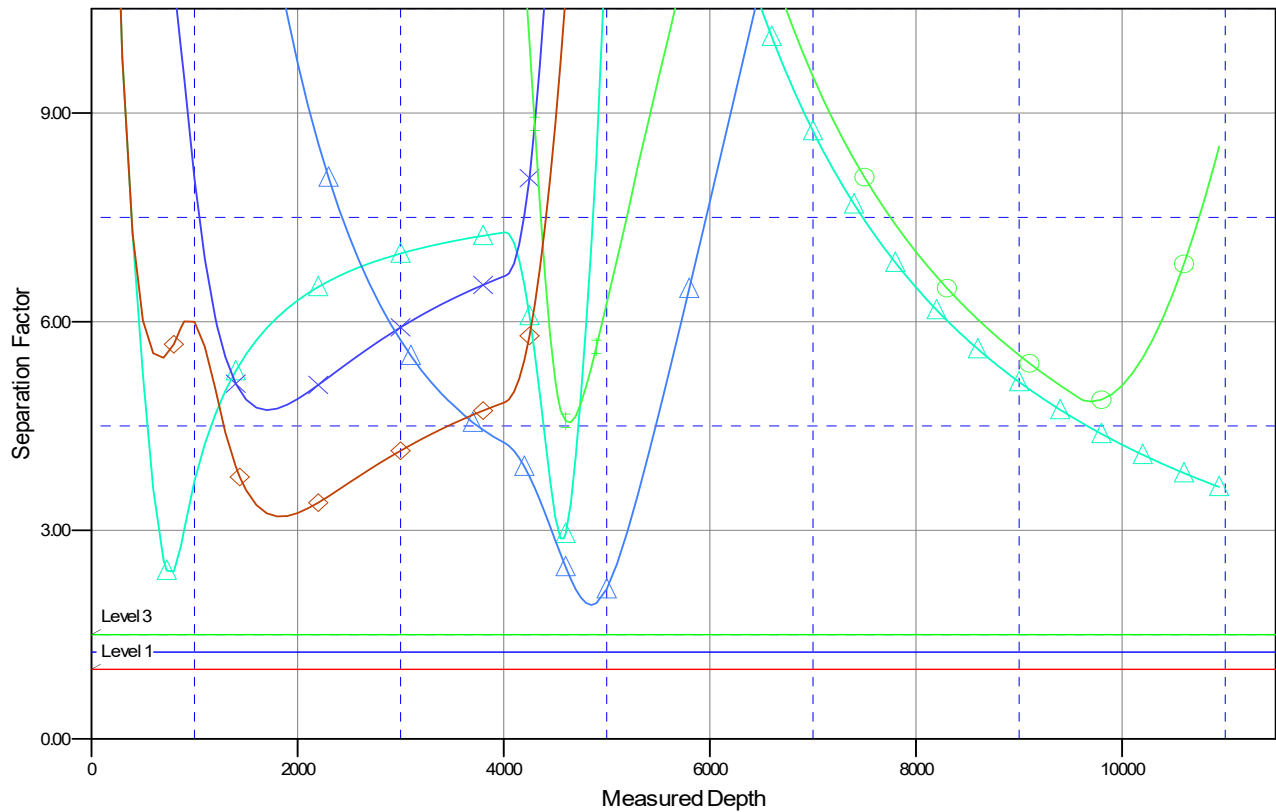

LEGEND

Escrito P01 2310 Federal COM 108H Original Drilling, APD V0
 Escrito P01 2310 Federal COM 134H Original Drilling, APD V0
 Champ 9, OH OH V0
 Good Times P86A2411 0 1H OH OH V0
 Escrito P01 2310 Federal COM 113H Original Drilling, APD V0
 Escrito P01 2310 137H, Original Drilling, APD V0
 Escrito P01 2310 Federal COM 108H Original Drilling, APD V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Farmington District Office
6251 College Blvd, Suite A
Farmington, New Mexico 87402



In Reply Refer To:
3162.3-1(NMF0110)

* DJR OPERATING LLC

#133H ESCRITO P01 2310 FED COM

Lease: NMNM42059 Agreement: TBD
SH: SESE Section 1, T. 23 N., R. 10 W.
San Juan County, New Mexico
BH: Section 2, T.23 N., R. 10 W.
San Juan County, New Mexico

***Above Data Required on Well Sign**

GENERAL REQUIREMENTS FOR OIL AND GAS OPERATIONS ON FEDERAL AND INDIAN LEASES

The following special requirements apply and are effective when **checked**:

- A. ☒ Note all surface/drilling conditions of approval attached.
- B. ☒ The required wait on cement (WOC) time will be a minimum of 500 psi compressive strength at 60 degrees. Blowout preventor (BOP) nipple-up operations may then be initiated
- C. ☐ Test the surface casing to a minimum of _____ psi for 30 minutes.
- D. ☐ Test all casing strings below the surface casing to .22 psi/ft. of casing string length or 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield burst) for a minimum of 30 minutes.
- E. ☒ Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the Bureau of Land Management, New Mexico State Office, Reservoir Management Group, 301 Dinosaur Trail, Santa Fe, New Mexico 87508.
The effective date of the agreement must be **prior** to any sales.
- F. ☐ The use of co-flex hose is authorized contingent upon the following:
 1. From the BOP to the choke manifold: the co-flex hose must be hobbled on both ends and saddle to prevent whip.
 2. From the choke manifold to the discharge tank: the co-flex hoses must be as straight as practical, hobbled on both ends and anchored to prevent whip.
 3. The co-flex hose pressure rating must be at least commensurate with approved BOPE.

INTERIOR REGION 7 • UPPER COLORADO BASIN

COLORADO, NEW MEXICO, UTAH, WYOMING

I. GENERAL

- A. Full compliance with all applicable laws and regulations, with the approved Permit to drill, and with the approved Surface Use and Operations Plan is required. Lessees and/or operators are fully accountable for the actions of their contractors and subcontractors. Failure to comply with these requirements and the filing of required reports will result in strict enforcement pursuant to 43 CFR 3163.1 or 3163.2.
- B. Each well shall have a well sign in legible condition from spud date to final abandonment. The sign should show the operator's name, lease serial number, or unit name, well number, location of the well, and whether lease is Tribal or Allotted, (See 43 CFR 3162.6(b)).
- C. A complete copy of the approved Application for Permit to Drill, along with any conditions of approval, shall be available to authorized personnel at the drill site whenever active drilling operations are under way.
- D. For Wildcat wells only, a drilling operations progress report is to be submitted, to the BLM-Field Office, weekly from the spud date until the well is completed and the Well Completion Report is filed. The report should be on 8-1/2 x 11 inch paper, and each page should identify the well by; operator's name, well number, location and lease number.
- E. As soon as practical, notice is required of all blowouts, fires and accidents involving life-threatening injuries or loss of life. (See NTL-3A).
- F. Prior approval by the BLM-Authorized Office (Drilling and Production Section) is required for variance from the approved drilling program and before commencing plugging operations, plug back work, casing repair work, corrective cementing operations, or suspending drilling operations indefinitely. Emergency approval may be obtained orally, but such approval is contingent upon filing of a Notice of Intent sundry within three business days. **Any changes to the approved plan or any questions regarding drilling operations should be directed to BLM during regular business hours at 505-564-7600. Emergency program changes after hours should be directed to Virgil Lucero at 505-793-1836.**
- G. **The Inspection and Enforcement Section (I&E), phone number (505-564-7750) is to be notified at least 24 hours in advance of BOP test, spudding, cementing, or plugging operations so that a BLM representative may witness the operations.**
- H. From the time drilling operations are initiated and until drilling operations are completed, a member of the drilling crew or the tool pusher shall always maintain rig surveillance, unless the well is secured with blowout preventers or cement plugs.
- I. If for any reason, drilling operations are suspended for more than 90 days, a written notice must be provided to this office outlining your plans for this well.

II. REPORTING REQUIREMENTS

- A. For reporting purposes, all well Sundry notices, well completion and other well actions shall be referenced by the appropriate lease, communitization agreement and/or unit agreement numbers.
- B. The following reports shall be filed with the BLM-Authorized Officer within 30 days after the work is completed.
1. Original and three copies on Federal and an Original and five copies on Indian leases of Sundry Notice (Form 3150-5), giving complete information concerning.
 - a. Setting of each string of casing. Show size and depth of hole, grade and weight of casing, depth set, depth of any and all cementing tools that are used, amount (in cubic feet) and types of cement used, whether cement circulated to surface and all cement tops in the casing annulus, casing test method and results, and the date work was done. Show spud date on first report submitted.
 - b. Intervals tested, perforated (include; size, number and location of perforations), acidized, or fractured; and results obtained. Provide date work was done on well completion report and completion sundry notice.
 - c. Subsequent Report of Abandonment, show the manner in which the well was plugged, including depths where casing was cut and pulled, intervals (by depths) where cement plugs were replaced, and dates of the operations.
 2. Well Completion Report (Form 3160-4) will be submitted with 30 days after well has been completed.
 - a. Initial Bottom Hole Pressure (BHP) for the producing formations. Show the BHP on the completion report. The pressure may be: 1) measured with a bottom hole bomb, or; 2) calculated based on shut in surface pressures (minimum seven day buildup) and fluid level shot.
 3. Submit a cement evaluation log, if cement is not circulated to surface.

III. DRILLER'S LOG

The following shall be entered in the daily driller's log: 1) Blowout preventer pressures tests, including test pressures and results. 2) Blowout preventer tests for proper functioning, 3) Blowout prevention drills conducted, 4) Casing run, including size, grade, weight, and depth set, 5) How pipe was cemented, including amount of cement, type, whether cement circulated to surface, location of cementing tools, etc., 6) Waiting on cement time for each casing string, 7) Casing pressure tests after cementing, including test pressure and results and 8) Estimated amounts of oil and gas recovered and/or produced during drill stem test.

IV. GAS FLARING

Gas produced from this well may not be vented or flared beyond an initial, authorized test period of * 30 Days or 50 MMCF following its (completion)(recompletion), whichever first occurs, without the prior, written approval of the authorized officer. Should gas be vented or flared without approval beyond the test period authorized above, you may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted. You shall be required to compensate the lessor for the portion of the gas vented or flared without approval which is determined to have been avoidably lost.

*30 days, unless a longer test period is specifically approved by the authorized officer. The 30-day period will commence upon the first gas to surface.

V. SAFETY

- A. All rig heating stoves are to be of the explosion-proof type.
- B. Rig safety lines are to be installed.
- C. Hard hats and other Personal Protective Equipment (PPE) must be utilized.

VI. CHANGE OF PLANS OR ABANDONMENT

- A. Any changes of plans required to mitigate unanticipated conditions encountered during drilling operations, will require approval as set forth in Section 1.F.
- B. If the well is dry, it is to be plugged in accordance with 43 CFR 3162.3-4, approval of the proposed plugging program is required as set forth in Section 1.F. The report should show the total depth reached, the reason for plugging, and the proposed intervals, by depths, where cement plugs are to be placed, type of plugging mud, etc. A Subsequent Report of Abandonment is required as set forth in Section II.B.1c.
- C. Unless a well has been properly cased and cemented, or properly plugged, the drilling rig must not be moved from the drill site without prior approval from the BLM-Authorized Officer.

VII. PHONE NUMBERS

- A. For BOPE tests, cementing, and plugging operations the phone number is 505-564-7750 and must be called 24 hours in advance in order that a BLM representative may witness the operations.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 381782

CONDITIONS

Operator: DJR OPERATING, LLC 200 Energy Court Farmington, NM 87401	OGRID:
	371838
	Action Number:
	381782
Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)	

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Notify OCD 24 hours prior to casing & cement	9/17/2024
ward.rikala	Will require a File As Drilled C-102 and a Directional Survey with the C-104	9/17/2024
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	9/17/2024
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing	9/17/2024
ward.rikala	If cement does not circulate on any string, a CBL is required for that string of casing	9/17/2024
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	9/17/2024
ward.rikala	This well can not be produced until operator is in compliance with Rule 5.9.	9/17/2024