

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 382893

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Paloma Permian AssetCo, LLC 1100 Louisiana, Ste. 5100 Houston, TX 77002		2. OGRID Number 332449
		3. API Number 30-015-56261
4. Property Code 337041	5. Property Name HOLLYWOOD STAR FEE 17 18	6. Well No. 801H

7. Surface Location

UL - Lot L	Section 16	Township 22S	Range 27E	Lot Idn	Feet From 1691	N/S Line S	Feet From 180	E/W Line W	County Eddy
---------------	---------------	-----------------	--------------	---------	-------------------	---------------	------------------	---------------	----------------

8. Proposed Bottom Hole Location

UL - Lot L	Section 18	Township 22S	Range 27E	Lot Idn 3	Feet From 1374	N/S Line S	Feet From 200	E/W Line W	County Eddy
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	------------------	---------------	----------------

9. Pool Information

PURPLE SAGE;WOLFCAMP (GAS)	98220
----------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type GAS	13. Cable/Rotary	14. Lease Type Private	15. Ground Level Elevation 3113
16. Multiple N	17. Proposed Depth 19928	18. Formation Wolfcamp	19. Contractor	20. Spud Date 4/1/2025
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	658	570	0
Int1	12.25	9.625	40	3107	1088	0
Prod	8.75	5.5	23	9788	2859	0
Prod	8.5	5.5	23	19928	2859	9788


Casing/Cement Program: Additional Comments

We will be drilling 8.75" open hole in vertical and curve, then downsize to 8.5" open hole for the lateral, then run a 5.5" long string of casing, after plan to cement with 2859 sks of Class H cement, estimating top of lead cement at surface and top of tail cement at 6000'.


22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5000	3500	Axon
Double Ram	10000	5000	Axon
Pipe	10000	5000	Axon

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Brittney Brunner	Approved By: Matthew Gomez
Title: OpAdmin	Title:
Email Address: bbrunner@palomaresources.com	Approved Date: 2/24/2025 Expiration Date: 2/24/2027
Date: 2/6/2025 Phone: 713-654-8534	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION				Revised July 9, 2024				
					Submittal Type:	☒ Initial Submittal			
						☐ Amended Report			
WELL LOCATION INFORMATION									
API Number 30-015-56261 PENDING		Pool Code 98220		Pool Name PURPLE SAGE WOLFCAMP (GAS)					
Property Code 337041		Property Name HOLLYWOOD STAR FEE 17-18					Well Number #801H		
OGRID No. 332449		Operator Name PALOMA PERMIAN ASSETCO, LLC					Ground Level Elevation 3113'		
Surface Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal					Mineral Owner: ☐ State ☒ Fee ☐ Tribal ☐ Federal				
Surface Location									
UL L	Section 16	Township 22 S	Range 27 E	Lot	Ft. from N/S 1691' FSL	Ft. from E/W 180' FWL	Latitude 32.390223°	Longitude -104.202404°	County EDDY
Bottom Hole Location									
UL	Section 18	Township 22 S	Range 27 E	Lot LOT 3	Ft. from N/S 1374' FSL	Ft. from E/W 200' FWL	Latitude 32.388779°	Longitude -104.236898°	County EDDY
Dedicated Acres 1267.84		Infill or Defining Well Infill		Defining Well API Pending		Overlapping Spacing Unit (Y/N) N		Consolidation Code	
Order Numbers.						Well setbacks are under Common Ownership: ☐ Yes ☐ No			
Kick Off Point (KOP)									
UL L	Section 16	Township 22 S	Range 27 E	Lot	Ft. from N/S 1374' FSL	Ft. from E/W 270' FWL	Latitude 32.389348°	Longitude -104.202111°	County EDDY
First Take Point (FTP)									
UL I	Section 17	Township 22 S	Range 27 E	Lot	Ft. from N/S 1374' FSL	Ft. from E/W 330' FEL	Latitude 32.389345°	Longitude -104.204055°	County EDDY
Last Take Point (LTP)									
UL	Section 18	Township 22 S	Range 27 E	Lot LOT 3	Ft. from N/S 1374' FSL	Ft. from E/W 330' FWL	Latitude 32.388788°	Longitude -104.236477°	County EDDY
Unitized Area or Area of Uniform Interest				Spacing Unit Type ☒ Horizontal ☐ Vertical			Ground Floor Elevation: 3113'		
OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i>  2/20/2025					SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>  17 Feb 2025				
Signature Lelan J Anders					Signature and Seal of Professional Surveyor 21209 FEBRUARY 17, 2025				
Printed Name LAnders@PalomResources.com					Certificate Number		Date of Survey		
Email Address									

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

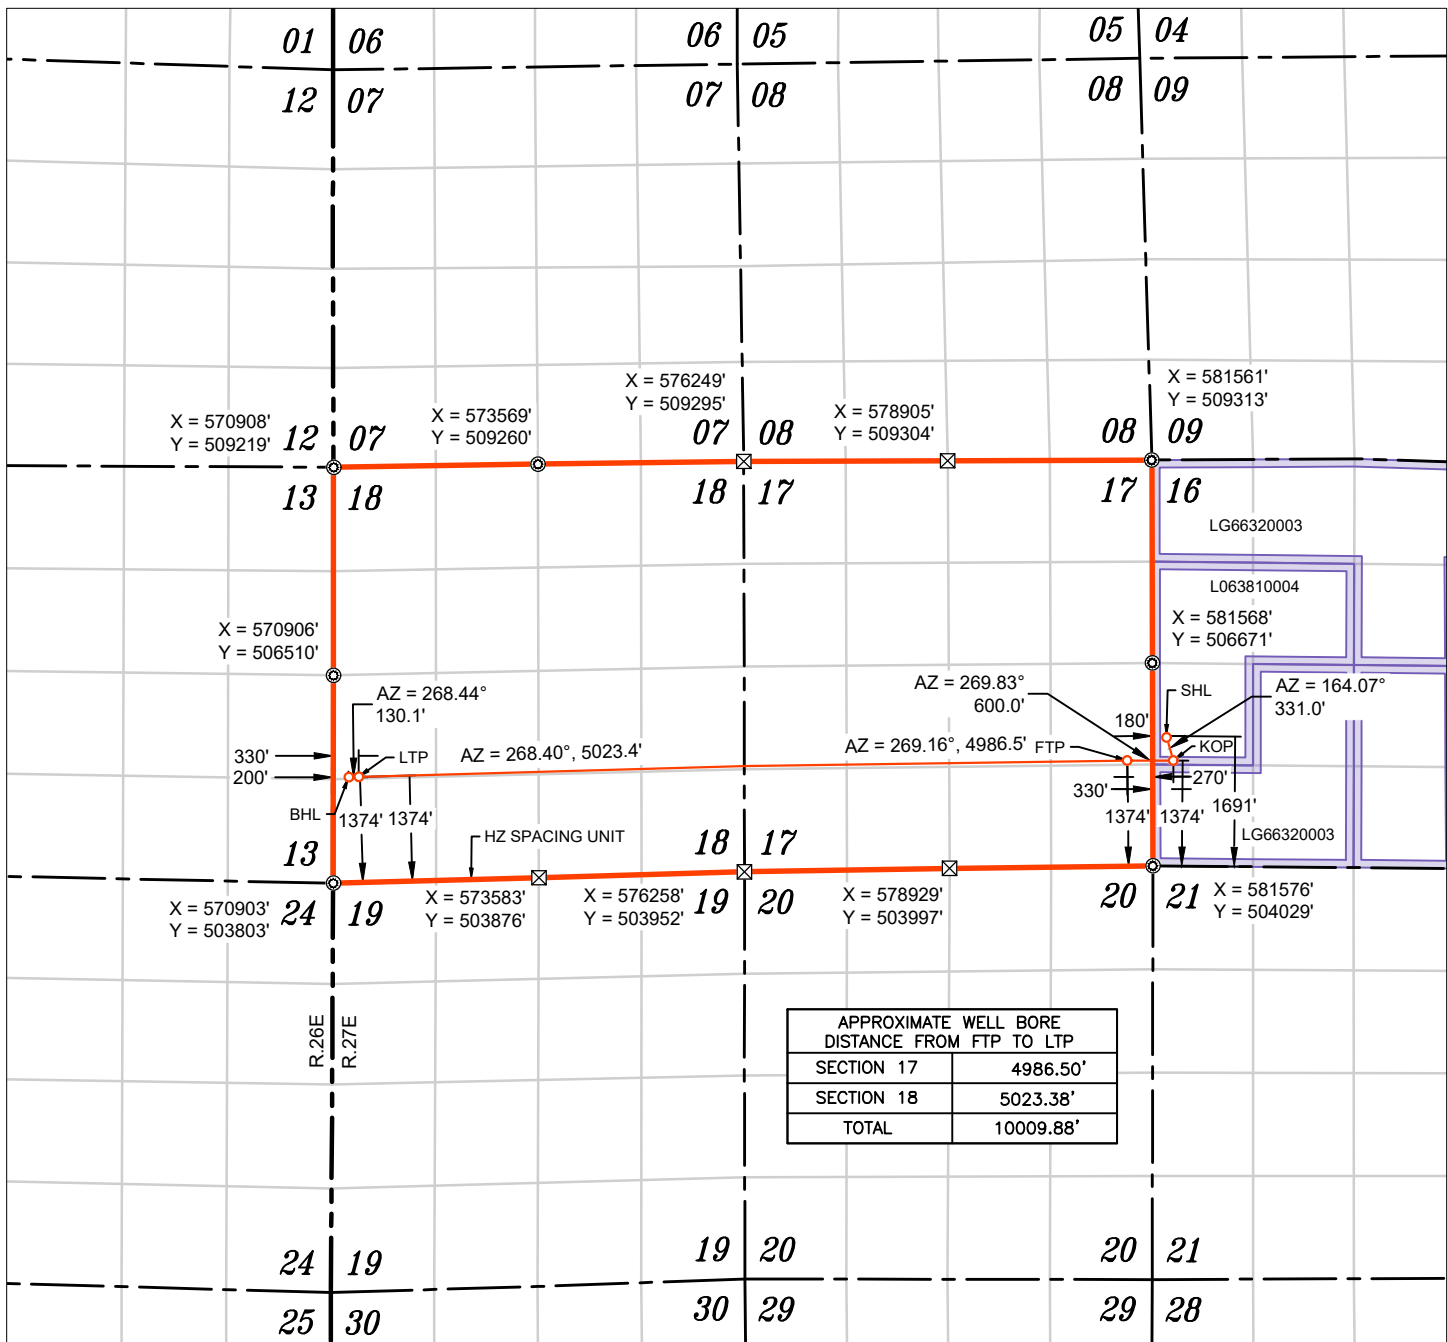

WELL NAME: HOLLYWOOD STAR FEE 17-18 #801H
ELEVATION: 3113'

NAD 83 (SHL) 1691' FSL & 180' FWL
LATITUDE = 32.390223°
LONGITUDE = -104.202404°
NAD 27 (SURFACE HOLE LOCATION)
LATITUDE = 32.390105°
LONGITUDE = -104.201902°
STATE PLANE NAD 83 (N.M. EAST)
N: 505719.43' E: 581751.07'
STATE PLANE NAD 27 (N.M. EAST)
N: 505659.80' E: 540569.58'

NAD 83 (KOP) 1374' FSL & 270' FWL
LATITUDE = 32.389348°
LONGITUDE = -104.202111°
NAD 27 (KOP)
LATITUDE = 32.389230°
LONGITUDE = -104.201609°
STATE PLANE NAD 83 (N.M. EAST)
N: 505401.17' E: 581841.93'
STATE PLANE NAD 27 (N.M. EAST)
N: 505341.54' E: 540660.44'

NAD 83 (FTP) 1374' FSL & 330' FEL
LATITUDE = 32.389345°
LONGITUDE = -104.204055°
NAD 27 (FTP)
LATITUDE = 32.389227°
LONGITUDE = -104.203553°
STATE PLANE NAD 83 (N.M. EAST)
N: 505399.42' E: 581241.93'
STATE PLANE NAD 27 (N.M. EAST)
N: 505339.80' E: 540060.44'


NAD 83 (LTP) 1374' FSL & 330' FWL
LATITUDE = 32.388788°
LONGITUDE = -104.236477°
NAD 27 (LTP)
LATITUDE = 32.388670°
LONGITUDE = -104.235973°
STATE PLANE NAD 83 (N.M. EAST)
N: 505186.12' E: 571234.54'
STATE PLANE NAD 27 (N.M. EAST)
N: 505126.61' E: 530053.16'

NAD 83 (BHL) 1374' FSL & 200' FWL
LATITUDE = 32.388779°
LONGITUDE = -104.236898°
NAD 27 (BHL)
LATITUDE = 32.388661°
LONGITUDE = -104.236394°
STATE PLANE NAD 83 (N.M. EAST)
N: 505182.57' E: 571104.54'
STATE PLANE NAD 27 (N.M. EAST)
N: 505123.07' E: 529923.16'

- FOUND MONUMENT
 CALC. CORNER
 SHL/ KOP/ FTP / PPP/ LTP / BHL
 HORIZONTAL SPACING UNIT
 STATE OIL & GAS LEASE
 BLM OIL & GAS LEASE

NOTES

- ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001).
- THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING NOVEMBER, 2024. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



SCALE: 1" = 2500'

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 382893

PERMIT COMMENTS

Operator Name and Address: Paloma Permian AssetCo, LLC [332449] 1100 Louisiana, Ste. 5100 Houston, TX 77002		API Number: 30-015-56261
		Well: HOLLYWOOD STAR FEE 17 18 #801H
Created By	Comment	Comment Date
lelananders	The surface location is in section 16, but the unit will be section 17 and 18 of T22S R27E. See C-102 attached in completion for details.	2/6/2025

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 382893

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Paloma Permian AssetCo, LLC [332449] 1100 Louisiana, Ste. 5100 Houston, TX 77002	API Number: 30-015-56261
	Well: HOLLYWOOD STAR FEE 17 18 #801H

OCD Reviewer	Condition
matthew.gomez	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
matthew.gomez	Notify the OCD 24 hours prior to casing & cement.
matthew.gomez	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
matthew.gomez	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
matthew.gomez	Cement is required to circulate on both surface and intermediate1 strings of casing.
matthew.gomez	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.
matthew.gomez	File As Drilled C-102 and a directional Survey with C-104 completion packet.
matthew.gomez	Administrative order required for non-standard spacing unit prior to production.
matthew.gomez	Prior to production of this well a change to the well name/number is required to comply with the OCD well naming convention.
matthew.gomez	This well is within the radius of the Carlsbad Brine Well. Operator shall provide written notice to OCD at least 14 days prior to the start of any drilling or completion activities. The notice shall be filed with OCD.Engineer@state.nm.us.
matthew.gomez	Vertical portions of wells may not advance within 1/4-mile of the backfilled void.
matthew.gomez	Lateral portions of wells occurring within 1-mile of the backfilled void may not occur at depths less than 5,000 feet.
matthew.gomez	Completion activities (hydraulic fracturing) within 1-mile of the backfilled void may not occur simultaneously. OCD may require the completion schedule to be modified if multiple completions are planned to occur simultaneously.



PALOMA RESOURCES

**EDDY CO., NM (NAD83, NME)
HOLLYWOOD STAR FEE 17-18
#801H**

OH

Plan: PLAN #1

Standard Planning Report

18 January, 2025



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Project	EDDY CO., NM (NAD83, NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		HOLLYWOOD STAR FEE 17-18				
Site Position:		Northing:	505,679.44 usft	Latitude:	32.3901134	
From:	Map	Easting:	581,751.18 usft	Longitude:	-104.2024042	
Position Uncertainty:		0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.070 °

Well	#801H					
Well Position	+N/-S	39.99 usft	Northing:	505,719.43 usft	Latitude:	32.3902233
	+E/-W	-0.11 usft	Easting:	581,751.07 usft	Longitude:	-104.2024044
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,113.00 usft

Wellbore	OH				
----------	----	--	--	--	--

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	02/25/25	6.415	59.838	47,145

Design	PLAN #1			
--------	---------	--	--	--

Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	268.77

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.000	
1,158.00	3.16	90.00	1,157.92	0.00	4.36	2.00	2.00	0.00	90.000	
1,365.40	3.16	172.07	1,365.09	-5.66	10.86	2.00	0.00	39.57	130.998	
8,627.49	3.16	172.07	8,616.15	-402.12	66.05	0.00	0.00	0.00	0.000	
8,785.47	0.00	268.65	8,774.05	-406.43	66.65	2.00	-2.00	0.00	180.000	
8,885.47	0.00	268.65	8,874.05	-406.43	66.65	0.00	0.00	0.00	0.000	
9,788.47	90.30	268.65	9,447.00	-420.00	-509.14	10.00	10.00	0.00	0.000	
18,188.47	90.30	268.65	9,403.09	-617.90	-8,906.69	0.00	0.00	0.00	0.000	
18,255.97	90.30	270.00	9,402.73	-618.69	-8,974.19	2.00	0.00	2.00	89.976	
19,928.27	90.30	270.00	9,393.98	-618.69	-10,646.46	0.00	0.00	0.00	0.000	



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	2.00	90.00	1,099.98	0.00	1.75	-1.74	2.00	2.00	0.00
1,158.00	3.16	90.00	1,157.92	0.00	4.36	-4.35	2.00	2.00	0.00
1,200.00	2.68	103.66	1,199.87	-0.23	6.47	-6.46	2.00	-1.13	32.53
1,300.00	2.50	148.85	1,299.77	-2.66	9.88	-9.82	2.00	-0.18	45.19
1,365.40	3.16	172.07	1,365.09	-5.66	10.86	-10.74	2.00	1.00	35.51
1,400.00	3.16	172.07	1,399.64	-7.55	11.13	-10.96	0.00	0.00	0.00
1,500.00	3.16	172.07	1,499.49	-13.01	11.89	-11.60	0.00	0.00	0.00
1,600.00	3.16	172.07	1,599.34	-18.47	12.65	-12.25	0.00	0.00	0.00
1,700.00	3.16	172.07	1,699.19	-23.93	13.41	-12.89	0.00	0.00	0.00
1,800.00	3.16	172.07	1,799.03	-29.39	14.17	-13.53	0.00	0.00	0.00
1,900.00	3.16	172.07	1,898.88	-34.85	14.93	-14.17	0.00	0.00	0.00
2,000.00	3.16	172.07	1,998.73	-40.31	15.69	-14.82	0.00	0.00	0.00
2,100.00	3.16	172.07	2,098.58	-45.77	16.45	-15.46	0.00	0.00	0.00
2,200.00	3.16	172.07	2,198.43	-51.23	17.21	-16.10	0.00	0.00	0.00
2,300.00	3.16	172.07	2,298.27	-56.69	17.97	-16.74	0.00	0.00	0.00
2,400.00	3.16	172.07	2,398.12	-62.14	18.73	-17.39	0.00	0.00	0.00
2,500.00	3.16	172.07	2,497.97	-67.60	19.49	-18.03	0.00	0.00	0.00
2,600.00	3.16	172.07	2,597.82	-73.06	20.25	-18.67	0.00	0.00	0.00
2,700.00	3.16	172.07	2,697.67	-78.52	21.01	-19.32	0.00	0.00	0.00
2,800.00	3.16	172.07	2,797.51	-83.98	21.77	-19.96	0.00	0.00	0.00
2,900.00	3.16	172.07	2,897.36	-89.44	22.53	-20.60	0.00	0.00	0.00
3,000.00	3.16	172.07	2,997.21	-94.90	23.29	-21.24	0.00	0.00	0.00
3,100.00	3.16	172.07	3,097.06	-100.36	24.05	-21.89	0.00	0.00	0.00
3,200.00	3.16	172.07	3,196.91	-105.82	24.81	-22.53	0.00	0.00	0.00
3,300.00	3.16	172.07	3,296.75	-111.28	25.57	-23.17	0.00	0.00	0.00
3,400.00	3.16	172.07	3,396.60	-116.74	26.33	-23.81	0.00	0.00	0.00
3,500.00	3.16	172.07	3,496.45	-122.20	27.09	-24.46	0.00	0.00	0.00
3,600.00	3.16	172.07	3,596.30	-127.66	27.85	-25.10	0.00	0.00	0.00
3,700.00	3.16	172.07	3,696.15	-133.11	28.61	-25.74	0.00	0.00	0.00
3,800.00	3.16	172.07	3,795.99	-138.57	29.37	-26.38	0.00	0.00	0.00
3,900.00	3.16	172.07	3,895.84	-144.03	30.13	-27.03	0.00	0.00	0.00
4,000.00	3.16	172.07	3,995.69	-149.49	30.89	-27.67	0.00	0.00	0.00
4,100.00	3.16	172.07	4,095.54	-154.95	31.65	-28.31	0.00	0.00	0.00
4,200.00	3.16	172.07	4,195.39	-160.41	32.41	-28.95	0.00	0.00	0.00
4,300.00	3.16	172.07	4,295.23	-165.87	33.17	-29.60	0.00	0.00	0.00
4,400.00	3.16	172.07	4,395.08	-171.33	33.93	-30.24	0.00	0.00	0.00
4,500.00	3.16	172.07	4,494.93	-176.79	34.69	-30.88	0.00	0.00	0.00
4,600.00	3.16	172.07	4,594.78	-182.25	35.45	-31.52	0.00	0.00	0.00
4,700.00	3.16	172.07	4,694.63	-187.71	36.21	-32.17	0.00	0.00	0.00
4,800.00	3.16	172.07	4,794.47	-193.17	36.97	-32.81	0.00	0.00	0.00
4,900.00	3.16	172.07	4,894.32	-198.63	37.73	-33.45	0.00	0.00	0.00
5,000.00	3.16	172.07	4,994.17	-204.08	38.49	-34.10	0.00	0.00	0.00
5,100.00	3.16	172.07	5,094.02	-209.54	39.24	-34.74	0.00	0.00	0.00



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200.00	3.16	172.07	5,193.87	-215.00	40.00	-35.38	0.00	0.00	0.00
5,300.00	3.16	172.07	5,293.71	-220.46	40.76	-36.02	0.00	0.00	0.00
5,400.00	3.16	172.07	5,393.56	-225.92	41.52	-36.67	0.00	0.00	0.00
5,500.00	3.16	172.07	5,493.41	-231.38	42.28	-37.31	0.00	0.00	0.00
5,600.00	3.16	172.07	5,593.26	-236.84	43.04	-37.95	0.00	0.00	0.00
5,700.00	3.16	172.07	5,693.11	-242.30	43.80	-38.59	0.00	0.00	0.00
5,800.00	3.16	172.07	5,792.95	-247.76	44.56	-39.24	0.00	0.00	0.00
5,900.00	3.16	172.07	5,892.80	-253.22	45.32	-39.88	0.00	0.00	0.00
6,000.00	3.16	172.07	5,992.65	-258.68	46.08	-40.52	0.00	0.00	0.00
6,100.00	3.16	172.07	6,092.50	-264.14	46.84	-41.16	0.00	0.00	0.00
6,200.00	3.16	172.07	6,192.35	-269.60	47.60	-41.81	0.00	0.00	0.00
6,300.00	3.16	172.07	6,292.19	-275.05	48.36	-42.45	0.00	0.00	0.00
6,400.00	3.16	172.07	6,392.04	-280.51	49.12	-43.09	0.00	0.00	0.00
6,500.00	3.16	172.07	6,491.89	-285.97	49.88	-43.73	0.00	0.00	0.00
6,600.00	3.16	172.07	6,591.74	-291.43	50.64	-44.38	0.00	0.00	0.00
6,700.00	3.16	172.07	6,691.59	-296.89	51.40	-45.02	0.00	0.00	0.00
6,800.00	3.16	172.07	6,791.43	-302.35	52.16	-45.66	0.00	0.00	0.00
6,900.00	3.16	172.07	6,891.28	-307.81	52.92	-46.30	0.00	0.00	0.00
7,000.00	3.16	172.07	6,991.13	-313.27	53.68	-46.95	0.00	0.00	0.00
7,100.00	3.16	172.07	7,090.98	-318.73	54.44	-47.59	0.00	0.00	0.00
7,200.00	3.16	172.07	7,190.83	-324.19	55.20	-48.23	0.00	0.00	0.00
7,300.00	3.16	172.07	7,290.67	-329.65	55.96	-48.88	0.00	0.00	0.00
7,400.00	3.16	172.07	7,390.52	-335.11	56.72	-49.52	0.00	0.00	0.00
7,500.00	3.16	172.07	7,490.37	-340.57	57.48	-50.16	0.00	0.00	0.00
7,600.00	3.16	172.07	7,590.22	-346.02	58.24	-50.80	0.00	0.00	0.00
7,700.00	3.16	172.07	7,690.07	-351.48	59.00	-51.45	0.00	0.00	0.00
7,800.00	3.16	172.07	7,789.91	-356.94	59.76	-52.09	0.00	0.00	0.00
7,900.00	3.16	172.07	7,889.76	-362.40	60.52	-52.73	0.00	0.00	0.00
8,000.00	3.16	172.07	7,989.61	-367.86	61.28	-53.37	0.00	0.00	0.00
8,100.00	3.16	172.07	8,089.46	-373.32	62.04	-54.02	0.00	0.00	0.00
8,200.00	3.16	172.07	8,189.31	-378.78	62.80	-54.66	0.00	0.00	0.00
8,300.00	3.16	172.07	8,289.15	-384.24	63.56	-55.30	0.00	0.00	0.00
8,400.00	3.16	172.07	8,389.00	-389.70	64.32	-55.94	0.00	0.00	0.00
8,500.00	3.16	172.07	8,488.85	-395.16	65.08	-56.59	0.00	0.00	0.00
8,600.00	3.16	172.07	8,588.70	-400.62	65.84	-57.23	0.00	0.00	0.00
8,627.49	3.16	172.07	8,616.15	-402.12	66.05	-57.41	0.00	0.00	0.00
8,700.00	1.71	172.07	8,688.59	-405.17	66.48	-57.76	2.00	-2.00	0.00
8,785.47	0.00	268.65	8,774.05	-406.43	66.65	-57.91	2.00	-2.00	0.00
8,800.00	0.00	0.00	8,788.58	-406.43	66.65	-57.91	0.00	0.00	0.00
8,885.47	0.00	268.65	8,874.05	-406.43	66.65	-57.91	0.00	0.00	0.00
8,900.00	1.45	268.65	8,888.57	-406.44	66.47	-57.73	10.00	10.00	0.00
8,950.00	6.45	268.65	8,938.44	-406.52	63.02	-54.28	10.00	10.00	0.00
9,000.00	11.45	268.65	8,987.81	-406.70	55.25	-46.51	10.00	10.00	0.00
9,050.00	16.45	268.65	9,036.32	-406.98	43.20	-34.45	10.00	10.00	0.00
9,100.00	21.45	268.65	9,083.60	-407.37	26.97	-18.22	10.00	10.00	0.00
9,150.00	26.45	268.65	9,129.28	-407.84	6.68	2.07	10.00	10.00	0.00
9,200.00	31.45	268.65	9,173.01	-408.41	-17.51	26.27	10.00	10.00	0.00
9,250.00	36.45	268.65	9,214.48	-409.07	-45.42	54.19	10.00	10.00	0.00
9,300.00	41.45	268.65	9,253.35	-409.81	-76.83	85.61	10.00	10.00	0.00
9,350.00	46.45	268.65	9,289.33	-410.63	-111.51	120.30	10.00	10.00	0.00
9,400.00	51.45	268.65	9,322.16	-411.52	-149.20	158.00	10.00	10.00	0.00
9,450.00	56.45	268.65	9,351.57	-412.47	-189.60	198.41	10.00	10.00	0.00
9,500.00	61.45	268.65	9,377.35	-413.48	-232.41	241.23	10.00	10.00	0.00
9,550.00	66.45	268.65	9,399.30	-414.54	-277.31	286.14	10.00	10.00	0.00



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,600.00	71.45	268.65	9,417.25	-415.64	-323.94	332.79	10.00	10.00	0.00	
9,650.00	76.45	268.65	9,431.07	-416.77	-371.97	380.83	10.00	10.00	0.00	
9,700.00	81.45	268.65	9,440.64	-417.92	-421.01	429.89	10.00	10.00	0.00	
9,750.00	86.45	268.65	9,445.91	-419.09	-470.70	479.59	10.00	10.00	0.00	
9,788.47	90.30	268.65	9,447.00	-420.00	-509.14	518.04	10.00	10.00	0.00	
9,800.00	90.30	268.65	9,446.94	-420.27	-520.67	529.57	0.00	0.00	0.00	
9,900.00	90.30	268.65	9,446.42	-422.63	-620.64	629.57	0.00	0.00	0.00	
10,000.00	90.30	268.65	9,445.89	-424.98	-720.61	729.56	0.00	0.00	0.00	
10,100.00	90.30	268.65	9,445.37	-427.34	-820.58	829.56	0.00	0.00	0.00	
10,200.00	90.30	268.65	9,444.85	-429.70	-920.55	929.56	0.00	0.00	0.00	
10,300.00	90.30	268.65	9,444.33	-432.05	-1,020.52	1,029.56	0.00	0.00	0.00	
10,400.00	90.30	268.65	9,443.80	-434.41	-1,120.49	1,129.56	0.00	0.00	0.00	
10,500.00	90.30	268.65	9,443.28	-436.76	-1,220.46	1,229.56	0.00	0.00	0.00	
10,600.00	90.30	268.65	9,442.76	-439.12	-1,320.43	1,329.56	0.00	0.00	0.00	
10,700.00	90.30	268.65	9,442.23	-441.48	-1,420.40	1,429.55	0.00	0.00	0.00	
10,800.00	90.30	268.65	9,441.71	-443.83	-1,520.38	1,529.55	0.00	0.00	0.00	
10,900.00	90.30	268.65	9,441.19	-446.19	-1,620.35	1,629.55	0.00	0.00	0.00	
11,000.00	90.30	268.65	9,440.67	-448.54	-1,720.32	1,729.55	0.00	0.00	0.00	
11,100.00	90.30	268.65	9,440.14	-450.90	-1,820.29	1,829.55	0.00	0.00	0.00	
11,200.00	90.30	268.65	9,439.62	-453.25	-1,920.26	1,929.55	0.00	0.00	0.00	
11,300.00	90.30	268.65	9,439.10	-455.61	-2,020.23	2,029.54	0.00	0.00	0.00	
11,400.00	90.30	268.65	9,438.58	-457.97	-2,120.20	2,129.54	0.00	0.00	0.00	
11,500.00	90.30	268.65	9,438.05	-460.32	-2,220.17	2,229.54	0.00	0.00	0.00	
11,600.00	90.30	268.65	9,437.53	-462.68	-2,320.14	2,329.54	0.00	0.00	0.00	
11,700.00	90.30	268.65	9,437.01	-465.03	-2,420.11	2,429.54	0.00	0.00	0.00	
11,800.00	90.30	268.65	9,436.48	-467.39	-2,520.08	2,529.54	0.00	0.00	0.00	
11,900.00	90.30	268.65	9,435.96	-469.75	-2,620.06	2,629.53	0.00	0.00	0.00	
12,000.00	90.30	268.65	9,435.44	-472.10	-2,720.03	2,729.53	0.00	0.00	0.00	
12,100.00	90.30	268.65	9,434.92	-474.46	-2,820.00	2,829.53	0.00	0.00	0.00	
12,200.00	90.30	268.65	9,434.39	-476.81	-2,919.97	2,929.53	0.00	0.00	0.00	
12,300.00	90.30	268.65	9,433.87	-479.17	-3,019.94	3,029.53	0.00	0.00	0.00	
12,400.00	90.30	268.65	9,433.35	-481.53	-3,119.91	3,129.53	0.00	0.00	0.00	
12,500.00	90.30	268.65	9,432.83	-483.88	-3,219.88	3,229.53	0.00	0.00	0.00	
12,600.00	90.30	268.65	9,432.30	-486.24	-3,319.85	3,329.52	0.00	0.00	0.00	
12,700.00	90.30	268.65	9,431.78	-488.59	-3,419.82	3,429.52	0.00	0.00	0.00	
12,800.00	90.30	268.65	9,431.26	-490.95	-3,519.79	3,529.52	0.00	0.00	0.00	
12,900.00	90.30	268.65	9,430.73	-493.31	-3,619.76	3,629.52	0.00	0.00	0.00	
13,000.00	90.30	268.65	9,430.21	-495.66	-3,719.73	3,729.52	0.00	0.00	0.00	
13,100.00	90.30	268.65	9,429.69	-498.02	-3,819.71	3,829.52	0.00	0.00	0.00	
13,200.00	90.30	268.65	9,429.17	-500.37	-3,919.68	3,929.51	0.00	0.00	0.00	
13,300.00	90.30	268.65	9,428.64	-502.73	-4,019.65	4,029.51	0.00	0.00	0.00	
13,400.00	90.30	268.65	9,428.12	-505.09	-4,119.62	4,129.51	0.00	0.00	0.00	
13,500.00	90.30	268.65	9,427.60	-507.44	-4,219.59	4,229.51	0.00	0.00	0.00	
13,600.00	90.30	268.65	9,427.07	-509.80	-4,319.56	4,329.51	0.00	0.00	0.00	
13,700.00	90.30	268.65	9,426.55	-512.15	-4,419.53	4,429.51	0.00	0.00	0.00	
13,800.00	90.30	268.65	9,426.03	-514.51	-4,519.50	4,529.50	0.00	0.00	0.00	
13,900.00	90.30	268.65	9,425.51	-516.87	-4,619.47	4,629.50	0.00	0.00	0.00	
14,000.00	90.30	268.65	9,424.98	-519.22	-4,719.44	4,729.50	0.00	0.00	0.00	
14,100.00	90.30	268.65	9,424.46	-521.58	-4,819.41	4,829.50	0.00	0.00	0.00	
14,200.00	90.30	268.65	9,423.94	-523.93	-4,919.39	4,929.50	0.00	0.00	0.00	
14,300.00	90.30	268.65	9,423.42	-526.29	-5,019.36	5,029.50	0.00	0.00	0.00	
14,400.00	90.30	268.65	9,422.89	-528.65	-5,119.33	5,129.50	0.00	0.00	0.00	
14,500.00	90.30	268.65	9,422.37	-531.00	-5,219.30	5,229.49	0.00	0.00	0.00	
14,600.00	90.30	268.65	9,421.85	-533.36	-5,319.27	5,329.49	0.00	0.00	0.00	



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
14,700.00	90.30	268.65	9,421.32	-535.71	-5,419.24	5,429.49	0.00	0.00	0.00	
14,800.00	90.30	268.65	9,420.80	-538.07	-5,519.21	5,529.49	0.00	0.00	0.00	
14,900.00	90.30	268.65	9,420.28	-540.42	-5,619.18	5,629.49	0.00	0.00	0.00	
15,000.00	90.30	268.65	9,419.76	-542.78	-5,719.15	5,729.49	0.00	0.00	0.00	
15,100.00	90.30	268.65	9,419.23	-545.14	-5,819.12	5,829.48	0.00	0.00	0.00	
15,200.00	90.30	268.65	9,418.71	-547.49	-5,919.09	5,929.48	0.00	0.00	0.00	
15,300.00	90.30	268.65	9,418.19	-549.85	-6,019.06	6,029.48	0.00	0.00	0.00	
15,400.00	90.30	268.65	9,417.66	-552.20	-6,119.04	6,129.48	0.00	0.00	0.00	
15,500.00	90.30	268.65	9,417.14	-554.56	-6,219.01	6,229.48	0.00	0.00	0.00	
15,600.00	90.30	268.65	9,416.62	-556.92	-6,318.98	6,329.48	0.00	0.00	0.00	
15,700.00	90.30	268.65	9,416.10	-559.27	-6,418.95	6,429.47	0.00	0.00	0.00	
15,800.00	90.30	268.65	9,415.57	-561.63	-6,518.92	6,529.47	0.00	0.00	0.00	
15,900.00	90.30	268.65	9,415.05	-563.98	-6,618.89	6,629.47	0.00	0.00	0.00	
16,000.00	90.30	268.65	9,414.53	-566.34	-6,718.86	6,729.47	0.00	0.00	0.00	
16,100.00	90.30	268.65	9,414.01	-568.70	-6,818.83	6,829.47	0.00	0.00	0.00	
16,200.00	90.30	268.65	9,413.48	-571.05	-6,918.80	6,929.47	0.00	0.00	0.00	
16,300.00	90.30	268.65	9,412.96	-573.41	-7,018.77	7,029.47	0.00	0.00	0.00	
16,400.00	90.30	268.65	9,412.44	-575.76	-7,118.74	7,129.46	0.00	0.00	0.00	
16,500.00	90.30	268.65	9,411.91	-578.12	-7,218.72	7,229.46	0.00	0.00	0.00	
16,600.00	90.30	268.65	9,411.39	-580.48	-7,318.69	7,329.46	0.00	0.00	0.00	
16,700.00	90.30	268.65	9,410.87	-582.83	-7,418.66	7,429.46	0.00	0.00	0.00	
16,800.00	90.30	268.65	9,410.35	-585.19	-7,518.63	7,529.46	0.00	0.00	0.00	
16,900.00	90.30	268.65	9,409.82	-587.54	-7,618.60	7,629.46	0.00	0.00	0.00	
17,000.00	90.30	268.65	9,409.30	-589.90	-7,718.57	7,729.45	0.00	0.00	0.00	
17,100.00	90.30	268.65	9,408.78	-592.26	-7,818.54	7,829.45	0.00	0.00	0.00	
17,200.00	90.30	268.65	9,408.25	-594.61	-7,918.51	7,929.45	0.00	0.00	0.00	
17,300.00	90.30	268.65	9,407.73	-596.97	-8,018.48	8,029.45	0.00	0.00	0.00	
17,400.00	90.30	268.65	9,407.21	-599.32	-8,118.45	8,129.45	0.00	0.00	0.00	
17,500.00	90.30	268.65	9,406.69	-601.68	-8,218.42	8,229.45	0.00	0.00	0.00	
17,600.00	90.30	268.65	9,406.16	-604.04	-8,318.40	8,329.44	0.00	0.00	0.00	
17,700.00	90.30	268.65	9,405.64	-606.39	-8,418.37	8,429.44	0.00	0.00	0.00	
17,800.00	90.30	268.65	9,405.12	-608.75	-8,518.34	8,529.44	0.00	0.00	0.00	
17,900.00	90.30	268.65	9,404.60	-611.10	-8,618.31	8,629.44	0.00	0.00	0.00	
18,000.00	90.30	268.65	9,404.07	-613.46	-8,718.28	8,729.44	0.00	0.00	0.00	
18,100.00	90.30	268.65	9,403.55	-615.82	-8,818.25	8,829.44	0.00	0.00	0.00	
18,188.47	90.30	268.65	9,403.09	-617.90	-8,906.69	8,917.91	0.00	0.00	0.00	
18,200.00	90.30	268.88	9,403.03	-618.15	-8,918.22	8,929.44	2.00	0.00	2.00	
18,255.97	90.30	270.00	9,402.73	-618.69	-8,974.19	8,985.40	2.00	0.00	2.00	
18,300.00	90.30	270.00	9,402.50	-618.69	-9,018.22	9,029.42	0.00	0.00	0.00	
18,400.00	90.30	270.00	9,401.98	-618.69	-9,118.21	9,129.39	0.00	0.00	0.00	
18,500.00	90.30	270.00	9,401.46	-618.69	-9,218.21	9,229.37	0.00	0.00	0.00	
18,600.00	90.30	270.00	9,400.93	-618.69	-9,318.21	9,329.35	0.00	0.00	0.00	
18,700.00	90.30	270.00	9,400.41	-618.69	-9,418.21	9,429.32	0.00	0.00	0.00	
18,800.00	90.30	270.00	9,399.89	-618.69	-9,518.21	9,529.30	0.00	0.00	0.00	
18,900.00	90.30	270.00	9,399.36	-618.69	-9,618.21	9,629.27	0.00	0.00	0.00	
19,000.00	90.30	270.00	9,398.84	-618.69	-9,718.21	9,729.25	0.00	0.00	0.00	
19,100.00	90.30	270.00	9,398.31	-618.69	-9,818.21	9,829.22	0.00	0.00	0.00	
19,200.00	90.30	270.00	9,397.79	-618.69	-9,918.20	9,929.20	0.00	0.00	0.00	
19,300.00	90.30	270.00	9,397.27	-618.69	-10,018.20	10,029.17	0.00	0.00	0.00	
19,400.00	90.30	270.00	9,396.74	-618.69	-10,118.20	10,129.15	0.00	0.00	0.00	
19,500.00	90.30	270.00	9,396.22	-618.69	-10,218.20	10,229.13	0.00	0.00	0.00	
19,600.00	90.30	270.00	9,395.70	-618.69	-10,318.20	10,329.10	0.00	0.00	0.00	
19,700.00	90.30	270.00	9,395.17	-618.69	-10,418.20	10,429.08	0.00	0.00	0.00	
19,800.00	90.30	270.00	9,394.65	-618.69	-10,518.20	10,529.05	0.00	0.00	0.00	



Planning Report

Database:	EDM 5000.1.13 Single User Db	Local Co-ordinate Reference:	Well #801H
Company:	PALOMA RESOURCES	TVD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Project:	EDDY CO., NM (NAD83, NME)	MD Reference:	RKB = 26' @ 3139.00usft (ICD 331)
Site:	HOLLYWOOD STAR FEE 17-18	North Reference:	Grid
Well:	#801H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,900.00	90.30	270.00	9,394.13	-618.69	-10,618.19	10,629.03	0.00	0.00	0.00
19,928.27	90.30	270.00	9,393.98	-618.69	-10,646.46	10,657.29	0.00	0.00	0.00

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
801H (SHL) 1691' FSI - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	505,719.43	581,751.07	32.3902233	-104.2024044
801H (PLAN KOP) 12 - plan hits target center - Point	0.00	0.00	8,874.05	-406.43	66.65	505,313.00	581,817.73	32.3891059	-104.2021901
801H (LTP) 1374' FSL - plan misses target center by 85.39usft at 19798.34usft MD (9394.66 TVD, -618.69 N, -10516.53 E) - Point	0.00	0.00	9,394.00	-533.31	-10,516.53	505,186.12	571,234.54	32.3887881	-104.2364766
801H (BHL) 1374' FSI - plan misses target center by 81.83usft at 19928.27usft MD (9393.98 TVD, -618.69 N, -10646.46 E) - Point	0.00	0.00	9,394.00	-536.86	-10,646.53	505,182.57	571,104.54	32.3887787	-104.2368978
801H (MID-POINT) 13 - plan misses target center by 144.21usft at 14772.77usft MD (9420.94 TVD, -537.43 N, -5491.99 E) - Point	0.00	0.00	9,420.93	-393.26	-5,495.39	505,326.17	576,255.68	32.3891596	-104.2202093
801H (FTP) 1374' FSI - plan misses target center by 99.96usft at 9786.11usft MD (9447.01 TVD, -419.94 N, -506.79 E) - Point	0.00	0.00	9,447.00	-320.01	-509.14	505,399.42	581,241.93	32.3893454	-104.2040552

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Paloma Permian AssetCo, LLC **OGRID:** 332449 **Date:** 1 / 28 / 2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Hollywood Star Fee 17-18 801H		L-16-22S-27E	1691 FSL 180 FWL	1000 bopd	9.2 MMcfpd	7000 bwpd

IV. Central Delivery Point Name: Hollywood Star CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Hollywood Star Fee 17-18 801H		4/1/2025	4/21/2025	8/15/2025	9/22/2025	9/29/2025

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Lelan J Anders
Title: Vice President of Operations
E-mail Address: LAnders@PalomaResources.com
Date: 2-19-2025
Phone: 713-650-8500
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Natural Gas Management Plan – Attachment

- VI.** Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing BRE ProMAX modeling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII.** Paloma Permian AssetCo, LLC (PPA) will take the following actions to comply with the regulations listed in 19.15.27.8:
- A.** PPA will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. PPA will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, compression will be added to deliver volumes that are produced, well production may also be curtailed to manage the flow of gas and not overrun compression.
 - B.** All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations.
 - C.** During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flowback will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, PPA will flare the natural gas for up to 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. PPA will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D.** Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(I) through (4). If there is no adequate takeaway for the separator gas, well(s) will be curtailed until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be measured using a TOTAL FLOW meter and reported appropriately.
 - E.** PPA will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(I) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. PPA will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.

- F.** The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. PPA will install equipment to measure the volume of natural gas flared from existing process piping, or a flowline piped from equipment such as high-pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an PPA issued after May 25, 2021, that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, PPA will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.
- VIII.** For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.



Hydrogen Sulfide Drilling Operations Plan

Paloma Permian AssetCo, LLC
1100 Louisiana Ste 5100
Houston, TX 77002
713-650-8500

1. H₂S Safety Instructions to the following:
 - Characteristics of H₂S.
 - Physical effects and hazards.
 - Principal and operation of H₂S detectors, warning system and briefing areas.
 - Evacuation procedures, routes and First Aid.
 - Proper use of safety equipment and life support systems.
 - Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30 min pressure demand air packs.
2. H₂S Detection & Alarm Systems:
 - H₂S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure/cellar area, on the mud returns pits by the shale shaker. Additional H₂S monitors may be placed as deemed necessary.
 - An audio alarm system will be installed on the derrick, the floor, and in the doghouse.
3. Windssocks and Wind Streamers:
 - Windssocks at mud pit area should be high enough to be visible.
 - Windssock on the rig floor/top of doghouse should be high enough to be visible.
4. Condition Flags & Signs:
 - Warning sign on access road to location
 - Flags to be displayed on sign at entrance to location
 - i. Green Flag – Normal Safe Operation Condition
 - ii. Yellow Flag – Potential Pressure and Danger
 - iii. Red Flag – Danger (H₂S present in dangerous concentrations) Only H₂S trained personnel admitted on location
5. Well Control Equipment:
 - See attached APD

PALOMA

P E R M I A N

6. Communications:

- While working under masks, chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at drilling foreman's trailer or living quarters.

7. Drilling Stem Testing:

- No Drill Stem Tests or hole coring is planned at this time.

8. Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.

9. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavenger chemicals if necessary.

10. Emergency Contacts:

Carlsbad, New Mexico:	
Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-887-3798
Local Emergency Planning Committee	575-887-6544
New Mexico Oil Conservation Division	575-887-6544

Santa Fe, New Mexico:	
New Mexico Emergency Response Commission	505-476-9600
New Mexico Emergency Response Commission (24 hr)	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

Federal Contacts:	
Carlsbad BLM Office	575-234-5972
National Emergency Response Center (Washington, DC)	800-424-8802

Medical:	
Flight for Life - Lubbock, TX	806-743-9911
AeroCare - Lubbock, TX	806-747-8923
Med Flight Air Ambulance - Albuquerque, NM	505-842-4433
SB Air Med Service - Albuquerque, NM	505-842-4949