District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 *Page 1 of 13* Form C-144 Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Proposed Alternative Method Permit or Closure Plan Application Type of action: Below grade tank registration									
Type of action: Below grade tank registration Permit of a pit or proposed alternative method									
BGT2 Closure of a pit, below-grade tank, or proposed alternative method									
Existing BGT Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank,									
or proposed alternative method									
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request									
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.									
1. Operator: <u>Dugan Production Corp.</u> OGRID #: <u>006515</u>									
Address: PO Box 420, Farmington, NM 87499-0420									
Facility or well name: <u>The Bear #2</u> Separator BGT									
API Number:									
U/L or Qtr/Qtr Section Township Range8W County: San Juan									
Center of Proposed Design: Latitude <u>36.185475</u> Longitude <u>-107.67557</u> NAD83									
Surface Owner: 🛛 Federal 🗌 State 🗋 Private 🗋 Tribal Trust or Indian Allotment 1980' FNL & 660' FWL									
2.									
<u>Pit</u>: Subsection F, G or J of 19.15.17.11 NMAC									
Temporary: Drilling Workover									
Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no									
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other									
String-Reinforced									
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D									
3.									
Below-grade tank: Subsection I of 19.15.17.11 NMAC									
Volume: 60 bbl Type of fluid: Produced Water									
Tank Construction material: <u>Steel</u>									
Tank Construction material: Steel Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off									
 Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other 									
Secondary containment with leak detection 🗌 Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off									
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness HDPE PVC Other 4.									
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness IHDPE PVC Other 4. Alternative Method:									
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness HDPE PVC Other 4.									
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness HDPE PVC Other Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.									
 Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other									
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness HDPE PVC Other Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.									
□ Secondary containment with leak detection □ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off □ Visible sidewalls and liner □ Visible sidewalls only □ Other									

<u>Netting</u>: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen D Netting Other_

6.

7.

8.

9.

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

🛛 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.16.8 NMAC

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

□ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.

Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

General siting							
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - ⊠ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells							
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells							
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🗌 No						
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No						
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	🗌 Yes 🗌 No						
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	🗌 Yes 🗌 No						
Below Grade Tanks							
 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🛛 No						
 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🛛 No						
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)							
 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	Yes No						
 Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No						
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search: Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No						

Temporary Pit Non-low chloride drilling fluid Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Yes Nisual inspection (certification) of the proposed site; Aerial photo; Satellite image Yes NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yes Yes NW Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes Ne Comparation of the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Yes Ne Comparation of the proposed site 	eceived by OCD: 5/15/2025 11:59:41 AM	Page 3 0f 1.
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Toographic map: Visual inspection (certification) of the proposed site Yes N Within 300 feet of any other fresh water well or spring, in the existence at the time of initial application. Visual inspection (certification) of the proposed site: Acrial photo: Satellite image Yes N Within 500 horizontal feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - irWATERS database search; Visual inspection (certification) of the proposed site Yes N Within 300 feet of a ventual. US Fish and Widdlife Welland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 300 feet of a continuously flowing watercourse, or 200 feet of any other fissh water wells segnificant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 1000 feet for a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Within 1000 feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Within 1000 feet for a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Within 500 feet of a weltand. US Fish and Withlife Wethand Identification map; Top		Yes No
or playa lake (measured from the ordinary high-water mark). Topographic map: Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Within 300 feet for a permanent residence, school, hospital, institution, or church in existence at the time of the initial application. Within 300 feet of a wetland. Within 300 feet of a setter - iWATERS database search; Visual inspection (certification) of the proposed site Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other resh water may. Yees N Within 300 feet of a continuously flowing watercourse, or 200 feet of any other resh water may. Yees N Within 300 feet of a continuously flowing watercourse, or 200 feet of any other resh water may. Yees N Within 300 feet of a continuously flowing watercourse, or 200 feet of any other resh water may. Yees N Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Yes N Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Within 500 feet of a wetland. Within 500 feet of a wetland. Within 500 feet of a wetland. Yes N Within 500 feet of a wetland. Yes N Within 500 feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. Yes N Within 500 feet of a wetland. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of 19.15.17.1 NMAC Operating Administrator Subsection C of 19	<u>Temporary Pit Non-low chloride drilling fluid</u>	
Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; Ves [] N Within 300 feet of a vertand. Visual inspection (certification) of the proposed site Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa like (measured from the ordinary high-water mark). Topographic map: Visual inspection (certification) of the proposed site Ves [] N Within 500 foet of a serial photo; Satellite image Within 500 feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Visual inspection (certification) of the proposed site Ves [] N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ves [] N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ves [] N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ves [] N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ves [] N Temporary Pits, Emergency Pits, and	or playa lake (measured from the ordinary high-water mark).	🗌 Yes 🗌 No
watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yes N Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Permanent Pit or Multi-Well Fluid Management Pit		🗌 Yes 🗌 No
US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Ves N Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) B of 19.15.17.9 NMAC Instructions: Each of the followi	watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application;	🗌 Yes 🗌 No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yes [] N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Data (Temporary Alt Encyprate Tanks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of 19.15.17.10 NMAC Mease complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.12 NMAC Previously Approved Design (attach copy of design) API Number:		🗌 Yes 🗌 No
lake (measured from the ordinary high-water mark).	Permanent Pit or Multi-Well Fluid Management Pit	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yes N Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of 19.15.17.10 NMAC Being Pilan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Operating and Maintenance Plan - based upon the appropriate requirement	lake (measured from the ordinary high-water mark).	□ Yes □ No
initial application.	Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes No
US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes N Ye	initial application.	🗌 Yes 🗌 No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Biting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of 19.15.17.11 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: It. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.11 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. It. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.11 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc		🗌 Yes 🗌 No
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC	Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC 	cuments are 9 NMAC .15.17.9 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:	Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached.	0.15.17.9 NMAC
	I revously reprove besign (auton copy of design) - An i reamber of remain Number	

.

^{12.} <u>Permanent Pits Permit Application Checklist</u> : Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the</i>	documents are							
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC								
 Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC 								
 Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC 								
 Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC 								
 Nuisance or Hazardous Odors, including H₂S, Prevention Plan Emergency Response Plan Oil Field Weste Stream Characterization 								
 Oil Field Waste Stream Characterization Monitoring and Inspection Plan Encient Control Plan 								
 Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 								
^{13.} <u>Proposed Closure</u> : 19.15.17.13 NMAC <i>Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.</i>								
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	luid Management Pit							
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)								
 On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method 								
14. <u>Waste Excavation and Removal Closure Plan Checklist</u> : (19.15.17.13 NMAC) Instructions: Each of the following items must be	attached to the							
 <i>closure plan. Please indicate, by a check mark in the box, that the documents are attached.</i> Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 								
15.								
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.								
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site								
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No							
 Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No							
Written confirmation or verification from the municipality; Written approval obtained from the municipality $Ves \square No$								
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Image: Comparison of the proposed site								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance								
	r							

Received by OCD: 5/13/2025 11:39:41 AM	Page 5 of 2							
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	🗌 Yes 🗌 No							
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 								
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	🗌 Yes 🗌 No							
Within a 100-year floodplain. - FEMA map								
 ^{16.} <u>On-Site Closure Plan Checklist</u>: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. 	lan. Please indicate,							
 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	.15.17.11 NMAC							
17. Operator Application Certification:								
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and bel	ief.							
Name (Print):Kevin Smaka Title:Regulatory Engineer								
Signature: Kevin Smaka Date: 5/13/2025								
e-mail address: <u>Kevin.Smaka@duganproduction.com</u> Telephone: <u>505-486-6207</u>								
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)								
OCD Representative Signature: Ocl Stone Approval Date: 05/16/2	2025							
Title: Environmental Scientist & Specialist-A OCD Permit Number: BGT2								
19. 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:								
20. Closure Method: ☑ Waste Excavation and Removal □ On-Site Closure Method □ Alternative Closure Method □ Waste Removal (Closed-le □ If different from approved plan, please explain.	oop systems only)							
21. Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please in mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation	ndicate, by a check							

Re-vegetation Application	Rates and Seed	ling Technique

Site Reclamation (Photo Documentation) On-site Closure Location: Latitude

Longitude

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print):	_Kevin Smaka, P.E

. .

22.

Date:	

Title: _Regulatory Engineer_

e-mail address: Kevin.Smaka@duganproduction.com

Telephone: <u>505-325-1821 x1049</u>

.

Below Grade Tank Closure Plan

 Dugan Production Corp.

 The Bear #2

 30-045-28552

 E-34-23N-8W

 1980 FNL
 660 FWL

 Surface Owner (BLM)

As directed by NMAC 19.15.17 the following plan/procedure has been prepared for closure of the below grade tank identified on the associated C-144.

- Dugan shall notify the surface owner by certified mail return receipt requested, unless the surface owner is a government agency in which case Dugan will notify via email (BLM), that Dugan plans closure operations at least 72 hours, but not more than one week, prior to any closure operation. Notice shall include well name, API number and location. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. A copy of the email sent to NMSLO will be included.
- 2. Dugan shall notify the OCD at least 72 hours, but not more than one week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range. If the closure is associated with a particular well, then the notice shall also include the well's name, number and API number. Dugan must close out a below-grade tank within 60-days of cessation of operation.
- 3. Dugan shall close the below-grade tank by first removing all contents and, if applicable, synthetic liners and transferring those materials to a division approved facility. In this case Dugan will haul solid waste to Envirotech (Permit # NM-01-0011). Liquid waste will be hauled to Dugan's Sanchez O'Brien SWD #1 (Permit # SWD-694). The pit liner will be disposed of at Waste Management's Crouch Mesa facility. The tank will be hauled to Dugan's yard. If the tank is in good condition, it will be placed in Dugan's inventory until it's placed back in service. If the tank is in poor condition, it will be sold for scrap.
- 4. Dugan shall test the soils beneath the below-grade tank as follows:

(a) At a minimum, a five-point composite sample to include any obvious stained or wet soils, or other evidence of contamination shall be taken under the liner, or the below-grade tank and that sample shall be analyzed for the constituents listed in Table I of 19.15.17.13 NMAC.

(b) If any contaminant concentration is higher than the parameters listed in Table I of 19.15.17.13 NMAC, the division may require additional delineation upon review of the results and Dugan must receive approval before proceeding with closure.

(c) If all contaminant concentrations are less than or equal to the parameters listed in Table I of 19.15.17.13 NMAC, then Dugan can proceed to backfill the pit, pad, or excavation with non-waste containing, uncontaminated, earthen material.

- 5. Once Dugan has closed the below-grade tank, Dugan shall reclaim the below-grade tank location, and all areas associated with the below-grade tank including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. Dugan shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Paragraph (2) of Subsection H of 19.15.17.13 NMAC, recontour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Paragraph (5) in Subsection H of 19.15.17.13 NMAC.
- 6. Areas reasonably needed for production operations or for subsequent drilling operations shall be compacted, covered, paved, or otherwise stabilized and maintained in such a way as to minimize dust and erosion to the extent practicable
- 7. Dugan will install a soil cover that shall consist of the background thickness of topsoil or one foot of suitable material, whichever is greater. The soil cover shall be constructed to the site's existing grade and all practical efforts shall be made to prevent ponding of water and erosion of the soil cover material.
- 8. Dugan will comply with the seeding requirements found in NMAC 19.15.17.13.H.(5) and notify the division when reclamation and re-vegetation are complete.
- 9. Within 60 days of closure completion Dugan will submit a closure report with form C-144 and will include the following:
 - a. Proof of closure notice given to NMOCD and the surface owner
 - b. Sampling analytical reports; information required by 19.15.17 NMAC
 - c. Disposal facility name and permit numbers
 - d. Details on backfilling, capping, covering and, where applicable, seeding application rates and seeding technique
 - e. Photo documentation of sampling and site reclamation


Depth to Groundwater

Dugan consulted the USGS and NMOSE water well data to determine a depth to water. Each agency reported groundwater was present at nearly 300 feet below surface. Based on these pieces of information, and with OCD's agreement on the matter, Dugan <u>estimates the depth to groundwater at this site is greater than 100 feet below the base</u> <u>of the BGT.</u>

List of Attachments

- 1. A topographic map of the area surrounding the BGT that identifies all nearby water courses as directed in section 9 of the C-144. See **Appendix A.**
- 2. Dugan reviewed the depth to water information of file with NMOSE. A copy of those results may be found in **Appendix B.**
- **3.** A data table from the USGS shows groundwater at a depth of 900 feet. The table is in **Appendix C.**

Appendix A

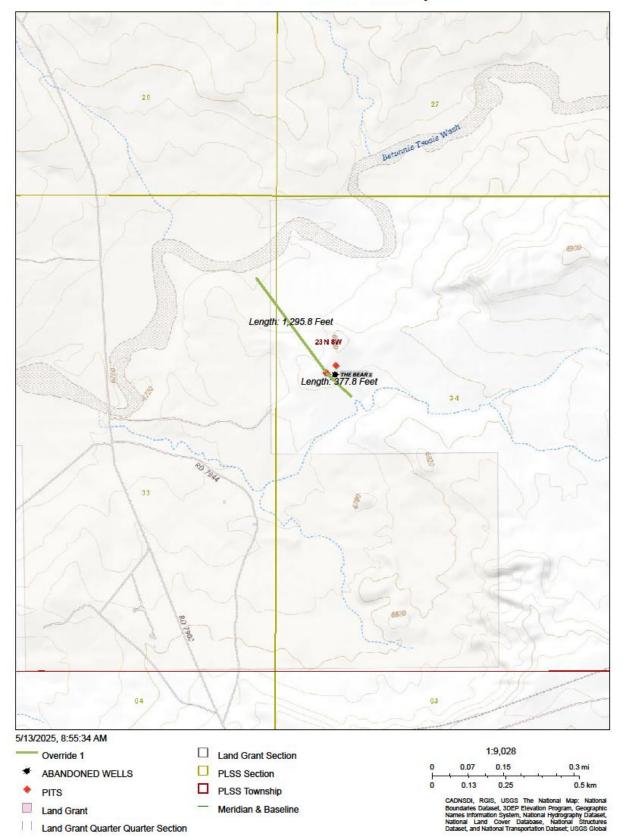

The Bear #2 Water Proximity

Dugan Production Corp

Appendix **B**

New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)	(R=POD has been replaced, O=orphaned, C=the file is closed)			(quart smalle larges										(In feet))
		Sub											Well		Water
POD Number	Code	basin	County	Q64	Q16	Q4	Sec	Tws	Range	x	Y	Мар	Depth	Water	Column
SJ 01304		sj	sj			NE	01	23N	08W	263823.0	4015987.0*	•	100		
SJ 01334		sj	sj			NE	01	23N	08W	263823.0	4015987.0*	•	90	40	50
SJ 01709		sj	sj		NW	NW	27	23N	08W	259451.0	4009831.0*	•	317	225	92
SJ 03978 POD1		sj	sj	NW	NE	NW	22	23N	08W	259816.4	4011541.8	•	500	260	240
SJ 04195 POD1		sj	sj		NW	SW	11	23N	08W	261123.2	4013544.4	•	700	290	410

Average Depth to Water: 203 feet

Minimum Depth: 40 feet

Maximum Depth: 290 feet

Record Count: 5

Basin/County Search: Basin: SJ

PLSS Search: Range: 08W Township: 23N

* UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

May 13, 2025 08:51 AM MST

Page 1 of 1

Water Column/Average Depth to Water

Appendix C

USGS 361538107444101 23N.09W.01.1233

San Juan County, New Mexico Latitude 36°15'38", Longitude 107°44'41" NAD27 Land-surface elevation 6,899 feet above NGVD29 The depth of the well is 1,020 feet below land surface. The depth of the hole is 1,020 feet below land surface. This well is completed in the Colorado Plateaus aquifers (N300COPLTS) national aquifer. This well is completed in the Ojo Alamo Sandstone (2110JAM) local aquifer.

Date \$	Time ≎	Ø Water-level date-time accuracy	Parameter ¢	Water level, feet below land surface
1971-02-27		D	62610	
1971-02-27		D	62611	
1971-02-27		D	72019	368.00
1971-09-14		D	62610	
1971-09-14		D	62611	
1971-09-14		D	72019	645.00

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
DUGAN PRODUCTION CORP	6515
PO Box 420	Action Number:
Farmington, NM 87499	461523
	Action Type:
	[C-144] Below Grade Tank Plan (C-144B)

CONDITIONS

Created By		Condition Date
joel.stone	None	5/16/2025

Page 13 of 13

Action 461523