District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 *Page 1 of 13* Form C-144 Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Proposed Alternative Method Permit or Closure Plan Application Type of action: Bolow grade tank registration Permit of a pit opposed alternative method Modification to an existing permitter opstration Status Colsure plan only submitted for an existing permitter opstration Or proposed differentiative method Instructions: Place submitted for an existing permitter opstration Operator: Distancions: Place submitted for an existing permitter opstration Proposed Jatemative method Instructions: Place submitted for an existing permitter opstration of the every more very or the every more does are triposite bibling should operations reach in application of writes water, ground water or the every more and submitted of a plan only submitted for an existing permitter opstration is an existing permitter opstration is must be about the plant only submitted of a plan	Pit, Below-Grade Tank, or
BGT1 Closure of a pit, below-grade tank, or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Destructions: Please submit one application (Form C144) per individual pit, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C144) per individual pit, below-grade tank or alternative request Tesses the advised that approval of his request data set of that pit, should permit of a surface water, ground water or the autromment. Nor does approval relieve the operator of 1abity should permits of user poly with any other applicable governmental authonity's rules, regulations or ordinances. Operator: Diggan Production Corp. OGRID #:006515 Address: PD Box 420; Eramington, NM 57499-0420 Facility or well name: Mary Loa # 002 API Number: BGT #1 U/L or Qtriftyr G Section _32Township _44N Range_10WCounty: San Juan Center of Proposed Design: Latinde _362:17285 Longitude107.917032.NAD83 1980' FNL & 1980 FEL Surface Owner: Clearal G State Clearatic Trabal Trast or Indian Allotment Temporary: Drilling Workover Permantel Clearatic Clearaticlearaticlearatic Clearatic Clearatic Clearatic Clearatic Clearati	Proposed Alternative Method Permit or Closure Plan Application
BGT1 □ Glosure of a pit, below-grade tank, or proposed alternative method Modification to an existing permitfor experiment of the permitted or non-permitted pit, below-grade tank, or proposed alternative method Distructions: Prease submit on eapplication (Form C144) per individual pit, below-grade tank or alternative request Bease he advised that approval of this request dates not relieve the operator of liability should operations result in pollution of surface water, ground water or the avicement. Nor does approval relieve the operator of liability is should operations result in pollution of surface water, ground water or the avicement. Nor does approval relieve the operator of liability is should operations result in pollution of surface water, ground water or the avicement. Nor does approval relieve the operator of liability is should operations result in pollution of surface water, ground water or the avicement. Nor does approval relieve the operator of liability is should operations result in pollution of surface water, ground water or the avicement. Nor does approval relieve the operator of liability is comply with any other applicable governmental authority's rules, regulations or ordinances. Import the applicable governmental authority's rules, regulations or ordinances. Import of the approval of this request data set. Nor States of the applicable governmental authority's rules, regulations or ordinances. Import of the applicable governmental authority's rules. Teaching applicable governmentapplicable governmentaplity. States applicable	
BG11 Modification to an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request Please submitted for an existing permitted or non-permitted pit, below-grade tank or alternative request Please submitted for an existing permitted or please submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method Instructions: Please submitted filese the operator C144) per individual pit, below-grade tank or alternative request Please the advised that request des not relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. Orderstor: Dagan Production Corp. OGRID #006515 Odrestor: Dagan Production Corp. OGRID #006515 Odrest 20. Farmington. NM 57499.0420 Facility or well name: Mary You 2 002 Adviews Po Rox 20. Farmington. NM 57499.0420 Facility or well name: Mary You 2 002 Adviews Po Rox 20. Farmington. NM 57499.0420 Facility or well name: Mary You 2 002 Adviews Po Rox 20. Farmington. NM 57499.0420 Facility or well name: Mary You 2 002 Adviews Po Rox 20. Farmington. NM 57499.0420 Facility or well ame: Mary You 2 002 Adviews Po Row 20. For You You 2 002 Corp Permit Number: BGT #1 U/L or Qurity G Section 32 Tory Solution 100 Section 4.526497 OCD Permit Number: BGT #1 U/L or Qurity G Section F, G or J of 19.15.17.11 NMAC Temporary: Drilling Pluid yes no Liner Seams: Welded Factory Other	\Box Cleave of a mit balance and tank on monored alternative method
or proposed alternative method Instructions: Please submit on application (Form C-114) per individual pit, below-grade tank or alternative request Passe be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the avironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. ^O perator: Dagan Production Corp. Operator: Dagan Production Corp. OGRID #:006515 Address: PO Box 420. Tarmington, NM 87409-0420 Facility or well name: Mary Lou # 002 API Number: BGT # 1. VL or Qtr/Qtr G Section 32 Township 24N Range 10W County: San Juan Contry: San Juan Control of Private 36.2717285 Longitude107.9170532 NAD83 1980' FNL & 1980 FEL Surface Owner: = Federal Ø State = Private = Tribal Trust or Indian Allotment Pers: Subsection F, G or J of 19.15.17.11 NMAC Termanent = Energency = Cavitation = P&A = Multi-Well Fluid Management Low Chloride Drilling Fluid = yes = no Lineed = Inter Unlined Liner type: Thicknessmil = LLDPE = PVC = Other	Modification to an existing permit/or registration
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of suffice water, ground water or the moreoment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. ¹ Operator: Digan Production Corp. Officity: Digan Production NM 87499-0420 Pacifity or well name: Mary Lou # 0002 API Number: Joud5-26497 OCD Permit Number: BGT # 1, U/l. or group and tank of the production State of the state	
These be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the wirking ment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. Operator: Dagan Production Corp.	
mvironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. L Operator: Dugan Production Corp. Address: PO Box 420, Farmington, NM 87499-0420	
Address: PO Box 420. Farmington, NM 87499-0420 Facility or well name: Mary Low # 002 API Number: <u>30-045-26497</u> OCD Permit Number: <u>BGT # 1</u> U/L or Qtr/Qtr G Section <u>32</u> Township <u>24N</u> Range <u>10W</u> County: <u>San Juan</u> Center of Proposed Design: Latitude <u>36-217285</u> Longitude <u>-107.9170532 NAD83</u> 1980' FNL & 1980 FEL Surface Owner: Federal State Private Tribal Trust or Indian Allotment 1000 * Pit : Subsection F, G or J of 19.15.17.11 NMAC 1980' FNL & 1980 FEL 1980' FNL & 1980 FEL * Pit : Subsection F, G or J of 19.15.17.11 NMAC 1000 Fell (Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other	
Address: PO Box 420. Farmington, NM 87499-0420 Facility or well name: Mary Low # 002 API Number: 30-045.26497 OCD Permit Number: BGT # L U/L or Qtr/Qtr G Section 32 Township 24N Range 10W County: San Juan Center of Proposed Design: Latitude 36.2117285 Longitude107.9170532 NAD83 1980' FNL & 1980 FEL Surface Owner: Federal 🗟 State Private Tribal Trust or Indian Allotment * P P Subsection F, G or J of 19.15.17.11 NMAC Temporary: D'Illing Workover Description Permanent Emergency Cavitation P&AA Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Line d Unlined Liner type: Thickness mil LLDPE PVC Other String-Reinforced Dimensions: x W x D X Stelew-grade tank: Subsection I of 19.15.17.11 NMAC Volume:	
Facility or well name: Mary Lou # 002 API Number; 30-045-26497. OCD Permit Number: BGT # 1. UL or QurQtr G Section 32 Township 24N Range 10W County: San Juan Center of Proposed Design: Latitude 36.2717285 Longitude -107.9170532 NAD83 1980' FNL & 1980 FEL Surface Owner: Federal Ø State Private Tribal Trust or Indian Allotment 109.0' FNL & 1980 FEL Surface Owner: Federal Ø State Private Tribal Trust or Indian Allotment 109.0' FNL & 1980 FEL Surface Owner: Federal Ø State Private Tribal Trust or Indian Allotment 109.0' FNL & 1980 FEL Surface Owner: Federal Ø State Private Trust or Indian Allotment 109.0' FNL & 1980 FEL Surface Owner: Federal Ø State Private Trust or Indian Allotment 109.0' FNL & 1980 FEL Surface Owner: Definition Private Trust or Indian Allotment Low Chloride Drilling Fluid yes no Intend Untimet Liner type: Cavitation P& Remanent Low Chloride Drilling Fluid yes no Sing-Resinforced	
API Number: 30:045-26497. OCD Permit Number: BGT # 1 U/L or Qtr/Qtr G Section 32 Township 24N Range 10W County: San Juan Center of Proposed Design: Latitude 26:2717285 Longitude -:107.9170532 NAD83 1980' FNL & 1980 FEL Surface Owner: Federal Ø State Private Tribal Trust or Indian Allotment 1980' FNL & 1980 FEL * # # # # # # # * # # # # # # # * #	
U/L or Qtr/Qtr G Section 32 Township 24N Range 10W County: San Juan Center of Proposed Design: Latitude 36.2717285 Longitude 107.9170532 NAD83 1980' FNL & 1980 FEL Surface Owner: Federal State Private Tribal Trust or Indian Allotment 1980' FNL & 1980 FEL Surface Owner: F G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Einergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness	
Center of Proposed Design: Latitude _36.2717285 Longitude107.9170532_NAD831980' FNL & 1980 FEL Surface Owner: [] Federal 🗟 State [] Private [] Tribal Trust or Indian Allotment 2 [] fi : Subsection F, G or J of 19.15.17.11 NMAC Temporary: [] Drilling [] Workover [] Permanent [] Emergency [] Cavitation [] P&A [] Multi-Well Fluid Management [] Low Chloride Drilling Fluid [] yes [] no [] Lined [] Unlined Liner type: Thickness mil [] LLDPE [] HDPE [] PVC [] Other [] String-Reinforced [] Liner Seams: [] Welded [] Factory [] Other Volume: bbl Dimensions: L X W X D 5 [] Below-grade tank : Subsection I of 19.15.17.11 NMAC Volume: 80 bbl Type of fluid: Produced Water [] Tank Construction material: Steel	
Surface Owner: Federal 🖾 State Private Tribal Trust or Indian Allotment 2. Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness	
<td></td>	
Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness	Surface Owner: Federal State Private Tribal Trust or Indian Allotment
S Below-grade tank: Subsection I of 19.15.17.11 NMAC S Below-grade tank: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) S S Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) S Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade t	
Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thicknessmil LLDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume:bbl Dimensions: Lx Wx D Secondary containment with leak detection Isible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Liner type: Unlined Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. <	
□ String-Reinforced Liner Seams: □ Welded □ Factory Other	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L	
3. Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: 80 bbl Type of fluid: Produced Water Tank Construction material: Steel	-
3. Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:	Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
Volume: 80 bbl Type of fluid: Produced Water Tank Construction material: Steel	
Tank Construction material: Steel Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Unlined HDPE PVC Image: Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	Below-grade tank: Subsection I of 19.15.17.11 NMAC
 Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other	Volume: <u>80</u> bbl Type of fluid: <u>Produced Water</u>
 □ Visible sidewalls and liner ☑ Visible sidewalls only □ Other Liner type: <u>Unlined</u> □ HDPE □ PVC □ Other 4. □ Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) □ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) ☑ Four foot height, four strands of barbed wire evenly spaced between one and four feet 	Tank Construction material: Steel
 □ Visible sidewalls and liner ☑ Visible sidewalls only □ Other Liner type: <u>Unlined</u> □ HDPE □ PVC □ Other 4. □ Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) □ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) ☑ Four foot height, four strands of barbed wire evenly spaced between one and four feet 	Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
Liner type: Unlined HDPE PVC Other 4. Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	
 4.	
 ☐ Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) ☐ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) ☑ Four foot height, four strands of barbed wire evenly spaced between one and four feet 	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Korr foot height, four strands of barbed wire evenly spaced between one and four feet	
 5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet 	
 Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) □ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) □ Four foot height, four strands of barbed wire evenly spaced between one and four feet 	
 Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet 	
institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	Four foot height, four strands of barbed wire evenly spaced between one and four feet
	Alternate. Please specify

7.

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen 🗌 Netting 🗌 Other Monthly inspections (If netting or screening is not physically feasible) Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks. **General siting** Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.] Yes 🛛 No X NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA NA 🗌 Yes 🖂 No Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. 🗌 NA NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance 🗌 Yes 🗌 No adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality Within the area overlying a subsurface mine. (Does not apply to below grade tanks) \square Yes \square No Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. (Does not apply to below grade tanks) Yes No Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Yes No Within a 100-year floodplain. (Does not apply to below grade tanks) FEMA map **Below Grade Tanks** Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured \square Yes \square No from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 🗌 Yes 🖂 No Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, ☐ Yes ☐ No or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial Yes No application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock Yes No watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

eceivea by OCD: //21/2025 8:00:44 AM	Page 3 0f 13
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
Temporary Pit Non-low chloride drilling fluid	
 Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	□ Yes □ No
 Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Permanent Pit or Multi-Well Fluid Management Pit	
 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
 Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	<i>cuments are</i> 9 NMAC 15.17.9 NMAC
11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached.	9.15.17.9 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

.

^{12.} <u>Permanent Pits Permit Application Checklist</u> : Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the of</i>	documents are
<i>attached.</i> Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC	
 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment 	
 Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC 	
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC	
Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC	
 Spending and Maintenance Frain Subset upon the appropriate requirements of 19.15.17.12 RMRC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan 	
Emergency Response Plan Oil Field Waste Stream Characterization	
Monitoring and Inspection Plan Erosion Control Plan	
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
^{13.} Proposed Closure: 19.15.17.13 NMAC	
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	luid Management Pit
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)	
 On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial 	
Alternative Closure Method	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached.	attached to the
 Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC 	
 Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
 Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
15.	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour	rce material are
provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste.	
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	🗌 Yes 🗌 No
- Topographic map; Visual inspection (certification) of the proposed site	
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application.	🗌 Yes 🗌 No
- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	
Form C-144 Oil Conservation Division Page 4 of	6

Received by	OCD:	7/21/2025	8:00:44 AM
-------------	------	-----------	------------

Received by OCD: 7/21/2025 8:00:44 AM	Page 5 of 1
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	🗌 Yes 🗌 No
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geologica 	1
Society; Topographic map	🗌 Yes 🗌 No
Within a 100-year floodplain. - FEMA map	🗌 Yes 🗌 No
 16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the close by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Construction/Design Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	15.17.11 NMAC of 19.15.17.11 NMAC
17. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge ar Name (Print): Eileen Yates Title: Environmental, Health, and Safety Manager	nd belief.
Signature: <u>Ilsen Gates</u> Date: <u>July 21. 2025</u>	
e-mail address: <u>Eileen.Yates@duganproduction.com</u> Telephone: <u>505-505-787-9832</u>	
18. OCD Approval: □ Permit Application (including closure plan) ✓ Closure Plan (only) □ OCD Conditions (see attachmen	
OCD Representative Signature: Ocl Stone Approval Date: 07/	/22/2025
Title: Environmental Scientist & Specialist-A OCD Permit Number: BGT1	
^{19.} <u>Closure Report (required within 60 days of closure completion)</u> : 19.15.17.13 NMAC <i>Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and subm</i> <i>The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please a</i> <i>section of the form until an approved closure plan has been obtained and the closure activities have been completed.</i> Closure Completion Date:	
20. Closure Method:	
Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Clo	sed-loop systems only)
^{21.} <u>Closure Report Attachment Checklist</u> : <u>Instructions</u> : Each of the following items must be attached to the closure report. Ple	ase indicate, by a check
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)	
 Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) 	
Confirmation Sampling Analytical Results (if applicable)	
 Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number 	
Soil Backfilling and Cover Installation	
 Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) 	
]1927 🗌 1983

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan. _____ Title: _____

Name (Print):

Signature:

22.

_____ Date: _____

e-mail address: _____ Telephone: _____

.

Below Grade Tank Closure Plan

Dugan Production Corp. Mary Lou # 002 30-045-26497 G-32-24N-10W 1980 FNL 1980 FEL Surface Owner: State

As directed by NMAC 19.15.17 the following plan/procedure has been prepared for closure of the below grade tank identified on the associated C-144.

- Dugan shall notify the surface owner by certified mail return receipt requested, unless the surface owner is a government agency in which case Dugan will notify via email, that Dugan plans closure operations at least 72 hours, but not more than one week, prior to any closure operation. Notice shall include well name, API number and location. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. A copy of the email sent to NMSLO will be included.
- 2. Dugan shall notify the OCD at least 72 hours, but not more than one week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range. If the closure is associated with a particular well, then the notice shall also include the well's name, number and API number. Dugan must close out a below-grade tank within 60-days of cessation of operation.
- 3. Dugan shall close the below-grade tank by first removing all contents and, if applicable, synthetic liners and transferring those materials to a division approved facility. In this case Dugan will haul solid waste to Envirotech (Permit # NM-01-0011). Liquid waste will be hauled to Dugan's Sanchez O'Brien SWD #1 (Permit # SWD-694). The pit liner will be disposed of at Waste Management's Crouch Mesa facility. The tank will be hauled to Dugan's yard. If the tank is in good condition, it will be placed in Dugan's inventory until its placed back in service. If the tank is in poor condition, it will be sold for scrap.
- 4. Dugan shall test the soils beneath the below-grade tank as follows:

(a) At a minimum, a five-point composite sample to include any obvious stained or wet soils, or other evidence of contamination shall be taken under the liner or the below-grade tank and that sample shall be analyzed for the constituents listed in Table I of 19.15.17.13 NMAC.

(b) If any contaminant concentration is higher than the parameters listed in Table I of 19.15.17.13 NMAC, the division may require additional delineation upon review of the results and Dugan must receive approval before proceeding with closure.

(c) If all contaminant concentrations are less than or equal to the parameters listed in Table I of 19.15.17.13 NMAC, then Dugan can proceed to backfill the pit, pad, or excavation with non-waste containing, uncontaminated, earthen material.

- 5. Once Dugan has closed the below-grade tank, Dugan shall reclaim the below-grade tank location and all areas associated with the below-grade tank including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. Dugan shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Paragraph (2) of Subsection H of 19.15.17.13 NMAC, recontour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Paragraph (5) in Subsection H of 19.15.17.13 NMAC. This BGT is located at a plugged well site. The site will be contoured and constructed to prevent erosion and run off. Dugan will comply with subsection H of 19.15.17.13 NMAC.
- 6. Areas reasonably needed for production operations or for subsequent drilling operations shall be compacted, covered, paved, or otherwise stabilized and maintained in such a way as to minimize dust and erosion to the extent practicable
- 7. Dugan will install a soil cover that shall consist of the background thickness of topsoil or one foot of suitable material, whichever is greater. The soil cover shall be constructed to the site's existing grade and all practical efforts shall be made to prevent ponding of water and erosion of the soil cover material.
- 8. Dugan will comply with the seeding requirements found in NMAC 19.15.17.13.H.(5) and notify the division when reclamation and re-vegetation are complete.
- Within 60 days of closure completion Dugan will submit a closure report with form C-144 and will include the following:
 - a. Proof of closure notice given to NMOCD and the surface owner
 - b. Sampling analytical reports; information required by 19.15.17 NMAC
 - c. Disposal facility name and permit numbers
 - d. Details on backfilling, capping, covering and, where applicable, seeding application rates and seeding technique
 - e. Photo documentation of sampling and site reclamation

Depth to Groundwater

To estimate groundwater depth in the BGT area, BGT Dugan utilized the New Mexico Office of State Engineers iWaters database, which compiles data on water wells throughout the region. An initial query for Section 32, Township 24 North, Range 10 West, yielded no results. The search was then expanded to include all sections within Township 24 North, Range 10 West, identifying three existing water wells. The average depth to water across these wells is approximately 439 feet. See **Appendix B**

Dugan also consulted the USGS database and found a nearby water well. Depth to water was measured at 297.09 feet in June of 2024. See **Appendix C**


Based on the data collected, and with OCD's agreement on the matter, Dugan <u>estimates</u> the depth to groundwater at this site is more than 100 feet below the base of the BGT.

List of Attachments

- 1. A topographic map of the area surrounding the BGT that identifies all nearby water courses as directed in section 9 of the C-144. See **Appendix A**
- The NMOSE iWaters database report for domestic water wells near the facility. None were found in the section the BGT is located in. Three water wells were identified in Sections 33, 36, and 29, Township 24 North, Range 10 West. See Appendix B
- 3. The USGS water data. See Appendix C

Appendix A

Map 1: Mary Lou # 002 Topo Map

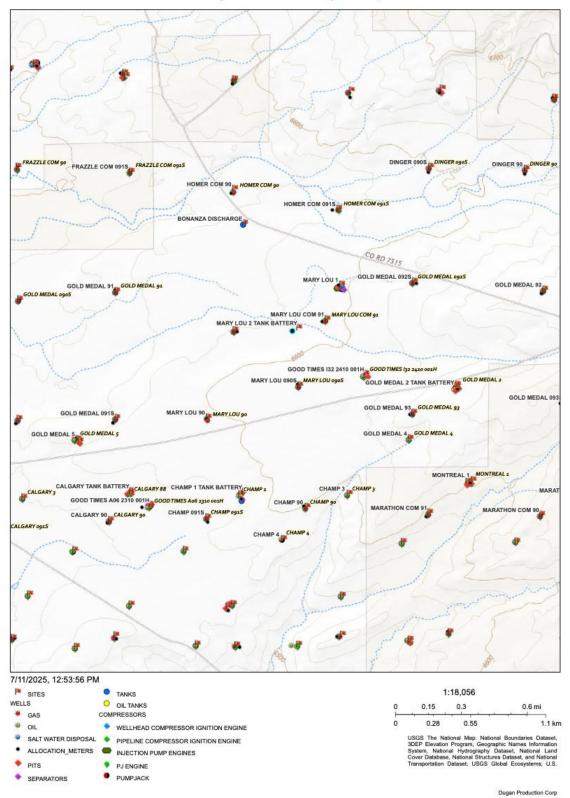

Mary Lou # 002 Topo Map

Appendix **B**

NMOSE: iWater Data

		Wa							-		ite Engii epth 1			ter	
(A CLW##### in the POD suffix indicates the POD has heen replaced & no longer serves a water right file.)	(R=POD has been replaced, O=orphaned, C=the file is closed)			(quart smalle larges	** **									(In feet)	
POD Number	Code	Sub basin	County	Q64	Q16	Q4	Sec	Tws	Range	x	Y	Мар	Well Depth		Water Column
SJ 01713		SJ	SJ		SE	SE	33	24N	10W	239936.0	4017203.0 *	•	373		
SJ 01714		SJ	SJ		SW	SE	36	24N	10W	244334.0	4017107.0 *	•	442	284	158
SJ 03141		SJ	SJ	SW	NE	NW	29	24N	10W	237520.0	4019956.0 *	٠	640	595	45

Average Depth to Water: 439 feet

Minimum Depth: 284 feet

Maximum Depth: 595 feet

Record Count: 3

Basin/County Search: County: SJ

PLSS Search: Range: 10W Township: 24N Section: 1-36

* UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

July 11, 2025 12:09 PM MST

Page 1 of 1

Water Column/Average Depth to Water Appendix C

USGS: Groundwater Data

USGS 361550107533701 24N.10W.33.4441 19R-286

San Juan County, New Mexico Latitude 36°15'50", Longitude 107°53'37" NAD83 Land-surface elevation 6,646 feet above NAVD88 The depth of the well is 373 feet below land surface. The depth of the hole is 373 feet below land surface. This well is completed in the Colorado Plateaus aquifers (N300COPLTS) national aquifer.

This well is completed in the Ojo Alamo Sandstone (2110JAM) local aquifer.

Date \$	Time \$	Water- level date- time accuracy	Parameter ≎ code	Water level, feet below land surface	Water level, feet above specific vertical datum
1968-09-05		D	62610		6335
1968-09-05		D	62611		6339
1968-09-05		D	72019	307.00	
1975-05-08		D	62610		6336
1975-05-08		D	62611		6340
1975-05-08		D	72019	305.56	
1986-05-16		D	62610		6313
1986-05-16		D	62611		6317
1986-05-16		D	72019	328.75	
2024-06-05	20:13 UTC	m	62610		6345
2024-06-05	20:13 UTC	m	62611		6348
2024-06-05	20:13 UTC	m	72019	297.09	

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
DUGAN PRODUCTION CORP	6515
PO Box 420	Action Number:
Farmington, NM 87499	486880
	Action Type:
	[C-144] Below Grade Tank Plan (C-144B)

CONDITIONS

Created By		Condition Date
joel.stone	None	7/22/2025

Page 13 of 13

Action 486880