Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: KUTZ GOVERNMENT Well Location: T28N / R10W / SEC 27 / County or Parish/State: SAN

NWSW / 36.631102 / -107.889305 JUAN / NM

Well Number: 3J Type of Well: CONVENTIONAL GAS Allottee or Tribe Name:

WELL

Lease Number: NMSF077383 Unit or CA Name: Unit or CA Number:

US Well Number: 300453018600S1 **Operator:** DUGAN PRODUCTION

CORPORATION

Subsequent Report

Sundry ID: 2864348

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/21/2025 Time Sundry Submitted: 10:56

Date Operation Actually Began: 04/09/2025

Actual Procedure: Dugan Production plugged and abandoned the well on 04/09/2025 - 04/11/2025 per the attached procedure.

SR Attachments

Actual Procedure

 $Kutz_Govt_3J_BLM_apvd_plug_change_20250721105417.pdf$

Kutz_Govt_3J_OCD_apvd_plug_change_20250721105418.pdf

Kutz_Govt_3J_SR_PA_formation_tops_20250721105050.pdf

Kutz_Govt_3J_SR_PA_completed_wellbore_schematic_20250721105008.pdf

Kutz_Govt_3J_SR_PA_work_completed_20250721104943.pdf

County or Parish/State: SAN 200 eived by OCD: 7/21/2025 3:14:48 PM Well Name: KUTZ GOVERNMENT Well Location: T28N / R10W / SEC 27 /

NWSW / 36.631102 / -107.889305

Well Number: 3J Type of Well: CONVENTIONAL GAS **Allottee or Tribe Name:**

Unit or CA Number:

JUAN / NM

Unit or CA Name:

US Well Number: 300453018600S1 Operator: DUGAN PRODUCTION

CORPORATION

Operator

Lease Number: NMSF077383

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TYRA FEIL Signed on: JUL 21, 2025 10:55 AM

Name: DUGAN PRODUCTION CORPORATION

Title: Authorized Representative Street Address: PO BOX 420

City: FARMINGTON State: NM

Phone: (505) 325-1821

Email address: TYRAFEIL@DUGANPRODUCTION.COM

Field

Representative Name: Aliph Reena

Street Address: PO Box 420

City: Farmington State: NM **Zip:** 87499-0420

Phone: (505)360-9192

Email address: Aliph.Reena@duganproduction.com

BLM Point of Contact

BLM POC Name: MATTHEW H KADE BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736 BLM POC Email Address: MKADE@BLM.GOV

Disposition: Accepted **Disposition Date:** 07/21/2025

Signature: Matthew Kade


Page 2 of 2

Dugan Production Corp. P&A'd the well on 04/09/2025 – 04/11/2025 per the following procedure:

- MI&RU Aztec Rig 450 & Cement equipment. Check pressures, Tubing 0 psi, Casing 0 psi, BH 0 psi.
- LD rods & 2-3/8" production tubing.
- Check pressures, Tubing 0 psi, Casing 0 psi, BH 0 psi.
- PU & tally 2-3/8" workstring. RIH $w/4\frac{1}{2}$ " string mill to 1894'. TOOH w/string mill. Secure well shut down for night.
- Check pressures, Tubing 0 psi, Casing 0 psi, BH 0 psi.
- PU and run 4½" CR and attempt to set CICR at 1844'. Couldn't set at 1844'. Attempted to set at 1834'. Good set at 1834'. Load and circulate hole with 30 bbls water.
- Attempt to pressure test casing to 650 psi for 30 minutes, casing tested good.
- TOOH w/all tubing & SB. RU Wireline & run CBL from 1805' to surface. Good cement to 120'. Sent copy of CBL and revised procedure to NMOCD/BLM. Approvals received. Communications attached.
- Plug I (Fruitland Pictured Cliffs): TIH w/workstring & sting into the CR. Squeezed 15 sks, 17.25 cu ft Class G neat cement to cover the Pictured Cliffs top below the cement retainer at 1833' to the top perf at 1894'. Displaced w/7 bbls water. Sting out. RO from top of retainer. TOOH and LD stinger. TIH open-ended to 1834', tagged TOR. Spot rest of Plug I on top of retainer at 1833' w/52 sks, 59.8 cu ft Class G neat cement to cover the Pictured Cliffs & Fruitland tops. Displaced w/4 bbls cement. RO from 1074' w/7 bbls water. Circulated 0.3 bbls cement to surface. WOC overnight. TIH w/tubing to tag TOC. Tagged TOC at 1165', good tag. Plug I, inside 4½" casing, Cement retainer at 1834', 67 sks, 77.05 cu ft, Fruitland-Pictured Cliffs, 1165'-1894'.
- Check pressures, Tubing 0 psi, Casing 0 psi, BH 0 psi.
- Plug II (Ojo Alamo-Kirtland): Spot Plug II inside 4½" casing from 1043' to 659' w/30 sks, 34.5 cu ft Class G neat cement to cover Kirtland & Ojo Alamo tops. Displaced w/2 bbls. WOC 4 hrs before next plug. No tag required as casing tested good. Plug II, inside 4½" casing, 30 sks, 34.5 cu ft, Kirtland-Ojo Alamo, 659'-1043'.
- TOOH w/all tubing. RU wireline & shoot squeeze holes at 100'. Establish rate through squeeze holes to surface through bradenhead, 3 bbls/minute at 25 psi. TIH w/open ended tubing to 193'.
- Plug III (Surface): Spot Inside/Outside Plug III, from 193' w/45 sks, 51.8 cu ft Class G neat cement to surface through bradenhead. Circulated 0.5 bbls cement to surface through bradenhead. WOC 4 hrs. RU welder. Cut wellhead off. Tagged cement inside casing at 36' and 38' inside annulus. Good tag. Plug III, Inside/Outside 4½" casing, perforations at 100', surface casing, 45 sks, 51.8 cu ft, 0-193'.
- Fill up cellar and install dry hole marker w/35 sks, 40.3 cu ft Class G neat cement.
- RD Aztec 450 and cement equipment. Clean location and move out.
- Bill Diers w/BLM witnessed job.
- Well P&A'd 4/11/2025.

Completed P & A Wellbore Schematic

Kutz Govt # 3J 30-045-30186 Fulcher Kutz Pictured Cliffs 1850' FSL & 790' FWL S27 T28N R10W San Juan County, NM Lat: 36.631052, Long: -107.889272

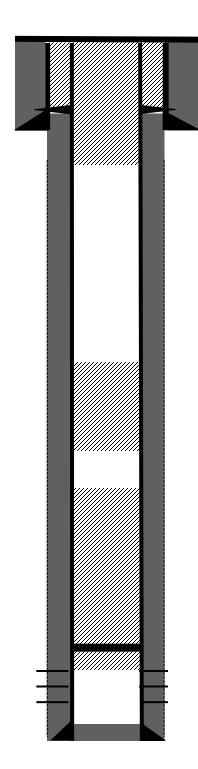

7" 23# casing @ 121'. Cemented with 50 sks, 57.5 Cu.ft Class B cement. Hole size: 8-3/4". Circulated 4 bbls cement to surface.

Plug III, Inside/Outside 4½" casing, Perforations at 100', surface casing, 45 sks, 51.8 cu ft, 0-193

Plug II, inside 4½" casing, 30 sks, 34.5 cu ft, Kirtland-Ojo Alamo, 659'-1043'

4 ½" 9.5#, 10.5# casing @ 2057'. Hole size: 6-1/4"

Cement production casing w/ $250 \, \mathrm{sks}$ Cement, $428 \, \mathrm{Cu.ft}$. Circulated 0.5 bbls cement to surface.

4 ½" CR set at 1834' Plug I, inside 4½" casing, Cement retainer at 1834', 67 sks, 77.05 cu ft, Fruitland-Pictured Cliffs, 1165'-1894'.

Pictured Cliffs Perforated @ 1894' - 1930'

PBTD @ 2035', TD 2057'

Kutz Govt #3J

30-045-30186 Fulcher Kutz Pictured Cliffs 1850' FSL & 790' FWL S27 T28N R10W

San Juan County, NM Lat: 36.631052, Long: -107.889272

Formation Tops (Referenced for P & A)

- Surface Casing 121'
- Ojo Alamo 830'/ 836'
- Kirtland 990'
- Fruitland 1343'
- Pictured Cliffs 1870'/1882'
- Perforations: 1892'-1930'

Tyra Feil

From: Rennick, Kenneth G < krennick@blm.gov>

Sent: Thursday, April 10, 2025 4:24 PM

To: Aliph Reena; Kuehling, Monica, EMNRD; Lucero, Virgil S; Porch, Dustin T; Kade, Matthew H; Diers, William B

Cc: Omar Ramirez; wyojafo@yahoo.com; David Thomas; Tyra Feil; Kevin Smaka

Subject: Re: [EXTERNAL] Kutz Govt # 3 J - CBL & Revised Procedure - Dugan Production

CAUTION: This email originated from outside your organization. Exercise caution when opening attachments or clicking links, especially from unknown senders.

The BLM finds the proposed procedure appropriate.

From: Aliph Reena < Aliph. Reena@duganproduction.com>

Sent: Thursday, April 10, 2025 3:34 PM

To: Kuehling, Monica, EMNRD <monica.kuehling@emnrd.nm.gov>; Lucero, Virgil S <vlucero@blm.gov>; Porch, Dustin T <dporch@blm.gov>; Kade, Matthew H <mkade@blm.gov>; Rennick, Kenneth G <krennick@blm.gov>; Diers, William B <WDiers@blm.gov>

Cc: Omar Ramirez <oramirez@aztecwell.com>; wyojafo@yahoo.com <wyojafo@yahoo.com>; David Thomas <dthomasgeo@outlook.com>; Tyra Feil <Tyra.Feil@duganproduction.com>; Kevin Smaka

<Kevin.Smaka@duganproduction.com>

Subject: [EXTERNAL] Kutz Govt # 3 J - CBL & Revised Procedure - Dugan Production

This email has been received from outside of DOI - Use caution before clicking on links, opening attachments, or responding.

RE: Revised procedure & CBL API: 30-045-30186 Kutz Govt # 3J

Please see the attached CBL for the Kutz Govt # 3J. From the CBL the TOC appear to be around 120'. We request the following change to the original approved NOI.

• Plug III: Surface 0-171, – Change plug from inside to inside/outside. Perforate at 100'. Establish rate to surface through BH. Circulate cement to surface from 171'.

All other plugs will be done as approved in the original NOI. If the changes are acceptable to BLM & NMOCD, please let us know and we will proceed accordingly.

Regards, Aliph Reena 505-360-9192

Aliph Reena P.E

Tyra Feil

From: Kuehling, Monica, EMNRD < monica.kuehling@emnrd.nm.gov>

Sent: Thursday, April 10, 2025 3:59 PM

To: Aliph Reena; vlucero@blm.gov; Dustin Porch; mkade@blm.gov; krennick@blm.gov; WDiers@blm.gov

Cc: Omar Ramirez; wyojafo@yahoo.com; David Thomas; Tyra Feil; Kevin Smaka

Subject: RE: [EXTERNAL] Kutz Govt # 3 J - CBL & Revised Procedure - Dugan Production

CAUTION: This email originated from outside your organization. Exercise caution when opening attachments or clicking links, especially from unknown senders.

NMOCD approves below with prior approval from the BLM

Thank you

Monica Kuehling

NMOCD

From: Aliph Reena < Aliph. Reena@duganproduction.com>

Sent: Thursday, April 10, 2025 3:34 PM

To: Kuehling, Monica, EMNRD <monica.kuehling@emnrd.nm.gov>; vlucero@blm.gov; Dustin Porch <dporch@blm.gov>; mkade@blm.gov; krennick@blm.gov; WDiers@blm.gov

Cc: Omar Ramirez <oramirez@aztecwell.com>; wyojafo@yahoo.com; David Thomas <dthomasgeo@outlook.com>; Tyra Feil <Tyra.Feil@duganproduction.com>; Kevin Smaka <Kevin.Smaka@duganproduction.com>

Subject: [EXTERNAL] Kutz Govt # 3 J - CBL & Revised Procedure - Dugan Production

CAUTION: This email originated outside of our organization. Exercise caution prior to clicking on links or opening attachments.

RE: Revised procedure & CBL

API: 30-045-30186 Kutz Govt # 3J

Please see the attached CBL for the Kutz Govt # 3J. From the CBL the TOC appear to be around 120'. We request the following change to the original approved NOI.

• **Plug III: Surface 0-171,** – Change plug from inside to inside/outside. Perforate at 100'. Establish rate to surface through BH. Circulate cement to surface from 171'.

All other plugs will be done as approved in the original NOI. If the changes are acceptable to BLM & NMOCD, please let us know and we will proceed accordingly.

Regards, Aliph Reena 505-360-9192

Aliph Reena P.E

Engineering Supervisor Dugan Production Corp. Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 487158

CONDITIONS

Operator:	OGRID:
DUGAN PRODUCTION CORP	6515
PO Box 420	Action Number:
Farmington, NM 87499	487158
	Action Type:
	[C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	7/23/2025