# Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: PURE GOLD B FEDERAL Well Location: T23S / R31E / SEC 20 / County or Parish/State: EDDY /

NWSW / 32.2872186 / -103.8006158 NM

Well Number: 15 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM38463 Unit or CA Name: Unit or CA Number:

**US Well Number:** 3001538520 **Operator:** OXY USA INCORPORATED

# **Notice of Intent**

**Sundry ID: 2855030** 

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 05/28/2025 Time Sundry Submitted: 01:25

Date proposed operation will begin: 06/28/2025

**Procedure Description:** OXY PROPOSES TO PA THE SUBJECT WELL. SEE ATTACHED CURRENT WELLBORE, PROPOSED WELLBORE, AND PA PROCEDURE. A PREP RIG MIGHT BE USED TO PULL EQUIPMENT BEFORE SETTING PLUGS. PLEASE SEE ATTACHED PA PREP RIG PROCEDURE

# **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

# **Procedure Description**

PURE\_GOLD\_B\_FEDERAL\_015\_PA\_NOI\_SUB\_5.28.2025\_20250528132514.pdf

Page 1 of 2

eived by OCD: 6/30/2025 8:47:19 AM Well Name: PURE GOLD B FEDERAL

Well Location: T23S / R31E / SEC 20 /

NWSW / 32.2872186 / -103.8006158

Type of Well: OIL WELL **Allottee or Tribe Name:** 

County or Parish/State: Page 2 of

**Unit or CA Number:** Lease Number: NMNM38463 **Unit or CA Name:** 

**US Well Number: 3001538520 Operator: OXY USA INCORPORATED** 

# **Conditions of Approval**

# **Specialist Review**

Well Number: 15

Pure\_Gold\_B\_Federal\_15\_Sundry\_ID\_2855030\_P\_A\_20250626122859.pdf

# **Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

**Operator Electronic Signature: STEPHEN JANACEK** Signed on: MAY 28, 2025 01:25 PM

Name: OXY USA INCORPORATED

Title: Regulatory Engineer

Street Address: 5 Greenway Plaza, Suite 110

City: Houston State: TX

Phone: (713) 497-2417

Email address: stephen\_janacek@oxy.com

# **Field**

**Representative Name:** 

**Street Address:** 

City: State: Zip:

Phone:

**Email address:** 

# **BLM Point of Contact**

**BLM POC Name: LONG VO BLM POC Title:** Petroleum Engineer

**BLM POC Phone:** 5759885402 BLM POC Email Address: LVO@BLM.GOV

**Disposition:** Approved Disposition Date: 06/26/2025

Signature: Long Vo

Page 2 of 2

Form 3160-5 (June 2019)

# UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

BURI	EAU OF LAND MANAGEMENT		5. Lease Serial No.		
SUNDRY NOTICES AND REPORTS ON WELLS  Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.		6. If Indian, Allottee or Tribe Name			
SUBMIT IN 1	FRIPLICATE - Other instructions on pag	ne 2	7. If Unit of CA/Agreement,	Name and/or No.	
1. Type of Well  Oil Well  Gas W	/ell Other		8. Well Name and No.		
2. Name of Operator			9. API Well No.		
3a. Address	3b. Phone No.	(include area code)	10. Field and Pool or Explora	atory Area	
4. Location of Well (Footage, Sec., T.,R	.,M., or Survey Description)		11. Country or Parish, State		
12. CHE	CK THE APPROPRIATE BOX(ES) TO IN	DICATE NATURE C	) OF NOTICE, REPORT OR OT	HER DATA	
TYPE OF SUBMISSION		TYPE	E OF ACTION		
Notice of Intent	Acidize Deep	en [raulic Fracturing [	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity	
Subsequent Report		Construction [	Recomplete	Other	
		and Abandon	Temporarily Abandon		
Final Abandonment Notice	Convert to Injection Plug peration: Clearly state all pertinent details, i	Back	Water Disposal		
completed. Final Abandonment Not is ready for final inspection.)	ins. If the operation results in a multiple concess must be filed only after all requirement after the filed only after all requirement true and correct. Name (Printed/Typed)				
4. I hereby certify that the foregoing is	true and correct. Name (Printea/Typea)	Title			
Signature		Date			
	THE SPACE FOR FED	ERAL OR STA	TE OFICE USE		
Approved by					
•		Title		Date	
	ned. Approval of this notice does not warran quitable title to those rights in the subject led duct operations thereon.	t or			
	B U.S.C Section 1212, make it a crime for an		and willfully to make to any d	lepartment or agency of the United States	

(Instructions on page 2)

# **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

# SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

# **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

# **Additional Information**

# **Location of Well**

 $0. \ SHL: \ NWSW \ / \ 1650 \ FSL \ / \ 2381 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 31E \ / \ SECTION: \ 20 \ / \ LAT: \ 32.2872186 \ / \ LONG: \ -103.8006158 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)$  BHL: \ \ NWSW \ / \ 2032 \ FSL \ / \ 773 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 31E \ / \ SECTION: \ 20 \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)

OXY USA INC.

PURE GOLD B FEDERAL 015

30-015-38520

NOI TO PERMANENTLY ABANDON THIS WELL VIA CEMENT PLUGGING.

# PROPOSED PLUGGING PROCEDURE

- 1. POOH WITH CURRENT 2-7/8" TBG AND BHA
- 2. SET CIBP AT 7944' VIA WORKSTRING. LEAK TEST TO 500 PSI FOR 30 MINUTES
- 3. SPOT 25 SX CL H CMT FROM 7944' TO 7734'. WOC AND TAG
- 4. SPOT 201 SX CL C CMT FROM 6650' TO 4950'. WOC AND TAG
- 5. SPOT 266 SX CL C CMT FROM 4350' TO 2100'. WOC AND TAG
- 6. SPOT 237 SX CL C CMT FROM 2000' TO SURFACE
- 7. VERIFY CMT TO SURFACE

# **FORMATION TOPS**

Nime	/-Top Meas. Depth
Pustlen :	367'
Too Sult	706' '4080'
Bellamon	4121
Cherry Common	5006
Bushy Curyon	(cco)
Bonespring	6301,

# **CURRENT WELLBORE**

Sean Lehle 3/31/2025 30-015-38520-0000 Eddy

String 1 OD 11.75 in, 42# H-40 ST&C TD 505 ft Rustler 387' TOC 0 ft, CIRC 189 SX

Salt 706'

String 2 OD 8.625 in, 32# J-55 LT&C TD 4211 ft TOC 0 ft, CIRC 420 SX

> Lamar 4080' Bell Canyon 4121'


Cherry Canyon 5006'

Brushy Canyon 6600'

String 3
OD 5.5 in, 17# J-55 LT&C
TD MD 8517 ft
TD TVD 8126 ft
TOC 0 ft, CIRC 57 SX
PBTD MD 8440 ft
PBTD TVD 8047 ft

Current Wellbore

**PURE GOLD B FEDERAL 015** 

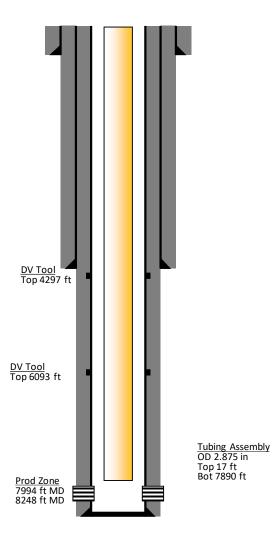

# PROPOSED WELLBORE

Sean Lehle 3/31/2025 30-015-38520-0000 Eddy

String 1 OD 11.75 in, 42# H-40 ST&C TD 505 ft Rustler 387' TOC 0 ft, CIRC 189 SX

Salt 706'

<u>String 2</u> OD 8.625 in, 32# J-55 LT&C TD 4211 ft TOC 0 ft, CIRC 420 SX

> Lamar 4080' Bell Canyon 4121'


Cherry Canyon 5006'

Brushy Canyon 6600'

String 3
OD 5.5 in, 17# J-55 LT&C
TD MD 8517 ft
TD TVD 8126 ft
TOC 0 ft, CIRC 57 SX
PBTD MD 8440 ft
PBTD TVD 8047 ft

Proposed Wellbore

**PURE GOLD B FEDERAL 015** 

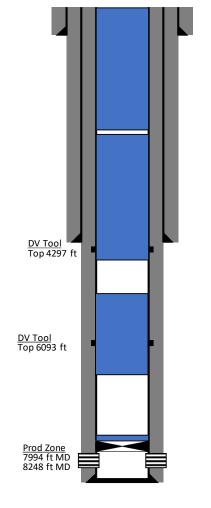

SPOT 237 SX CMT FROM 2000' TO SURFACE.
VERIFY CMT TO SURFACE

SPOT 266 SX CMT FROM 4350' TO 2100' WOC AND TAG

SPOT 201 SX CMT FROM 6650' TO 4950'. WOC AND TAG

SET CIBP @ 7944'. LEAK TEST 500 PSI 30 MIN SPOT 25 SX CMT FROM 7944' TO 7734'

# PA PREP WORK PROCEDURE

The subject well might be pre-plugged prior to PA rig operations. The plugging rig will come in within 90 days of equipment removal to begin plugging this well.

# Prep rig steps

- 1. Notify BLM or OCD prior to rig up.
- 2. MIRU prep rig. Prep equipment to pull pump/rods in the hole (if well has rods).
- 3. LD rods and pump, switchover to pull tbg.
- 4. ND wellhead & NU BOP.
- 5. POOH and LD tbg & BHA.
- 6. RU WL unit. Run and set CIBP.
- 7. If required, run CBL from top of plug to surface and submit to OCD
- 8. RD wireline unit.
- 9. Dump bail cmt as needed on top of CIBP.
- 10. Tag TOC & ensure well control steps followed below prior to rig off.

# Well control precautions

- 1. Run official MIT test to ensure pressure holds after CIBP is set.
- 2. Ensure well control prior to rig off by tagging TOC on top of CIBP.
- 3. NU WH flange and ensure all valves are closed when moving prep rig off location, no WS tubing left in hole.



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Reports
06/25/2025

Well Name: PURE GOLD B FEDERAL Well Location: T23S / R31E / SEC 20 / County or Parish/State: EDDY /

NWSW / 32.2872186 / -103.8006158

Well Number: 15 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM38463 Unit or CA Name: Unit or CA Number:

# **Notice of Intent**

**Sundry ID: 2855030** 

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 05/28/2025 Time Sundry Submitted: 01:25

Date proposed operation will begin: 06/28/2025

**Procedure Description:** OXY PROPOSES TO PA THE SUBJECT WELL. SEE ATTACHED CURRENT WELLBORE, PROPOSED WELLBORE, AND PA PROCEDURE. A PREP RIG MIGHT BE USED TO PULL EQUIPMENT BEFORE SETTING PLUGS. PLEASE SEE ATTACHED PA PREP RIG PROCEDURE

# **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

# **Procedure Description**

PURE\_GOLD\_B\_FEDERAL\_015\_PA\_NOI\_SUB\_5.28.2025\_20250528132514.pdf

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Page 1 of 2

well Name: PURE GOLD B FEDERAL Well Location: T23S / R31E / SEC 20 / County or Parish/State: EDDY / of

NWSW / 32.2872186 / -103.8006158

Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM38463 Unit or CA Name: Unit or CA Number:

US Well Number: 3001538520 Operator: OXY USA INCORPORATED

# **Operator**

Well Number: 15

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: STEPHEN JANACEK Signed on: MAY 28, 2025 01:25 PM

Name: OXY USA INCORPORATED

Title: Regulatory Engineer

Street Address: 5 Greenway Plaza, Suite 110

City: Houston State: TX

Phone: (713) 497-2417

Email address: stephen\_janacek@oxy.com

# **Field**

**Representative Name:** 

**Street Address:** 

City: State: Zip:

Phone:

Email address:

APPROVED by Long Vo Petroleum Engineer Carlsbad Field Office 575-988-50402 LVO@BLM.GOV

Page 2 of 2

Form 3160-5 (June 2019)

# **UNITED STATES** DEPARTMENT OF THE INTERIOR

FORM APPROVE	O
OMB No. 1004-013	7
Expires: October 31, 2	02

DEI	MINIMUM OF THE I	MILKIOK			-F	
BUR	EAU OF LAND MAN	AGEMENT		5. Lease Serial No.		
Do not use this	NOTICES AND REPO form for proposals t Use Form 3160-3 (A	to drill or to re-	enter an	6. If Indian, Allottee or Tribe	e Name	
SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2		7. If Unit of CA/Agreement,	, Name and/or No.	
1. Type of Well				8. Well Name and No.		
Oil Well Gas V	Well Other					
2. Name of Operator				9. API Well No.		
3a. Address		3b. Phone No. (inclu	ide area code)	10. Field and Pool or Explor	atory Area	
4. Location of Well (Footage, Sec., T., I	R.,M., or Survey Description)			11. Country or Parish, State		
12. CHE	ECK THE APPROPRIATE B	OX(ES) TO INDICA	TE NATURE (	OF NOTICE, REPORT OR O	THER DATA	
TYPE OF SUBMISSION			ТҮРГ	E OF ACTION		
Notice of Intent	Acidize	Deepen	[	Production (Start/Resume	e) Water Shut-G	Off
	Alter Casing	Hydraulic	Fracturing [	Reclamation	Well Integrit	.y
Subsequent Report	Casing Repair	New Cons		Recomplete	Other	
	Change Plans	Plug and A		Temporarily Abandon		
Final Abandonment Notice	Convert to Injection	Plug Back	l	Water Disposal		
14. I hereby certify that the foregoing is	s true and correct. Name (Pri					
		Title				
Signature		Date	e			
	THE SPACE	FOR FEDERA	L OR STA	TE OFICE USE		
Approved by Long Vo	2	>	Petr Title	oleum Engineer	6-26-2025 Date	
Conditions of approval, if any, are attac certify that the applicant holds legal or which would entitle the applicant to con	equitable title to those rights		Office C	arlsbad Field Office		
Title 18 U.S.C Section 1001 and Title 4	3 U.S.C Section 1212, make	it a crime for any per	son knowingly	and willfully to make to any	department or agency	of the United States

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

# **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

# SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

# **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

# **Additional Information**

# **Location of Well**

 $0. \ SHL: \ NWSW \ / \ 1650 \ FSL \ / \ 2381 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 31E \ / \ SECTION: \ 20 \ / \ LAT: \ 32.2872186 \ / \ LONG: \ -103.8006158 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)$  BHL: \ \ NWSW \ / \ 2032 \ FSL \ / \ 773 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 31E \ / \ SECTION: \ 20 \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)

OXY USA INC.

**PURE GOLD B FEDERAL 015** 

30-015-38520

NOI TO PERMANENTLY ABANDON THIS WELL VIA CEMENT PLUGGING.

# **REVISED**11:40 am, Jun 26, 2025

# PROPOSED PLUGGING PROCEDURE

- 1. POOH WITH CURRENT 2-7/8" TBG AND BHA
- 2. TIH with gauge ring and tag PBTD. Spot 25 sxs Class H on top.
- 3. SET CIBP AT 7944' VIA WORKSTRING. LEAK TEST TO 500 PSI FOR 30 MINUTES
- 4. Run CBL from CIBP to surface.
- 5. SPOT 25 SX CL H CMT FROM 7944' TO 7734'. WOC AND TAG
- 6. SPOT 201 SX CL C CMT FROM 6650' TO 4950'. WOC AND TAG
- 7. SPOT 266 SX CL C CMT FROM 4350' TO 2100'. WOC AND TAG
- 8. SPOT 237 SX CL C CMT FROM 2100' TO SURFACE
- 9. VERIFY CMT TO SURFACE

# **FORMATION TOPS**

Name	/-Top Meas. Depth
Pustlen .	367'
TOP Sult	706
Camar	40€0'
Bellamon	ધારા,
Cherry Common	5006
BushinCenyon	(cco)
Bonespring	€301,

# **CURRENT WELLBORE**

Sean Lehle 3/31/2025 30-015-38520-0000 Eddy

String 1 OD 11.75 in, 42# H-40 ST&C TD 505 ft Rustler 387' TOC 0 ft, CIRC 189 SX

Salt 706'

String 2 OD 8.625 in, 32# J-55 LT&C TD 4211 ft TOC 0 ft, CIRC 420 SX

> Lamar 4080' Bell Canyon 4121'


Cherry Canyon 5006'

Brushy Canyon 6600'

String 3
OD 5.5 in, 17# J-55 LT&C
TD MD 8517 ft
TD TVD 8126 ft Bone Spring 8301'
TOC 0 ft, CIRC 57 SX
PBTD MD 8440 ft
PBTD TVD 8047 ft

Current Wellbore

**PURE GOLD B FEDERAL 015** 

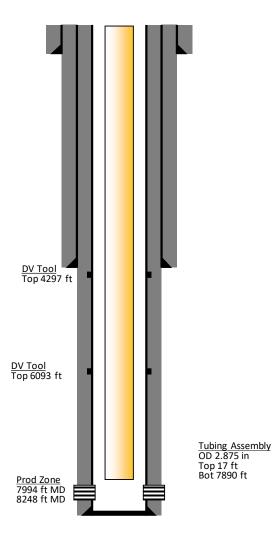

# PROPOSED WELLBORE

Sean Lehle 3/31/2025 30-015-38520-0000 Eddy

String 1 OD 11.75 in, 42# H-40 ST&C TD 505 ft Rustler 387' TOC 0 ft, CIRC 189 SX

Salt 706'

<u>String 2</u> OD 8.625 in, 32# J-55 LT&C TD 4211 ft TOC 0 ft, CIRC 420 SX

> Lamar 4080' Bell Canyon 4121'


Cherry Canyon 5006'

Brushy Canyon 6600'

String 3
OD 5.5 in, 17# J-55 LT&C
TD MD 8517 ft
TD TVD 8126 ft
TOC 0 ft, CIRC 57 SX
PBTD MD 8440 ft
PBTD TVD 8047 ft

Proposed Wellbore

**PURE GOLD B FEDERAL 015** 

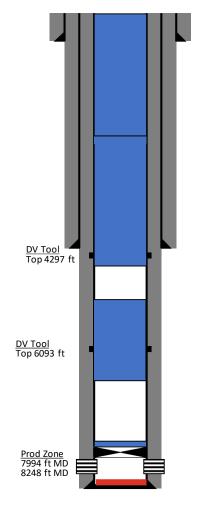

SPOT 237 SX CMT FROM 2100' TO SURFACE.
VERIFY CMT TO SURFACE

SPOT 266 SX CMT FROM 4350' TO 2100' WOC AND TAG

SPOT 201 SX CMT FROM 6650' TO 4950'. WOC AND TAG

\*Run CBL from CIBP to surface.

Submit results to BLM.

SET CIBP @ 7944'. LEAK TEST 500 PSI 30 MIN SPOT 25 SX CMT FROM 7944' TO 7734'

TIH with gauge ring and tag PBTD. Spot 25 sxs on top Class H.

**REVISED** 

11:40 am, Jun 26, 2025

# PA PREP WORK PROCEDURE

The subject well might be pre-plugged prior to PA rig operations. The plugging rig will come in within 90 days of equipment removal to begin plugging this well.

# Prep rig steps

- 1. Notify BLM or OCD prior to rig up.
- 2. MIRU prep rig. Prep equipment to pull pump/rods in the hole (if well has rods).
- 3. LD rods and pump, switchover to pull tbg.
- 4. ND wellhead & NU BOP.
- 5. POOH and LD tbg & BHA.
- 6. RU WL unit. Run and set CIBP.
- 7. If required, run CBL from top of plug to surface and submit to OCD
- 8. RD wireline unit.
- 9. Dump bail cmt as needed on top of CIBP.
- 10. Tag TOC & ensure well control steps followed below prior to rig off.

# Well control precautions

- 1. Run official MIT test to ensure pressure holds after CIBP is set.
- 2. Ensure well control prior to rig off by tagging TOC on top of CIBP.
- 3. NU WH flange and ensure all valves are closed when moving prep rig off location, no WS tubing left in hole.

# Lesser Prairie Chicken Area

# BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

# Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Lea County, call 575-689-5981. Eddy County, please email notifications to: <a href="mailto:BLM NM CFO PluggingNotifications@BLM.GOV">BLM NM CFO PluggingNotifications@BLM.GOV</a>. The Eddy County inspector on call phone, 575-361-2822, will remain active as a secondary contact.

<u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

<u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

Released to Imaging: 7/24/2025 10:10:29 AM

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.** 

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Above Ground Level Marker: If outside of Lesser Prairie-Chicken Habitat an above ground level marker shall be utilized. All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified BY PHONE (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 14<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off. The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

Below Ground Level Marker: If within Lesser Prairie-Chicken Habitat a below ground level marker shall be utilized. All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified BY PHONE (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 14<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing. The following information shall be permanently inscribed on the plate: well name and number, name of operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

Operator to verify the ground marker type with the BLM before setting dry hole Marker.

Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date well was plugged.

<u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

<u>Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:</u>
From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted.



# **United States Department of the Interior**

# BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

# **Reclamation Objectives and Procedures**

**Reclamation Objective:** Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No.

For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.

The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and

Released to Imaging: 7/24/2025 10:10:29 AM

access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.

It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.

At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Angela Mohle Environmental Protection Specialist 575-234-9226

Robert Duenas Environmental Protection Specialist 575-234-2229

Terry Gregston Environmental Protection/HAZMAT Specialist 575-234-5958

Sundry ID	2855030						
Plug Type	Тор	Bottom	Length	Tag	Sacks	Cement Class	Notes
							Spot cement from 2100' to surface.
Surface Plug	0.00			Tag/Verify	208.00	С	Verify at surface.
Fresh Water @ 460	405.40			base no			
11.75 inch- Shoe Plug	449.95	555.00	105.05	Tag/Verify			
Top of Salt @ 706	648.94	756.00	107.06	Tag/Verify			
Base of Salt @ 4121	4029.79	4171.00	141.21	Tag/Verify			
Delaware @ 4121	4029.79	4171.00	141.21	If solid			
8.625 inch- Shoe Plug	4118.89	4261.00	142.11	Tag/Verify			
DV tool plug	4204.03	4347.00	142.97	Tag/Verify	223.00	С	Spot cement from 4350' to 2100'. WOC and Tag.
2. too. p.u.g							Spot cement from 6650' to 4950'.
DV tool plug	5982.07	6143.00	160.93	Tag/Verify	168.00	С	WOC and Tag.
CIBP Plug	7909.00	7944.00		If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio	25.00		Set CIBP at 7944'. Leak test CIBP. Spot 25 sxs on top.
Perforations Plug (If No CIBP)	7944.00			Tag/Verify	25.00		Oper 20 3x3 on top.
				If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio			TIH and tag PBTD,
Bonesprings @ 8290	8157.10			ns	25.00	Н	Spot 25 sxs on top.
5.5 inch- Shoe Plug	8382.82	8568.00	185.18	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H >7500' Class C<7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

	50 Feet fr	om Base	of Salt to	surface
--	------------	---------	------------	---------

	50 Feet II	om Base of Sait t	o surrace
Cave Karst/Potash Cement Requirement:	<u>R111</u>		
Wild Life	Within Lesser Prairi	e Chicken Area	
11.75 inch- Shoe Plug @	505.00		
8.625 inch- Shoe Plug @	4211.00		
5.5 inch- Shoe Plug @	8518.00		
Perforatons Top @	7994.00	Perforations	8248.00
DV Tool @ DV Tool @	4297.00 6093.00	CIBP @	7944.00

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory <a href="https://www.emnrd.nm.gov/ocd/contact-us">https://www.emnrd.nm.gov/ocd/contact-us</a>

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 480114

# **CONDITIONS**

Operator:	OGRID:
OXY USA INC	16696
P.O. Box 4294	Action Number:
Houston, TX 772104294	480114
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

# CONDITIONS

Created By		Condition Date
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	7/24/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	7/24/2025