District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 *Page 1 of 16* Form C-144 Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

| Pit, Below-Grade Tank, or |
|---|
| Proposed Alternative Method Permit or Closure Plan Application |
| Type of action: Below grade tank registration Permit of a pit or proposed alternative method |
| BGT # 2 Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration |
| Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method |
| Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request |
| Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. |
| 1. Operator: <u>Dugan Production Corp.</u> OGRID #: <u>006515</u> |
| Address: PO Box 420, Farmington, NM 87499-0420 |
| Facility or well name: <u>Sanchez O'Brien SWD #001</u> |
| API Number: 30-045-25298 OCD Permit Number: BGT 2 |
| U/L or Qtr/Qtr <u>L</u> Section <u>06</u> Township <u>24N</u> Range <u>09W</u> County: <u>San Juan</u> |
| Center of Proposed Design: Latitude <u>36.3403587</u> Longitude <u>-107.8359222</u> NAD83 1650' FSL & 990' FWL |
| Surface Owner: 🖾 Federal 🗌 State 🗌 Private 🗌 Tribal Trust or Indian Allotment |
| 2. |
| <u>Pit:</u> Subsection F, G or J of 19.15.17.11 NMAC |
| Temporary: Drilling Workover |
| Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no |
| Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other |
| |
| Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x Wx D |
| 3. |
| Below-grade tank: Subsection I of 19.15.17.11 NMAC |
| Volume: 60 bbl Type of fluid: Produced Water |
| Tank Construction material: Steel |
| \Box Secondary containment with leak detection \Box Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off |
| □ Visible sidewalls and liner ☑ Visible sidewalls only □ Other Liner type: □ HDPE PVC □ Other |
| |
| 4. |
| Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. |
| 5. |
| Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) |
| Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, |
| institution or church) |
| Four foot height, four strands of barbed wire evenly spaced between one and four feet |
| Alternate. Please specify |

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen Netting Other

6.

7.

8.

9.

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

🛛 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.16.8 NMAC

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

□ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.

Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

| General siting | |
|--|--------------------|
| Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. NM Office of the State Engineer - iWATERS database search; X USGS; X Data obtained from nearby wells | □ Yes ⊠ No □ NA |
| Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | ☐ Yes ☐ No ☐ NA |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality | 🗌 Yes 🗌 No |
| Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division | 🗌 Yes 🗌 No |
| Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map | 🗌 Yes 🗌 No |
| Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map | 🗌 Yes 🗌 No |
| Below Grade Tanks | |
| Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site | 🛛 Yes 🗌 No |
| Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site | 🗌 Yes 🛛 No |
| Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) | |
| Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. | 🗌 Yes 🗌 No |
| Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | |
| Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |

| Peceived by OCD: 7/22/2025 12:49:24 PM | Page 3 of 10 |
|---|---------------------------------------|
| Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Temporary Pit Non-low chloride drilling fluid | |
| Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | 🗌 Yes 🗌 No |
| Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Permanent Pit or Multi-Well Fluid Management Pit | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). | |
| - Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | 🗌 Yes 🗌 No |
| Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| 10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number: | cuments are 9 NMAC 15.17.9 NMAC |
| 11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC | |
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number: | .15.17.9 NMAC |
| | |

•

| ^{12.} <u>Permanent Pits Permit Application Checklist</u> : Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the</i> | documents are |
|--|----------------------------|
| attached. | uocuments ure |
| Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC | |
| Climatological Factors Assessment | |
| Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC | |
| Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC | |
| Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC | |
| Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | |
| Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC | |
| Nuisance or Hazardous Odors, including H₂S, Prevention Plan Emergency Response Plan | |
| Oil Field Waste Stream Characterization | |
| Monitoring and Inspection Plan Erosion Control Plan | |
| Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC | |
| 13. Deserved Classes 10.15.17.12 ND4AC | |
| <u>Proposed Closure</u> : 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. | |
| Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F | luid Management Pit |
| Alternative | C |
| Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) | |
| On-site Closure Method (Only for temporary pits and closed-loop systems) | |
| In-place Burial On-site Trench Burial Alternative Closure Method | |
| 14. | |
| <u>Waste Excavation and Removal Closure Plan Checklist</u> : (19.15.17.13 NMAC) Instructions: Each of the following items must be | attached to the |
| <i>closure plan. Please indicate, by a check mark in the box, that the documents are attached.</i> Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC | |
| Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC | |
| Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC | |
| Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC | |
| Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC | |
| 15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC | |
| Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sources | |
| provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. 1 19.15.17.10 NMAC for guidance. | Please refer to |
| | |
| Ground water is less than 25 feet below the bottom of the buried waste. | 🗌 Yes 🗌 No |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | ∐ NA |
| Ground water is between 25-50 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | ☐ Yes ☐ No ☐ NA |
| Ground water is more than 100 feet below the bottom of the buried waste. | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | └ Yes └ No □ NA |
| Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa | \square Yes \square No |
| lake (measured from the ordinary high-water mark). | |
| - Topographic map; Visual inspection (certification) of the proposed site | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | Yes No |
| Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence | 🗌 Yes 🗌 No |
| at the time of initial application. | |
| - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site | |
| Written confirmation or verification from the municipality; Written approval obtained from the municipality | 🗌 Yes 🗌 No |
| Within 300 feet of a wetland. US Figh and Wildlife Watland Identification many Tanagraphic many Visual inspection (cortification) of the proposed site | |
| US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | 🗌 Yes 🗌 No |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance | |
| Form C-144 Oil Conservation Division Page 4 of | 6 |

| Received by (| OCD : | 7/22/2025 | 12:49:24 | PM |
|---------------|--------------|-----------|----------|----|
|---------------|--------------|-----------|----------|----|

| Received by OCD: 7/22/2025 12:49:24 PM | Page 5 of 1 |
|---|------------------------------|
| adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality | 🗌 Yes 🗌 No |
| Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division | 🗌 Yes 🗌 No |
| Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map | □ Yes □ No |
| Within a 100-year floodplain. - FEMA map | Yes No |
| 16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure p by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards can Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC | 7.11 NMAC 0.15.17.11 NMAC |
| 17. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and be Name (Print): Eileen Yates Signature: | lief. |
| e-mail address: <u>Eileen.Yates@duganproduction.com</u> Telephone: <u>505-787-9832</u> | |
| $ \underline{OCD Approva}: \square Permit Application (including closure plan) \square Closure Plan (only) \square OCD Conditions (see attachment) \\ \bigcirc a \neq 0 \\ \hline \hline$ | 2025 |
| OCD Representative Signature: | |
| ^{19.} <u>Closure Report (required within 60 days of closure completion)</u> : 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submittin The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date: | |
| 20. Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method If different from approved plan, please explain. | loop systems only) |
| 21. Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please is mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique | ndicate, by a check |

On-site Closure Location: Latitude

Longitude

.

NAD: 1927 1983

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan. Name (Print): Title:

Signature:

22.

_____ Date: _____

e-mail address: _____ Telephone: _____

.

Below Grade Tank Closure Plan

Dugan Production Corp.

Sanchez O'Brien SWD # 001

BGT # 2 API# 30-045-25298 L-06-24N-09W 1650 FSL 990 FWL Surface Owner: Federal

As directed by NMAC 19.15.17 the following plan/procedure has been prepared for closure of the below grade tank identified on the associated C-144.

- Dugan shall notify the surface owner by certified mail return receipt requested, unless the surface owner is a government agency in which case Dugan will notify via email (NMSLO), that Dugan plans closure operations at least 72 hours, but not more than one week, prior to any closure operation. Notice shall include well name, API number and location. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. A copy of the email sent to NMSLO will be included.
- 2. Dugan shall notify the OCD at least 72 hours, but not more than one week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range. If the closure is associated with a particular well, then the notice shall also include the well's name, number and API number. Dugan must close out a below-grade tank within 60-days of cessation of operation.
- 3. Dugan shall close the below-grade tank by first removing all contents and, if applicable, synthetic liners and transferring those materials to a division approved facility. In this case Dugan will haul solid waste to Envirotech (Permit # NM-01-0011). Liquid waste will be hauled to Dugan's Sanchez O'Brien SWD #1 (Permit # SWD-694). The pit liner will be disposed of at Waste Management's Crouch Mesa facility. The tank will be hauled to Dugan's yard. If the tank is in good condition, it will be placed in Dugan's inventory until its placed back in service. If the tank is in poor condition, it will be sold for scrap.
- 4. Dugan shall test the soils beneath the below-grade tank as follows:

(a) At a minimum, a five-point composite sample to include any obvious stained or wet soils, or other evidence of contamination shall be taken under the liner or the below-grade tank and that sample shall be analyzed for the constituents listed in Table I of 19.15.17.13 NMAC.

(b) If any contaminant concentration is higher than the parameters listed in Table I of 19.15.17.13 NMAC, the division may require additional delineation upon review of the results and Dugan must receive approval before proceeding with closure.

(c) If all contaminant concentrations are less than or equal to the parameters listed in Table I of 19.15.17.13 NMAC, then Dugan can proceed to backfill the pit, pad, or excavation with non-waste containing, uncontaminated, earthen material.

- 5. Once Dugan has closed the below-grade tank, Dugan shall reclaim the below-grade tank location and all areas associated with the below-grade tank including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. Dugan shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Paragraph (2) of Subsection H of 19.15.17.13 NMAC, recontour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Paragraph (5) in Subsection H of 19.15.17.13 NMAC.
- 6. Areas reasonably needed for production operations or for subsequent drilling operations shall be compacted, covered, paved, or otherwise stabilized and maintained in such a way as to minimize dust and erosion to the extent practicable.
- 7. Dugan will install a soil cover that shall consist of the background thickness of topsoil or one foot of suitable material, whichever is greater. The soil cover shall be constructed to the site's existing grade and all practical efforts shall be made to prevent ponding of water and erosion of the soil cover material.
- This BGT is located at an active wellsite and will remain active for many years. No seeding will take place until the well is permanently plugged and abandoned. After the well is permanently plugged Dugan will comply with the seeding requirements found in NMAC 19.15.17.13.H.(5) and notify the division when reclamation and re-vegetation are complete.
- 9. Within 60 days of closure completion Dugan will submit a closure report with form C-144 and will include the following:
 - a. Proof of closure notice given to NMOCD and the surface owner
 - b. Sampling analytical reports; information required by 19.15.17 NMAC
 - c. Disposal facility name and permit numbers
 - d. Details on backfilling, capping, covering and, where applicable, seeding application rates and seeding technique
 - e. Photo documentation of sampling and site reclamation.


Depth to Groundwater

Dugan consulted the USGS and NMOSE water well data to determine a depth to water. Each agency reported groundwater was present at nearly 300 feet below surface. Based on these pieces of information, and with OCD's agreement on the matter, Dugan <u>estimates the depth to groundwater at this site is nearly 300 feet below the base of the</u> <u>BGT.</u>

List of Attachments

- 1. A topographic map of the area surrounding the BGT that identifies all nearby water courses as directed in section 9 of the C-144. See **Appendix A**
- 2. The New Mexico Office of the State Engineer (NMOSE) tracks the usage and assignment of water rights and water well installations and records this information in the Water Rights Reporting System (WRRS) database. A search was conducted for Section 06, Township 24N, and Range 09W, no data existed. The search was expanded to include all sections of township 24N and Range 09W, which provided data for three water wells. The water wells were found in Section 07, 27, and 25. The depth of the closest well to the Site was 1,073 feet and the three average is 540 feet. See Appendix B
- **3.** Dugan Production conducted a liquid level measurement using an Echometer at the 16'Gs water well located at the Sanchez O'Brien #001 site on June 19, 2024. The fluid level in the well was recorded at a depth of 573 feet. See **Appendix C**
- **4.** The New Mexico Office of the State Engineer (NMOSE) provides an interactive mapping program, OSE POD Locations, which maps points of diversion (PODs). The PODs are each assigned POD numbers in the database which contains depth to water information. Utilizing this tool, an exploratory water well within 2,163.7 feet of the Site which has a recorded depth to water of 628 feet was located. See **Appendix D**
- 5. The USGS Water Resources database provides data for groundwater levels for New Mexico using a mapping program which identifies water wells. A water well is located 2,481.2 feet from the Site, and a depth to water of 600 feet as of October of 1963. See Appendix E

Appendix A: Topographic Map

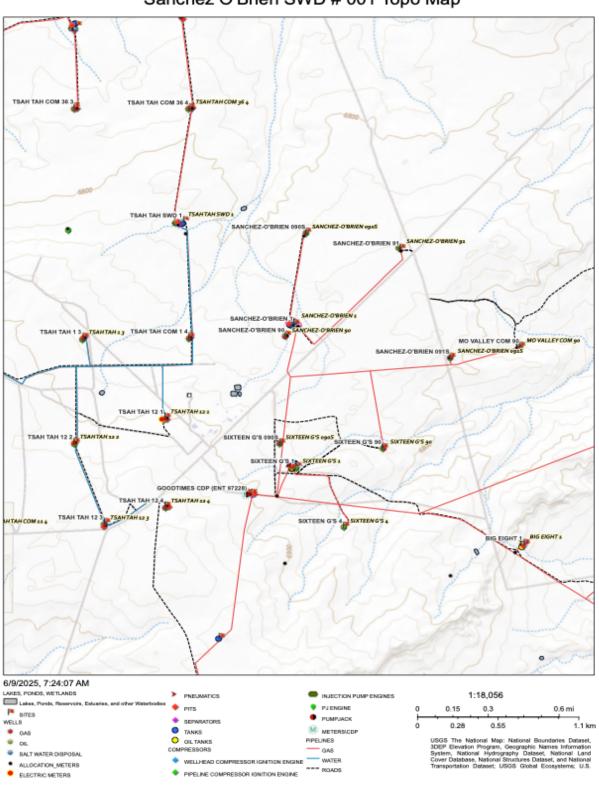

Sanchez O'Brien SWD # 001 Topo Map

Dugan Production Corp

(A CLW##### in

Appendix B: NMOSE Water Well Data

New Mexico Office of the State Engineer Water Column/Average Depth to Water

| the POD suffix indicates the POD has been replaced & no longer serves a water right file.) | (R=POD has been replaced, O=orphaned, C=the file is closed) | | | (quart smalle larges | | | | | | | | | | (In feet) |) |
|---|--|--------------|--------|----------------------------|-----|----|-----|-----|-------|----------|-------------|-----|------|----------------|-----------------|
| POD Number | Code | Sub basin | County | Q64 | Q16 | Q4 | Sec | Tws | Range | x | Y | Мар | | Depth Water | Water Column |
| SJ 01507 | | sj | RA | SW | SW | SE | 10 | 23N | 07W | 269889.0 | 4013098.0 * | • | 1709 | 900 | 809 |
| SJ 02233 | | sj | RA | NW | NW | NE | 15 | 23N | 07W | 269856.0 | 4012864.0 * | • | 1100 | | |
| SJ 04054 POD1 | | sj | RA | | | NW | 14 | 23N | 07W | 270627.2 | 4012298.4 | • | 273 | 180 | 93 |

Average Depth to Water: 540 feet

Minimum Depth: 180 feet

Maximum Depth: 900 feet

Record Count: 3

Basin/County Search: County: RA

PLSS Search: Range: 07W Township: 23N Section: 1-36


* UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.


Page 1 of 1

Water Column/Average Depth to Water

Appendix C: Dugan Production Depth to Water Report

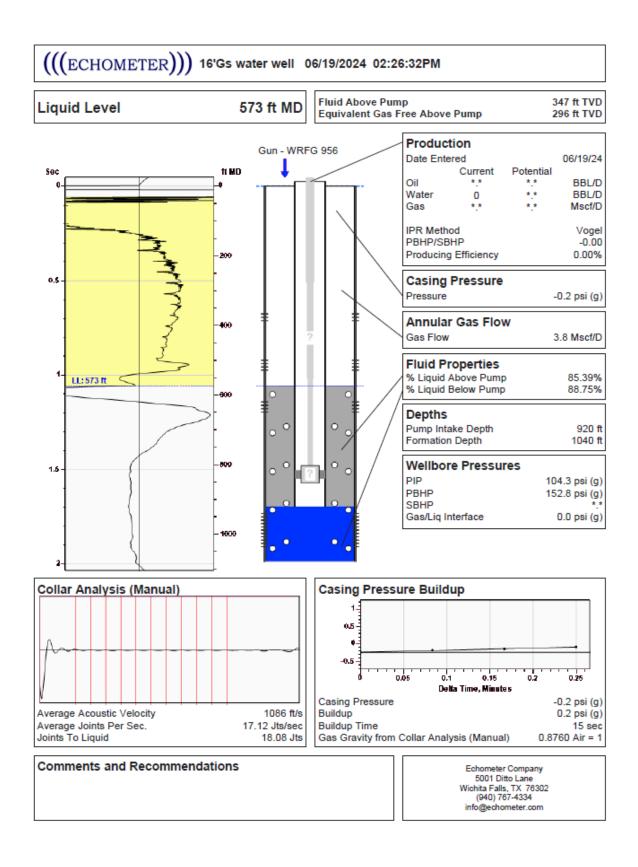

Appendix D: Dugan Production Depth to Water Report

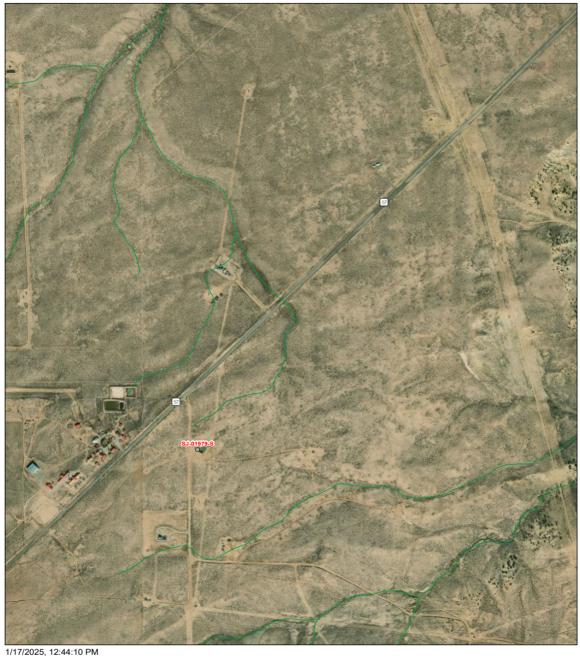

Sanchez O'Brien - OSE POD Location Map

| 1/17/2025, 12:44:10 PM | | |
|----------------------------|-------------------------|---|
| GIS WATERS PODs | Water Right Regulations | 1:9,028 |
| Active | Artesian Planning Area | 0 0.07 0.15 0.3 mi |
| • | NHD Flowlines | 0 0.13 0.25 0.5 km |
| OSE District Bound | ary Artificial Path | Esri, HERE, iPC, Esri, HERE, Garmin, iPC, Maxar |
| | Stream River | |

Online web user This is an unofficial map from the OSE's online application.

Appendix D: Dugan Production Depth to Water Report

| Point | | | | | | | | | int c | |
|---|--------------|----------------|-----------------|----------|------|--------|-------|--------------|-----------|--|
| quarters are 1=NW 2=NE 3=SW 4=SE quarters are smallest to largest NAD03 UTIM in meters | | | | | | | | | | |
| Well Tag | POD Nb | r Q64 | Q16 | Q4 | Sec | Tws | Rng | x | Y | |
| | SJ 01979 | ł | SW | NE | 32 | 25N | 09W | 247838.5 | 4027524.9 | |
| * UTM locatio | on was deriv | ed from PLSS - | see Help | | | | | | | |
| Driller Lice | ense: | | Driller Compa | any: | | | | | | |
| Driller Na | me: S | ALAZAR DRI | ILLING COMPAN | ٩Y | | | | | | |
| Drill Start | Date: 1 | 986-02-08 | Drill Finish Da | ate: | 1986 | -02-15 | Plug | Date: | | |
| Log File D | ate: 1 | 986-03-18 | PCW Rcv Dat | e: | 1986 | -03-18 | Sour | ce: | Shallow | |
| Pump Typ | e: S | UBMER | Pipe Discharg | ge Size: | 3.5 | | Estin | nated Yield: | | |
| Casing Siz | | 0.75 | Depth Well: | | 1180 | | | h Water: | 628 | |

Appendix E: USGS Data

USGS 362004107502501 24N.10W.12.2223

San Juan County, New Mexico Latitude 36°20'04", Longitude 107°50'25" NAD27 Land-surface elevation 6,878 feet above NGVD29 This well is completed in the Colorado Plateaus aquifers (N300COPLTS) national aquifer. This well is completed in the Ojo Alamo Sandstone (2110JAM) local aquifer.

| Date | ٢ | Time | \$ Water-level date-time accuracy | \$ | Parameter code | \$ | Water level, feet below land surface | \$ |
|------|-----------|------|--|----|-------------------|-------|---|--------|
| 19 | 963-10-31 | | | D | | 62610 | | |
| | 963-10-31 | | | D | | 62611 | | |
| 19 | 963-10-31 | | | D | | 72019 | | 600.00 |

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

| Operator: | OGRID: |
|-----------------------|--|
| DUGAN PRODUCTION CORP | 6515 |
| PO Box 420 | Action Number: |
| Farmington, NM 87499 | 487525 |
| | Action Type: |
| | [C-144] Below Grade Tank Plan (C-144B) |
| | |

CONDITIONS

| Created By | | Condition Date |
|------------|------|-------------------|
| joel.stone | None | 7/25/2025 |

Page 16 of 16

Action 487525