Form 3160-5 (June 2019)

UNITED STATES

FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

5. Lease Serial No. NMNM54449

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals

Do not use this t		to drill or to re-enter an PD) for such proposals.	6. If Indian, Allottee or Tribe N	ame
SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2	7. If Unit of CA/Agreement, N	ame and/or No.
1. Type of Well Oil Well Gas W	Well Other		8. Well Name and No. FEDERAL 27/6	
2. Name of Operator H L BROWN OF	PERATING, LLC		9. API Well No. 3004120937	
3a. Address 300 W. Louisana, Midland, TX 79701 3b. Phone No. (include area code) (432) 683-5216		10. Field and Pool or Explorate BLUITT-SILURO-DEVONIAN, NOR	ory Area TH/BLUITT-SILURO-DEVONIAN, NORTH	
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 27/T7S/R37E/NMP		11. Country or Parish, State ROOSEVELT/NM		
12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICATE NATURE (OF NOTICE, REPORT OR OTH	ER DATA
TYPE OF SUBMISSION	:	TYPI	E OF ACTION	
Notice of Intent	Acidize Alter Casing	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity
Subsequent Report	Casing Repair Change Plans	New Construction Plug and Abandon	Recomplete Temporarily Abandon	Other
Final Abandonment Notice	Convert to Injection	Plug Back	Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

1) SET 5-1/2" CIBP @ 8,675'; PUMP (30) SXS. CLASS "H" CMT. @ 8,675'-8,475'; WOC X TAG TOC. 2) CIRC. WELL W/ M.L.F.; PRES. TEST CSG. TO 500# X HOLD FOR 30 MINS. 3) PUMP (75) SXS. CLASS "H" CMT. @ 8,003'-7,444' (T/WLCP., 5-1/2" DV TOOL); WOC X TAG TOC. 4) PUMP (25) SXS. CLASS "C" CMT. @ 7,057'-6,897' (T/ABO); WOC X TAG TOC. 5) PUMP (25) SXS. CLASS "C" CMT. @ 5,069'-4,919' (T/GLOR.). 6) PUMP (25) SXS. CLASS "C" CMT. @ 3,800'-3,650' (8-5/8" CSG.SHOE, T/S.A.); WOC X TAG TOC. 7) PUMP (25) SXS. CLASS "C" CMT. @ 2,604'-2,484' (T/YATES); WOC X TAG TOC. 8) CIRC. (70) SXS. CLASS "C" CMT. @ 570'-3'. 9) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL BELOW GROUND DRY HOLE MARKER (LPC).

DURING THIS PROCEDURE WE PLAN TO USE A CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

See Conditions of Approval

Like Approval by NMOCD

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) DAVID EYLER / Ph: (432) 687-3033	Agent OSIOC	12025	•
(Electronic Submission)	Date	08/05/2	2025
THE SPACE FOR FEDERAL OR STATE OFICE USE			
Approved by JENNIFER SANCHEZ Digitally signed by JENNIFER SANCHEZ Date: 2025.08.06 08:55:39 -06'00'	Petroleum E	ngineer	Date 08/06/2025
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject lear which would entitle the applicant to conduct operations thereon.			

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Location of Well

0. SHL: SENW / 1600 FNL / 1710 FWL / TWSP: 7S / RANGE: 37E / SECTION: 27 / LAT: 33.6821337 / LONG: -103.1434298 (TVD: 9200 feet, MD: 9200 feet) BHL: SENW / 1600 FNL / 1710 FWL / TWSP: 7S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 9200 feet, MD: 9200 feet)

(Form 3160-5, page 3)

BUREAU OF LAND MANAGEMENT Roswell Field Office 2909 W. Second Street Roswell, New Mexico 88201 575-627-0272

General Requirements for Plug Backs

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Subsequent Plug back Reporting:</u> Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date work was completed.</u>
- 7. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Form 3160-5 (June 2019)

UNITED STATES

FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021

DEPARTMENT OF	THE INTERIOR
BUREAU OF LAND	MANAGEMENT

BUREAU OF LAND MANAGEMENT		NI	MNM54449	
Do not use this f		ORTS ON WELLS to drill or to re-enter an PD) for such proposals.	6. If Indian, Allottee or Tribe N	ame
SUBMIT IN	TRIPLICATE - Other instru	uctions on page 2	7. If Unit of CA/Agreement, N	ame and/or No.
1. Type of Well Oil Well Gas W	/ell Other		8. Well Name and No. FEDERAL 27/6	
2. Name of Operator H L BROWN OF	PERATING, LLC		9. API Well No. 3004120937	
3a. Address 300 W. Louisana, Midla	nd, TX 79701	3b. Phone No. (include area code) (432) 683-5216	10. Field and Pool or Explorate BLUITT-SILURO-DEVONIAN, NOR	ory Area rh/BLUITT-SILURO-DEVONIAN, NORTH
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 27/T7S/R37E/NMP		11. Country or Parish, State ROOSEVELT/NM		
12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICATE NATURE C	F NOTICE, REPORT OR OTH	ER DATA
TYPE OF SUBMISSION	3	ТҮРЕ	OF ACTION	
Notice of Intent	Acidize Alter Casing	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity
Subsequent Report	Casing Repair Change Plans	New Construction ✓ Plug and Abandon	Recomplete Temporarily Abandon	Other
Final Abandonment Notice	Convert to Injection	Plug Back	Water Disposal	
the Bond under which the work will completion of the involved operation	Ily or recomplete horizontal l be perfonned or provide the ons. If the operation results in	ly, give subsurface locations and mea e Bond No. on file with BLM/BIA. F n a multiple completion or recomplet	asured and true vertical depths of Required subsequent reports mus- tion in a new interval, a Form 31	f all pertinent markers and zones. Attach

is ready for final inspection.)

1) SET 5-1/2" CIBP @ 8,675"; PUMP (30) SXS. CLASS "H" CMT. @ 8,675'-8,475"; WOC X TAG TOC. 2) CIRC. WELL W/ M.L.F.; PRES. TEST CSG. TO 500# X HOLD FOR 30 MINS. 3) PUMP (75) SXS. CLASS "H" CMT. @ 8,003'-7,444' (T/WLCP., 5-1/2" DV TOOL); WOC X TAG TOC. 4) PUMP (25) SXS. CLASS "C" CMT. @ 7,057'-6,897' (T/ABO); WOC X TAG TOC. 5) PUMP (25) SXS. CLASS "C" CMT. @ 5,069'-4,919' (T/GLOR.). 6) PUMP (25) SXS. CLASS "C" CMT. @ 3,800'-3,650' (8-5/8" CSG.SHOE, T/S.A.); WOC X TAG TOC. 7) PUMP (25) SXS, CLASS "C" CMT. @ 2,604'-2,484' (T/YATES); WOC X TAG TOC. 8) CIRC. (70) SXS, CLASS "C" CMT. @ 570'-3'. 9) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL BELOW GROUND DRY HOLE MARKER (LPC).

DURING THIS PROCEDURE WE PLAN TO USE A CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

See Conditions of Approval

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Like Approval by NMOCD

14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>) DAVID EYLER / Ph: (432) 687-303	Agent 0 8/06/2025			
Signature (Electronic Submission)	Date 08/05	/2025		
THE SPACE FOR FEDERAL OR STATE OFICE USE				
Approved by JENNIFER SANCHEZ Digitally signed by JENNIFER SANCHEZ Date: 2025.08.06 08:55:39 -06'00'	Petroleum Engineer	Date 08/06/2025		
Conditions of approval, if any, are attached. Approval of this notice does not warrant o certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.				
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States				

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Location of Well

0. SHL: SENW / 1600 FNL / 1710 FWL / TWSP: 7S / RANGE: 37E / SECTION: 27 / LAT: 33.6821337 / LONG: -103.1434298 (TVD: 9200 feet, MD: 9200 feet) BHL: SENW / 1600 FNL / 1710 FWL / TWSP: 7S / SECTION: / LAT: 0.0 / LONG: 0.0 (TVD: 9200 feet, MD: 9200 feet)

(Form 3160-5, page 3)

BUREAU OF LAND MANAGEMENT Roswell Field Office 2909 W. Second Street Roswell, New Mexico 88201 575-627-0272

General Requirements for Plug Backs

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from this approval.


If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.


In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Subsequent Plug back Reporting:</u> Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date work was completed.</u>
- 7. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

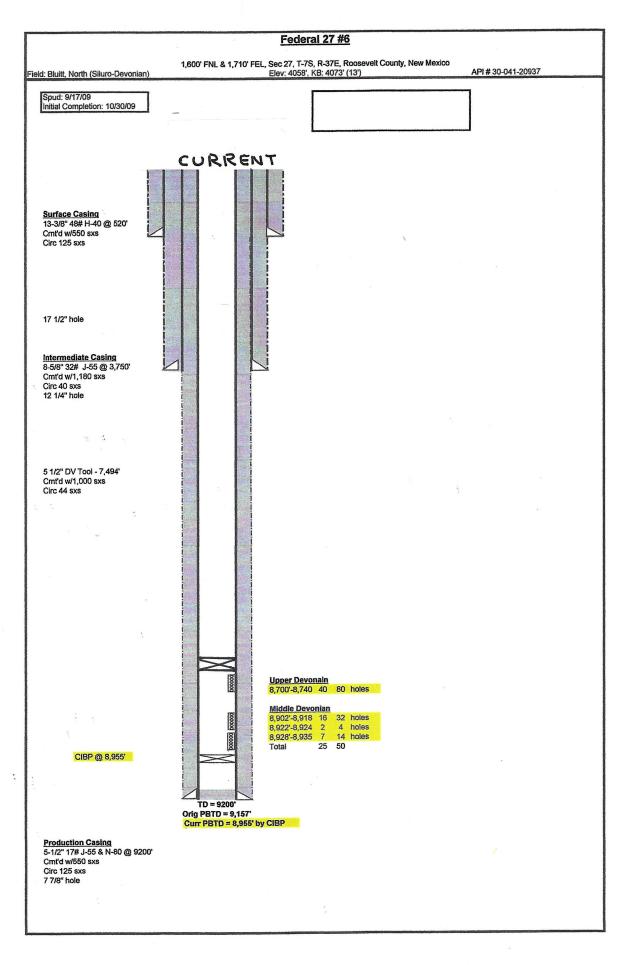

Federal 27 #6 complete.xls 6/22/2025 1:23 PM

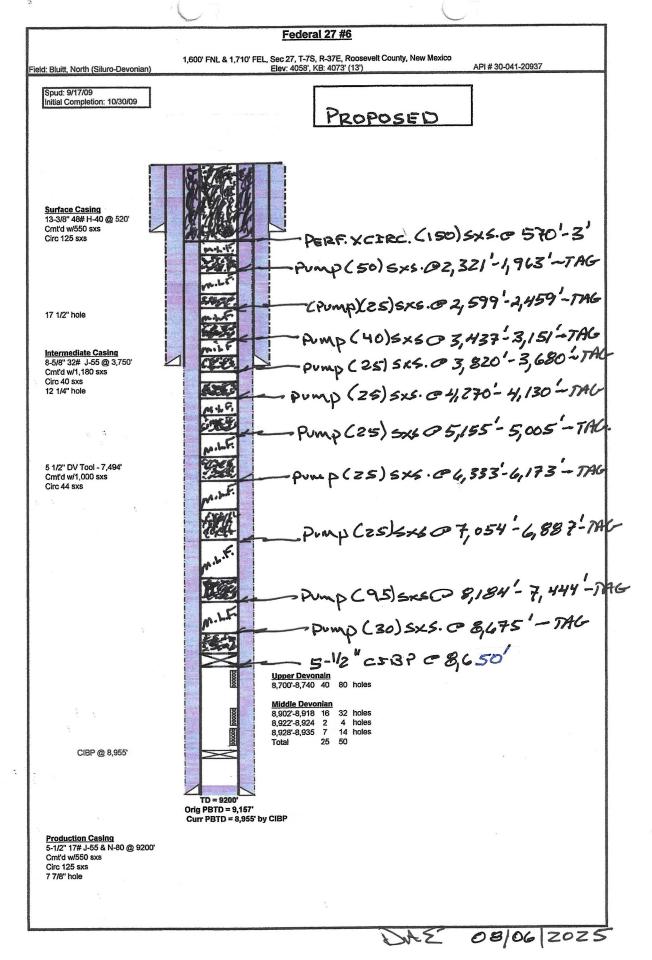

Federal 27 #6 complete.xls 6/22/2025 1:23 PM

Federal 27 6 30-041-20937 H L Brown Operating, LLC August 6, 2025 Conditions of Approval

- 1. Operator shall place CIBP at 8,650'. Operator shall place 30 sx Class H cement on top of CIBP. <u>WOC and TAG.</u>
- 2. Operator shall place a balanced Class H plug from 8,184' to 7,444' to seal the top of Penn, top of the Wolfcamp, and the DV tool. WOC and TAG. Tag must be 50' above DV tool which is exactly 7,444'.
- 3. Operator shall place a balanced Class C plug from 7,054' to 6,887' to seal the top of the Abo Formation. <u>WOC.</u>
- 4. Operator shall place a balanced Class C plug from 6,333' to 6,173' to seal the top of the Bone Spring Formation. <u>WOC.</u>
- 5. Operator shall place a balanced Class C plug from 5,155' to 5,005' to seal the top of the Glorietta Formation. <u>WOC.</u>
- 6. Operator shall place a balanced Class C plug from 4,270' to 4,130' to seal the top of the San Andres Formation. WOC.
- 7. Operator shall place a balanced Class C plug from 3,820' to 3,680' to seal 8-5/8' casing shoe. <u>WOC.</u>
- 8. Operator shall place a balanced Class C plug from 3,437' to 3,151' to seal the top of the Queen and Grayburg Formations. WOC.
- 9. Operator shall place a balanced Class C plug from 2,599' to 2,459' to seal the top of the top of Yates and Base of Salt Formations. <u>WOC.</u>
- 10. Operator shall place a balanced Class C plug from 2,321' to 1,963' to seal the top of the top of Salt and Rustler Formations. <u>WOC.</u>

- 11. Operator shall perf at 570' and squeeze cement class C cement to surface to seal the 13-3/8" casing shoe.
- 12. Dry hole marker must be below ground.
- 13. Surface reclamation will need to be completed once the well bore has been plugged. Please contact <u>rflores@blm.gov</u> for additional information.
- 14. See attached for general plugging stipulations.

JAM 08062025

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 494682

CONDITIONS

Operator:	OGRID:
H L BROWN OPERATING, LLC	213179
P.O. Box 2237	Action Number:
Midland, TX 79702	494682
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created E	y Condition	Condition Date
gcorde	None None	8/14/2025