

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-101  
August 1, 2011

Permit 394526

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

|                                                                                                                        |  |                               |
|------------------------------------------------------------------------------------------------------------------------|--|-------------------------------|
| 1. Operator Name and Address<br>Permian Resources Operating, LLC<br>300 N. Marienfeld St Ste 1000<br>Midland, TX 79701 |  | 2. OGRID Number<br>372165     |
| 4. Property Code<br>337735                                                                                             |  | 3. API Number<br>30-015-57206 |
| 5. Property Name<br>Baked Ziti                                                                                         |  | 6. Well No.<br>123H           |

**7. Surface Location**

|               |               |                 |              |              |                   |               |                  |               |                |
|---------------|---------------|-----------------|--------------|--------------|-------------------|---------------|------------------|---------------|----------------|
| UL - Lot<br>I | Section<br>29 | Township<br>21S | Range<br>27E | Lot Idn<br>I | Feet From<br>2484 | N/S Line<br>S | Feet From<br>542 | E/W Line<br>E | County<br>Eddy |
|---------------|---------------|-----------------|--------------|--------------|-------------------|---------------|------------------|---------------|----------------|

**8. Proposed Bottom Hole Location**

|               |               |                 |              |              |                   |               |                   |               |                |
|---------------|---------------|-----------------|--------------|--------------|-------------------|---------------|-------------------|---------------|----------------|
| UL - Lot<br>K | Section<br>26 | Township<br>21S | Range<br>26E | Lot Idn<br>K | Feet From<br>2283 | N/S Line<br>S | Feet From<br>1424 | E/W Line<br>W | County<br>Eddy |
|---------------|---------------|-----------------|--------------|--------------|-------------------|---------------|-------------------|---------------|----------------|

**9. Pool Information**

|                         |       |
|-------------------------|-------|
| CEDAR HILLS;BONE SPRING | 11560 |
|-------------------------|-------|

**Additional Well Information**

|                           |                             |                                        |                           |                                    |
|---------------------------|-----------------------------|----------------------------------------|---------------------------|------------------------------------|
| 11. Work Type<br>New Well | 12. Well Type<br>OIL        | 13. Cable/Rotary                       | 14. Lease Type<br>Private | 15. Ground Level Elevation<br>3154 |
| 16. Multiple<br>N         | 17. Proposed Depth<br>26457 | 18. Formation<br>2nd Bone Spring Sand  | 19. Contractor            | 20. Spud Date<br>3/1/2026          |
| Depth to Ground water     |                             | Distance from nearest fresh water well |                           | Distance to nearest surface water  |

☒ We will be using a closed-loop system in lieu of lined pits

**21. Proposed Casing and Cement Program**

| Type | Hole Size | Casing Size | Casing Weight/ft | Setting Depth | Sacks of Cement | Estimated TOC |
|------|-----------|-------------|------------------|---------------|-----------------|---------------|
| Surf | 17.5      | 13.375      | 54.5             | 300           | 240             | 0             |
| Int1 | 12.25     | 10.75       | 45.5             | 790           | 140             | 0             |
| Int2 | 9.875     | 8.625       | 32               | 3163          | 230             | 0             |
| Prod | 7.875     | 5.5         | 20               | 26457         | 2480            | 6736          |
| Prod | 7.875     | 5.5         | 20               | 9465          | 400             | 2663          |

**Casing/Cement Program: Additional Comments**

|  |
|--|
|  |
|--|

**22. Proposed Blowout Prevention Program**

|         |                  |               |              |
|---------|------------------|---------------|--------------|
| Type    | Working Pressure | Test Pressure | Manufacturer |
| Annular | 5000             | 5000          |              |

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.  
I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.  
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

Signature:

Printed Name: Electronically filed by Stephanie Rabadue

Title: Regulatory Manager

Email Address: stephanie.rabadue@permianres.com

Date: 7/30/2025

Phone: 432-260-4388

**OIL CONSERVATION DIVISION**

Approved By: Jeffrey Harrison

Title: Petroleum Specialist III

Approved Date: 9/4/2025

Expiration Date: 9/4/2027

Conditions of Approval Attached

|                                                                 |                                                                                                            |                                     |                                                       |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------|
| <b>C-102</b><br><br>Submit Electronically<br>Via OCD Permitting | State of New Mexico<br>Energy, Minerals & Natural Resources Department<br><b>OIL CONSERVATION DIVISION</b> | Revised July 9, 2024                |                                                       |
|                                                                 |                                                                                                            | Submittal<br>Type:                  | <input checked="" type="checkbox"/> Initial Submittal |
|                                                                 |                                                                                                            |                                     | <input type="checkbox"/> Amended Report               |
|                                                                 |                                                                                                            | <input type="checkbox"/> As Drilled |                                                       |

## WELL LOCATION INFORMATION

|                                                                                                                                                        |                                                          |                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| API Number<br><del>ED</del> <b>30-015-57206</b>                                                                                                        | Pool Code<br><b>11560</b>                                | Pool Name<br><b>CEDAR HILL; BONE SPRING</b>                                                                                                            |
| Property Code<br><del>ED</del> <b>337735</b>                                                                                                           | Property Name<br><b>BAKED ZITI</b>                       | Well Number<br><b>123H</b>                                                                                                                             |
| OGRID No.<br><b>372165</b>                                                                                                                             | Operator Name<br><b>PERMIAN RESOURCES OPERATING, LLC</b> | Ground Level Elevation<br><b>3,153.64'</b>                                                                                                             |
| Surface Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |                                                          | Mineral Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |

## Surface Location

|          |           |            |            |     |                   |                 |                   |                     |             |
|----------|-----------|------------|------------|-----|-------------------|-----------------|-------------------|---------------------|-------------|
| UL       | Section   | Township   | Range      | Lot | Ft. from N/S      | Ft. from E/W    | Latitude          | Longitude           | County      |
| <b>I</b> | <b>29</b> | <b>21S</b> | <b>27E</b> |     | <b>2,484' FSL</b> | <b>542' FEL</b> | <b>32.450414°</b> | <b>-104.205264°</b> | <b>EDDY</b> |

## Bottom Hole Location

|          |           |            |            |     |                   |                   |                   |                     |             |
|----------|-----------|------------|------------|-----|-------------------|-------------------|-------------------|---------------------|-------------|
| UL       | Section   | Township   | Range      | Lot | Ft. from N/S      | Ft. from E/W      | Latitude          | Longitude           | County      |
| <b>K</b> | <b>26</b> | <b>21S</b> | <b>26E</b> |     | <b>2,283' FSL</b> | <b>1,424' FWL</b> | <b>32.450161°</b> | <b>-104.267076°</b> | <b>EDDY</b> |

|                                           |                                          |                                             |                                                                                                               |                                |
|-------------------------------------------|------------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------|
| Dedicated Acres<br><b>597.35</b>          | Infill or Defining Well<br><b>Infill</b> | Defining Well API<br><b>Baked Ziti 113H</b> | Overlapping Spacing Unit (Y/N)<br><b>N</b>                                                                    | Consolidation Code<br><b>F</b> |
| Order Numbers. <b>F-pending submittal</b> |                                          |                                             | Well setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |                                |

## Kick Off Point (KOP)

|          |           |            |            |     |                   |                 |                   |                     |             |
|----------|-----------|------------|------------|-----|-------------------|-----------------|-------------------|---------------------|-------------|
| UL       | Section   | Township   | Range      | Lot | Ft. from N/S      | Ft. from E/W    | Latitude          | Longitude           | County      |
| <b>I</b> | <b>29</b> | <b>21S</b> | <b>27E</b> |     | <b>2,484' FSL</b> | <b>542' FEL</b> | <b>32.450414°</b> | <b>-104.205264°</b> | <b>EDDY</b> |


## First Take Point (FTP)

|          |           |            |            |     |                   |                 |                   |                     |             |
|----------|-----------|------------|------------|-----|-------------------|-----------------|-------------------|---------------------|-------------|
| UL       | Section   | Township   | Range      | Lot | Ft. from N/S      | Ft. from E/W    | Latitude          | Longitude           | County      |
| <b>I</b> | <b>29</b> | <b>21S</b> | <b>27E</b> |     | <b>2,310' FSL</b> | <b>100' FEL</b> | <b>32.449934°</b> | <b>-104.203832°</b> | <b>EDDY</b> |

## Last Take Point (LTP)

|          |           |            |            |     |                   |                   |                   |                     |             |
|----------|-----------|------------|------------|-----|-------------------|-------------------|-------------------|---------------------|-------------|
| UL       | Section   | Township   | Range      | Lot | Ft. from N/S      | Ft. from E/W      | Latitude          | Longitude           | County      |
| <b>K</b> | <b>26</b> | <b>21S</b> | <b>26E</b> |     | <b>2,283' FSL</b> | <b>1,424' FWL</b> | <b>32.450161°</b> | <b>-104.267076°</b> | <b>EDDY</b> |

|                                                         |                                                                                                    |                                        |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------|
| Unitized Area or Area of Uniform Interest<br><b>N/A</b> | Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical | Ground Floor Elevation:<br><b>3183</b> |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                                                                                                                                                                                                                                                                                          |                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| <b>OPERATOR CERTIFICATIONS</b><br><br>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.<br><br>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.<br><br> <b>7/30/25</b> |  | <b>SURVEYOR CERTIFICATIONS</b><br><br>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.<br><br><br><b>Date: 7/9/2025</b> |                                   |
| Signature<br><b>Kanicia Schlichting</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  | Signature and Seal of Professional Surveyor                                                                                                                                                                                                                                                                                                                              |                                   |
| Printed Name<br><b>kanicia.schlichting@permianres.com</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  | Certificate Number<br><b>12177</b>                                                                                                                                                                                                                                                                                                                                       | Date of Survey<br><b>7/9/2025</b> |
| Email Address                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |                                                                                                                                                                                                                                                                                                                                                                          |                                   |

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

LAST TAKE POINT &  
BOTTOM HOLE LOCATION  
2,283' FSL & 1,424' FWL

---

NAD 83 X = 561,775.48'  
NAD 83 Y = 527,505.91'  
NAD 83 LAT = 32.450161°  
NAD 83 LONG = -104.267076°  
NAD 27 X = 520,594.68'  
NAD 27 Y = 527,445.94'  
NAD 27 LAT = 32.450044°  
NAD 27 LONG = -104.266570°

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form APD Conditions

Permit 394526

**PERMIT CONDITIONS OF APPROVAL**

|                                                                                                                               |                             |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Operator Name and Address:<br>Permian Resources Operating, LLC [372165]<br>300 N. Marienfeld St Ste 1000<br>Midland, TX 79701 | API Number:<br>30-015-57206 |
|                                                                                                                               | Well:<br>Baked Ziti #123H   |

| OCD Reviewer     | Condition                                                                                                                                                                                                                                                                         |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| jeffrey.harrison | This well is within the designated 4-string area. Four full casing strings must be utilized for this well.                                                                                                                                                                        |
| jeffrey.harrison | This well is within the radius of the Carlsbad Brine Well. Operator shall provide written notice to OCD at least 14 days prior to the start of any drilling or completion activities. The notice shall be filed with OCD.Engineer@state.nm.us.                                    |
| jeffrey.harrison | Vertical portions of wells may not advance within 1/4-mile of the backfilled void.                                                                                                                                                                                                |
| jeffrey.harrison | Lateral portions of wells occurring within 1-mile of the backfilled void may not occur at depths less than 5,000 feet.                                                                                                                                                            |
| jeffrey.harrison | Completion activities (hydraulic fracturing) within 1-mile of the backfilled void may not occur simultaneously. OCD may require the completion schedule to be modified if multiple completions are planned to occur simultaneously.                                               |
| jeffrey.harrison | This well is within the Capitan Reef. The first intermediate casing string shall be set and cemented back to surface immediately above the Capitan Reef. The second intermediate string shall be set and cemented back to surface immediately below the base of the Capitan Reef. |
| jeffrey.harrison | Brine water shall not be used in the Capitan Reef. Only fresh water shall be utilized until the Capitan Reef is cased and cemented.                                                                                                                                               |
| jeffrey.harrison | Notify the OCD 24 hours prior to casing & cement.                                                                                                                                                                                                                                 |
| jeffrey.harrison | File As Drilled C-102 and a directional Survey with C-104 completion packet.                                                                                                                                                                                                      |
| jeffrey.harrison | A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.                                                                                                                                                                                                            |
| jeffrey.harrison | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.             |
| jeffrey.harrison | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                              |



# **PERMIAN**

## **R E S O U R C E S**

### **NEW MEXICO**

**(SP) EDDY**

**BAKED ZITI**

**BAKED ZITI 123H**

**OWB**

**PWP0**

## **Anticollision Report**

**29 January, 2025**

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

| Reference                    | PWP0                                                                |                |                     |
|------------------------------|---------------------------------------------------------------------|----------------|---------------------|
| Filter type:                 | NO GLOBAL FILTER: Using user defined selection & filtering criteria |                |                     |
| Interpolation Method:        | Stations                                                            | Error Model:   | ISCWSA              |
| Depth Range:                 | Unlimited                                                           | Scan Method:   | Closest Approach 3D |
| Results Limited by:          | Maximum centre distance of 1,000.0usft                              | Error Surface: | Pedal Curve         |
| Warning Levels Evaluated at: | 2.00 Sigma                                                          | Casing Method: | Not applied         |

| Survey Tool Program |              | Date              | 1/29/2025 |                           |  |
|---------------------|--------------|-------------------|-----------|---------------------------|--|
| From<br>(usft)      | To<br>(usft) | Survey (Wellbore) | Tool Name | Description               |  |
| 0.0                 | 26,456.7     | PWP0 (OWB)        | MWD       | OWSG_Rev2_ MWD - Standard |  |

| Summary                         |                                 |                              |                                 |                                  |                   |                     |
|---------------------------------|---------------------------------|------------------------------|---------------------------------|----------------------------------|-------------------|---------------------|
| Site Name                       | Reference Measured Depth (usft) | Offset Measured Depth (usft) | Distance Between Centres (usft) | Distance Between Ellipses (usft) | Separation Factor | Warning             |
| Offset Well - Wellbore - Design |                                 |                              |                                 |                                  |                   |                     |
| BAKED ZITI                      |                                 |                              |                                 |                                  |                   |                     |
| BAKED ZITI 113H - OWB - PWP0    | 1,000.0                         | 999.3                        | 33.0                            | 26.0                             | 4.747             | CC, ES              |
| BAKED ZITI 113H - OWB - PWP0    | 1,200.0                         | 1,197.2                      | 36.2                            | 27.9                             | 4.364             | SF                  |
| BAKED ZITI 114H - OWB - PWP0    | 1,000.0                         | 997.1                        | 99.0                            | 92.1                             | 14.257            | CC, ES              |
| BAKED ZITI 114H - OWB - PWP0    | 1,400.0                         | 1,382.7                      | 115.0                           | 105.4                            | 12.014            | SF                  |
| BAKED ZITI 124H - OWB - PWP0    | 1,000.0                         | 998.8                        | 66.0                            | 59.1                             | 9.496             | CC, ES              |
| BAKED ZITI 124H - OWB - PWP0    | 1,300.0                         | 1,291.8                      | 74.7                            | 65.7                             | 8.359             | SF                  |
| BAKED ZITI 133H - OWB - PWP0    | 4,831.9                         | 4,859.8                      | 237.3                           | 200.7                            | 6.482             | CC                  |
| BAKED ZITI 133H - OWB - PWP0    | 4,900.0                         | 4,926.6                      | 237.6                           | 200.5                            | 6.393             | ES                  |
| BAKED ZITI 133H - OWB - PWP0    | 5,100.0                         | 5,122.7                      | 242.9                           | 204.2                            | 6.267             | SF                  |
| BAKED ZITI 134H - OWB - PWP0    | 2,191.7                         | 2,235.4                      | 94.0                            | 77.8                             | 5.817             | CC                  |
| BAKED ZITI 134H - OWB - PWP0    | 2,200.0                         | 2,243.3                      | 94.0                            | 77.8                             | 5.783             | ES                  |
| BAKED ZITI 134H - OWB - PWP0    | 2,300.0                         | 2,338.4                      | 99.7                            | 82.4                             | 5.737             | SF                  |
| BAKED ZITI 213H - OWB - PWP0    | 5,641.4                         | 5,662.0                      | 44.6                            | 1.5                              | 1.035             | Level 3, CC, ES, SF |
| BAKED ZITI 214H - OWB - PWP0    | 3,250.8                         | 3,312.0                      | 160.0                           | 135.8                            | 6.599             | CC                  |
| BAKED ZITI 214H - OWB - PWP0    | 3,300.0                         | 3,359.7                      | 160.5                           | 135.7                            | 6.468             | ES                  |
| BAKED ZITI 214H - OWB - PWP0    | 3,400.0                         | 3,456.6                      | 164.1                           | 138.2                            | 6.329             | SF                  |
| BAKED ZITI 423H - OWB - PWP0    | 4,665.8                         | 4,708.2                      | 166.3                           | 129.6                            | 4.529             | CC                  |
| BAKED ZITI 423H - OWB - PWP0    | 4,700.0                         | 4,741.7                      | 166.4                           | 129.4                            | 4.496             | ES                  |
| BAKED ZITI 423H - OWB - PWP0    | 4,800.0                         | 4,839.9                      | 168.3                           | 130.4                            | 4.446             | SF                  |
| BAKED ZITI 424H - OWB - PWP0    | 2,608.1                         | 2,682.8                      | 110.2                           | 89.9                             | 5.436             | CC, ES              |
| BAKED ZITI 424H - OWB - PWP0    | 2,700.0                         | 2,770.3                      | 113.7                           | 92.2                             | 5.293             | SF                  |

|                                                          |                       |                       |                       |                  |               |                        |              |              |                                 |                         |                           |                             |                             |  |
|----------------------------------------------------------|-----------------------|-----------------------|-----------------------|------------------|---------------|------------------------|--------------|--------------|---------------------------------|-------------------------|---------------------------|-----------------------------|-----------------------------|--|
| Offset Design: BAKED ZITI - BAKED ZITI 113H - OWB - PWP0 |                       |                       |                       |                  |               |                        |              |              |                                 |                         |                           |                             | Offset Site Error: 0.0 usft |  |
| Survey Program: 0-MWD                                    |                       |                       |                       |                  |               |                        |              |              |                                 |                         |                           | Offset Well Error: 0.0 usft |                             |  |
| Reference                                                |                       | Offset                |                       | Semi Major Axis  |               | Offset Wellbore Centre |              |              | Rule Assigned:                  |                         |                           |                             |                             |  |
| Measured Depth (usft)                                    | Vertical Depth (usft) | Measured Depth (usft) | Vertical Depth (usft) | Reference (usft) | Offset (usft) | Highside Toolface (°)  | +N/-S (usft) | +E/-W (usft) | Distance Between Centres (usft) | Between Ellipses (usft) | Minimum Separation (usft) | Separation Factor           | Warning                     |  |
| 0.0                                                      | 0.0                   | 0.0                   | 0.0                   | 0.0              | 0.0           | 179.79                 | -33.0        | 0.1          | 33.0                            |                         |                           |                             |                             |  |
| 100.0                                                    | 100.0                 | 99.3                  | 99.3                  | 0.3              | 0.2           | 179.79                 | -33.0        | 0.1          | 33.0                            | 32.5                    | 0.50                      | 65.987                      |                             |  |
| 200.0                                                    | 200.0                 | 199.3                 | 199.3                 | 0.6              | 0.6           | 179.79                 | -33.0        | 0.1          | 33.0                            | 31.8                    | 1.22                      | 27.132                      |                             |  |
| 300.0                                                    | 300.0                 | 299.3                 | 299.3                 | 1.0              | 1.0           | 179.79                 | -33.0        | 0.1          | 33.0                            | 31.1                    | 1.93                      | 17.070                      |                             |  |
| 400.0                                                    | 400.0                 | 399.3                 | 399.3                 | 1.3              | 1.3           | 179.79                 | -33.0        | 0.1          | 33.0                            | 30.4                    | 2.65                      | 12.452                      |                             |  |
| 500.0                                                    | 500.0                 | 499.3                 | 499.3                 | 1.7              | 1.7           | 179.79                 | -33.0        | 0.1          | 33.0                            | 29.6                    | 3.37                      | 9.801                       |                             |  |
| 600.0                                                    | 600.0                 | 599.3                 | 599.3                 | 2.0              | 2.0           | 179.79                 | -33.0        | 0.1          | 33.0                            | 28.9                    | 4.08                      | 8.080                       |                             |  |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 113H - OWB - PWP0 |                       |                       |                       |           |        |                       |              |              |                        |                         |                           |                   | <b>Offset Site Error:</b> 0.0 usft |
|-----------------------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------|--------|-----------------------|--------------|--------------|------------------------|-------------------------|---------------------------|-------------------|------------------------------------|
| <b>Survey Program:</b> 0-MWD                                    |                       |                       |                       |           |        |                       |              |              |                        |                         |                           |                   | <b>Offset Well Error:</b> 0.0 usft |
| Measured Depth (usft)                                           | Vertical Depth (usft) | Measured Depth (usft) | Vertical Depth (usft) | Reference | Offset | Highside Toolface (°) | +N/-S (usft) | +E/-W (usft) | Between Centres (usft) | Between Ellipses (usft) | Minimum Separation (usft) | Separation Factor | Warning                            |
| 700.0                                                           | 700.0                 | 699.3                 | 699.3                 | 2.4       | 2.4    | 179.79                | -33.0        | 0.1          | 33.0                   | 28.2                    | 4.80                      | 6.874             |                                    |
| 800.0                                                           | 800.0                 | 799.3                 | 799.3                 | 2.8       | 2.8    | 179.79                | -33.0        | 0.1          | 33.0                   | 27.5                    | 5.52                      | 5.981             |                                    |
| 900.0                                                           | 900.0                 | 899.3                 | 899.3                 | 3.1       | 3.1    | 179.79                | -33.0        | 0.1          | 33.0                   | 26.8                    | 6.23                      | 5.293             |                                    |
| 1,000.0                                                         | 1,000.0               | 999.3                 | 999.3                 | 3.5       | 3.5    | 179.79                | -33.0        | 0.1          | 33.0                   | 26.0                    | 6.95                      | 4.747 CC, ES      |                                    |
| 1,100.0                                                         | 1,100.0               | 1,098.3               | 1,098.3               | 3.8       | 3.8    | 66.57                 | -34.5        | 0.9          | 33.8                   | 26.1                    | 7.63                      | 4.423             |                                    |
| 1,200.0                                                         | 1,199.8               | 1,197.2               | 1,197.1               | 4.2       | 4.1    | 69.95                 | -38.9        | 3.5          | 36.2                   | 27.9                    | 8.29                      | 4.364 SF          |                                    |
| 1,300.0                                                         | 1,299.5               | 1,296.0               | 1,295.5               | 4.5       | 4.5    | 74.62                 | -46.3        | 7.6          | 40.5                   | 31.5                    | 8.96                      | 4.518             |                                    |
| 1,400.0                                                         | 1,398.7               | 1,394.6               | 1,393.4               | 4.9       | 4.8    | 79.64                 | -56.6        | 13.5         | 46.9                   | 37.2                    | 9.64                      | 4.858             |                                    |
| 1,500.0                                                         | 1,497.7               | 1,493.0               | 1,490.5               | 5.2       | 5.2    | 82.70                 | -69.8        | 20.9         | 55.6                   | 45.3                    | 10.34                     | 5.377             |                                    |
| 1,600.0                                                         | 1,596.8               | 1,590.9               | 1,586.7               | 5.6       | 5.5    | 82.73                 | -85.9        | 30.0         | 66.8                   | 55.7                    | 11.05                     | 6.041             |                                    |
| 1,700.0                                                         | 1,695.8               | 1,689.0               | 1,682.5               | 6.0       | 5.9    | 81.11                 | -104.6       | 40.6         | 80.1                   | 68.3                    | 11.78                     | 6.801             |                                    |
| 1,800.0                                                         | 1,794.8               | 1,788.0               | 1,778.9               | 6.4       | 6.4    | 79.68                 | -124.0       | 51.5         | 93.9                   | 81.4                    | 12.53                     | 7.491             |                                    |
| 1,900.0                                                         | 1,893.8               | 1,887.1               | 1,875.4               | 6.8       | 6.8    | 78.62                 | -143.4       | 62.5         | 107.7                  | 94.4                    | 13.30                     | 8.099             |                                    |
| 2,000.0                                                         | 1,992.9               | 1,986.1               | 1,971.9               | 7.2       | 7.2    | 77.79                 | -162.8       | 73.4         | 121.6                  | 107.5                   | 14.08                     | 8.636             |                                    |
| 2,100.0                                                         | 2,091.9               | 2,085.1               | 2,068.4               | 7.6       | 7.7    | 77.14                 | -182.1       | 84.4         | 135.5                  | 120.6                   | 14.87                     | 9.115             |                                    |
| 2,200.0                                                         | 2,190.9               | 2,184.1               | 2,164.9               | 8.0       | 8.1    | 76.61                 | -201.5       | 95.3         | 149.4                  | 133.8                   | 15.66                     | 9.542             |                                    |
| 2,300.0                                                         | 2,289.9               | 2,283.1               | 2,261.3               | 8.4       | 8.6    | 76.17                 | -220.9       | 106.3        | 163.3                  | 146.9                   | 16.46                     | 9.925             |                                    |
| 2,400.0                                                         | 2,389.0               | 2,382.2               | 2,357.8               | 8.8       | 9.1    | 75.79                 | -240.3       | 117.2        | 177.3                  | 160.0                   | 17.26                     | 10.271            |                                    |
| 2,500.0                                                         | 2,488.0               | 2,481.2               | 2,454.3               | 9.2       | 9.5    | 75.47                 | -259.7       | 128.2        | 191.2                  | 173.1                   | 18.06                     | 10.584            |                                    |
| 2,600.0                                                         | 2,587.0               | 2,580.2               | 2,550.8               | 9.6       | 10.0   | 75.20                 | -279.1       | 139.2        | 205.1                  | 186.2                   | 18.87                     | 10.869            |                                    |
| 2,700.0                                                         | 2,686.1               | 2,679.2               | 2,647.3               | 10.0      | 10.5   | 74.96                 | -298.5       | 150.1        | 219.1                  | 199.4                   | 19.69                     | 11.128            |                                    |
| 2,800.0                                                         | 2,785.1               | 2,778.2               | 2,743.8               | 10.4      | 11.0   | 74.75                 | -317.9       | 161.1        | 233.0                  | 212.5                   | 20.50                     | 11.366            |                                    |
| 2,900.0                                                         | 2,884.1               | 2,877.3               | 2,840.2               | 10.8      | 11.4   | 74.56                 | -337.3       | 172.0        | 247.0                  | 225.6                   | 21.32                     | 11.585            |                                    |
| 3,000.0                                                         | 2,983.1               | 2,976.3               | 2,936.7               | 11.2      | 11.9   | 74.39                 | -356.7       | 183.0        | 260.9                  | 238.8                   | 22.14                     | 11.786            |                                    |
| 3,100.0                                                         | 3,082.2               | 3,075.3               | 3,033.2               | 11.6      | 12.4   | 74.24                 | -376.1       | 193.9        | 274.9                  | 251.9                   | 22.96                     | 11.972            |                                    |
| 3,200.0                                                         | 3,181.2               | 3,174.3               | 3,129.7               | 12.1      | 12.9   | 74.11                 | -395.5       | 204.9        | 288.8                  | 265.0                   | 23.78                     | 12.145            |                                    |
| 3,300.0                                                         | 3,280.2               | 3,273.3               | 3,226.2               | 12.5      | 13.4   | 73.99                 | -414.9       | 215.9        | 302.8                  | 278.2                   | 24.61                     | 12.305            |                                    |
| 3,400.0                                                         | 3,379.2               | 3,372.3               | 3,322.6               | 12.9      | 13.9   | 73.87                 | -434.3       | 226.8        | 316.7                  | 291.3                   | 25.43                     | 12.454            |                                    |
| 3,500.0                                                         | 3,478.3               | 3,471.4               | 3,419.1               | 13.3      | 14.4   | 73.77                 | -453.7       | 237.8        | 330.7                  | 304.4                   | 26.26                     | 12.593            |                                    |
| 3,600.0                                                         | 3,577.3               | 3,570.4               | 3,515.6               | 13.7      | 14.9   | 73.68                 | -473.1       | 248.7        | 344.6                  | 317.5                   | 27.09                     | 12.724            |                                    |
| 3,700.0                                                         | 3,676.3               | 3,669.4               | 3,612.1               | 14.1      | 15.3   | 73.59                 | -492.4       | 259.7        | 358.6                  | 330.7                   | 27.91                     | 12.846            |                                    |
| 3,800.0                                                         | 3,775.3               | 3,768.4               | 3,708.6               | 14.5      | 15.8   | 73.51                 | -511.8       | 270.6        | 372.5                  | 343.8                   | 28.74                     | 12.961            |                                    |
| 3,900.0                                                         | 3,874.4               | 3,867.4               | 3,805.1               | 15.0      | 16.3   | 73.43                 | -531.2       | 281.6        | 386.5                  | 356.9                   | 29.58                     | 13.069            |                                    |
| 4,000.0                                                         | 3,973.4               | 3,966.5               | 3,901.5               | 15.4      | 16.8   | 73.36                 | -550.6       | 292.5        | 400.5                  | 370.1                   | 30.41                     | 13.170            |                                    |
| 4,014.3                                                         | 3,987.6               | 3,980.7               | 3,915.4               | 15.4      | 16.9   | 73.35                 | -553.4       | 294.1        | 402.5                  | 371.9                   | 30.53                     | 13.185            |                                    |
| 4,100.0                                                         | 4,072.6               | 4,065.4               | 3,997.9               | 15.8      | 17.3   | 73.37                 | -570.0       | 303.5        | 414.8                  | 383.6                   | 31.22                     | 13.286            |                                    |
| 4,200.0                                                         | 4,172.2               | 4,164.1               | 4,094.1               | 16.2      | 17.8   | 73.00                 | -589.3       | 314.4        | 430.1                  | 398.1                   | 31.99                     | 13.447            |                                    |
| 4,300.0                                                         | 4,272.0               | 4,262.4               | 4,189.9               | 16.5      | 18.3   | 72.27                 | -608.6       | 325.3        | 446.6                  | 413.9                   | 32.70                     | 13.656            |                                    |
| 4,400.0                                                         | 4,372.0               | 4,360.2               | 4,285.2               | 16.9      | 18.8   | 71.23                 | -627.7       | 336.1        | 464.3                  | 430.9                   | 33.37                     | 13.912            |                                    |
| 4,414.3                                                         | 4,386.3               | 4,374.2               | 4,298.8               | 16.9      | 18.9   | -174.47               | -630.5       | 337.7        | 466.9                  | 433.5                   | 33.46                     | 13.954            |                                    |
| 4,500.0                                                         | 4,472.0               | 4,457.7               | 4,380.2               | 17.2      | 19.3   | -175.77               | -646.8       | 346.9        | 483.0                  | 449.0                   | 34.00                     | 14.204            |                                    |
| 4,600.0                                                         | 4,572.0               | 4,555.1               | 4,475.1               | 17.5      | 19.8   | -177.18               | -665.9       | 357.7        | 502.0                  | 467.3                   | 34.63                     | 14.493            |                                    |
| 4,700.0                                                         | 4,672.0               | 4,652.6               | 4,570.0               | 17.8      | 20.3   | -178.49               | -685.0       | 368.5        | 521.3                  | 486.0                   | 35.27                     | 14.778            |                                    |
| 4,800.0                                                         | 4,772.0               | 4,750.0               | 4,665.0               | 18.1      | 20.8   | -179.71               | -704.1       | 379.2        | 540.8                  | 504.9                   | 35.92                     | 15.057            |                                    |
| 4,900.0                                                         | 4,872.0               | 4,847.4               | 4,759.9               | 18.5      | 21.3   | 179.15                | -723.2       | 390.0        | 560.6                  | 524.0                   | 36.57                     | 15.330            |                                    |
| 5,000.0                                                         | 4,972.0               | 4,944.9               | 4,854.9               | 18.8      | 21.8   | 178.10                | -742.3       | 400.8        | 580.5                  | 543.3                   | 37.22                     | 15.598            |                                    |
| 5,100.0                                                         | 5,072.0               | 5,055.3               | 4,962.6               | 19.1      | 22.3   | 177.02                | -763.2       | 412.6        | 600.0                  | 562.1                   | 37.99                     | 15.795            |                                    |
| 5,200.0                                                         | 5,172.0               | 5,177.0               | 5,082.3               | 19.4      | 22.9   | 176.10                | -782.3       | 423.4        | 616.3                  | 577.5                   | 38.83                     | 15.874            |                                    |
| 5,300.0                                                         | 5,272.0               | 5,300.3               | 5,204.4               | 19.8      | 23.4   | 175.42                | -797.2       | 431.8        | 628.9                  | 589.3                   | 39.62                     | 15.873            |                                    |
| 5,400.0                                                         | 5,372.0               | 5,424.9               | 5,328.5               | 20.1      | 23.9   | 174.97                | -807.5       | 437.7        | 637.6                  | 597.2                   | 40.36                     | 15.796            |                                    |
| 5,500.0                                                         | 5,472.0               | 5,550.3               | 5,453.7               | 20.4      | 24.3   | 174.73                | -813.2       | 440.9        | 642.3                  | 601.2                   | 41.05                     | 15.648            |                                    |
| 5,600.0                                                         | 5,572.0               | 5,667.9               | 5,571.3               | 20.8      | 24.6   | 174.68                | -814.3       | 441.5        | 643.2                  | 601.5                   | 41.68                     | 15.432            |                                    |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                |                                 |                      |
|----------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|---------------------|------------------|-----------------------------|------------------------|-----------------|------------------------------|-------------------------------|----------------|---------------------------------|----------------------|
| Offset Design: BAKED ZITI - BAKED ZITI 113H - OWB - PWP0 |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                | Offset Site Error:              | 0.0 usft             |
| Survey Program: 0-MWD                                    |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                | Offset Well Error:              | 0.0 usft             |
| Reference                                                |                             | Offset                      |                             | Semi Major Axis     |                  | Highside<br>Toolface<br>(°) | Offset Wellbore Centre |                 | Distance                     |                               | Rule Assigned: | Warning                         |                      |
| Measured<br>Depth<br>(usft)                              | Vertical<br>Depth<br>(usft) | Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Reference<br>(usft) | Offset<br>(usft) |                             | +N/-S<br>(usft)        | +E/-W<br>(usft) | Between<br>Centres<br>(usft) | Between<br>Ellipses<br>(usft) |                | Minimum<br>Separation<br>(usft) | Separation<br>Factor |
| 5,700.0                                                  | 5,672.0                     | 5,772.1                     | 5,675.5                     | 21.1                | 24.9             | 174.78                      | -814.3                 | 440.4           | 643.1                        | 600.8                         |                | 42.32                           | 15.197               |
| 5,800.0                                                  | 5,772.0                     | 5,882.6                     | 5,783.8                     | 21.4                | 25.1             | 176.59                      | -814.2                 | 420.1           | 641.6                        | 598.6                         |                | 42.99                           | 14.923               |
| 5,900.0                                                  | 5,872.0                     | 5,979.4                     | 5,872.8                     | 21.7                | 25.2             | 179.96                      | -814.1                 | 382.3           | 640.2                        | 596.4                         |                | 43.78                           | 14.622               |
| 5,906.5                                                  | 5,878.5                     | 5,985.1                     | 5,877.8                     | 21.8                | 25.3             | -179.79                     | -814.1                 | 379.5           | 640.2                        | 596.4                         |                | 43.84                           | 14.604               |
| 6,000.0                                                  | 5,972.0                     | 6,058.7                     | 5,938.8                     | 22.1                | 25.3             | -176.12                     | -813.9                 | 338.5           | 642.4                        | 597.8                         |                | 44.59                           | 14.406               |
| 6,100.0                                                  | 6,072.0                     | 6,121.6                     | 5,985.4                     | 22.4                | 25.3             | -172.38                     | -813.7                 | 296.3           | 651.3                        | 606.1                         |                | 45.18                           | 14.417               |
| 6,200.0                                                  | 6,172.0                     | 6,171.1                     | 6,017.9                     | 22.7                | 25.3             | -169.13                     | -813.6                 | 259.0           | 669.3                        | 623.9                         |                | 45.33                           | 14.763               |
| 6,300.0                                                  | 6,272.0                     | 6,210.3                     | 6,040.9                     | 23.1                | 25.3             | -166.41                     | -813.5                 | 227.3           | 697.2                        | 652.3                         |                | 44.97                           | 15.503               |
| 6,400.0                                                  | 6,372.0                     | 6,241.7                     | 6,057.3                     | 23.4                | 25.3             | -164.17                     | -813.4                 | 200.5           | 735.2                        | 691.0                         |                | 44.15                           | 16.653               |
| 6,500.0                                                  | 6,472.0                     | 6,267.3                     | 6,069.3                     | 23.8                | 25.3             | -162.32                     | -813.3                 | 178.0           | 782.3                        | 739.3                         |                | 42.98                           | 18.200               |
| 6,600.0                                                  | 6,572.0                     | 6,288.3                     | 6,078.3                     | 24.1                | 25.3             | -160.78                     | -813.2                 | 159.0           | 837.5                        | 795.9                         |                | 41.63                           | 20.117               |
| 6,700.0                                                  | 6,672.0                     | 6,300.0                     | 6,083.0                     | 24.4                | 25.3             | -159.93                     | -813.2                 | 148.3           | 899.7                        | 859.6                         |                | 40.13                           | 22.420               |
| 6,735.5                                                  | 6,707.5                     | 6,311.4                     | 6,087.3                     | 24.5                | 25.3             | -159.09                     | -813.2                 | 137.7           | 923.1                        | 883.4                         |                | 39.72                           | 23.240               |
| 6,750.0                                                  | 6,722.0                     | 6,313.7                     | 6,088.1                     | 24.6                | 25.3             | -67.66                      | -813.2                 | 135.6           | 932.8                        | 893.3                         |                | 39.52                           | 23.605               |
| 6,775.0                                                  | 6,746.9                     | 6,325.0                     | 6,092.0                     | 24.7                | 25.2             | -64.43                      | -813.1                 | 125.0           | 949.6                        | 910.4                         |                | 39.28                           | 24.179               |
| 6,800.0                                                  | 6,771.8                     | 6,325.0                     | 6,092.0                     | 24.7                | 25.2             | -62.05                      | -813.1                 | 125.0           | 966.2                        | 927.4                         |                | 38.86                           | 24.865               |
| 6,825.0                                                  | 6,796.4                     | 6,325.0                     | 6,092.0                     | 24.8                | 25.2             | -59.76                      | -813.1                 | 125.0           | 982.7                        | 944.3                         |                | 38.44                           | 25.563               |
| 6,850.0                                                  | 6,820.9                     | 6,325.0                     | 6,092.0                     | 24.9                | 25.2             | -57.54                      | -813.1                 | 125.0           | 999.0                        | 961.0                         |                | 38.03                           | 26.271               |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

**PERMIAN****RESOURCES**

## Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 114H - OWB - PWP0 |                       |                       |                       |           |                               |                       |                                     |              |                                 |                         |                           | <b>Offset Site Error:</b> | 0.0 usft |
|-----------------------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------|-------------------------------|-----------------------|-------------------------------------|--------------|---------------------------------|-------------------------|---------------------------|---------------------------|----------|
| <b>Survey Program:</b> 0-MWD                                    |                       |                       |                       |           |                               |                       |                                     |              |                                 |                         |                           | <b>Offset Well Error:</b> | 0.0 usft |
| Measured Depth (usft)                                           | Vertical Depth (usft) | Measured Depth (usft) | Vertical Depth (usft) | Reference | Semi Major Axis Offset (usft) | Highside Toolface (°) | Offset Wellbore Centre +N/-S (usft) | +E/-W (usft) | Distance Between Centres (usft) | Between Ellipses (usft) | Minimum Separation (usft) | Separation Factor         | Warning  |
| 0.0                                                             | 0.0                   | 0.0                   | 0.0                   | 0.0       | 0.0                           | 179.79                | -99.0                               | 0.4          | 99.0                            |                         |                           |                           |          |
| 100.0                                                           | 100.0                 | 97.1                  | 97.1                  | 0.3       | 0.2                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 98.5                    | 0.49                      | 200.170                   |          |
| 200.0                                                           | 200.0                 | 197.1                 | 197.1                 | 0.6       | 0.6                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 97.8                    | 1.21                      | 81.927                    |          |
| 300.0                                                           | 300.0                 | 297.1                 | 297.1                 | 1.0       | 1.0                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 97.1                    | 1.93                      | 51.420                    |          |
| 400.0                                                           | 400.0                 | 397.1                 | 397.1                 | 1.3       | 1.3                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 96.4                    | 2.64                      | 37.468                    |          |
| 500.0                                                           | 500.0                 | 497.1                 | 497.1                 | 1.7       | 1.7                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 95.6                    | 3.36                      | 29.471                    |          |
| 600.0                                                           | 600.0                 | 597.1                 | 597.1                 | 2.0       | 2.0                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 94.9                    | 4.08                      | 24.288                    |          |
| 700.0                                                           | 700.0                 | 697.1                 | 697.1                 | 2.4       | 2.4                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 94.2                    | 4.79                      | 20.655                    |          |
| 800.0                                                           | 800.0                 | 797.1                 | 797.1                 | 2.8       | 2.7                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 93.5                    | 5.51                      | 17.967                    |          |
| 900.0                                                           | 900.0                 | 897.1                 | 897.1                 | 3.1       | 3.1                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 92.8                    | 6.23                      | 15.899                    |          |
| 1,000.0                                                         | 1,000.0               | 997.1                 | 997.1                 | 3.5       | 3.5                           | 179.79                | -99.0                               | 0.4          | 99.0                            | 92.1                    | 6.94                      | 14.257                    | CC, ES   |
| 1,100.0                                                         | 1,100.0               | 1,093.9               | 1,093.9               | 3.8       | 3.8                           | 65.99                 | -100.5                              | 0.7          | 99.8                            | 92.2                    | 7.62                      | 13.105                    |          |
| 1,200.0                                                         | 1,199.8               | 1,190.5               | 1,190.3               | 4.2       | 4.1                           | 67.94                 | -105.2                              | 1.7          | 102.6                           | 94.4                    | 8.27                      | 12.416                    |          |
| 1,300.0                                                         | 1,299.5               | 1,286.8               | 1,286.3               | 4.5       | 4.4                           | 70.93                 | -113.0                              | 3.4          | 107.6                           | 98.7                    | 8.91                      | 12.066                    |          |
| 1,400.0                                                         | 1,398.7               | 1,382.7               | 1,381.6               | 4.9       | 4.8                           | 74.62                 | -124.0                              | 5.7          | 115.0                           | 105.4                   | 9.57                      | 12.014                    | SF       |
| 1,500.0                                                         | 1,497.7               | 1,478.2               | 1,476.0               | 5.2       | 5.1                           | 78.11                 | -137.9                              | 8.7          | 125.6                           | 115.3                   | 10.24                     | 12.262                    |          |
| 1,600.0                                                         | 1,596.8               | 1,573.2               | 1,569.4               | 5.6       | 5.5                           | 80.43                 | -154.9                              | 12.3         | 139.4                           | 128.5                   | 10.91                     | 12.777                    |          |
| 1,700.0                                                         | 1,695.8               | 1,667.4               | 1,661.4               | 6.0       | 5.8                           | 81.76                 | -174.7                              | 16.6         | 156.4                           | 144.8                   | 11.59                     | 13.492                    |          |
| 1,800.0                                                         | 1,794.8               | 1,760.7               | 1,751.8               | 6.4       | 6.2                           | 82.31                 | -197.2                              | 21.4         | 176.1                           | 163.9                   | 12.27                     | 14.360                    |          |
| 1,900.0                                                         | 1,893.8               | 1,852.9               | 1,840.4               | 6.8       | 6.7                           | 82.31                 | -222.2                              | 26.8         | 198.7                           | 185.7                   | 12.94                     | 15.355                    |          |
| 2,000.0                                                         | 1,992.9               | 1,943.8               | 1,926.8               | 7.2       | 7.1                           | 81.92                 | -249.7                              | 32.6         | 223.9                           | 210.3                   | 13.60                     | 16.458                    |          |
| 2,100.0                                                         | 2,091.9               | 2,033.3               | 2,011.1               | 7.6       | 7.6                           | 81.29                 | -279.3                              | 39.0         | 251.8                           | 237.5                   | 14.26                     | 17.657                    |          |
| 2,200.0                                                         | 2,190.9               | 2,121.3               | 2,092.9               | 8.0       | 8.0                           | 80.51                 | -310.8                              | 45.8         | 282.3                           | 267.4                   | 14.90                     | 18.943                    |          |
| 2,300.0                                                         | 2,289.9               | 2,207.5               | 2,172.1               | 8.4       | 8.5                           | 79.64                 | -344.2                              | 52.9         | 315.4                           | 299.9                   | 15.53                     | 20.307                    |          |
| 2,400.0                                                         | 2,389.0               | 2,292.0               | 2,248.6               | 8.8       | 9.1                           | 78.75                 | -379.1                              | 60.4         | 351.2                           | 335.0                   | 16.15                     | 21.744                    |          |
| 2,500.0                                                         | 2,488.0               | 2,374.6               | 2,322.4               | 9.2       | 9.6                           | 77.86                 | -415.3                              | 68.1         | 389.4                           | 372.6                   | 16.75                     | 23.246                    |          |
| 2,600.0                                                         | 2,587.0               | 2,455.2               | 2,393.5               | 9.6       | 10.2                          | 76.99                 | -452.7                              | 76.2         | 430.1                           | 412.7                   | 17.33                     | 24.810                    |          |
| 2,700.0                                                         | 2,686.1               | 2,533.9               | 2,461.6               | 10.0      | 10.8                          | 76.15                 | -491.0                              | 84.4         | 473.2                           | 455.3                   | 17.90                     | 26.433                    |          |
| 2,800.0                                                         | 2,785.1               | 2,610.5               | 2,527.0               | 10.4      | 11.4                          | 75.36                 | -530.1                              | 92.7         | 518.6                           | 500.1                   | 18.45                     | 28.109                    |          |
| 2,900.0                                                         | 2,884.1               | 2,685.0               | 2,589.5               | 10.8      | 12.0                          | 74.60                 | -569.7                              | 101.2        | 566.2                           | 547.2                   | 18.98                     | 29.832                    |          |
| 3,000.0                                                         | 2,983.1               | 2,757.5               | 2,649.3               | 11.2      | 12.6                          | 73.90                 | -609.8                              | 109.8        | 616.1                           | 596.6                   | 19.50                     | 31.600                    |          |
| 3,100.0                                                         | 3,082.2               | 2,827.9               | 2,706.3               | 11.6      | 13.3                          | 73.23                 | -650.1                              | 118.4        | 668.0                           | 648.0                   | 19.99                     | 33.411                    |          |
| 3,200.0                                                         | 3,181.2               | 2,900.0               | 2,763.7               | 12.1      | 13.9                          | 72.58                 | -692.8                              | 127.6        | 721.9                           | 701.4                   | 20.54                     | 35.147                    |          |
| 3,300.0                                                         | 3,280.2               | 2,965.6               | 2,815.0               | 12.5      | 14.5                          | 72.01                 | -732.8                              | 136.2        | 777.7                           | 756.7                   | 20.99                     | 37.047                    |          |
| 3,400.0                                                         | 3,379.2               | 3,047.7               | 2,878.8               | 12.9      | 15.3                          | 71.37                 | -783.4                              | 147.0        | 834.2                           | 812.5                   | 21.75                     | 38.359                    |          |
| 3,500.0                                                         | 3,478.3               | 3,129.9               | 2,942.7               | 13.3      | 16.2                          | 70.80                 | -834.0                              | 157.8        | 890.8                           | 868.3                   | 22.51                     | 39.573                    |          |
| 3,600.0                                                         | 3,577.3               | 3,212.1               | 3,006.6               | 13.7      | 17.0                          | 70.31                 | -884.5                              | 168.7        | 947.4                           | 924.1                   | 23.28                     | 40.698                    |          |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                           |                |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|----------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 124H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Site Error:</b> | 0.0 usft       |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     |                     |                               |                                |                                  |                           |                |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| 0.0                                                             | 0.0                          | 0.0                          | 0.0                          | 0.0                           | 0.0                  | 179.79                | -66.0               | 0.2                 | 66.0                          |                                |                                  |                           |                |
| 100.0                                                           | 100.0                        | 98.8                         | 98.8                         | 0.3                           | 0.2                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 65.5                           | 0.50                             | 132.305                   |                |
| 200.0                                                           | 200.0                        | 198.8                        | 198.8                        | 0.6                           | 0.6                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 64.8                           | 1.21                             | 54.344                    |                |
| 300.0                                                           | 300.0                        | 298.8                        | 298.8                        | 1.0                           | 1.0                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 64.1                           | 1.93                             | 34.172                    |                |
| 400.0                                                           | 400.0                        | 398.8                        | 398.8                        | 1.3                           | 1.3                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 63.4                           | 2.65                             | 24.921                    |                |
| 500.0                                                           | 500.0                        | 498.8                        | 498.8                        | 1.7                           | 1.7                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 62.6                           | 3.37                             | 19.612                    |                |
| 600.0                                                           | 600.0                        | 598.8                        | 598.8                        | 2.0                           | 2.0                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 61.9                           | 4.08                             | 16.168                    |                |
| 700.0                                                           | 700.0                        | 698.8                        | 698.8                        | 2.4                           | 2.4                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 61.2                           | 4.80                             | 13.752                    |                |
| 800.0                                                           | 800.0                        | 798.8                        | 798.8                        | 2.8                           | 2.8                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 60.5                           | 5.52                             | 11.965                    |                |
| 900.0                                                           | 900.0                        | 898.8                        | 898.8                        | 3.1                           | 3.1                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 59.8                           | 6.23                             | 10.589                    |                |
| 1,000.0                                                         | 1,000.0                      | 998.8                        | 998.8                        | 3.5                           | 3.5                  | 179.79                | -66.0               | 0.2                 | 66.0                          | 59.1                           | 6.95                             | 9.496 CC, ES              |                |
| 1,100.0                                                         | 1,100.0                      | 1,096.6                      | 1,096.6                      | 3.8                           | 3.8                  | 66.23                 | -67.6               | 0.7                 | 66.9                          | 59.3                           | 7.63                             | 8.768                     |                |
| 1,200.0                                                         | 1,199.8                      | 1,194.4                      | 1,194.2                      | 4.2                           | 4.1                  | 68.80                 | -72.3               | 2.1                 | 69.7                          | 61.4                           | 8.28                             | 8.418                     |                |
| 1,300.0                                                         | 1,299.5                      | 1,291.8                      | 1,291.3                      | 4.5                           | 4.5                  | 72.62                 | -80.2               | 4.5                 | 74.7                          | 65.7                           | 8.93                             | 8.359 SF                  |                |
| 1,400.0                                                         | 1,398.7                      | 1,389.0                      | 1,387.8                      | 4.9                           | 4.8                  | 77.11                 | -91.2               | 7.9                 | 82.2                          | 72.6                           | 9.60                             | 8.559                     |                |
| 1,500.0                                                         | 1,497.7                      | 1,485.7                      | 1,483.4                      | 5.2                           | 5.1                  | 80.89                 | -105.3              | 12.1                | 92.7                          | 82.4                           | 10.28                            | 9.016                     |                |
| 1,600.0                                                         | 1,596.8                      | 1,582.0                      | 1,578.0                      | 5.6                           | 5.5                  | 82.87                 | -122.4              | 17.3                | 106.3                         | 95.3                           | 10.97                            | 9.689                     |                |
| 1,700.0                                                         | 1,695.8                      | 1,677.5                      | 1,671.2                      | 6.0                           | 5.9                  | 83.49                 | -142.3              | 23.3                | 122.6                         | 111.0                          | 11.66                            | 10.519                    |                |
| 1,800.0                                                         | 1,794.8                      | 1,772.1                      | 1,762.8                      | 6.4                           | 6.3                  | 83.21                 | -165.0              | 30.1                | 141.6                         | 129.3                          | 12.35                            | 11.472                    |                |
| 1,900.0                                                         | 1,893.8                      | 1,868.7                      | 1,855.7                      | 6.8                           | 6.7                  | 82.49                 | -190.4              | 37.8                | 162.7                         | 149.6                          | 13.08                            | 12.432                    |                |
| 2,000.0                                                         | 1,992.9                      | 1,966.4                      | 1,949.6                      | 7.2                           | 7.2                  | 81.90                 | -216.2              | 45.6                | 183.8                         | 170.0                          | 13.85                            | 13.269                    |                |
| 2,100.0                                                         | 2,091.9                      | 2,064.1                      | 2,043.6                      | 7.6                           | 7.7                  | 81.44                 | -241.9              | 53.3                | 205.0                         | 190.3                          | 14.63                            | 14.009                    |                |
| 2,200.0                                                         | 2,190.9                      | 2,161.9                      | 2,137.5                      | 8.0                           | 8.1                  | 81.06                 | -267.7              | 61.1                | 226.2                         | 210.7                          | 15.42                            | 14.667                    |                |
| 2,300.0                                                         | 2,289.9                      | 2,259.6                      | 2,231.4                      | 8.4                           | 8.6                  | 80.75                 | -293.5              | 68.9                | 247.4                         | 231.1                          | 16.21                            | 15.255                    |                |
| 2,400.0                                                         | 2,389.0                      | 2,357.3                      | 2,325.4                      | 8.8                           | 9.1                  | 80.48                 | -319.3              | 76.7                | 268.5                         | 251.5                          | 17.01                            | 15.783                    |                |
| 2,500.0                                                         | 2,488.0                      | 2,455.0                      | 2,419.3                      | 9.2                           | 9.6                  | 80.26                 | -345.1              | 84.5                | 289.7                         | 271.9                          | 17.82                            | 16.260                    |                |
| 2,600.0                                                         | 2,587.0                      | 2,552.7                      | 2,513.2                      | 9.6                           | 10.2                 | 80.07                 | -370.9              | 92.3                | 311.0                         | 292.3                          | 18.63                            | 16.691                    |                |
| 2,700.0                                                         | 2,686.1                      | 2,650.5                      | 2,607.2                      | 10.0                          | 10.7                 | 79.90                 | -396.7              | 100.1               | 332.2                         | 312.7                          | 19.44                            | 17.083                    |                |
| 2,800.0                                                         | 2,785.1                      | 2,748.2                      | 2,701.1                      | 10.4                          | 11.2                 | 79.75                 | -422.4              | 107.8               | 353.4                         | 333.1                          | 20.26                            | 17.441                    |                |
| 2,900.0                                                         | 2,884.1                      | 2,845.9                      | 2,795.0                      | 10.8                          | 11.7                 | 79.61                 | -448.2              | 115.6               | 374.6                         | 353.5                          | 21.08                            | 17.769                    |                |
| 3,000.0                                                         | 2,983.1                      | 2,943.6                      | 2,889.0                      | 11.2                          | 12.2                 | 79.50                 | -474.0              | 123.4               | 395.8                         | 373.9                          | 21.90                            | 18.070                    |                |
| 3,100.0                                                         | 3,082.2                      | 3,041.4                      | 2,982.9                      | 11.6                          | 12.8                 | 79.39                 | -499.8              | 131.2               | 417.0                         | 394.3                          | 22.73                            | 18.348                    |                |
| 3,200.0                                                         | 3,181.2                      | 3,139.1                      | 3,076.8                      | 12.1                          | 13.3                 | 79.29                 | -525.6              | 139.0               | 438.2                         | 414.7                          | 23.55                            | 18.604                    |                |
| 3,300.0                                                         | 3,280.2                      | 3,236.8                      | 3,170.8                      | 12.5                          | 13.8                 | 79.21                 | -551.4              | 146.8               | 459.4                         | 435.1                          | 24.38                            | 18.842                    |                |
| 3,400.0                                                         | 3,379.2                      | 3,334.5                      | 3,264.7                      | 12.9                          | 14.4                 | 79.13                 | -577.2              | 154.5               | 480.7                         | 455.4                          | 25.21                            | 19.063                    |                |
| 3,500.0                                                         | 3,478.3                      | 3,432.2                      | 3,358.6                      | 13.3                          | 14.9                 | 79.06                 | -603.0              | 162.3               | 501.9                         | 475.8                          | 26.05                            | 19.268                    |                |
| 3,600.0                                                         | 3,577.3                      | 3,530.0                      | 3,452.6                      | 13.7                          | 15.5                 | 78.99                 | -628.7              | 170.1               | 523.1                         | 496.2                          | 26.88                            | 19.460                    |                |
| 3,700.0                                                         | 3,676.3                      | 3,627.7                      | 3,546.5                      | 14.1                          | 16.0                 | 78.93                 | -654.5              | 177.9               | 544.3                         | 516.6                          | 27.71                            | 19.640                    |                |
| 3,800.0                                                         | 3,775.3                      | 3,725.4                      | 3,640.5                      | 14.5                          | 16.5                 | 78.87                 | -680.3              | 185.7               | 565.5                         | 537.0                          | 28.55                            | 19.808                    |                |
| 3,900.0                                                         | 3,874.4                      | 3,823.1                      | 3,734.4                      | 15.0                          | 17.1                 | 78.82                 | -706.1              | 193.5               | 586.8                         | 557.4                          | 29.39                            | 19.966                    |                |
| 4,000.0                                                         | 3,973.4                      | 3,920.8                      | 3,828.3                      | 15.4                          | 17.6                 | 78.77                 | -731.9              | 201.2               | 608.0                         | 577.7                          | 30.23                            | 20.115                    |                |
| 4,014.3                                                         | 3,987.6                      | 3,934.8                      | 3,841.8                      | 15.4                          | 17.7                 | 78.76                 | -735.6              | 202.4               | 611.0                         | 580.7                          | 30.35                            | 20.135                    |                |
| 4,100.0                                                         | 4,072.6                      | 4,018.5                      | 3,922.2                      | 15.8                          | 18.2                 | 78.98                 | -757.7              | 209.0               | 629.4                         | 598.4                          | 31.05                            | 20.273                    |                |
| 4,200.0                                                         | 4,172.2                      | 4,115.9                      | 4,015.8                      | 16.2                          | 18.7                 | 78.96                 | -783.4              | 216.8               | 651.6                         | 619.7                          | 31.83                            | 20.472                    |                |
| 4,300.0                                                         | 4,272.0                      | 4,212.9                      | 4,109.1                      | 16.5                          | 19.3                 | 78.70                 | -808.9              | 224.5               | 674.4                         | 641.9                          | 32.56                            | 20.711                    |                |
| 4,400.0                                                         | 4,372.0                      | 4,309.4                      | 4,201.8                      | 16.9                          | 19.8                 | 78.22                 | -834.4              | 232.2               | 698.1                         | 664.8                          | 33.26                            | 20.991                    |                |
| 4,414.3                                                         | 4,386.3                      | 4,323.2                      | 4,215.1                      | 16.9                          | 19.9                 | -167.39               | -838.1              | 233.3               | 701.5                         | 668.2                          | 33.35                            | 21.035                    |                |
| 4,500.0                                                         | 4,472.0                      | 4,405.5                      | 4,294.2                      | 17.2                          | 20.3                 | -168.30               | -859.8              | 239.8               | 722.4                         | 688.5                          | 33.91                            | 21.301                    |                |
| 4,600.0                                                         | 4,572.0                      | 4,501.6                      | 4,386.6                      | 17.5                          | 20.9                 | -169.30               | -885.1              | 247.5               | 746.9                         | 712.4                          | 34.57                            | 21.606                    |                |
| 4,700.0                                                         | 4,672.0                      | 4,597.8                      | 4,479.0                      | 17.8                          | 21.4                 | -170.24               | -910.5              | 255.2               | 771.7                         | 736.5                          | 35.23                            | 21.902                    |                |
| 4,800.0                                                         | 4,772.0                      | 4,693.9                      | 4,571.4                      | 18.1                          | 22.0                 | -171.12               | -935.9              | 262.8               | 796.6                         | 760.7                          | 35.90                            | 22.191                    |                |
| 4,900.0                                                         | 4,872.0                      | 4,790.0                      | 4,663.8                      | 18.5                          | 22.5                 | -171.95               | -961.2              | 270.5               | 821.7                         | 785.2                          | 36.57                            | 22.472                    |                |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   |                    |          |
|----------------------------------------------------------|----------------|----------------|----------------|-----------------|--------|-------------------|------------------------|--------|-----------------|------------------|--------------------|-------------------|--------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 124H - OWB - PWP0 |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Site Error: | 0.0 usft |
| Survey Program: 0-MWD                                    |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Well Error: | 0.0 usft |
| Reference                                                |                | Offset         |                | Semi Major Axis |        |                   | Offset Wellbore Centre |        | Rule Assigned:  |                  |                    |                   |                    |          |
| Measured Depth                                           | Vertical Depth | Measured Depth | Vertical Depth | Reference       | Offset | Highside Toolface | +N/-S                  | +E/-W  | Between Centres | Between Ellipses | Minimum Separation | Separation Factor | Warning            |          |
| (usft)                                                   | (usft)         | (usft)         | (usft)         | (usft)          | (usft) | (°)               | (usft)                 | (usft) | (usft)          | (usft)           | (usft)             |                   |                    |          |
| 5,000.0                                                  | 4,972.0        | 4,886.2        | 4,756.2        | 18.8            | 23.1   | -172.72           | -986.6                 | 278.1  | 847.0           | 809.7            | 37.24              | 22.745            |                    |          |
| 5,100.0                                                  | 5,072.0        | 4,982.3        | 4,848.6        | 19.1            | 23.6   | -173.46           | -1,012.0               | 285.8  | 872.4           | 834.5            | 37.91              | 23.011            |                    |          |
| 5,200.0                                                  | 5,172.0        | 5,078.4        | 4,941.0        | 19.4            | 24.1   | -174.15           | -1,037.3               | 293.4  | 897.9           | 859.3            | 38.59              | 23.269            |                    |          |
| 5,300.0                                                  | 5,272.0        | 5,174.5        | 5,033.5        | 19.8            | 24.7   | -174.81           | -1,062.7               | 301.1  | 923.5           | 884.3            | 39.27              | 23.519            |                    |          |
| 5,400.0                                                  | 5,372.0        | 5,270.7        | 5,125.9        | 20.1            | 25.2   | -175.43           | -1,088.1               | 308.8  | 949.3           | 909.3            | 39.95              | 23.762            |                    |          |
| 5,500.0                                                  | 5,472.0        | 5,366.8        | 5,218.3        | 20.4            | 25.8   | -176.01           | -1,113.4               | 316.4  | 975.1           | 934.5            | 40.63              | 23.998            |                    |          |

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 133H - OWB - PWP0 |                       |                       |                       |                  |               |                       |                                     |              |                        |                                  |                           | <b>Offset Site Error:</b> | 0.0 usft |
|-----------------------------------------------------------------|-----------------------|-----------------------|-----------------------|------------------|---------------|-----------------------|-------------------------------------|--------------|------------------------|----------------------------------|---------------------------|---------------------------|----------|
| <b>Survey Program:</b> 0-MWD                                    |                       |                       |                       |                  |               |                       |                                     |              |                        |                                  |                           | <b>Offset Well Error:</b> | 0.0 usft |
| Measured Depth (usft)                                           | Vertical Depth (usft) | Measured Depth (usft) | Vertical Depth (usft) | Reference (usft) | Offset (usft) | Highside Toolface (°) | Offset Wellbore Centre +N/-S (usft) | +E/-W (usft) | Between Centres (usft) | Distance Between Ellipses (usft) | Minimum Separation (usft) | Separation Factor         | Warning  |
| 0.0                                                             | 0.0                   | 3.7                   | 3.7                   | 0.0              | 0.0           | -0.21                 | 251.0                               | -0.9         | 251.0                  |                                  |                           |                           |          |
| 100.0                                                           | 100.0                 | 103.7                 | 103.7                 | 0.3              | 0.3           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 250.5                            | 0.52                      | 487.264                   |          |
| 200.0                                                           | 200.0                 | 203.7                 | 203.7                 | 0.6              | 0.6           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 249.8                            | 1.23                      | 203.724                   |          |
| 300.0                                                           | 300.0                 | 303.7                 | 303.7                 | 1.0              | 1.0           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 249.1                            | 1.95                      | 128.784                   |          |
| 400.0                                                           | 400.0                 | 403.7                 | 403.7                 | 1.3              | 1.3           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 248.3                            | 2.67                      | 94.151                    |          |
| 500.0                                                           | 500.0                 | 503.7                 | 503.7                 | 1.7              | 1.7           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 247.6                            | 3.38                      | 74.197                    |          |
| 600.0                                                           | 600.0                 | 603.7                 | 603.7                 | 2.0              | 2.1           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 246.9                            | 4.10                      | 61.222                    |          |
| 700.0                                                           | 700.0                 | 703.7                 | 703.7                 | 2.4              | 2.4           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 246.2                            | 4.82                      | 52.110                    |          |
| 800.0                                                           | 800.0                 | 803.7                 | 803.7                 | 2.8              | 2.8           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 245.5                            | 5.53                      | 45.359                    |          |
| 900.0                                                           | 900.0                 | 903.7                 | 903.7                 | 3.1              | 3.1           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 244.8                            | 6.25                      | 40.156                    |          |
| 965.4                                                           | 965.4                 | 969.1                 | 969.1                 | 3.4              | 3.4           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 244.3                            | 6.72                      | 37.354                    |          |
| 1,000.0                                                         | 1,000.0               | 1,003.7               | 1,003.7               | 3.5              | 3.5           | -0.21                 | 251.0                               | -0.9         | 251.0                  | 244.0                            | 6.97                      | 36.026                    |          |
| 1,100.0                                                         | 1,100.0               | 1,103.5               | 1,103.5               | 3.8              | 3.8           | -115.46               | 251.0                               | -2.8         | 251.8                  | 244.1                            | 7.66                      | 32.853                    |          |
| 1,200.0                                                         | 1,199.8               | 1,202.7               | 1,202.5               | 4.2              | 4.2           | -117.66               | 251.0                               | -8.1         | 254.3                  | 246.0                            | 8.34                      | 30.475                    |          |
| 1,300.0                                                         | 1,299.5               | 1,301.5               | 1,301.1               | 4.5              | 4.5           | -120.78               | 251.0                               | -15.0        | 259.2                  | 250.1                            | 9.04                      | 28.679                    |          |
| 1,400.0                                                         | 1,398.7               | 1,399.7               | 1,399.1               | 4.9              | 4.9           | -124.33               | 251.0                               | -21.8        | 266.8                  | 257.0                            | 9.74                      | 27.398                    |          |
| 1,500.0                                                         | 1,497.7               | 1,499.9               | 1,499.2               | 5.2              | 5.2           | -127.80               | 251.0                               | -27.1        | 276.1                  | 265.7                            | 10.45                     | 26.421                    |          |
| 1,600.0                                                         | 1,596.8               | 1,601.3               | 1,600.5               | 5.6              | 5.6           | -130.38               | 251.0                               | -28.8        | 285.4                  | 274.2                            | 11.17                     | 25.548                    |          |
| 1,700.0                                                         | 1,695.8               | 1,700.3               | 1,699.5               | 6.0              | 5.9           | -132.43               | 251.0                               | -28.8        | 294.6                  | 282.8                            | 11.89                     | 24.789                    |          |
| 1,800.0                                                         | 1,794.8               | 1,799.3               | 1,798.5               | 6.4              | 6.3           | -134.36               | 251.0                               | -28.8        | 304.3                  | 291.7                            | 12.60                     | 24.141                    |          |
| 1,900.0                                                         | 1,893.8               | 1,910.4               | 1,909.6               | 6.8              | 6.7           | -136.39               | 249.0                               | -28.1        | 312.3                  | 299.0                            | 13.34                     | 23.404                    |          |
| 2,000.0                                                         | 1,992.9               | 2,022.1               | 2,021.1               | 7.2              | 7.0           | -138.36               | 242.9                               | -25.8        | 316.8                  | 302.7                            | 14.06                     | 22.530                    |          |
| 2,100.0                                                         | 2,091.9               | 2,134.0               | 2,132.4               | 7.6              | 7.4           | -140.35               | 232.8                               | -22.1        | 317.7                  | 302.9                            | 14.76                     | 21.519                    |          |
| 2,200.0                                                         | 2,190.9               | 2,245.7               | 2,243.1               | 8.0              | 7.8           | -142.42               | 218.6                               | -16.8        | 315.0                  | 299.6                            | 15.45                     | 20.393                    |          |
| 2,300.0                                                         | 2,289.9               | 2,356.9               | 2,352.6               | 8.4              | 8.2           | -144.64               | 200.4                               | -10.1        | 308.9                  | 292.8                            | 16.12                     | 19.166                    |          |
| 2,400.0                                                         | 2,389.0               | 2,456.4               | 2,450.2               | 8.8              | 8.5           | -146.78               | 182.3                               | -3.3         | 301.1                  | 284.3                            | 16.82                     | 17.901                    |          |
| 2,500.0                                                         | 2,488.0               | 2,555.4               | 2,547.3               | 9.2              | 8.9           | -149.02               | 164.2                               | 3.4          | 293.8                  | 276.3                            | 17.53                     | 16.758                    |          |
| 2,600.0                                                         | 2,587.0               | 2,654.5               | 2,644.5               | 9.6              | 9.3           | -151.38               | 146.1                               | 10.1         | 286.9                  | 268.7                            | 18.25                     | 15.726                    |          |
| 2,700.0                                                         | 2,686.1               | 2,753.5               | 2,741.6               | 10.0             | 9.7           | -153.84               | 128.0                               | 16.8         | 280.6                  | 261.6                            | 18.96                     | 14.796                    |          |
| 2,800.0                                                         | 2,785.1               | 2,852.6               | 2,838.8               | 10.4             | 10.1          | -156.41               | 109.9                               | 23.5         | 274.8                  | 255.1                            | 19.69                     | 13.957                    |          |
| 2,900.0                                                         | 2,884.1               | 2,951.6               | 2,935.9               | 10.8             | 10.5          | -159.08               | 91.9                                | 30.2         | 269.6                  | 249.2                            | 20.42                     | 13.201                    |          |
| 3,000.0                                                         | 2,983.1               | 3,050.7               | 3,033.1               | 11.2             | 10.9          | -161.85               | 73.8                                | 36.9         | 265.0                  | 243.8                            | 21.16                     | 12.523                    |          |
| 3,100.0                                                         | 3,082.2               | 3,149.7               | 3,130.2               | 11.6             | 11.3          | -164.71               | 55.7                                | 43.6         | 261.0                  | 239.1                            | 21.91                     | 11.915                    |          |
| 3,200.0                                                         | 3,181.2               | 3,248.7               | 3,227.4               | 12.1             | 11.7          | -167.65               | 37.6                                | 50.3         | 257.7                  | 235.1                            | 22.67                     | 11.372                    |          |
| 3,300.0                                                         | 3,280.2               | 3,347.8               | 3,324.5               | 12.5             | 12.2          | -170.65               | 19.6                                | 57.0         | 255.2                  | 231.7                            | 23.44                     | 10.888                    |          |
| 3,400.0                                                         | 3,379.2               | 3,446.8               | 3,421.7               | 12.9             | 12.6          | -173.71               | 1.5                                 | 63.7         | 253.3                  | 229.1                            | 24.22                     | 10.460                    |          |
| 3,500.0                                                         | 3,478.3               | 3,545.9               | 3,518.8               | 13.3             | 13.0          | -176.80               | -16.6                               | 70.5         | 252.3                  | 227.2                            | 25.02                     | 10.082                    |          |
| 3,595.2                                                         | 3,572.5               | 3,640.1               | 3,611.3               | 13.7             | 13.4          | -179.75               | -33.8                               | 76.8         | 251.9                  | 226.1                            | 25.79                     | 9.766                     |          |
| 3,600.0                                                         | 3,577.3               | 3,644.9               | 3,616.0               | 13.7             | 13.4          | -179.90               | -34.7                               | 77.2         | 251.9                  | 226.1                            | 25.83                     | 9.752                     |          |
| 3,700.0                                                         | 3,676.3               | 3,744.0               | 3,713.1               | 14.1             | 13.9          | -176.99               | -52.7                               | 83.9         | 252.3                  | 225.7                            | 26.66                     | 9.464                     |          |
| 3,800.0                                                         | 3,775.3               | 3,843.0               | 3,810.3               | 14.5             | 14.3          | -173.90               | -70.8                               | 90.6         | 253.5                  | 226.0                            | 27.50                     | 9.217                     |          |
| 3,900.0                                                         | 3,874.4               | 3,942.0               | 3,907.4               | 15.0             | 14.8          | -170.85               | -88.9                               | 97.3         | 255.4                  | 227.0                            | 28.36                     | 9.006                     |          |
| 4,000.0                                                         | 3,973.4               | 4,041.1               | 4,004.6               | 15.4             | 15.2          | -167.85               | -107.0                              | 104.0        | 258.0                  | 228.8                            | 29.23                     | 8.829                     |          |
| 4,014.3                                                         | 3,987.6               | 4,055.3               | 4,018.5               | 15.4             | 15.3          | -167.43               | -109.6                              | 105.0        | 258.5                  | 229.1                            | 29.35                     | 8.806                     |          |
| 4,100.0                                                         | 4,072.6               | 4,140.1               | 4,101.7               | 15.8             | 15.6          | -164.86               | -125.0                              | 110.7        | 260.1                  | 230.0                            | 30.11                     | 8.641                     |          |
| 4,200.0                                                         | 4,172.2               | 4,239.0               | 4,198.7               | 16.2             | 16.1          | -161.68               | -143.1                              | 117.4        | 259.7                  | 228.7                            | 30.99                     | 8.378                     |          |
| 4,300.0                                                         | 4,272.0               | 4,337.8               | 4,295.5               | 16.5             | 16.5          | -158.21               | -161.1                              | 124.1        | 256.8                  | 224.9                            | 31.89                     | 8.051                     |          |
| 4,400.0                                                         | 4,372.0               | 4,436.1               | 4,392.0               | 16.9             | 17.0          | -154.34               | -179.1                              | 130.7        | 251.7                  | 218.9                            | 32.80                     | 7.675                     |          |
| 4,414.3                                                         | 4,386.3               | 4,450.2               | 4,405.8               | 16.9             | 17.0          | -91.78                | -181.6                              | 131.7        | 250.8                  | 217.9                            | 32.93                     | 7.617                     |          |
| 4,500.0                                                         | 4,472.0               | 4,534.2               | 4,488.2               | 17.2             | 17.4          | -95.40                | -197.0                              | 137.4        | 245.9                  | 212.2                            | 33.69                     | 7.299                     |          |
| 4,600.0                                                         | 4,572.0               | 4,632.3               | 4,584.5               | 17.5             | 17.9          | -99.79                | -214.9                              | 144.0        | 241.5                  | 207.0                            | 34.58                     | 6.984                     |          |
| 4,700.0                                                         | 4,672.0               | 4,730.4               | 4,680.7               | 17.8             | 18.3          | -104.30               | -232.8                              | 150.7        | 238.7                  | 203.2                            | 35.47                     | 6.729                     |          |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          |                                    |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|--------------------------|------------------------------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 133H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          | <b>Offset Site Error:</b> 0.0 usft |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          | <b>Offset Well Error:</b> 0.0 usft |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     |                     |                               |                                |                                  |                          |                                    |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b> | <b>Warning</b>                     |
| 4,800.0                                                         | 4,772.0                      | 4,828.5                      | 4,776.9                      | 18.1                          | 18.8                 | -108.89               | -250.7              | 157.3               | 237.4                         | 201.0                          | 36.33                            | 6.533                    |                                    |
| 4,831.9                                                         | 4,803.9                      | 4,859.8                      | 4,807.6                      | 18.2                          | 18.9                 | -110.36               | -256.4              | 159.4               | 237.3                         | 200.7                          | 36.61                            | 6.482 CC                 |                                    |
| 4,900.0                                                         | 4,872.0                      | 4,926.6                      | 4,873.1                      | 18.5                          | 19.2                 | -113.49               | -268.6              | 164.0               | 237.6                         | 200.5                          | 37.18                            | 6.393 ES                 |                                    |
| 5,000.0                                                         | 4,972.0                      | 5,024.6                      | 4,969.3                      | 18.8                          | 19.7                 | -118.06               | -286.5              | 170.6               | 239.5                         | 201.5                          | 37.99                            | 6.305                    |                                    |
| 5,100.0                                                         | 5,072.0                      | 5,122.7                      | 5,065.5                      | 19.1                          | 20.1                 | -122.53               | -304.4              | 177.3               | 242.9                         | 204.2                          | 38.77                            | 6.267 SF                 |                                    |
| 5,200.0                                                         | 5,172.0                      | 5,220.8                      | 5,161.7                      | 19.4                          | 20.6                 | -126.86               | -322.3              | 183.9               | 247.9                         | 208.3                          | 39.51                            | 6.273                    |                                    |
| 5,300.0                                                         | 5,272.0                      | 5,318.9                      | 5,257.9                      | 19.8                          | 21.0                 | -131.00               | -340.2              | 190.5               | 254.2                         | 213.9                          | 40.23                            | 6.318                    |                                    |
| 5,400.0                                                         | 5,372.0                      | 5,417.0                      | 5,354.1                      | 20.1                          | 21.5                 | -134.93               | -358.1              | 197.2               | 261.8                         | 220.9                          | 40.91                            | 6.398                    |                                    |
| 5,500.0                                                         | 5,472.0                      | 5,515.1                      | 5,450.3                      | 20.4                          | 21.9                 | -138.62               | -376.0              | 203.8               | 270.6                         | 229.0                          | 41.58                            | 6.507                    |                                    |
| 5,600.0                                                         | 5,572.0                      | 5,613.2                      | 5,546.6                      | 20.8                          | 22.4                 | -142.08               | -393.9              | 210.5               | 280.5                         | 238.2                          | 42.23                            | 6.641                    |                                    |
| 5,700.0                                                         | 5,672.0                      | 5,711.2                      | 5,642.8                      | 21.1                          | 22.8                 | -145.30               | -411.8              | 217.1               | 291.3                         | 248.4                          | 42.87                            | 6.796                    |                                    |
| 5,800.0                                                         | 5,772.0                      | 5,809.3                      | 5,739.0                      | 21.4                          | 23.3                 | -148.28               | -429.7              | 223.8               | 303.0                         | 259.5                          | 43.49                            | 6.967                    |                                    |
| 5,900.0                                                         | 5,872.0                      | 5,907.4                      | 5,835.2                      | 21.7                          | 23.7                 | -151.04               | -447.6              | 230.4               | 315.5                         | 271.4                          | 44.12                            | 7.151                    |                                    |
| 6,000.0                                                         | 5,972.0                      | 6,005.5                      | 5,931.4                      | 22.1                          | 24.2                 | -153.59               | -465.5              | 237.0               | 328.6                         | 283.9                          | 44.74                            | 7.346                    |                                    |
| 6,100.0                                                         | 6,072.0                      | 6,103.6                      | 6,027.6                      | 22.4                          | 24.7                 | -155.94               | -483.4              | 243.7               | 342.4                         | 297.0                          | 45.36                            | 7.548                    |                                    |
| 6,200.0                                                         | 6,172.0                      | 6,201.7                      | 6,123.8                      | 22.7                          | 25.1                 | -158.11               | -501.3              | 250.3               | 356.7                         | 310.7                          | 45.99                            | 7.756                    |                                    |
| 6,300.0                                                         | 6,272.0                      | 6,299.8                      | 6,220.0                      | 23.1                          | 25.6                 | -160.11               | -519.2              | 257.0               | 371.4                         | 324.8                          | 46.61                            | 7.969                    |                                    |
| 6,400.0                                                         | 6,372.0                      | 6,397.9                      | 6,316.2                      | 23.4                          | 26.0                 | -161.96               | -537.1              | 263.6               | 386.6                         | 339.4                          | 47.25                            | 8.183                    |                                    |
| 6,500.0                                                         | 6,472.0                      | 6,495.9                      | 6,412.4                      | 23.8                          | 26.5                 | -163.67               | -555.0              | 270.3               | 402.2                         | 354.3                          | 47.88                            | 8.399                    |                                    |
| 6,600.0                                                         | 6,572.0                      | 6,594.0                      | 6,508.7                      | 24.1                          | 27.0                 | -165.26               | -572.9              | 276.9               | 418.0                         | 369.5                          | 48.52                            | 8.616                    |                                    |
| 6,700.0                                                         | 6,672.0                      | 6,692.1                      | 6,604.9                      | 24.4                          | 27.4                 | -166.73               | -590.8              | 283.5               | 434.2                         | 385.1                          | 49.16                            | 8.832                    |                                    |
| 6,735.5                                                         | 6,707.5                      | 6,727.0                      | 6,639.1                      | 24.5                          | 27.6                 | -167.22               | -597.2              | 285.9               | 440.0                         | 390.6                          | 49.40                            | 8.908                    |                                    |
| 6,750.0                                                         | 6,722.0                      | 6,741.1                      | 6,653.0                      | 24.6                          | 27.6                 | -77.36                | -599.8              | 286.9               | 442.4                         | 392.9                          | 49.49                            | 8.939                    |                                    |
| 6,775.0                                                         | 6,746.9                      | 6,765.5                      | 6,676.9                      | 24.7                          | 27.8                 | -77.42                | -604.2              | 288.5               | 446.2                         | 396.5                          | 49.63                            | 8.991                    |                                    |
| 6,800.0                                                         | 6,771.8                      | 6,789.7                      | 6,700.6                      | 24.7                          | 27.9                 | -77.65                | -608.6              | 290.1               | 449.8                         | 400.0                          | 49.76                            | 9.039                    |                                    |
| 6,825.0                                                         | 6,796.4                      | 6,813.6                      | 6,724.1                      | 24.8                          | 28.0                 | -78.04                | -613.0              | 291.8               | 453.1                         | 403.3                          | 49.87                            | 9.087                    |                                    |
| 6,850.0                                                         | 6,820.9                      | 6,837.2                      | 6,747.2                      | 24.9                          | 28.1                 | -78.58                | -617.3              | 293.4               | 456.4                         | 406.4                          | 49.97                            | 9.133                    |                                    |
| 6,875.0                                                         | 6,845.0                      | 6,860.5                      | 6,770.0                      | 24.9                          | 28.2                 | -79.24                | -621.5              | 294.9               | 459.5                         | 409.4                          | 50.06                            | 9.179                    |                                    |
| 6,900.0                                                         | 6,868.7                      | 6,883.2                      | 6,792.3                      | 25.0                          | 28.3                 | -80.01                | -625.7              | 296.5               | 462.6                         | 412.4                          | 50.13                            | 9.227                    |                                    |
| 6,925.0                                                         | 6,892.0                      | 6,905.4                      | 6,814.1                      | 25.1                          | 28.4                 | -80.87                | -629.7              | 298.0               | 465.6                         | 415.4                          | 50.19                            | 9.277                    |                                    |
| 6,950.0                                                         | 6,914.8                      | 6,927.1                      | 6,835.4                      | 25.1                          | 28.5                 | -81.80                | -633.7              | 299.5               | 468.8                         | 418.5                          | 50.25                            | 9.330                    |                                    |
| 6,975.0                                                         | 6,937.0                      | 6,948.1                      | 6,856.0                      | 25.2                          | 28.6                 | -82.77                | -637.5              | 300.9               | 472.1                         | 421.8                          | 50.29                            | 9.387                    |                                    |
| 7,000.0                                                         | 6,958.6                      | 6,968.4                      | 6,875.9                      | 25.2                          | 28.7                 | -83.76                | -641.2              | 302.3               | 475.6                         | 425.3                          | 50.33                            | 9.451                    |                                    |
| 7,025.0                                                         | 6,979.6                      | 6,988.0                      | 6,895.1                      | 25.3                          | 28.8                 | -84.74                | -644.8              | 303.6               | 479.5                         | 429.1                          | 50.36                            | 9.521                    |                                    |
| 7,050.0                                                         | 6,999.7                      | 7,006.8                      | 6,913.5                      | 25.3                          | 28.9                 | -85.69                | -648.2              | 304.8               | 483.7                         | 433.3                          | 50.39                            | 9.599                    |                                    |
| 7,075.0                                                         | 7,019.1                      | 7,024.7                      | 6,931.1                      | 25.3                          | 29.0                 | -86.59                | -651.5              | 306.1               | 488.4                         | 438.0                          | 50.42                            | 9.686                    |                                    |
| 7,100.0                                                         | 7,037.6                      | 7,041.7                      | 6,947.8                      | 25.4                          | 29.1                 | -87.41                | -654.6              | 307.2               | 493.6                         | 443.2                          | 50.45                            | 9.783                    |                                    |
| 7,125.0                                                         | 7,055.2                      | 7,057.7                      | 6,963.5                      | 25.4                          | 29.1                 | -88.13                | -657.5              | 308.3               | 499.4                         | 448.9                          | 50.49                            | 9.891                    |                                    |
| 7,150.0                                                         | 7,071.8                      | 7,072.8                      | 6,978.3                      | 25.5                          | 29.2                 | -88.71                | -660.3              | 309.3               | 505.9                         | 455.3                          | 50.54                            | 10.009                   |                                    |
| 7,175.0                                                         | 7,087.5                      | 7,086.8                      | 6,992.0                      | 25.5                          | 29.3                 | -89.15                | -662.8              | 310.3               | 513.0                         | 462.4                          | 50.60                            | 10.139                   |                                    |
| 7,200.0                                                         | 7,102.1                      | 7,099.8                      | 7,004.7                      | 25.6                          | 29.3                 | -89.42                | -665.2              | 311.1               | 520.9                         | 470.2                          | 50.66                            | 10.282                   |                                    |
| 7,225.0                                                         | 7,115.6                      | 7,111.6                      | 7,016.3                      | 25.6                          | 29.4                 | -89.50                | -667.4              | 311.9               | 529.6                         | 478.8                          | 50.74                            | 10.436                   |                                    |
| 7,250.0                                                         | 7,128.0                      | 7,122.3                      | 7,026.8                      | 25.7                          | 29.4                 | -89.38                | -669.3              | 312.7               | 539.0                         | 488.1                          | 50.84                            | 10.602                   |                                    |
| 7,275.0                                                         | 7,139.3                      | 7,131.8                      | 7,036.1                      | 25.8                          | 29.5                 | -89.03                | -671.1              | 313.3               | 549.2                         | 498.2                          | 50.94                            | 10.781                   |                                    |
| 7,300.0                                                         | 7,149.4                      | 7,140.1                      | 7,044.3                      | 25.9                          | 29.5                 | -88.46                | -672.6              | 313.9               | 560.2                         | 509.1                          | 51.06                            | 10.972                   |                                    |
| 7,325.0                                                         | 7,158.2                      | 7,147.2                      | 7,051.3                      | 26.0                          | 29.5                 | -87.64                | -673.9              | 314.4               | 571.9                         | 520.7                          | 51.18                            | 11.174                   |                                    |
| 7,350.0                                                         | 7,165.9                      | 7,153.1                      | 7,057.0                      | 26.1                          | 29.6                 | -86.56                | -674.9              | 314.8               | 584.3                         | 533.0                          | 51.31                            | 11.387                   |                                    |
| 7,375.0                                                         | 7,172.2                      | 7,157.7                      | 7,061.5                      | 26.2                          | 29.6                 | -85.23                | -675.8              | 315.1               | 597.4                         | 546.0                          | 51.45                            | 11.611                   |                                    |
| 7,400.0                                                         | 7,177.3                      | 7,161.0                      | 7,064.8                      | 26.3                          | 29.6                 | -83.64                | -676.4              | 315.3               | 611.1                         | 559.6                          | 51.59                            | 11.845                   |                                    |
| 7,425.0                                                         | 7,181.1                      | 7,163.0                      | 7,066.8                      | 26.4                          | 29.6                 | -81.79                | -676.8              | 315.4               | 625.4                         | 573.7                          | 51.74                            | 12.089                   |                                    |
| 7,450.0                                                         | 7,183.6                      | 7,163.8                      | 7,067.5                      | 26.6                          | 29.6                 | -79.70                | -676.9              | 315.5               | 640.3                         | 588.4                          | 51.88                            | 12.341                   |                                    |
| 7,475.0                                                         | 7,184.8                      | 7,163.3                      | 7,067.0                      | 26.7                          | 29.6                 | -77.38                | -676.8              | 315.4               | 655.5                         | 603.5                          | 52.02                            | 12.600                   |                                    |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      |          |
|----------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|---------------------|------------------|-----------------------------|------------------------|-----------------|------------------------------|-------------------------------|---------------------------------|----------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 133H - OWB - PWP0 |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 | Offset Site Error:   | 0.0 usft |
| Survey Program: 0-MWD                                    |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 | Offset Well Error:   | 0.0 usft |
| Reference                                                |                             | Offset                      |                             | Semi Major Axis     |                  | Highside<br>Toolface<br>(°) | Offset Wellbore Centre |                 | Distance                     |                               | Rule Assigned:                  |                      | Warning  |
| Measured<br>Depth<br>(usft)                              | Vertical<br>Depth<br>(usft) | Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Reference<br>(usft) | Offset<br>(usft) |                             | +N/-S<br>(usft)        | +E/-W<br>(usft) | Between<br>Centres<br>(usft) | Between<br>Ellipses<br>(usft) | Minimum<br>Separation<br>(usft) | Separation<br>Factor |          |
| 7,485.5                                                  | 7,185.0                     | 7,162.7                     | 7,066.4                     | 26.8                | 29.6             | -76.34                      | -676.7                 | 315.4           | 662.0                        | 610.0                         | 52.08                           | 12.712               |          |
| 7,500.0                                                  | 7,185.0                     | 7,161.7                     | 7,065.5                     | 26.9                | 29.6             | -76.23                      | -676.5                 | 315.3           | 671.1                        | 619.0                         | 52.16                           | 12.867               |          |
| 7,600.0                                                  | 7,185.0                     | 7,154.9                     | 7,058.8                     | 27.7                | 29.6             | -75.48                      | -675.3                 | 314.9           | 738.8                        | 686.1                         | 52.73                           | 14.012               |          |
| 7,700.0                                                  | 7,185.0                     | 7,148.0                     | 7,052.1                     | 28.6                | 29.6             | -74.73                      | -674.0                 | 314.4           | 813.1                        | 759.8                         | 53.25                           | 15.268               |          |
| 7,800.0                                                  | 7,185.0                     | 7,141.2                     | 7,045.4                     | 29.7                | 29.5             | -73.98                      | -672.8                 | 314.0           | 892.3                        | 838.6                         | 53.72                           | 16.612               |          |
| 7,900.0                                                  | 7,185.0                     | 7,134.4                     | 7,038.7                     | 31.0                | 29.5             | -73.23                      | -671.5                 | 313.5           | 975.4                        | 921.2                         | 54.11                           | 18.025               |          |

**PERMIAN****RESOURCES****Anticollision Report**

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      |                           |                |
|-----------------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------|--------------------------|----------------------------------|-------------------------------|-------------------------|-----------------------------------|------------------------------------|--------------------------------------|---------------------------|----------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 134H - OWB - PWP0 |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      | <b>Offset Site Error:</b> | 0.0 usft       |
| <b>Survey Program:</b> 0-MWD                                    |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                |                                  | <b>Offset</b>                    |                                  | <b>Semi Major Axis</b>      |                          | <b>Highside Toolface<br/>(°)</b> | <b>Offset Wellbore Centre</b> |                         | <b>Distance</b>                   |                                    | <b>Minimum Separation<br/>(usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| <b>Measured Depth<br/>(usft)</b>                                | <b>Vertical Depth<br/>(usft)</b> | <b>Measured Depth<br/>(usft)</b> | <b>Vertical Depth<br/>(usft)</b> | <b>Reference<br/>(usft)</b> | <b>Offset<br/>(usft)</b> |                                  | <b>+N/-S<br/>(usft)</b>       | <b>+E/-W<br/>(usft)</b> | <b>Between Centres<br/>(usft)</b> | <b>Between Ellipses<br/>(usft)</b> |                                      |                           |                |
| 0.0                                                             | 0.0                              | 4.2                              | 4.2                              | 0.0                         | 0.0                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             |                                    |                                      |                           |                |
| 100.0                                                           | 100.0                            | 104.2                            | 104.2                            | 0.3                         | 0.3                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 217.5                              | 0.52                                 | 421.734                   |                |
| 200.0                                                           | 200.0                            | 204.2                            | 204.2                            | 0.6                         | 0.6                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 216.8                              | 1.23                                 | 176.683                   |                |
| 300.0                                                           | 300.0                            | 304.2                            | 304.2                            | 1.0                         | 1.0                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 216.1                              | 1.95                                 | 111.750                   |                |
| 400.0                                                           | 400.0                            | 404.2                            | 404.2                            | 1.3                         | 1.3                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 215.3                              | 2.67                                 | 81.717                    |                |
| 500.0                                                           | 500.0                            | 504.2                            | 504.2                            | 1.7                         | 1.7                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 214.6                              | 3.38                                 | 64.408                    |                |
| 600.0                                                           | 600.0                            | 604.2                            | 604.2                            | 2.0                         | 2.1                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 213.9                              | 4.10                                 | 53.150                    |                |
| 700.0                                                           | 700.0                            | 704.2                            | 704.2                            | 2.4                         | 2.4                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 213.2                              | 4.82                                 | 45.242                    |                |
| 800.0                                                           | 800.0                            | 804.2                            | 804.2                            | 2.8                         | 2.8                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 212.5                              | 5.54                                 | 39.382                    |                |
| 900.0                                                           | 900.0                            | 904.2                            | 904.2                            | 3.1                         | 3.1                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 211.7                              | 6.25                                 | 34.867                    |                |
| 1,000.0                                                         | 1,000.0                          | 1,004.5                          | 1,004.5                          | 3.5                         | 3.5                      | -0.21                            | 218.0                         | -0.8                    | 218.0                             | 211.0                              | 6.97                                 | 31.277                    |                |
| 1,100.0                                                         | 1,100.0                          | 1,112.7                          | 1,112.6                          | 3.8                         | 3.9                      | -115.09                          | 215.8                         | -0.5                    | 216.7                             | 209.0                              | 7.68                                 | 28.219                    |                |
| 1,200.0                                                         | 1,199.8                          | 1,220.6                          | 1,220.3                          | 4.2                         | 4.2                      | -116.31                          | 209.6                         | 0.4                     | 213.2                             | 204.8                              | 8.36                                 | 25.505                    |                |
| 1,300.0                                                         | 1,299.5                          | 1,328.0                          | 1,327.3                          | 4.5                         | 4.6                      | -118.42                          | 199.4                         | 1.8                     | 207.7                             | 198.6                              | 9.04                                 | 22.976                    |                |
| 1,400.0                                                         | 1,398.7                          | 1,434.9                          | 1,433.2                          | 4.9                         | 5.0                      | -121.53                          | 185.4                         | 3.8                     | 200.4                             | 190.7                              | 9.72                                 | 20.628                    |                |
| 1,500.0                                                         | 1,497.7                          | 1,541.0                          | 1,537.8                          | 5.2                         | 5.3                      | -125.21                          | 167.6                         | 6.3                     | 191.0                             | 180.6                              | 10.39                                | 18.379                    |                |
| 1,600.0                                                         | 1,596.8                          | 1,646.2                          | 1,640.7                          | 5.6                         | 5.8                      | -129.37                          | 146.1                         | 9.3                     | 178.7                             | 167.6                              | 11.06                                | 16.158                    |                |
| 1,700.0                                                         | 1,695.8                          | 1,750.3                          | 1,741.7                          | 6.0                         | 6.2                      | -134.33                          | 121.3                         | 12.8                    | 163.8                             | 152.1                              | 11.73                                | 13.970                    |                |
| 1,800.0                                                         | 1,794.8                          | 1,852.9                          | 1,840.4                          | 6.4                         | 6.7                      | -140.58                          | 93.2                          | 16.7                    | 146.8                             | 134.4                              | 12.40                                | 11.842                    |                |
| 1,900.0                                                         | 1,893.8                          | 1,953.9                          | 1,936.4                          | 6.8                         | 7.1                      | -148.91                          | 62.2                          | 21.1                    | 128.7                             | 115.6                              | 13.11                                | 9.813                     |                |
| 2,000.0                                                         | 1,992.9                          | 2,053.0                          | 2,029.5                          | 7.2                         | 7.7                      | -160.45                          | 28.5                          | 25.8                    | 111.0                             | 97.1                               | 13.95                                | 7.961                     |                |
| 2,100.0                                                         | 2,091.9                          | 2,148.2                          | 2,118.3                          | 7.6                         | 8.2                      | -175.37                          | -5.3                          | 30.6                    | 98.1                              | 83.1                               | 15.04                                | 6.526                     |                |
| 2,191.7                                                         | 2,182.7                          | 2,235.4                          | 2,199.7                          | 7.9                         | 8.7                      | 168.66                           | -36.2                         | 34.9                    | 94.0                              | 77.8                               | 16.16                                | 5.817 CC                  |                |
| 2,200.0                                                         | 2,190.9                          | 2,243.3                          | 2,207.1                          | 8.0                         | 8.7                      | 167.18                           | -39.0                         | 35.3                    | 94.0                              | 77.8                               | 16.26                                | 5.783 ES                  |                |
| 2,300.0                                                         | 2,289.9                          | 2,338.4                          | 2,295.9                          | 8.4                         | 9.3                      | 149.99                           | -72.8                         | 40.1                    | 99.7                              | 82.4                               | 17.39                                | 5.737 SF                  |                |
| 2,400.0                                                         | 2,389.0                          | 2,433.5                          | 2,384.7                          | 8.8                         | 9.8                      | 135.63                           | -106.5                        | 44.8                    | 113.8                             | 95.5                               | 18.31                                | 6.218                     |                |
| 2,500.0                                                         | 2,488.0                          | 2,528.7                          | 2,473.5                          | 9.2                         | 10.4                     | 124.76                           | -140.3                        | 49.6                    | 133.7                             | 114.6                              | 19.10                                | 7.000                     |                |
| 2,600.0                                                         | 2,587.0                          | 2,623.8                          | 2,562.3                          | 9.6                         | 11.0                     | 116.78                           | -174.0                        | 54.3                    | 157.1                             | 137.3                              | 19.83                                | 7.921                     |                |
| 2,700.0                                                         | 2,686.1                          | 2,718.9                          | 2,651.1                          | 10.0                        | 11.6                     | 110.88                           | -207.8                        | 59.1                    | 182.7                             | 162.2                              | 20.57                                | 8.885                     |                |
| 2,800.0                                                         | 2,785.1                          | 2,814.1                          | 2,740.0                          | 10.4                        | 12.2                     | 106.44                           | -241.6                        | 63.8                    | 209.8                             | 188.5                              | 21.31                                | 9.843                     |                |
| 2,900.0                                                         | 2,884.1                          | 2,909.2                          | 2,828.8                          | 10.8                        | 12.8                     | 103.00                           | -275.3                        | 68.6                    | 237.8                             | 215.7                              | 22.07                                | 10.772                    |                |
| 3,000.0                                                         | 2,983.1                          | 3,004.3                          | 2,917.6                          | 11.2                        | 13.4                     | 100.28                           | -309.1                        | 73.3                    | 266.4                             | 243.5                              | 22.84                                | 11.661                    |                |
| 3,100.0                                                         | 3,082.2                          | 3,099.4                          | 3,006.4                          | 11.6                        | 14.0                     | 98.09                            | -342.8                        | 78.1                    | 295.4                             | 271.8                              | 23.62                                | 12.505                    |                |
| 3,200.0                                                         | 3,181.2                          | 3,194.6                          | 3,095.2                          | 12.1                        | 14.6                     | 96.29                            | -376.6                        | 82.8                    | 324.8                             | 300.4                              | 24.41                                | 13.303                    |                |
| 3,300.0                                                         | 3,280.2                          | 3,289.7                          | 3,184.0                          | 12.5                        | 15.2                     | 94.78                            | -410.4                        | 87.6                    | 354.4                             | 329.2                              | 25.21                                | 14.057                    |                |
| 3,400.0                                                         | 3,379.2                          | 3,384.8                          | 3,272.8                          | 12.9                        | 15.8                     | 93.51                            | -444.1                        | 92.3                    | 384.2                             | 358.2                              | 26.02                                | 14.768                    |                |
| 3,500.0                                                         | 3,478.3                          | 3,479.9                          | 3,361.6                          | 13.3                        | 16.5                     | 92.42                            | -477.9                        | 97.1                    | 414.2                             | 387.4                              | 26.83                                | 15.438                    |                |
| 3,600.0                                                         | 3,577.3                          | 3,575.1                          | 3,450.4                          | 13.7                        | 17.1                     | 91.47                            | -511.6                        | 101.8                   | 444.3                             | 416.6                              | 27.64                                | 16.071                    |                |
| 3,700.0                                                         | 3,676.3                          | 3,670.2                          | 3,539.2                          | 14.1                        | 17.7                     | 90.65                            | -545.4                        | 106.6                   | 474.5                             | 446.0                              | 28.46                                | 16.668                    |                |
| 3,800.0                                                         | 3,775.3                          | 3,765.3                          | 3,628.0                          | 14.5                        | 18.3                     | 89.92                            | -579.2                        | 111.3                   | 504.7                             | 475.4                              | 29.29                                | 17.233                    |                |
| 3,900.0                                                         | 3,874.4                          | 3,860.5                          | 3,716.9                          | 15.0                        | 19.0                     | 89.28                            | -612.9                        | 116.1                   | 535.0                             | 504.9                              | 30.11                                | 17.767                    |                |
| 4,000.0                                                         | 3,973.4                          | 3,955.6                          | 3,805.7                          | 15.4                        | 19.6                     | 88.70                            | -646.7                        | 120.8                   | 565.4                             | 534.5                              | 30.94                                | 18.273                    |                |
| 4,014.3                                                         | 3,987.6                          | 3,969.2                          | 3,818.4                          | 15.4                        | 19.7                     | 88.63                            | -651.5                        | 121.5                   | 569.8                             | 538.7                              | 31.06                                | 18.344                    |                |
| 4,100.0                                                         | 4,072.6                          | 4,050.6                          | 3,894.4                          | 15.8                        | 20.2                     | 88.61                            | -680.4                        | 125.5                   | 595.9                             | 564.1                              | 31.75                                | 18.766                    |                |
| 4,200.0                                                         | 4,172.2                          | 4,145.4                          | 3,982.8                          | 16.2                        | 20.8                     | 88.34                            | -714.0                        | 130.3                   | 626.5                             | 594.0                              | 32.51                                | 19.269                    |                |
| 4,300.0                                                         | 4,272.0                          | 4,239.7                          | 4,070.9                          | 16.5                        | 21.5                     | 87.85                            | -747.5                        | 135.0                   | 657.5                             | 624.2                              | 33.22                                | 19.789                    |                |
| 4,400.0                                                         | 4,372.0                          | 4,333.4                          | 4,158.4                          | 16.9                        | 22.1                     | 87.18                            | -780.8                        | 139.7                   | 688.8                             | 654.9                              | 33.88                                | 20.328                    |                |
| 4,414.3                                                         | 4,386.3                          | 4,346.8                          | 4,170.9                          | 16.9                        | 22.2                     | -158.45                          | -785.5                        | 140.3                   | 693.3                             | 659.4                              | 33.97                                | 20.408                    |                |
| 4,500.0                                                         | 4,472.0                          | 4,426.8                          | 4,245.6                          | 17.2                        | 22.7                     | -159.64                          | -813.9                        | 144.3                   | 720.6                             | 686.1                              | 34.51                                | 20.883                    |                |
| 4,600.0                                                         | 4,572.0                          | 4,520.1                          | 4,332.7                          | 17.5                        | 23.3                     | -160.91                          | -847.0                        | 149.0                   | 752.8                             | 717.6                              | 35.13                                | 21.425                    |                |
| 4,700.0                                                         | 4,672.0                          | 4,613.5                          | 4,419.9                          | 17.8                        | 24.0                     | -162.09                          | -880.1                        | 153.6                   | 785.3                             | 749.5                              | 35.77                                | 21.953                    |                |
| 4,800.0                                                         | 4,772.0                          | 4,706.9                          | 4,507.0                          | 18.1                        | 24.6                     | -163.18                          | -913.3                        | 158.3                   | 818.0                             | 781.6                              | 36.41                                | 22.466                    |                |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   |                    |          |
|----------------------------------------------------------|----------------|----------------|----------------|-----------------|--------|-------------------|------------------------|--------|-----------------|------------------|--------------------|-------------------|--------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 134H - OWB - PWP0 |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Site Error: | 0.0 usft |
| Survey Program: 0-MWD                                    |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Well Error: | 0.0 usft |
| Reference                                                |                | Offset         |                | Semi Major Axis |        |                   | Offset Wellbore Centre |        | Rule Assigned:  |                  |                    |                   |                    |          |
| Measured Depth                                           | Vertical Depth | Measured Depth | Vertical Depth | Reference       | Offset | Highside Toolface | +N/-S                  | +E/-W  | Between Centres | Between Ellipses | Minimum Separation | Separation Factor | Warning            |          |
| (usft)                                                   | (usft)         | (usft)         | (usft)         | (usft)          | (usft) | (°)               | (usft)                 | (usft) | (usft)          | (usft)           | (usft)             |                   |                    |          |
| 4,900.0                                                  | 4,872.0        | 4,800.2        | 4,594.2        | 18.5            | 25.2   | -164.18           | -946.4                 | 163.0  | 851.1           | 814.0            | 37.06              | 22.963            |                    |          |
| 5,000.0                                                  | 4,972.0        | 4,893.6        | 4,681.4        | 18.8            | 25.8   | -165.11           | -979.5                 | 167.6  | 884.3           | 846.6            | 37.72              | 23.446            |                    |          |
| 5,100.0                                                  | 5,072.0        | 4,986.9        | 4,768.5        | 19.1            | 26.5   | -165.97           | -1,012.7               | 172.3  | 917.7           | 879.3            | 38.38              | 23.914            |                    |          |
| 5,200.0                                                  | 5,172.0        | 5,080.3        | 4,855.7        | 19.4            | 27.1   | -166.77           | -1,045.8               | 176.9  | 951.3           | 912.3            | 39.04              | 24.368            |                    |          |
| 5,300.0                                                  | 5,272.0        | 5,173.6        | 4,942.8        | 19.8            | 27.7   | -167.52           | -1,078.9               | 181.6  | 985.1           | 945.4            | 39.71              | 24.807            |                    |          |

**PERMIAN****RESOURCES**

## Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                           |                |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|----------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 213H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Site Error:</b> | 0.0 usft       |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     |                     |                               |                                |                                  |                           |                |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| 0.0                                                             | 0.0                          | 5.8                          | 5.8                          | 0.0                           | 0.0                  | -0.21                 | 317.0               | -1.2                | 317.0                         |                                |                                  |                           |                |
| 100.0                                                           | 100.0                        | 105.8                        | 105.8                        | 0.3                           | 0.3                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 316.5                          | 0.52                             | 606.526                   |                |
| 200.0                                                           | 200.0                        | 205.8                        | 205.8                        | 0.6                           | 0.6                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 315.8                          | 1.24                             | 255.730                   |                |
| 300.0                                                           | 300.0                        | 305.8                        | 305.8                        | 1.0                           | 1.0                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 315.0                          | 1.96                             | 162.022                   |                |
| 400.0                                                           | 400.0                        | 405.8                        | 405.8                        | 1.3                           | 1.3                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 314.3                          | 2.67                             | 118.573                   |                |
| 500.0                                                           | 500.0                        | 505.8                        | 505.8                        | 1.7                           | 1.7                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 313.6                          | 3.39                             | 93.499                    |                |
| 600.0                                                           | 600.0                        | 605.8                        | 605.8                        | 2.0                           | 2.1                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 312.9                          | 4.11                             | 77.179                    |                |
| 700.0                                                           | 700.0                        | 705.8                        | 705.8                        | 2.4                           | 2.4                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 312.2                          | 4.82                             | 65.709                    |                |
| 800.0                                                           | 800.0                        | 805.8                        | 805.8                        | 2.8                           | 2.8                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 311.5                          | 5.54                             | 57.208                    |                |
| 900.0                                                           | 900.0                        | 905.8                        | 905.8                        | 3.1                           | 3.1                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 310.7                          | 6.26                             | 50.654                    |                |
| 1,000.0                                                         | 1,000.0                      | 1,006.3                      | 1,006.3                      | 3.5                           | 3.5                  | -0.21                 | 317.0               | -1.2                | 317.0                         | 310.0                          | 6.98                             | 45.441                    |                |
| 1,100.0                                                         | 1,100.0                      | 1,115.3                      | 1,115.3                      | 3.8                           | 3.9                  | -114.73               | 315.3               | 0.4                 | 316.1                         | 308.5                          | 7.69                             | 41.097                    |                |
| 1,200.0                                                         | 1,199.8                      | 1,224.2                      | 1,224.0                      | 4.2                           | 4.2                  | -114.93               | 310.5               | 4.7                 | 313.9                         | 305.5                          | 8.39                             | 37.429                    |                |
| 1,300.0                                                         | 1,299.5                      | 1,333.0                      | 1,332.2                      | 4.5                           | 4.6                  | -115.29               | 302.7               | 11.8                | 310.3                         | 301.2                          | 9.09                             | 34.145                    |                |
| 1,400.0                                                         | 1,398.7                      | 1,438.3                      | 1,436.6                      | 4.9                           | 5.0                  | -115.83               | 292.4               | 21.1                | 305.6                         | 295.8                          | 9.80                             | 31.197                    |                |
| 1,500.0                                                         | 1,497.7                      | 1,538.1                      | 1,535.5                      | 5.2                           | 5.4                  | -116.48               | 282.0               | 30.4                | 301.1                         | 290.6                          | 10.51                            | 28.650                    |                |
| 1,600.0                                                         | 1,596.8                      | 1,638.0                      | 1,634.3                      | 5.6                           | 5.7                  | -117.16               | 271.7               | 39.7                | 296.7                         | 285.5                          | 11.24                            | 26.403                    |                |
| 1,700.0                                                         | 1,695.8                      | 1,737.8                      | 1,733.2                      | 6.0                           | 6.1                  | -117.85               | 261.4               | 49.0                | 292.3                         | 280.4                          | 11.97                            | 24.416                    |                |
| 1,800.0                                                         | 1,794.8                      | 1,837.6                      | 1,832.1                      | 6.4                           | 6.5                  | -118.56               | 251.1               | 58.3                | 288.0                         | 275.3                          | 12.71                            | 22.651                    |                |
| 1,900.0                                                         | 1,893.8                      | 1,937.5                      | 1,931.0                      | 6.8                           | 6.9                  | -119.30               | 240.8               | 67.6                | 283.7                         | 270.2                          | 13.46                            | 21.076                    |                |
| 2,000.0                                                         | 1,992.9                      | 2,037.3                      | 2,029.8                      | 7.2                           | 7.3                  | -120.06               | 230.5               | 76.9                | 279.4                         | 265.2                          | 14.21                            | 19.666                    |                |
| 2,100.0                                                         | 2,091.9                      | 2,137.2                      | 2,128.7                      | 7.6                           | 7.7                  | -120.84               | 220.2               | 86.3                | 275.2                         | 260.3                          | 14.96                            | 18.396                    |                |
| 2,200.0                                                         | 2,190.9                      | 2,237.0                      | 2,227.6                      | 8.0                           | 8.1                  | -121.65               | 209.8               | 95.6                | 271.1                         | 255.4                          | 15.71                            | 17.250                    |                |
| 2,300.0                                                         | 2,289.9                      | 2,336.8                      | 2,326.4                      | 8.4                           | 8.5                  | -122.48               | 199.5               | 104.9               | 267.0                         | 250.5                          | 16.47                            | 16.212                    |                |
| 2,400.0                                                         | 2,389.0                      | 2,436.7                      | 2,425.3                      | 8.8                           | 8.9                  | -123.33               | 189.2               | 114.2               | 263.0                         | 245.7                          | 17.22                            | 15.267                    |                |
| 2,500.0                                                         | 2,488.0                      | 2,536.5                      | 2,524.2                      | 9.2                           | 9.3                  | -124.22               | 178.9               | 123.5               | 259.0                         | 241.0                          | 17.98                            | 14.406                    |                |
| 2,600.0                                                         | 2,587.0                      | 2,636.4                      | 2,623.0                      | 9.6                           | 9.7                  | -125.13               | 168.6               | 132.8               | 255.1                         | 236.3                          | 18.73                            | 13.617                    |                |
| 2,700.0                                                         | 2,686.1                      | 2,736.2                      | 2,721.9                      | 10.0                          | 10.1                 | -126.07               | 158.3               | 142.1               | 251.2                         | 231.7                          | 19.48                            | 12.894                    |                |
| 2,800.0                                                         | 2,785.1                      | 2,836.0                      | 2,820.8                      | 10.4                          | 10.5                 | -127.03               | 148.0               | 151.4               | 247.4                         | 227.2                          | 20.23                            | 12.229                    |                |
| 2,900.0                                                         | 2,884.1                      | 2,935.9                      | 2,919.6                      | 10.8                          | 10.9                 | -128.03               | 137.6               | 160.7               | 243.7                         | 222.8                          | 20.98                            | 11.616                    |                |
| 3,000.0                                                         | 2,983.1                      | 3,035.7                      | 3,018.5                      | 11.2                          | 11.3                 | -129.06               | 127.3               | 170.1               | 240.1                         | 218.4                          | 21.73                            | 11.050                    |                |
| 3,100.0                                                         | 3,082.2                      | 3,135.6                      | 3,117.4                      | 11.6                          | 11.7                 | -130.12               | 117.0               | 179.4               | 236.6                         | 214.1                          | 22.47                            | 10.526                    |                |
| 3,200.0                                                         | 3,181.2                      | 3,235.4                      | 3,216.2                      | 12.1                          | 12.2                 | -131.21               | 106.7               | 188.7               | 233.1                         | 209.9                          | 23.22                            | 10.041                    |                |
| 3,300.0                                                         | 3,280.2                      | 3,335.2                      | 3,315.1                      | 12.5                          | 12.6                 | -132.33               | 96.4                | 198.0               | 229.7                         | 205.8                          | 23.96                            | 9.590                     |                |
| 3,400.0                                                         | 3,379.2                      | 3,435.1                      | 3,414.0                      | 12.9                          | 13.0                 | -133.48               | 86.1                | 207.3               | 226.4                         | 201.8                          | 24.69                            | 9.171                     |                |
| 3,500.0                                                         | 3,478.3                      | 3,534.9                      | 3,512.8                      | 13.3                          | 13.4                 | -134.67               | 75.8                | 216.6               | 223.3                         | 197.8                          | 25.43                            | 8.781                     |                |
| 3,600.0                                                         | 3,577.3                      | 3,634.8                      | 3,611.7                      | 13.7                          | 13.8                 | -135.90               | 65.4                | 225.9               | 220.2                         | 194.0                          | 26.16                            | 8.417                     |                |
| 3,700.0                                                         | 3,676.3                      | 3,734.6                      | 3,710.6                      | 14.1                          | 14.2                 | -137.15               | 55.1                | 235.2               | 217.2                         | 190.3                          | 26.88                            | 8.078                     |                |
| 3,800.0                                                         | 3,775.3                      | 3,834.4                      | 3,809.5                      | 14.5                          | 14.6                 | -138.44               | 44.8                | 244.5               | 214.3                         | 186.7                          | 27.61                            | 7.762                     |                |
| 3,900.0                                                         | 3,874.4                      | 3,934.3                      | 3,908.3                      | 15.0                          | 15.1                 | -139.77               | 34.5                | 253.9               | 211.5                         | 183.2                          | 28.33                            | 7.467                     |                |
| 4,000.0                                                         | 3,973.4                      | 4,034.1                      | 4,007.2                      | 15.4                          | 15.5                 | -141.13               | 24.2                | 263.2               | 208.9                         | 179.8                          | 29.05                            | 7.190                     |                |
| 4,014.3                                                         | 3,987.6                      | 4,048.4                      | 4,021.4                      | 15.4                          | 15.5                 | -141.33               | 22.7                | 264.5               | 208.5                         | 179.4                          | 29.15                            | 7.152                     |                |
| 4,100.0                                                         | 4,072.6                      | 4,134.0                      | 4,106.1                      | 15.8                          | 15.9                 | -142.27               | 13.9                | 272.5               | 205.3                         | 175.6                          | 29.77                            | 6.898                     |                |
| 4,200.0                                                         | 4,172.2                      | 4,233.7                      | 4,204.9                      | 16.2                          | 16.3                 | -142.82               | 3.6                 | 281.8               | 199.1                         | 168.6                          | 30.49                            | 6.530                     |                |
| 4,300.0                                                         | 4,272.0                      | 4,333.3                      | 4,303.5                      | 16.5                          | 16.7                 | -142.75               | -6.7                | 291.1               | 190.1                         | 158.9                          | 31.22                            | 6.091                     |                |
| 4,400.0                                                         | 4,372.0                      | 4,432.6                      | 4,401.8                      | 16.9                          | 17.1                 | -141.97               | -17.0               | 300.3               | 178.4                         | 146.4                          | 31.95                            | 5.584                     |                |
| 4,414.3                                                         | 4,386.3                      | 4,446.8                      | 4,415.9                      | 16.9                          | 17.2                 | -27.31                | -18.5               | 301.6               | 176.5                         | 144.4                          | 32.05                            | 5.506                     |                |
| 4,500.0                                                         | 4,472.0                      | 4,531.6                      | 4,499.9                      | 17.2                          | 17.6                 | -26.26                | -27.2               | 309.6               | 165.0                         | 132.3                          | 32.68                            | 5.048                     |                |
| 4,600.0                                                         | 4,572.0                      | 4,630.7                      | 4,597.9                      | 17.5                          | 18.0                 | -24.83                | -37.4               | 318.8               | 151.6                         | 118.2                          | 33.42                            | 4.537                     |                |
| 4,700.0                                                         | 4,672.0                      | 4,729.7                      | 4,696.0                      | 17.8                          | 18.4                 | -23.12                | -47.7               | 328.0               | 138.4                         | 104.2                          | 34.18                            | 4.049                     |                |
| 4,800.0                                                         | 4,772.0                      | 4,828.7                      | 4,794.1                      | 18.1                          | 18.8                 | -21.06                | -57.9               | 337.3               | 125.3                         | 90.3                           | 34.95                            | 3.585                     |                |
| 4,900.0                                                         | 4,872.0                      | 4,927.8                      | 4,892.1                      | 18.5                          | 19.2                 | -18.52                | -68.1               | 346.5               | 112.4                         | 76.6                           | 35.75                            | 3.144                     |                |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

**PERMIAN****RESOURCES****Anticollision Report**

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      |                           |                |
|-----------------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------|--------------------------|----------------------------------|-------------------------------|-------------------------|-----------------------------------|------------------------------------|--------------------------------------|---------------------------|----------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 213H - OWB - PWP0 |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      | <b>Offset Site Error:</b> | 0.0 usft       |
| <b>Survey Program:</b> 0-MWD                                    |                                  |                                  |                                  |                             |                          |                                  |                               |                         |                                   |                                    |                                      | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                |                                  | <b>Offset</b>                    |                                  | <b>Semi Major Axis</b>      |                          | <b>Highside Toolface<br/>(°)</b> | <b>Offset Wellbore Centre</b> |                         | <b>Distance</b>                   |                                    | <b>Minimum Separation<br/>(usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| <b>Measured Depth<br/>(usft)</b>                                | <b>Vertical Depth<br/>(usft)</b> | <b>Measured Depth<br/>(usft)</b> | <b>Vertical Depth<br/>(usft)</b> | <b>Reference<br/>(usft)</b> | <b>Offset<br/>(usft)</b> |                                  | <b>+N/-S<br/>(usft)</b>       | <b>+E/-W<br/>(usft)</b> | <b>Between Centres<br/>(usft)</b> | <b>Between Ellipses<br/>(usft)</b> |                                      |                           |                |
| 5,000.0                                                         | 4,972.0                          | 5,026.8                          | 4,990.2                          | 18.8                        | 19.6                     | -15.33                           | -78.4                         | 355.7                   | 99.8                              | 63.2                               | 36.58                                | 2.728                     |                |
| 5,100.0                                                         | 5,072.0                          | 5,125.8                          | 5,088.2                          | 19.1                        | 20.1                     | -11.23                           | -88.6                         | 365.0                   | 87.5                              | 50.1                               | 37.46                                | 2.337                     |                |
| 5,200.0                                                         | 5,172.0                          | 5,224.8                          | 5,186.3                          | 19.4                        | 20.5                     | -5.86                            | -98.8                         | 374.2                   | 75.9                              | 37.5                               | 38.41                                | 1.976                     |                |
| 5,300.0                                                         | 5,272.0                          | 5,323.9                          | 5,284.4                          | 19.8                        | 20.9                     | 1.36                             | -109.1                        | 383.4                   | 65.1                              | 25.7                               | 39.45                                | 1.651                     |                |
| 5,400.0                                                         | 5,372.0                          | 5,422.9                          | 5,382.4                          | 20.1                        | 21.3                     | 11.17                            | -119.3                        | 392.7                   | 55.8                              | 15.2                               | 40.60                                | 1.375 Level 3             |                |
| 5,500.0                                                         | 5,472.0                          | 5,521.9                          | 5,480.5                          | 20.4                        | 21.7                     | 24.30                            | -129.5                        | 401.9                   | 48.7                              | 6.9                                | 41.78                                | 1.166 Level 3             |                |
| 5,600.0                                                         | 5,572.0                          | 5,620.9                          | 5,578.6                          | 20.8                        | 22.1                     | 40.62                            | -139.7                        | 411.1                   | 44.9                              | 2.2                                | 42.77                                | 1.050 Level 3             |                |
| 5,641.4                                                         | 5,613.4                          | 5,662.0                          | 5,619.2                          | 20.9                        | 22.3                     | 47.93                            | -144.0                        | 415.0                   | 44.6                              | 1.5                                | 43.05                                | 1.035 Level 3, CC, ES, SF |                |
| 5,700.0                                                         | 5,672.0                          | 5,720.0                          | 5,676.6                          | 21.1                        | 22.6                     | 58.19                            | -150.0                        | 420.4                   | 45.3                              | 2.0                                | 43.31                                | 1.046 Level 3             |                |
| 5,800.0                                                         | 5,772.0                          | 5,819.5                          | 5,775.3                          | 21.4                        | 23.0                     | 73.27                            | -159.7                        | 429.1                   | 49.4                              | 5.8                                | 43.52                                | 1.134 Level 3             |                |
| 5,900.0                                                         | 5,872.0                          | 5,920.0                          | 5,875.3                          | 21.7                        | 23.4                     | 82.70                            | -166.9                        | 435.7                   | 54.3                              | 10.5                               | 43.82                                | 1.239 Level 3             |                |
| 6,000.0                                                         | 5,972.0                          | 6,021.0                          | 5,976.1                          | 22.1                        | 23.7                     | 87.85                            | -171.7                        | 440.0                   | 58.1                              | 13.9                               | 44.25                                | 1.313 Level 3             |                |
| 6,100.0                                                         | 6,072.0                          | 6,122.3                          | 6,077.4                          | 22.4                        | 24.1                     | 89.90                            | -173.7                        | 441.8                   | 59.9                              | 15.1                               | 44.80                                | 1.338 Level 3             |                |
| 6,200.0                                                         | 6,172.0                          | 6,222.7                          | 6,177.8                          | 22.7                        | 24.4                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 14.6                               | 45.44                                | 1.321 Level 3             |                |
| 6,300.0                                                         | 6,272.0                          | 6,322.7                          | 6,277.8                          | 23.1                        | 24.7                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 13.9                               | 46.09                                | 1.302 Level 3             |                |
| 6,400.0                                                         | 6,372.0                          | 6,422.7                          | 6,377.8                          | 23.4                        | 25.0                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 13.3                               | 46.75                                | 1.284 Level 3             |                |
| 6,500.0                                                         | 6,472.0                          | 6,522.7                          | 6,477.8                          | 23.8                        | 25.3                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 12.6                               | 47.40                                | 1.266 Level 3             |                |
| 6,600.0                                                         | 6,572.0                          | 6,622.7                          | 6,577.8                          | 24.1                        | 25.6                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 12.0                               | 48.06                                | 1.249 Level 3             |                |
| 6,700.0                                                         | 6,672.0                          | 6,722.7                          | 6,677.8                          | 24.4                        | 25.9                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 11.3                               | 48.72                                | 1.232 Level 3             |                |
| 6,735.5                                                         | 6,707.5                          | 6,758.2                          | 6,713.3                          | 24.5                        | 26.0                     | 90.00                            | -173.8                        | 441.9                   | 60.0                              | 11.1                               | 48.96                                | 1.226 Level 3             |                |
| 6,750.0                                                         | 6,722.0                          | 6,772.7                          | 6,727.8                          | 24.6                        | 26.0                     | 179.81                           | -173.8                        | 441.9                   | 60.2                              | 11.2                               | 49.05                                | 1.228 Level 3             |                |
| 6,775.0                                                         | 6,746.9                          | 6,797.7                          | 6,752.7                          | 24.7                        | 26.1                     | 179.81                           | -173.8                        | 441.9                   | 61.6                              | 12.4                               | 49.21                                | 1.253 Level 3             |                |
| 6,800.0                                                         | 6,771.8                          | 6,822.5                          | 6,777.6                          | 24.7                        | 26.2                     | 179.82                           | -173.8                        | 441.9                   | 64.4                              | 15.0                               | 49.37                                | 1.304 Level 3             |                |
| 6,825.0                                                         | 6,796.4                          | 6,847.2                          | 6,802.2                          | 24.8                        | 26.3                     | 179.83                           | -173.8                        | 441.9                   | 68.4                              | 18.8                               | 49.53                                | 1.381 Level 3             |                |
| 6,850.0                                                         | 6,820.9                          | 6,871.6                          | 6,826.7                          | 24.9                        | 26.4                     | 179.84                           | -173.8                        | 441.9                   | 73.7                              | 24.0                               | 49.68                                | 1.483 Level 3             |                |
| 6,875.0                                                         | 6,845.0                          | 6,895.7                          | 6,850.8                          | 24.9                        | 26.4                     | 179.85                           | -173.8                        | 441.9                   | 80.2                              | 30.4                               | 49.83                                | 1.610                     |                |
| 6,900.0                                                         | 6,868.7                          | 6,919.5                          | 6,874.5                          | 25.0                        | 26.5                     | 179.86                           | -173.8                        | 441.9                   | 88.1                              | 38.1                               | 49.98                                | 1.762                     |                |
| 6,925.0                                                         | 6,892.0                          | 6,942.8                          | 6,897.8                          | 25.1                        | 26.6                     | 179.87                           | -173.8                        | 441.9                   | 97.1                              | 47.0                               | 50.12                                | 1.938                     |                |
| 6,950.0                                                         | 6,914.8                          | 6,965.6                          | 6,920.6                          | 25.1                        | 26.6                     | 179.88                           | -173.8                        | 441.9                   | 107.4                             | 57.1                               | 50.26                                | 2.137                     |                |
| 6,975.0                                                         | 6,937.0                          | 6,987.8                          | 6,942.8                          | 25.2                        | 26.7                     | 179.89                           | -173.8                        | 441.9                   | 118.8                             | 68.4                               | 50.39                                | 2.358                     |                |
| 7,000.0                                                         | 6,958.6                          | 7,009.4                          | 6,964.4                          | 25.2                        | 26.8                     | 179.90                           | -173.8                        | 441.9                   | 131.4                             | 80.9                               | 50.51                                | 2.601                     |                |
| 7,025.0                                                         | 6,979.6                          | 7,030.3                          | 6,985.4                          | 25.3                        | 26.8                     | 179.90                           | -173.8                        | 441.9                   | 145.1                             | 94.5                               | 50.63                                | 2.866                     |                |
| 7,050.0                                                         | 6,999.7                          | 7,050.5                          | 7,005.5                          | 25.3                        | 26.9                     | 179.91                           | -173.8                        | 441.9                   | 159.9                             | 109.1                              | 50.75                                | 3.151                     |                |
| 7,075.0                                                         | 7,019.1                          | 7,069.8                          | 7,024.9                          | 25.3                        | 27.0                     | 179.91                           | -173.8                        | 441.9                   | 175.7                             | 124.8                              | 50.86                                | 3.455                     |                |
| 7,100.0                                                         | 7,037.6                          | 7,088.3                          | 7,043.4                          | 25.4                        | 27.0                     | 179.92                           | -173.8                        | 441.9                   | 192.5                             | 141.5                              | 50.96                                | 3.778                     |                |
| 7,125.0                                                         | 7,055.2                          | 7,105.9                          | 7,061.0                          | 25.4                        | 27.1                     | 179.92                           | -173.8                        | 441.9                   | 210.2                             | 159.2                              | 51.05                                | 4.118                     |                |
| 7,150.0                                                         | 7,071.8                          | 7,122.6                          | 7,077.6                          | 25.5                        | 27.1                     | 179.92                           | -173.8                        | 441.9                   | 228.9                             | 177.7                              | 51.14                                | 4.476                     |                |
| 7,175.0                                                         | 7,087.5                          | 7,138.2                          | 7,093.3                          | 25.5                        | 27.2                     | 179.92                           | -173.8                        | 441.9                   | 248.4                             | 197.2                              | 51.22                                | 4.849                     |                |
| 7,200.0                                                         | 7,102.1                          | 7,152.8                          | 7,107.9                          | 25.6                        | 27.2                     | 179.92                           | -173.8                        | 441.9                   | 268.7                             | 217.4                              | 51.29                                | 5.238                     |                |
| 7,225.0                                                         | 7,115.6                          | 7,166.4                          | 7,121.4                          | 25.6                        | 27.3                     | 179.92                           | -173.8                        | 441.9                   | 289.7                             | 238.3                              | 51.36                                | 5.640                     |                |
| 7,250.0                                                         | 7,128.0                          | 7,178.8                          | 7,133.8                          | 25.7                        | 27.3                     | 179.92                           | -173.8                        | 441.9                   | 311.4                             | 260.0                              | 51.42                                | 6.055                     |                |
| 7,275.0                                                         | 7,139.3                          | 7,190.0                          | 7,145.1                          | 25.8                        | 27.3                     | 179.92                           | -173.8                        | 441.9                   | 333.7                             | 282.2                              | 51.47                                | 6.483                     |                |
| 7,300.0                                                         | 7,149.4                          | 7,200.1                          | 7,155.2                          | 25.9                        | 27.4                     | 179.92                           | -173.8                        | 441.9                   | 356.6                             | 305.1                              | 51.52                                | 6.921                     |                |
| 7,325.0                                                         | 7,158.2                          | 7,209.0                          | 7,164.0                          | 26.0                        | 27.4                     | 179.91                           | -173.8                        | 441.9                   | 380.0                             | 328.4                              | 51.56                                | 7.369                     |                |
| 7,350.0                                                         | 7,165.9                          | 7,216.6                          | 7,171.7                          | 26.1                        | 27.4                     | 179.90                           | -173.8                        | 441.9                   | 403.8                             | 352.2                              | 51.59                                | 7.826                     |                |
| 7,375.0                                                         | 7,172.2                          | 7,223.0                          | 7,178.0                          | 26.2                        | 27.4                     | 179.88                           | -173.8                        | 441.9                   | 427.9                             | 376.3                              | 51.62                                | 8.290                     |                |
| 7,400.0                                                         | 7,177.3                          | 7,228.1                          | 7,183.1                          | 26.3                        | 27.5                     | 179.86                           | -173.8                        | 441.9                   | 452.4                             | 400.8                              | 51.64                                | 8.761                     |                |
| 7,425.0                                                         | 7,181.1                          | 7,231.9                          | 7,186.9                          | 26.4                        | 27.5                     | 179.81                           | -173.8                        | 441.9                   | 477.1                             | 425.5                              | 51.66                                | 9.236                     |                |
| 7,450.0                                                         | 7,183.6                          | 7,234.4                          | 7,189.4                          | 26.6                        | 27.5                     | 179.69                           | -173.8                        | 441.9                   | 502.0                             | 450.3                              | 51.67                                | 9.716                     |                |
| 7,475.0                                                         | 7,184.8                          | 7,235.6                          | 7,190.6                          | 26.7                        | 27.5                     | 179.02                           | -173.8                        | 441.9                   | 526.9                             | 475.3                              | 51.67                                | 10.198                    |                |
| 7,485.5                                                         | 7,185.0                          | 7,235.7                          | 7,190.8                          | 26.8                        | 27.5                     | 90.29                            | -173.8                        | 441.9                   | 537.5                             | 485.8                              | 51.67                                | 10.402                    |                |
| 7,500.0                                                         | 7,185.0                          | 7,235.7                          | 7,190.8                          | 26.9                        | 27.5                     | 90.29                            | -173.8                        | 441.9                   | 551.9                             | 500.3                              | 51.67                                | 10.682                    |                |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      |                    |          |
|----------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|---------------------|------------------|-----------------------------|------------------------|-----------------|------------------------------|-------------------------------|---------------------------------|----------------------|--------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 213H - OWB - PWP0 |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      | Offset Site Error: | 0.0 usft |
| Survey Program: 0-MWD                                    |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      | Offset Well Error: | 0.0 usft |
| Reference                                                |                             | Offset                      |                             | Semi Major Axis     |                  | Highside<br>Toolface<br>(°) | Offset Wellbore Centre |                 | Rule Assigned:               |                               |                                 |                      | Warning            |          |
| Measured<br>Depth<br>(usft)                              | Vertical<br>Depth<br>(usft) | Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Reference<br>(usft) | Offset<br>(usft) |                             | +N/-S<br>(usft)        | +E/-W<br>(usft) | Between<br>Centres<br>(usft) | Between<br>Ellipses<br>(usft) | Minimum<br>Separation<br>(usft) | Separation<br>Factor |                    |          |
| 7,600.0                                                  | 7,185.0                     | 7,235.7                     | 7,190.8                     | 27.7                | 27.5             | 90.35                       | -173.8                 | 441.9           | 651.9                        | 600.3                         | 51.68                           | 12.616               |                    |          |
| 7,700.0                                                  | 7,185.0                     | 7,235.7                     | 7,190.8                     | 28.6                | 27.5             | 90.40                       | -173.8                 | 441.9           | 751.9                        | 700.3                         | 51.68                           | 14.550               |                    |          |
| 7,800.0                                                  | 7,185.0                     | 7,235.7                     | 7,190.8                     | 29.7                | 27.5             | 90.45                       | -173.8                 | 441.9           | 851.9                        | 800.3                         | 51.68                           | 16.484               |                    |          |
| 7,900.0                                                  | 7,185.0                     | 7,235.7                     | 7,190.8                     | 31.0                | 27.5             | 90.51                       | -173.8                 | 441.9           | 951.9                        | 900.3                         | 51.69                           | 18.416               |                    |          |

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                           |                |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|----------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 214H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Site Error:</b> | 0.0 usft       |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     |                     |                               |                                |                                  |                           |                |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| 0.0                                                             | 0.0                          | 4.5                          | 4.5                          | 0.0                           | 0.0                  | -0.21                 | 284.0               | -1.0                | 284.0                         |                                |                                  |                           |                |
| 100.0                                                           | 100.0                        | 104.5                        | 104.5                        | 0.3                           | 0.3                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 283.5                          | 0.52                             | 548.275                   |                |
| 200.0                                                           | 200.0                        | 204.5                        | 204.5                        | 0.6                           | 0.6                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 282.8                          | 1.23                             | 229.973                   |                |
| 300.0                                                           | 300.0                        | 304.5                        | 304.5                        | 1.0                           | 1.0                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 282.1                          | 1.95                             | 145.502                   |                |
| 400.0                                                           | 400.0                        | 404.5                        | 404.5                        | 1.3                           | 1.3                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 281.3                          | 2.67                             | 106.415                   |                |
| 500.0                                                           | 500.0                        | 504.5                        | 504.5                        | 1.7                           | 1.7                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 280.6                          | 3.39                             | 83.881                    |                |
| 600.0                                                           | 600.0                        | 604.5                        | 604.5                        | 2.0                           | 2.1                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 279.9                          | 4.10                             | 69.223                    |                |
| 700.0                                                           | 700.0                        | 704.5                        | 704.5                        | 2.4                           | 2.4                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 279.2                          | 4.82                             | 58.926                    |                |
| 800.0                                                           | 800.0                        | 804.5                        | 804.5                        | 2.8                           | 2.8                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 278.5                          | 5.54                             | 51.295                    |                |
| 900.0                                                           | 900.0                        | 904.5                        | 904.5                        | 3.1                           | 3.1                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 277.7                          | 6.25                             | 45.415                    |                |
| 1,000.0                                                         | 1,000.0                      | 1,004.5                      | 1,004.5                      | 3.5                           | 3.5                  | -0.21                 | 284.0               | -1.0                | 284.0                         | 277.0                          | 6.97                             | 40.744                    |                |
| 1,100.0                                                         | 1,100.0                      | 1,104.5                      | 1,104.5                      | 3.8                           | 3.9                  | -114.99               | 284.0               | -1.0                | 284.7                         | 277.1                          | 7.68                             | 37.097                    |                |
| 1,200.0                                                         | 1,199.8                      | 1,204.3                      | 1,204.3                      | 4.2                           | 4.2                  | -115.90               | 284.0               | -1.0                | 287.0                         | 278.6                          | 8.37                             | 34.279                    |                |
| 1,300.0                                                         | 1,299.5                      | 1,304.0                      | 1,304.0                      | 4.5                           | 4.6                  | -117.37               | 284.0               | -1.0                | 290.9                         | 281.8                          | 9.07                             | 32.056                    |                |
| 1,400.0                                                         | 1,398.7                      | 1,403.2                      | 1,403.2                      | 4.9                           | 4.9                  | -119.34               | 284.0               | -1.0                | 296.7                         | 286.9                          | 9.78                             | 30.326                    |                |
| 1,500.0                                                         | 1,497.7                      | 1,502.2                      | 1,502.2                      | 5.2                           | 5.3                  | -121.62               | 284.0               | -1.0                | 303.8                         | 293.3                          | 10.50                            | 28.935                    |                |
| 1,600.0                                                         | 1,596.8                      | 1,601.4                      | 1,601.4                      | 5.6                           | 5.6                  | -123.79               | 284.0               | -1.0                | 311.4                         | 300.2                          | 11.22                            | 27.753                    |                |
| 1,700.0                                                         | 1,695.8                      | 1,712.8                      | 1,712.7                      | 6.0                           | 6.0                  | -126.07               | 281.9               | -0.5                | 317.4                         | 305.5                          | 11.96                            | 26.540                    |                |
| 1,800.0                                                         | 1,794.8                      | 1,824.6                      | 1,824.4                      | 6.4                           | 6.4                  | -128.25               | 275.5               | 1.3                 | 320.0                         | 307.3                          | 12.68                            | 25.242                    |                |
| 1,900.0                                                         | 1,893.8                      | 1,936.5                      | 1,935.7                      | 6.8                           | 6.7                  | -130.39               | 265.0               | 4.2                 | 319.0                         | 305.6                          | 13.38                            | 23.839                    |                |
| 2,000.0                                                         | 1,992.9                      | 2,048.2                      | 2,046.3                      | 7.2                           | 7.1                  | -132.56               | 250.3               | 8.3                 | 314.5                         | 300.5                          | 14.07                            | 22.350                    |                |
| 2,100.0                                                         | 2,091.9                      | 2,159.3                      | 2,155.7                      | 7.6                           | 7.5                  | -134.85               | 231.6               | 13.5                | 306.6                         | 291.8                          | 14.75                            | 20.788                    |                |
| 2,200.0                                                         | 2,190.9                      | 2,269.5                      | 2,263.4                      | 8.0                           | 7.9                  | -137.34               | 209.0               | 19.7                | 295.2                         | 279.8                          | 15.40                            | 19.165                    |                |
| 2,300.0                                                         | 2,289.9                      | 2,378.4                      | 2,368.9                      | 8.4                           | 8.4                  | -140.15               | 182.7               | 27.0                | 280.6                         | 264.6                          | 16.04                            | 17.493                    |                |
| 2,400.0                                                         | 2,389.0                      | 2,485.9                      | 2,471.9                      | 8.8                           | 8.8                  | -143.43               | 153.0               | 35.2                | 263.0                         | 246.4                          | 16.67                            | 15.780                    |                |
| 2,500.0                                                         | 2,488.0                      | 2,584.1                      | 2,565.3                      | 9.2                           | 9.3                  | -147.00               | 123.8               | 43.3                | 244.0                         | 226.7                          | 17.38                            | 14.041                    |                |
| 2,600.0                                                         | 2,587.0                      | 2,681.1                      | 2,657.5                      | 9.6                           | 9.7                  | -151.09               | 94.9                | 51.3                | 226.1                         | 208.0                          | 18.13                            | 12.473                    |                |
| 2,700.0                                                         | 2,686.1                      | 2,778.0                      | 2,749.7                      | 10.0                          | 10.2                 | -155.83               | 66.1                | 59.3                | 209.5                         | 190.6                          | 18.90                            | 11.082                    |                |
| 2,800.0                                                         | 2,785.1                      | 2,874.9                      | 2,841.9                      | 10.4                          | 10.7                 | -161.31               | 37.2                | 67.3                | 194.5                         | 174.8                          | 19.72                            | 9.866                     |                |
| 2,900.0                                                         | 2,884.1                      | 2,971.9                      | 2,934.1                      | 10.8                          | 11.2                 | -167.60               | 8.3                 | 75.3                | 181.7                         | 161.1                          | 20.59                            | 8.823                     |                |
| 3,000.0                                                         | 2,983.1                      | 3,068.8                      | 3,026.3                      | 11.2                          | 11.7                 | -174.69               | -20.5               | 83.2                | 171.4                         | 149.9                          | 21.54                            | 7.958                     |                |
| 3,100.0                                                         | 3,082.2                      | 3,165.8                      | 3,118.5                      | 11.6                          | 12.2                 | -177.49               | -49.4               | 91.2                | 164.2                         | 141.7                          | 22.57                            | 7.275                     |                |
| 3,200.0                                                         | 3,181.2                      | 3,262.7                      | 3,210.6                      | 12.1                          | 12.7                 | -169.17               | -78.3               | 99.2                | 160.5                         | 136.8                          | 23.67                            | 6.780                     |                |
| 3,250.8                                                         | 3,231.5                      | 3,312.0                      | 3,257.5                      | 12.3                          | 13.0                 | -164.86               | -92.9               | 103.3               | 160.0                         | 135.8                          | 24.25                            | 6.599 CC                  |                |
| 3,300.0                                                         | 3,280.2                      | 3,359.7                      | 3,302.8                      | 12.5                          | 13.2                 | -160.67               | -107.2              | 107.2               | 160.5                         | 135.7                          | 24.81                            | 6.468 ES                  |                |
| 3,400.0                                                         | 3,379.2                      | 3,456.6                      | 3,395.0                      | 12.9                          | 13.8                 | -152.35               | -136.0              | 115.2               | 164.1                         | 138.2                          | 25.94                            | 6.329 SF                  |                |
| 3,500.0                                                         | 3,478.3                      | 3,553.5                      | 3,487.2                      | 13.3                          | 14.3                 | -144.52               | -164.9              | 123.2               | 171.3                         | 144.3                          | 27.02                            | 6.339                     |                |
| 3,600.0                                                         | 3,577.3                      | 3,650.5                      | 3,579.4                      | 13.7                          | 14.9                 | -137.41               | -193.8              | 131.2               | 181.5                         | 153.5                          | 28.05                            | 6.472                     |                |
| 3,700.0                                                         | 3,676.3                      | 3,747.4                      | 3,671.6                      | 14.1                          | 15.4                 | -131.11               | -222.6              | 139.2               | 194.3                         | 165.3                          | 29.01                            | 6.698                     |                |
| 3,800.0                                                         | 3,775.3                      | 3,844.4                      | 3,763.8                      | 14.5                          | 15.9                 | -125.62               | -251.5              | 147.2               | 209.2                         | 179.3                          | 29.92                            | 6.992                     |                |
| 3,900.0                                                         | 3,874.4                      | 3,941.3                      | 3,856.0                      | 15.0                          | 16.5                 | -120.87               | -280.4              | 155.2               | 225.8                         | 195.0                          | 30.80                            | 7.332                     |                |
| 4,000.0                                                         | 3,973.4                      | 4,038.2                      | 3,948.2                      | 15.4                          | 17.1                 | -116.77               | -309.2              | 163.2               | 243.7                         | 212.1                          | 31.64                            | 7.703                     |                |
| 4,014.3                                                         | 3,987.6                      | 4,052.1                      | 3,961.4                      | 15.4                          | 17.1                 | -116.23               | -313.4              | 164.3               | 246.4                         | 214.7                          | 31.76                            | 7.758                     |                |
| 4,100.0                                                         | 4,072.6                      | 4,135.1                      | 4,040.3                      | 15.8                          | 17.6                 | -113.28               | -338.1              | 171.1               | 262.3                         | 229.8                          | 32.45                            | 8.081                     |                |
| 4,200.0                                                         | 4,172.2                      | 4,231.6                      | 4,132.1                      | 16.2                          | 18.2                 | -109.71               | -366.8              | 179.1               | 280.6                         | 247.4                          | 33.20                            | 8.453                     |                |
| 4,300.0                                                         | 4,272.0                      | 4,327.7                      | 4,223.5                      | 16.5                          | 18.7                 | -106.02               | -395.5              | 187.0               | 299.2                         | 265.3                          | 33.87                            | 8.832                     |                |
| 4,400.0                                                         | 4,372.0                      | 4,423.2                      | 4,314.4                      | 16.9                          | 19.3                 | -102.25               | -423.9              | 194.9               | 318.4                         | 283.9                          | 34.47                            | 9.235                     |                |
| 4,414.3                                                         | 4,386.3                      | 4,436.9                      | 4,327.3                      | 16.9                          | 19.4                 | -143.82               | -428.0              | 196.0               | 321.2                         | 286.6                          | 34.55                            | 9.295                     |                |
| 4,500.0                                                         | 4,472.0                      | 4,518.3                      | 4,404.8                      | 17.2                          | 19.8                 | -147.24               | -452.2              | 202.7               | 338.7                         | 303.7                          | 35.01                            | 9.674                     |                |
| 4,600.0                                                         | 4,572.0                      | 4,613.4                      | 4,495.3                      | 17.5                          | 20.4                 | -150.81               | -480.6              | 210.6               | 360.6                         | 325.0                          | 35.55                            | 10.143                    |                |
| 4,700.0                                                         | 4,672.0                      | 4,708.5                      | 4,585.7                      | 17.8                          | 21.0                 | -153.99               | -508.9              | 218.4               | 383.7                         | 347.6                          | 36.09                            | 10.632                    |                |
| 4,800.0                                                         | 4,772.0                      | 4,803.6                      | 4,676.2                      | 18.1                          | 21.5                 | -156.81               | -537.2              | 226.3               | 407.8                         | 371.2                          | 36.64                            | 11.131                    |                |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



**PERMIAN****RESOURCES**

## Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 214H - OWB - PWP0 |                              |                              |                              |                         |                      |                              |                               |                     |                               |                                |                                  | <b>Offset Site Error:</b> | 0.0 usft       |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------|----------------------|------------------------------|-------------------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|----------------|
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                         |                      |                              |                               |                     |                               |                                |                                  | <b>Offset Well Error:</b> | 0.0 usft       |
| <b>Reference</b>                                                |                              | <b>Offset</b>                |                              | <b>Semi Major Axis</b>  |                      |                              | <b>Offset Wellbore Centre</b> |                     | <b>Distance</b>               |                                |                                  | <b>Rule Assigned:</b>     |                |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b> | <b>Offset (usft)</b> | <b>Highside Toolface (°)</b> | <b>+N/-S (usft)</b>           | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b>  | <b>Warning</b> |
| 4,900.0                                                         | 4,872.0                      | 4,898.8                      | 4,766.6                      | 18.5                    | 22.1                 | -159.33                      | -565.5                        | 234.1               | 432.8                         | 395.6                          | 37.20                            | 11.636                    |                |
| 5,000.0                                                         | 4,972.0                      | 4,993.9                      | 4,857.1                      | 18.8                    | 22.7                 | -161.57                      | -593.8                        | 241.9               | 458.5                         | 420.8                          | 37.77                            | 12.140                    |                |
| 5,100.0                                                         | 5,072.0                      | 5,089.0                      | 4,947.5                      | 19.1                    | 23.2                 | -163.58                      | -622.2                        | 249.8               | 484.9                         | 446.5                          | 38.36                            | 12.641                    |                |
| 5,200.0                                                         | 5,172.0                      | 5,184.1                      | 5,038.0                      | 19.4                    | 23.8                 | -165.39                      | -650.5                        | 257.6               | 511.7                         | 472.7                          | 38.95                            | 13.136                    |                |
| 5,300.0                                                         | 5,272.0                      | 5,279.2                      | 5,128.4                      | 19.8                    | 24.3                 | -167.02                      | -678.8                        | 265.5               | 539.0                         | 499.4                          | 39.56                            | 13.624                    |                |
| 5,400.0                                                         | 5,372.0                      | 5,374.3                      | 5,218.9                      | 20.1                    | 24.9                 | -168.49                      | -707.1                        | 273.3               | 566.6                         | 526.4                          | 40.18                            | 14.102                    |                |
| 5,500.0                                                         | 5,472.0                      | 5,469.4                      | 5,309.3                      | 20.4                    | 25.5                 | -169.83                      | -735.5                        | 281.1               | 594.6                         | 553.8                          | 40.81                            | 14.570                    |                |
| 5,600.0                                                         | 5,572.0                      | 5,564.5                      | 5,399.8                      | 20.8                    | 26.1                 | -171.05                      | -763.8                        | 289.0               | 622.8                         | 581.4                          | 41.44                            | 15.028                    |                |
| 5,700.0                                                         | 5,672.0                      | 5,659.6                      | 5,490.2                      | 21.1                    | 26.6                 | -172.16                      | -792.1                        | 296.8               | 651.3                         | 609.2                          | 42.09                            | 15.475                    |                |
| 5,800.0                                                         | 5,772.0                      | 5,754.7                      | 5,580.7                      | 21.4                    | 27.2                 | -173.19                      | -820.4                        | 304.7               | 680.0                         | 637.3                          | 42.74                            | 15.910                    |                |
| 5,900.0                                                         | 5,872.0                      | 5,849.8                      | 5,671.1                      | 21.7                    | 27.8                 | -174.13                      | -848.8                        | 312.5               | 708.9                         | 665.5                          | 43.40                            | 16.335                    |                |
| 6,000.0                                                         | 5,972.0                      | 5,944.9                      | 5,761.6                      | 22.1                    | 28.3                 | -175.00                      | -877.1                        | 320.3               | 737.9                         | 693.9                          | 44.06                            | 16.748                    |                |
| 6,100.0                                                         | 6,072.0                      | 6,040.0                      | 5,852.0                      | 22.4                    | 28.9                 | -175.80                      | -905.4                        | 328.2               | 767.1                         | 722.4                          | 44.73                            | 17.150                    |                |
| 6,200.0                                                         | 6,172.0                      | 6,135.1                      | 5,942.5                      | 22.7                    | 29.5                 | -176.54                      | -933.7                        | 336.0               | 796.4                         | 751.0                          | 45.40                            | 17.541                    |                |
| 6,300.0                                                         | 6,272.0                      | 6,230.2                      | 6,032.9                      | 23.1                    | 30.1                 | -177.24                      | -962.1                        | 343.9               | 825.9                         | 779.8                          | 46.08                            | 17.922                    |                |
| 6,400.0                                                         | 6,372.0                      | 6,325.3                      | 6,123.4                      | 23.4                    | 30.6                 | -177.88                      | -990.4                        | 351.7               | 855.4                         | 808.6                          | 46.76                            | 18.292                    |                |
| 6,500.0                                                         | 6,472.0                      | 6,420.4                      | 6,213.8                      | 23.8                    | 31.2                 | -178.48                      | -1,018.7                      | 359.5               | 885.0                         | 837.6                          | 47.45                            | 18.652                    |                |
| 6,600.0                                                         | 6,572.0                      | 6,515.5                      | 6,304.3                      | 24.1                    | 31.8                 | -179.05                      | -1,047.0                      | 367.4               | 914.7                         | 866.6                          | 48.14                            | 19.002                    |                |
| 6,700.0                                                         | 6,672.0                      | 6,610.7                      | 6,394.7                      | 24.4                    | 32.4                 | -179.58                      | -1,075.4                      | 375.2               | 944.5                         | 895.7                          | 48.83                            | 19.343                    |                |
| 6,735.5                                                         | 6,707.5                      | 6,644.5                      | 6,426.9                      | 24.5                    | 32.6                 | -179.76                      | -1,085.4                      | 378.0               | 955.1                         | 906.1                          | 49.08                            | 19.462                    |                |
| 6,750.0                                                         | 6,722.0                      | 6,658.2                      | 6,439.9                      | 24.6                    | 32.6                 | -89.49                       | -1,089.5                      | 379.1               | 959.5                         | 910.3                          | 49.18                            | 19.511                    |                |
| 6,775.0                                                         | 6,746.9                      | 6,681.8                      | 6,462.4                      | 24.7                    | 32.8                 | -88.76                       | -1,096.6                      | 381.1               | 966.9                         | 917.6                          | 49.33                            | 19.600                    |                |
| 6,800.0                                                         | 6,771.8                      | 6,705.2                      | 6,484.7                      | 24.7                    | 32.9                 | -88.10                       | -1,103.5                      | 383.0               | 974.4                         | 924.9                          | 49.48                            | 19.692                    |                |
| 6,825.0                                                         | 6,796.4                      | 6,728.3                      | 6,506.7                      | 24.8                    | 33.1                 | -87.52                       | -1,110.4                      | 384.9               | 981.8                         | 932.2                          | 49.62                            | 19.787                    |                |
| 6,850.0                                                         | 6,820.9                      | 6,751.1                      | 6,528.3                      | 24.9                    | 33.2                 | -87.00                       | -1,117.2                      | 386.8               | 989.2                         | 939.5                          | 49.75                            | 19.886                    |                |
| 6,875.0                                                         | 6,845.0                      | 6,773.5                      | 6,549.6                      | 24.9                    | 33.3                 | -86.54                       | -1,123.9                      | 388.6               | 996.7                         | 946.8                          | 49.86                            | 19.988                    |                |

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                           |          |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|---------------------------|----------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 423H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Site Error:</b> | 0.0 usft |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  | <b>Offset Well Error:</b> | 0.0 usft |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     | <b>Warning</b>      |                               |                                |                                  |                           |          |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b>  |          |
| 0.0                                                             | 0.0                          | 9.0                          | 9.0                          | 0.0                           | 0.0                  | -0.21                 | 383.0               | -1.4                | 383.0                         |                                |                                  |                           |          |
| 100.0                                                           | 100.0                        | 109.0                        | 109.0                        | 0.3                           | 0.3                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 382.5                          | 0.53                             | 717.068                   |          |
| 200.0                                                           | 200.0                        | 209.0                        | 209.0                        | 0.6                           | 0.6                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 381.8                          | 1.25                             | 306.141                   |          |
| 300.0                                                           | 300.0                        | 309.0                        | 309.0                        | 1.0                           | 1.0                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 381.0                          | 1.97                             | 194.614                   |          |
| 400.0                                                           | 400.0                        | 409.0                        | 409.0                        | 1.3                           | 1.4                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 380.3                          | 2.68                             | 142.648                   |          |
| 500.0                                                           | 500.0                        | 509.0                        | 509.0                        | 1.7                           | 1.7                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 379.6                          | 3.40                             | 112.585                   |          |
| 600.0                                                           | 600.0                        | 609.0                        | 609.0                        | 2.0                           | 2.1                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 378.9                          | 4.12                             | 92.988                    |          |
| 700.0                                                           | 700.0                        | 709.0                        | 709.0                        | 2.4                           | 2.4                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 378.2                          | 4.84                             | 79.202                    |          |
| 800.0                                                           | 800.0                        | 809.0                        | 809.0                        | 2.8                           | 2.8                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 377.4                          | 5.55                             | 68.976                    |          |
| 900.0                                                           | 900.0                        | 909.0                        | 909.0                        | 3.1                           | 3.2                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 376.7                          | 6.27                             | 61.088                    |          |
| 1,000.0                                                         | 1,000.0                      | 1,010.3                      | 1,010.3                      | 3.5                           | 3.5                  | -0.21                 | 383.0               | -1.4                | 383.0                         | 376.0                          | 6.99                             | 54.795                    |          |
| 1,100.0                                                         | 1,100.0                      | 1,124.6                      | 1,124.6                      | 3.8                           | 3.9                  | -114.85               | 380.5               | -0.5                | 381.5                         | 373.8                          | 7.72                             | 49.425                    |          |
| 1,200.0                                                         | 1,199.8                      | 1,238.7                      | 1,238.5                      | 4.2                           | 4.3                  | -115.36               | 373.7               | 2.0                 | 377.8                         | 369.3                          | 8.42                             | 44.860                    |          |
| 1,300.0                                                         | 1,299.5                      | 1,352.5                      | 1,351.6                      | 4.5                           | 4.7                  | -116.25               | 362.7               | 6.1                 | 371.8                         | 362.7                          | 9.12                             | 40.753                    |          |
| 1,400.0                                                         | 1,398.7                      | 1,465.8                      | 1,463.7                      | 4.9                           | 5.1                  | -117.54               | 347.6               | 11.7                | 363.7                         | 353.9                          | 9.83                             | 37.017                    |          |
| 1,500.0                                                         | 1,497.7                      | 1,575.0                      | 1,571.2                      | 5.2                           | 5.5                  | -118.77               | 329.2               | 18.5                | 353.0                         | 342.4                          | 10.53                            | 33.524                    |          |
| 1,600.0                                                         | 1,596.8                      | 1,674.1                      | 1,668.5                      | 5.6                           | 5.9                  | -119.92               | 311.4               | 25.1                | 341.3                         | 330.1                          | 11.24                            | 30.363                    |          |
| 1,700.0                                                         | 1,695.8                      | 1,773.2                      | 1,765.7                      | 6.0                           | 6.3                  | -121.14               | 293.7               | 31.6                | 329.8                         | 317.8                          | 11.96                            | 27.569                    |          |
| 1,800.0                                                         | 1,794.8                      | 1,872.3                      | 1,863.0                      | 6.4                           | 6.7                  | -122.45               | 276.0               | 38.2                | 318.4                         | 305.7                          | 12.69                            | 25.095                    |          |
| 1,900.0                                                         | 1,893.8                      | 1,971.4                      | 1,960.2                      | 6.8                           | 7.1                  | -123.86               | 258.2               | 44.7                | 307.2                         | 293.8                          | 13.42                            | 22.896                    |          |
| 2,000.0                                                         | 1,992.9                      | 2,070.4                      | 2,057.5                      | 7.2                           | 7.5                  | -125.37               | 240.5               | 51.3                | 296.3                         | 282.1                          | 14.15                            | 20.935                    |          |
| 2,100.0                                                         | 2,091.9                      | 2,169.5                      | 2,154.8                      | 7.6                           | 7.9                  | -127.00               | 222.8               | 57.9                | 285.5                         | 270.6                          | 14.89                            | 19.179                    |          |
| 2,200.0                                                         | 2,190.9                      | 2,268.6                      | 2,252.0                      | 8.0                           | 8.4                  | -128.75               | 205.0               | 64.4                | 275.0                         | 259.4                          | 15.62                            | 17.604                    |          |
| 2,300.0                                                         | 2,289.9                      | 2,367.7                      | 2,349.3                      | 8.4                           | 8.8                  | -130.63               | 187.3               | 71.0                | 264.7                         | 248.4                          | 16.36                            | 16.187                    |          |
| 2,400.0                                                         | 2,389.0                      | 2,466.7                      | 2,446.5                      | 8.8                           | 9.2                  | -132.67               | 169.6               | 77.5                | 254.8                         | 237.7                          | 17.09                            | 14.910                    |          |
| 2,500.0                                                         | 2,488.0                      | 2,565.8                      | 2,543.8                      | 9.2                           | 9.7                  | -134.86               | 151.8               | 84.1                | 245.2                         | 227.4                          | 17.83                            | 13.757                    |          |
| 2,600.0                                                         | 2,587.0                      | 2,664.9                      | 2,641.0                      | 9.6                           | 10.1                 | -137.23               | 134.1               | 90.7                | 236.0                         | 217.5                          | 18.56                            | 12.717                    |          |
| 2,700.0                                                         | 2,686.1                      | 2,764.0                      | 2,738.3                      | 10.0                          | 10.6                 | -139.79               | 116.4               | 97.2                | 227.3                         | 208.0                          | 19.30                            | 11.778                    |          |
| 2,800.0                                                         | 2,785.1                      | 2,863.1                      | 2,835.6                      | 10.4                          | 11.0                 | -142.54               | 98.7                | 103.8               | 219.0                         | 199.0                          | 20.04                            | 10.930                    |          |
| 2,900.0                                                         | 2,884.1                      | 2,962.1                      | 2,932.8                      | 10.8                          | 11.5                 | -145.49               | 80.9                | 110.3               | 211.3                         | 190.5                          | 20.78                            | 10.167                    |          |
| 3,000.0                                                         | 2,983.1                      | 3,061.2                      | 3,030.1                      | 11.2                          | 11.9                 | -148.66               | 63.2                | 116.9               | 204.2                         | 182.6                          | 21.53                            | 9.481                     |          |
| 3,100.0                                                         | 3,082.2                      | 3,160.3                      | 3,127.3                      | 11.6                          | 12.4                 | -152.04               | 45.5                | 123.4               | 197.7                         | 175.4                          | 22.30                            | 8.868                     |          |
| 3,200.0                                                         | 3,181.2                      | 3,259.4                      | 3,224.6                      | 12.1                          | 12.8                 | -155.64               | 27.7                | 130.0               | 192.0                         | 168.9                          | 23.07                            | 8.322                     |          |
| 3,300.0                                                         | 3,280.2                      | 3,358.4                      | 3,321.8                      | 12.5                          | 13.3                 | -159.43               | 10.0                | 136.6               | 187.1                         | 163.3                          | 23.87                            | 7.839                     |          |
| 3,400.0                                                         | 3,379.2                      | 3,457.5                      | 3,419.1                      | 12.9                          | 13.7                 | -163.41               | -7.7                | 143.1               | 183.1                         | 158.4                          | 24.69                            | 7.417                     |          |
| 3,500.0                                                         | 3,478.3                      | 3,556.6                      | 3,516.4                      | 13.3                          | 14.2                 | -167.54               | -25.5               | 149.7               | 180.0                         | 154.5                          | 25.53                            | 7.051                     |          |
| 3,600.0                                                         | 3,577.3                      | 3,655.7                      | 3,613.6                      | 13.7                          | 14.7                 | -171.78               | -43.2               | 156.2               | 177.9                         | 151.5                          | 26.41                            | 6.738                     |          |
| 3,700.0                                                         | 3,676.3                      | 3,754.8                      | 3,710.9                      | 14.1                          | 15.1                 | -176.11               | -60.9               | 162.8               | 176.8                         | 149.5                          | 27.30                            | 6.476                     |          |
| 3,755.2                                                         | 3,730.9                      | 3,809.4                      | 3,764.5                      | 14.4                          | 15.4                 | -178.51               | -70.7               | 166.4               | 176.7                         | 148.9                          | 27.81                            | 6.352                     |          |
| 3,800.0                                                         | 3,775.3                      | 3,853.8                      | 3,808.1                      | 14.5                          | 15.6                 | -179.54               | -78.6               | 169.4               | 176.8                         | 148.6                          | 28.23                            | 6.262                     |          |
| 3,900.0                                                         | 3,874.4                      | 3,952.9                      | 3,905.4                      | 15.0                          | 16.0                 | -175.21               | -96.4               | 175.9               | 177.8                         | 148.6                          | 29.18                            | 6.092                     |          |
| 4,000.0                                                         | 3,973.4                      | 4,052.0                      | 4,002.6                      | 15.4                          | 16.5                 | -170.95               | -114.1              | 182.5               | 179.8                         | 149.6                          | 30.14                            | 5.963                     |          |
| 4,014.3                                                         | 3,987.6                      | 4,066.2                      | 4,016.6                      | 15.4                          | 16.6                 | -170.35               | -116.7              | 183.4               | 180.1                         | 149.8                          | 30.28                            | 5.948                     |          |
| 4,100.0                                                         | 4,072.6                      | 4,151.1                      | 4,099.9                      | 15.8                          | 17.0                 | -166.73               | -131.8              | 189.0               | 181.5                         | 150.4                          | 31.12                            | 5.831                     |          |
| 4,200.0                                                         | 4,172.2                      | 4,250.0                      | 4,197.1                      | 16.2                          | 17.4                 | -162.27               | -149.6              | 195.6               | 180.9                         | 148.8                          | 32.12                            | 5.633                     |          |
| 4,300.0                                                         | 4,272.0                      | 4,348.8                      | 4,294.0                      | 16.5                          | 17.9                 | -157.40               | -167.2              | 202.1               | 178.3                         | 145.1                          | 33.13                            | 5.380                     |          |
| 4,400.0                                                         | 4,372.0                      | 4,447.2                      | 4,390.6                      | 16.9                          | 18.3                 | -151.89               | -184.8              | 208.6               | 173.8                         | 139.7                          | 34.15                            | 5.090                     |          |
| 4,414.3                                                         | 4,386.3                      | 4,461.3                      | 4,404.4                      | 16.9                          | 18.4                 | -94.49                | -187.4              | 209.6               | 173.1                         | 138.8                          | 34.30                            | 5.047                     |          |
| 4,500.0                                                         | 4,472.0                      | 4,545.4                      | 4,487.0                      | 17.2                          | 18.8                 | -99.72                | -202.4              | 215.1               | 169.3                         | 134.1                          | 35.15                            | 4.816                     |          |
| 4,600.0                                                         | 4,572.0                      | 4,643.6                      | 4,583.4                      | 17.5                          | 19.3                 | -106.06               | -220.0              | 221.6               | 166.8                         | 130.7                          | 36.11                            | 4.618                     |          |
| 4,665.8                                                         | 4,637.8                      | 4,708.2                      | 4,646.8                      | 17.7                          | 19.6                 | -110.30               | -231.5              | 225.9               | 166.3                         | 129.6                          | 36.72                            | 4.529 CC                  |          |
| 4,700.0                                                         | 4,672.0                      | 4,741.7                      | 4,679.7                      | 17.8                          | 19.7                 | -112.51               | -237.5              | 228.1               | 166.4                         | 129.4                          | 37.02                            | 4.496 ES                  |          |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

**PERMIAN****RESOURCES****Anticollision Report**

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                         |                      |                     |                     |                     |                               |                                |                                  |                          |                                    |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------|----------------------|---------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|--------------------------|------------------------------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 423H - OWB - PWP0 |                              |                              |                              |                         |                      |                     |                     |                     |                               |                                |                                  |                          | <b>Offset Site Error:</b> 0.0 usft |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                         |                      |                     |                     |                     |                               |                                |                                  |                          | <b>Offset Well Error:</b> 0.0 usft |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Rule Assigned:</b>   |                      |                     |                     | <b>Warning</b>      |                               |                                |                                  |                          |                                    |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b> | <b>Offset (usft)</b> | <b>Toolface (°)</b> | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b> |                                    |
| 4,800.0                                                         | 4,772.0                      | 4,839.9                      | 4,776.1                      | 18.1                    | 20.2                 | -118.89             | -255.1              | 234.6               | 168.3                         | 130.4                          | 37.85                            | 4.446 SF                 |                                    |
| 4,900.0                                                         | 4,872.0                      | 4,938.1                      | 4,872.4                      | 18.5                    | 20.6                 | -125.08             | -272.7              | 241.1               | 172.2                         | 133.6                          | 38.60                            | 4.461                    |                                    |
| 5,000.0                                                         | 4,972.0                      | 5,036.2                      | 4,968.8                      | 18.8                    | 21.1                 | -130.93             | -290.2              | 247.6               | 178.1                         | 138.8                          | 39.28                            | 4.535                    |                                    |
| 5,100.0                                                         | 5,072.0                      | 5,134.4                      | 5,065.2                      | 19.1                    | 21.6                 | -136.36             | -307.8              | 254.1               | 185.8                         | 145.9                          | 39.90                            | 4.657                    |                                    |
| 5,200.0                                                         | 5,172.0                      | 5,232.5                      | 5,161.5                      | 19.4                    | 22.0                 | -141.33             | -325.4              | 260.6               | 195.1                         | 154.6                          | 40.48                            | 4.819                    |                                    |
| 5,300.0                                                         | 5,272.0                      | 5,330.7                      | 5,257.9                      | 19.8                    | 22.5                 | -145.84             | -342.9              | 267.1               | 205.7                         | 164.6                          | 41.03                            | 5.012                    |                                    |
| 5,400.0                                                         | 5,372.0                      | 5,428.9                      | 5,354.2                      | 20.1                    | 22.9                 | -149.89             | -360.5              | 273.6               | 217.4                         | 175.9                          | 41.58                            | 5.230                    |                                    |
| 5,500.0                                                         | 5,472.0                      | 5,527.0                      | 5,450.6                      | 20.4                    | 23.4                 | -153.51             | -378.1              | 280.1               | 230.2                         | 188.1                          | 42.12                            | 5.466                    |                                    |
| 5,600.0                                                         | 5,572.0                      | 5,625.2                      | 5,546.9                      | 20.8                    | 23.9                 | -156.76             | -395.6              | 286.6               | 243.8                         | 201.1                          | 42.66                            | 5.714                    |                                    |
| 5,700.0                                                         | 5,672.0                      | 5,723.4                      | 5,643.3                      | 21.1                    | 24.3                 | -159.65             | -413.2              | 293.1               | 258.1                         | 214.8                          | 43.22                            | 5.971                    |                                    |
| 5,800.0                                                         | 5,772.0                      | 5,821.5                      | 5,739.7                      | 21.4                    | 24.8                 | -162.25             | -430.8              | 299.6               | 272.9                         | 229.1                          | 43.79                            | 6.233                    |                                    |
| 5,900.0                                                         | 5,872.0                      | 5,919.7                      | 5,836.0                      | 21.7                    | 25.2                 | -164.57             | -448.3              | 306.1               | 288.3                         | 243.9                          | 44.37                            | 6.498                    |                                    |
| 6,000.0                                                         | 5,972.0                      | 6,017.8                      | 5,932.4                      | 22.1                    | 25.7                 | -166.66             | -465.9              | 312.6               | 304.1                         | 259.1                          | 44.96                            | 6.764                    |                                    |
| 6,100.0                                                         | 6,072.0                      | 6,116.0                      | 6,028.7                      | 22.4                    | 26.2                 | -168.54             | -483.5              | 319.1               | 320.2                         | 274.7                          | 45.56                            | 7.029                    |                                    |
| 6,200.0                                                         | 6,172.0                      | 6,214.2                      | 6,125.1                      | 22.7                    | 26.6                 | -170.24             | -501.0              | 325.6               | 336.7                         | 290.5                          | 46.17                            | 7.292                    |                                    |
| 6,300.0                                                         | 6,272.0                      | 6,312.3                      | 6,221.5                      | 23.1                    | 27.1                 | -171.78             | -518.6              | 332.1               | 353.4                         | 306.6                          | 46.79                            | 7.552                    |                                    |
| 6,400.0                                                         | 6,372.0                      | 6,410.5                      | 6,317.8                      | 23.4                    | 27.5                 | -173.19             | -536.2              | 338.6               | 370.3                         | 322.9                          | 47.42                            | 7.809                    |                                    |
| 6,500.0                                                         | 6,472.0                      | 6,508.7                      | 6,414.2                      | 23.8                    | 28.0                 | -174.47             | -553.7              | 345.1               | 387.5                         | 339.4                          | 48.06                            | 8.062                    |                                    |
| 6,600.0                                                         | 6,572.0                      | 6,606.8                      | 6,510.5                      | 24.1                    | 28.5                 | -175.64             | -571.3              | 351.6               | 404.8                         | 356.1                          | 48.71                            | 8.310                    |                                    |
| 6,700.0                                                         | 6,672.0                      | 6,705.0                      | 6,606.9                      | 24.4                    | 28.9                 | -176.72             | -588.9              | 358.1               | 422.3                         | 372.9                          | 49.36                            | 8.554                    |                                    |
| 6,735.5                                                         | 6,707.5                      | 6,739.9                      | 6,641.1                      | 24.5                    | 29.1                 | -177.08             | -595.1              | 360.4               | 428.5                         | 378.9                          | 49.60                            | 8.640                    |                                    |
| 6,750.0                                                         | 6,722.0                      | 6,754.0                      | 6,655.1                      | 24.6                    | 29.2                 | -87.14              | -597.7              | 361.4               | 431.0                         | 381.4                          | 49.69                            | 8.675                    |                                    |
| 6,775.0                                                         | 6,746.9                      | 6,778.5                      | 6,679.0                      | 24.7                    | 29.3                 | -87.04              | -602.0              | 363.0               | 435.4                         | 385.6                          | 49.83                            | 8.737                    |                                    |
| 6,800.0                                                         | 6,771.8                      | 6,802.7                      | 6,702.8                      | 24.7                    | 29.4                 | -87.10              | -606.4              | 364.6               | 439.7                         | 389.7                          | 49.96                            | 8.801                    |                                    |
| 6,825.0                                                         | 6,796.4                      | 6,826.6                      | 6,726.3                      | 24.8                    | 29.5                 | -87.31              | -610.6              | 366.2               | 444.0                         | 393.9                          | 50.07                            | 8.867                    |                                    |
| 6,850.0                                                         | 6,820.9                      | 6,850.2                      | 6,749.5                      | 24.9                    | 29.6                 | -87.64              | -614.9              | 367.7               | 448.3                         | 398.2                          | 50.17                            | 8.936                    |                                    |
| 6,875.0                                                         | 6,845.0                      | 6,873.5                      | 6,772.3                      | 24.9                    | 29.7                 | -88.09              | -619.0              | 369.3               | 452.8                         | 402.5                          | 50.26                            | 9.008                    |                                    |
| 6,900.0                                                         | 6,868.7                      | 6,896.3                      | 6,794.7                      | 25.0                    | 29.8                 | -88.63              | -623.1              | 370.8               | 457.3                         | 406.9                          | 50.34                            | 9.084                    |                                    |
| 6,925.0                                                         | 6,892.0                      | 6,918.5                      | 6,816.5                      | 25.1                    | 29.9                 | -89.25              | -627.1              | 372.3               | 462.0                         | 411.6                          | 50.41                            | 9.165                    |                                    |
| 6,950.0                                                         | 6,914.8                      | 6,940.2                      | 6,837.8                      | 25.1                    | 30.0                 | -89.91              | -631.0              | 373.7               | 467.0                         | 416.5                          | 50.47                            | 9.252                    |                                    |
| 6,975.0                                                         | 6,937.0                      | 6,961.3                      | 6,858.5                      | 25.2                    | 30.1                 | -90.60              | -634.7              | 375.1               | 472.2                         | 421.7                          | 50.53                            | 9.346                    |                                    |
| 7,000.0                                                         | 6,958.6                      | 6,981.6                      | 6,878.5                      | 25.2                    | 30.2                 | -91.29              | -638.4              | 376.4               | 477.8                         | 427.3                          | 50.58                            | 9.447                    |                                    |
| 7,025.0                                                         | 6,979.6                      | 7,001.2                      | 6,897.7                      | 25.3                    | 30.3                 | -91.96              | -641.9              | 377.7               | 483.9                         | 433.2                          | 50.63                            | 9.556                    |                                    |
| 7,050.0                                                         | 6,999.7                      | 7,020.0                      | 6,916.2                      | 25.3                    | 30.4                 | -92.58              | -645.3              | 379.0               | 490.4                         | 439.7                          | 50.69                            | 9.675                    |                                    |
| 7,075.0                                                         | 7,019.1                      | 7,038.0                      | 6,933.8                      | 25.3                    | 30.5                 | -93.14              | -648.5              | 380.2               | 497.5                         | 446.8                          | 50.75                            | 9.803                    |                                    |
| 7,100.0                                                         | 7,037.6                      | 7,055.0                      | 6,950.5                      | 25.4                    | 30.6                 | -93.60              | -651.5              | 381.3               | 505.2                         | 454.4                          | 50.82                            | 9.941                    |                                    |
| 7,125.0                                                         | 7,055.2                      | 7,071.1                      | 6,966.3                      | 25.4                    | 30.7                 | -93.94              | -654.4              | 382.4               | 513.5                         | 462.6                          | 50.89                            | 10.090                   |                                    |
| 7,150.0                                                         | 7,071.8                      | 7,086.2                      | 6,981.1                      | 25.5                    | 30.7                 | -94.15              | -657.1              | 383.4               | 522.5                         | 471.6                          | 50.98                            | 10.250                   |                                    |
| 7,175.0                                                         | 7,087.5                      | 7,100.3                      | 6,994.9                      | 25.5                    | 30.8                 | -94.20              | -659.6              | 384.3               | 532.2                         | 481.2                          | 51.08                            | 10.421                   |                                    |
| 7,200.0                                                         | 7,102.1                      | 7,113.3                      | 7,007.7                      | 25.6                    | 30.9                 | -94.07              | -661.9              | 385.1               | 542.7                         | 491.5                          | 51.18                            | 10.603                   |                                    |
| 7,225.0                                                         | 7,115.6                      | 7,125.2                      | 7,019.4                      | 25.6                    | 30.9                 | -93.75              | -664.1              | 385.9               | 553.9                         | 502.6                          | 51.31                            | 10.796                   |                                    |
| 7,250.0                                                         | 7,128.0                      | 7,135.9                      | 7,029.9                      | 25.7                    | 31.0                 | -93.22              | -666.0              | 386.6               | 565.8                         | 514.3                          | 51.44                            | 11.000                   |                                    |
| 7,275.0                                                         | 7,139.3                      | 7,145.4                      | 7,039.3                      | 25.8                    | 31.0                 | -92.46              | -667.7              | 387.3               | 578.4                         | 526.8                          | 51.58                            | 11.214                   |                                    |
| 7,300.0                                                         | 7,149.4                      | 7,153.8                      | 7,047.5                      | 25.9                    | 31.0                 | -91.46              | -669.2              | 387.8               | 591.7                         | 540.0                          | 51.73                            | 11.440                   |                                    |
| 7,325.0                                                         | 7,158.2                      | 7,160.9                      | 7,054.5                      | 26.0                    | 31.1                 | -90.21              | -670.5              | 388.3               | 605.7                         | 553.8                          | 51.88                            | 11.675                   |                                    |
| 7,350.0                                                         | 7,165.9                      | 7,166.8                      | 7,060.3                      | 26.1                    | 31.1                 | -88.69              | -671.5              | 388.7               | 620.4                         | 568.3                          | 52.05                            | 11.919                   |                                    |
| 7,375.0                                                         | 7,172.2                      | 7,171.5                      | 7,064.8                      | 26.2                    | 31.1                 | -86.92              | -672.4              | 389.0               | 635.6                         | 583.3                          | 52.21                            | 12.173                   |                                    |
| 7,400.0                                                         | 7,177.3                      | 7,174.9                      | 7,068.1                      | 26.3                    | 31.1                 | -84.87              | -673.0              | 389.2               | 651.3                         | 598.9                          | 52.37                            | 12.435                   |                                    |
| 7,425.0                                                         | 7,181.1                      | 7,176.9                      | 7,070.2                      | 26.4                    | 31.2                 | -82.58              | -673.3              | 389.4               | 667.5                         | 614.9                          | 52.54                            | 12.704                   |                                    |
| 7,450.0                                                         | 7,183.6                      | 7,177.7                      | 7,071.0                      | 26.6                    | 31.2                 | -80.03              | -673.5              | 389.4               | 684.1                         | 631.4                          | 52.70                            | 12.980                   |                                    |
| 7,475.0                                                         | 7,184.8                      | 7,177.3                      | 7,070.5                      | 26.7                    | 31.2                 | -77.27              | -673.4              | 389.4               | 701.0                         | 648.1                          | 52.86                            | 13.262                   |                                    |
| 7,485.5                                                         | 7,185.0                      | 7,176.7                      | 7,069.9                      | 26.8                    | 31.2                 | -76.05              | -673.3              | 389.3               | 708.2                         | 655.3                          | 52.92                            | 13.383                   |                                    |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   |                    |          |
|----------------------------------------------------------|----------------|----------------|----------------|-----------------|--------|-------------------|------------------------|--------|-----------------|------------------|--------------------|-------------------|--------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 423H - OWB - PWP0 |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Site Error: | 0.0 usft |
| Survey Program: 0-MWD                                    |                |                |                |                 |        |                   |                        |        |                 |                  |                    |                   | Offset Well Error: | 0.0 usft |
| Reference                                                |                | Offset         |                | Semi Major Axis |        |                   | Offset Wellbore Centre |        | Rule Assigned:  |                  |                    |                   |                    |          |
| Measured Depth                                           | Vertical Depth | Measured Depth | Vertical Depth | Reference       | Offset | Highside Toolface | +N/-S                  | +E/-W  | Between Centres | Between Ellipses | Minimum Separation | Separation Factor | Warning            |          |
| (usft)                                                   | (usft)         | (usft)         | (usft)         | (usft)          | (usft) | (°)               | (usft)                 | (usft) | (usft)          | (usft)           | (usft)             |                   |                    |          |
| 7,500.0                                                  | 7,185.0        | 7,175.7        | 7,069.0        | 26.9            | 31.1   | -75.94            | -673.1                 | 389.3  | 718.2           | 665.2            | 53.01              | 13.549            |                    |          |
| 7,600.0                                                  | 7,185.0        | 7,169.0        | 7,062.4        | 27.7            | 31.1   | -75.20            | -671.9                 | 388.8  | 791.2           | 737.6            | 53.60              | 14.760            |                    |          |
| 7,700.0                                                  | 7,185.0        | 7,162.3        | 7,055.9        | 28.6            | 31.1   | -74.47            | -670.7                 | 388.4  | 869.5           | 815.4            | 54.15              | 16.058            |                    |          |
| 7,800.0                                                  | 7,185.0        | 7,155.7        | 7,049.3        | 29.7            | 31.1   | -73.73            | -669.5                 | 388.0  | 951.9           | 897.2            | 54.62              | 17.425            |                    |          |

**PERMIAN****RESOURCES**

## Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

|                                                                 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          |                                    |
|-----------------------------------------------------------------|------------------------------|------------------------------|------------------------------|-------------------------------|----------------------|-----------------------|---------------------|---------------------|-------------------------------|--------------------------------|----------------------------------|--------------------------|------------------------------------|
| <b>Offset Design:</b> BAKED ZITI - BAKED ZITI 424H - OWB - PWP0 |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          | <b>Offset Site Error:</b> 0.0 usft |
| <b>Survey Program:</b> 0-MWD                                    |                              |                              |                              |                               |                      |                       |                     |                     |                               |                                |                                  |                          | <b>Offset Well Error:</b> 0.0 usft |
| <b>Reference</b>                                                | <b>Offset</b>                | <b>Semi Major Axis</b>       | <b>Highside</b>              | <b>Offset Wellbore Centre</b> | <b>Distance</b>      | <b>Rule Assigned:</b> |                     |                     |                               |                                |                                  |                          |                                    |
| <b>Measured Depth (usft)</b>                                    | <b>Vertical Depth (usft)</b> | <b>Measured Depth (usft)</b> | <b>Vertical Depth (usft)</b> | <b>Reference (usft)</b>       | <b>Offset (usft)</b> | <b>Toolface (°)</b>   | <b>+N/-S (usft)</b> | <b>+E/-W (usft)</b> | <b>Between Centres (usft)</b> | <b>Between Ellipses (usft)</b> | <b>Minimum Separation (usft)</b> | <b>Separation Factor</b> | <b>Warning</b>                     |
| 0.0                                                             | 0.0                          | 7.4                          | 7.4                          | 0.0                           | 0.0                  | -0.21                 | 350.0               | -1.3                | 350.0                         |                                |                                  |                          |                                    |
| 100.0                                                           | 100.0                        | 107.4                        | 107.4                        | 0.3                           | 0.3                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 349.5                          | 0.53                             | 662.397                  |                                    |
| 200.0                                                           | 200.0                        | 207.4                        | 207.4                        | 0.6                           | 0.6                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 348.8                          | 1.25                             | 281.052                  |                                    |
| 300.0                                                           | 300.0                        | 307.4                        | 307.4                        | 1.0                           | 1.0                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 348.0                          | 1.96                             | 178.366                  |                                    |
| 400.0                                                           | 400.0                        | 407.4                        | 407.4                        | 1.3                           | 1.4                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 347.3                          | 2.68                             | 130.636                  |                                    |
| 500.0                                                           | 500.0                        | 507.4                        | 507.4                        | 1.7                           | 1.7                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 346.6                          | 3.40                             | 103.058                  |                                    |
| 600.0                                                           | 600.0                        | 607.4                        | 607.4                        | 2.0                           | 2.1                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 345.9                          | 4.11                             | 85.094                   |                                    |
| 700.0                                                           | 700.0                        | 707.4                        | 707.4                        | 2.4                           | 2.4                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 345.2                          | 4.83                             | 72.464                   |                                    |
| 800.0                                                           | 800.0                        | 807.4                        | 807.4                        | 2.8                           | 2.8                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 344.5                          | 5.55                             | 63.098                   |                                    |
| 900.0                                                           | 900.0                        | 907.4                        | 907.4                        | 3.1                           | 3.1                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 343.7                          | 6.26                             | 55.876                   |                                    |
| 1,000.0                                                         | 1,000.0                      | 1,008.4                      | 1,008.4                      | 3.5                           | 3.5                  | -0.21                 | 350.0               | -1.3                | 350.0                         | 343.0                          | 6.98                             | 50.120                   |                                    |
| 1,100.0                                                         | 1,100.0                      | 1,122.1                      | 1,122.0                      | 3.8                           | 3.9                  | -114.94               | 347.4               | -0.8                | 348.5                         | 340.8                          | 7.71                             | 45.201                   |                                    |
| 1,200.0                                                         | 1,199.8                      | 1,235.4                      | 1,235.2                      | 4.2                           | 4.3                  | -115.71               | 340.5               | 0.4                 | 344.6                         | 336.1                          | 8.41                             | 40.986                   |                                    |
| 1,300.0                                                         | 1,299.5                      | 1,348.4                      | 1,347.5                      | 4.5                           | 4.6                  | -117.03               | 329.2               | 2.4                 | 338.3                         | 329.2                          | 9.10                             | 37.169                   |                                    |
| 1,400.0                                                         | 1,398.7                      | 1,460.6                      | 1,458.6                      | 4.9                           | 5.0                  | -118.93               | 313.6               | 5.1                 | 330.0                         | 320.2                          | 9.80                             | 33.686                   |                                    |
| 1,500.0                                                         | 1,497.7                      | 1,572.0                      | 1,568.2                      | 5.2                           | 5.5                  | -121.02               | 294.0               | 8.6                 | 319.0                         | 308.5                          | 10.49                            | 30.417                   |                                    |
| 1,600.0                                                         | 1,596.8                      | 1,682.3                      | 1,675.9                      | 5.6                           | 5.9                  | -123.22               | 270.4               | 12.8                | 304.5                         | 293.3                          | 11.17                            | 27.261                   |                                    |
| 1,700.0                                                         | 1,695.8                      | 1,791.4                      | 1,781.3                      | 6.0                           | 6.4                  | -125.62               | 243.0               | 17.6                | 286.6                         | 274.7                          | 11.84                            | 24.205                   |                                    |
| 1,800.0                                                         | 1,794.8                      | 1,898.8                      | 1,884.1                      | 6.4                           | 6.9                  | -128.36               | 212.3               | 23.0                | 265.5                         | 253.0                          | 12.50                            | 21.242                   |                                    |
| 1,900.0                                                         | 1,893.8                      | 2,004.3                      | 1,983.8                      | 6.8                           | 7.4                  | -131.65               | 178.4               | 29.0                | 241.4                         | 228.2                          | 13.15                            | 18.360                   |                                    |
| 2,000.0                                                         | 1,992.9                      | 2,103.4                      | 2,076.5                      | 7.2                           | 7.9                  | -135.56               | 143.8               | 35.1                | 215.1                         | 201.3                          | 13.84                            | 15.537                   |                                    |
| 2,100.0                                                         | 2,091.9                      | 2,198.7                      | 2,165.4                      | 7.6                           | 8.5                  | -140.35               | 110.2               | 41.0                | 189.7                         | 175.0                          | 14.61                            | 12.980                   |                                    |
| 2,200.0                                                         | 2,190.9                      | 2,293.9                      | 2,254.4                      | 8.0                           | 9.0                  | -146.52               | 76.5                | 47.0                | 165.9                         | 150.4                          | 15.43                            | 10.748                   |                                    |
| 2,300.0                                                         | 2,289.9                      | 2,389.2                      | 2,343.3                      | 8.4                           | 9.6                  | -154.52               | 42.9                | 52.9                | 144.6                         | 128.2                          | 16.36                            | 8.840                    |                                    |
| 2,400.0                                                         | 2,389.0                      | 2,484.5                      | 2,432.3                      | 8.8                           | 10.1                 | -164.85               | 9.3                 | 58.8                | 127.0                         | 109.6                          | 17.44                            | 7.283                    |                                    |
| 2,500.0                                                         | 2,488.0                      | 2,579.7                      | 2,521.2                      | 9.2                           | 10.7                 | -177.66               | -24.3               | 64.8                | 115.0                         | 96.2                           | 18.74                            | 6.136                    |                                    |
| 2,600.0                                                         | 2,587.0                      | 2,675.0                      | 2,610.2                      | 9.6                           | 11.3                 | 167.71                | -58.0               | 70.7                | 110.2                         | 90.1                           | 20.16                            | 5.468                    |                                    |
| 2,608.1                                                         | 2,595.1                      | 2,682.8                      | 2,617.4                      | 9.6                           | 11.4                 | 166.49                | -60.7               | 71.2                | 110.2                         | 89.9                           | 20.27                            | 5.436 CC, ES             |                                    |
| 2,700.0                                                         | 2,686.1                      | 2,770.3                      | 2,699.1                      | 10.0                          | 11.9                 | 152.92                | -91.6               | 76.6                | 113.7                         | 92.2                           | 21.47                            | 5.293 SF                 |                                    |
| 2,800.0                                                         | 2,785.1                      | 2,865.6                      | 2,788.0                      | 10.4                          | 12.5                 | 139.74                | -125.2              | 82.6                | 124.6                         | 102.1                          | 22.55                            | 5.529                    |                                    |
| 2,900.0                                                         | 2,884.1                      | 2,960.8                      | 2,877.0                      | 10.8                          | 13.1                 | 129.01                | -158.8              | 88.5                | 141.4                         | 118.0                          | 23.40                            | 6.043                    |                                    |
| 3,000.0                                                         | 2,983.1                      | 3,056.1                      | 2,965.9                      | 11.2                          | 13.7                 | 120.65                | -192.5              | 94.4                | 162.2                         | 138.1                          | 24.15                            | 6.717                    |                                    |
| 3,100.0                                                         | 3,082.2                      | 3,151.4                      | 3,054.9                      | 11.6                          | 14.3                 | 114.22                | -226.1              | 100.4               | 185.7                         | 160.8                          | 24.86                            | 7.469                    |                                    |
| 3,200.0                                                         | 3,181.2                      | 3,246.7                      | 3,143.8                      | 12.1                          | 15.0                 | 109.23                | -259.7              | 106.3               | 210.9                         | 185.3                          | 25.56                            | 8.250                    |                                    |
| 3,300.0                                                         | 3,280.2                      | 3,341.9                      | 3,232.8                      | 12.5                          | 15.6                 | 105.30                | -293.3              | 112.2               | 237.3                         | 211.0                          | 26.28                            | 9.030                    |                                    |
| 3,400.0                                                         | 3,379.2                      | 3,437.2                      | 3,321.7                      | 12.9                          | 16.2                 | 102.16                | -326.9              | 118.2               | 264.6                         | 237.6                          | 27.02                            | 9.794                    |                                    |
| 3,500.0                                                         | 3,478.3                      | 3,532.5                      | 3,410.7                      | 13.3                          | 16.8                 | 99.60                 | -360.6              | 124.1               | 292.5                         | 264.7                          | 27.76                            | 10.535                   |                                    |
| 3,600.0                                                         | 3,577.3                      | 3,627.8                      | 3,499.6                      | 13.7                          | 17.4                 | 97.48                 | -394.2              | 130.0               | 320.8                         | 292.3                          | 28.53                            | 11.247                   |                                    |
| 3,700.0                                                         | 3,676.3                      | 3,723.0                      | 3,588.6                      | 14.1                          | 18.1                 | 95.71                 | -427.8              | 136.0               | 349.5                         | 320.2                          | 29.30                            | 11.929                   |                                    |
| 3,800.0                                                         | 3,775.3                      | 3,818.3                      | 3,677.5                      | 14.5                          | 18.7                 | 94.20                 | -461.4              | 141.9               | 378.5                         | 348.4                          | 30.09                            | 12.581                   |                                    |
| 3,900.0                                                         | 3,874.4                      | 3,913.6                      | 3,766.4                      | 15.0                          | 19.3                 | 92.90                 | -495.1              | 147.9               | 407.7                         | 376.8                          | 30.88                            | 13.202                   |                                    |
| 4,000.0                                                         | 3,973.4                      | 4,008.8                      | 3,855.4                      | 15.4                          | 20.0                 | 91.78                 | -528.7              | 153.8               | 437.0                         | 405.3                          | 31.68                            | 13.795                   |                                    |
| 4,014.3                                                         | 3,987.6                      | 4,022.5                      | 3,868.1                      | 15.4                          | 20.1                 | 91.63                 | -533.5              | 154.6               | 441.2                         | 409.4                          | 31.79                            | 13.877                   |                                    |
| 4,100.0                                                         | 4,072.6                      | 4,104.0                      | 3,944.2                      | 15.8                          | 20.6                 | 91.16                 | -562.3              | 159.7               | 466.4                         | 434.0                          | 32.46                            | 14.370                   |                                    |
| 4,200.0                                                         | 4,172.2                      | 4,198.8                      | 4,032.8                      | 16.2                          | 21.2                 | 90.37                 | -595.7              | 165.6               | 496.0                         | 462.8                          | 33.18                            | 14.949                   |                                    |
| 4,300.0                                                         | 4,272.0                      | 4,293.2                      | 4,120.9                      | 16.5                          | 21.8                 | 89.35                 | -629.0              | 171.5               | 525.9                         | 492.1                          | 33.85                            | 15.538                   |                                    |
| 4,400.0                                                         | 4,372.0                      | 4,387.0                      | 4,208.4                      | 16.9                          | 22.5                 | 88.16                 | -662.1              | 177.3               | 556.3                         | 521.9                          | 34.46                            | 16.144                   |                                    |
| 4,414.3                                                         | 4,386.3                      | 4,400.4                      | 4,220.9                      | 16.9                          | 22.6                 | -157.55               | -666.9              | 178.2               | 560.7                         | 526.2                          | 34.54                            | 16.233                   |                                    |
| 4,500.0                                                         | 4,472.0                      | 4,480.4                      | 4,295.6                      | 17.2                          | 23.1                 | -159.13               | -695.1              | 183.2               | 587.3                         | 552.3                          | 35.03                            | 16.765                   |                                    |
| 4,600.0                                                         | 4,572.0                      | 4,573.7                      | 4,382.7                      | 17.5                          | 23.7                 | -160.81               | -728.0              | 189.0               | 618.9                         | 583.3                          | 35.62                            | 17.375                   |                                    |
| 4,700.0                                                         | 4,672.0                      | 4,667.1                      | 4,469.9                      | 17.8                          | 24.3                 | -162.32               | -761.0              | 194.8               | 650.9                         | 614.6                          | 36.22                            | 17.971                   |                                    |
| 4,800.0                                                         | 4,772.0                      | 4,760.4                      | 4,557.1                      | 18.1                          | 25.0                 | -163.70               | -793.9              | 200.6               | 683.2                         | 646.4                          | 36.83                            | 18.553                   |                                    |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

PERMIAN  
RESOURCES

Anticollision Report

|                    |                 |                              |                      |
|--------------------|-----------------|------------------------------|----------------------|
| Company:           | NEW MEXICO      | Local Co-ordinate Reference: | Well BAKED ZITI 123H |
| Project:           | (SP) EDDY       | TVD Reference:               | KB @ 3183.6usft      |
| Reference Site:    | BAKED ZITI      | MD Reference:                | KB @ 3183.6usft      |
| Site Error:        | 0.0 usft        | North Reference:             | Grid                 |
| Reference Well:    | BAKED ZITI 123H | Survey Calculation Method:   | Minimum Curvature    |
| Well Error:        | 0.0 usft        | Output errors are at         | 2.00 sigma           |
| Reference Wellbore | OWB             | Database:                    | Compass_17           |
| Reference Design:  | PWP0            | Offset TVD Reference:        | Offset Datum         |

|                                                          |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      |                    |          |
|----------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|---------------------|------------------|-----------------------------|------------------------|-----------------|------------------------------|-------------------------------|---------------------------------|----------------------|--------------------|----------|
| Offset Design: BAKED ZITI - BAKED ZITI 424H - OWB - PWP0 |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      | Offset Site Error: | 0.0 usft |
| Survey Program: 0-MWD                                    |                             |                             |                             |                     |                  |                             |                        |                 |                              |                               |                                 |                      | Offset Well Error: | 0.0 usft |
| Reference                                                |                             | Offset                      |                             | Semi Major Axis     |                  | Highside<br>Toolface<br>(°) | Offset Wellbore Centre |                 | Distance                     |                               | Rule Assigned:                  |                      | Warning            |          |
| Measured<br>Depth<br>(usft)                              | Vertical<br>Depth<br>(usft) | Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Reference<br>(usft) | Offset<br>(usft) |                             | +N/-S<br>(usft)        | +E/-W<br>(usft) | Between<br>Centres<br>(usft) | Between<br>Ellipses<br>(usft) | Minimum<br>Separation<br>(usft) | Separation<br>Factor |                    |          |
| 4,900.0                                                  | 4,872.0                     | 4,853.8                     | 4,644.2                     | 18.5                | 25.6             | -164.96                     | -826.9                 | 206.4           | 715.9                        | 678.5                         | 37.45                           | 19.119               |                    |          |
| 5,000.0                                                  | 4,972.0                     | 4,947.1                     | 4,731.4                     | 18.8                | 26.2             | -166.11                     | -859.8                 | 212.2           | 748.9                        | 710.8                         | 38.07                           | 19.669               |                    |          |
| 5,100.0                                                  | 5,072.0                     | 5,040.5                     | 4,818.5                     | 19.1                | 26.8             | -167.16                     | -892.8                 | 218.0           | 782.1                        | 743.4                         | 38.71                           | 20.204               |                    |          |
| 5,200.0                                                  | 5,172.0                     | 5,133.9                     | 4,905.7                     | 19.4                | 27.5             | -168.13                     | -925.7                 | 223.9           | 815.6                        | 776.2                         | 39.36                           | 20.723               |                    |          |
| 5,300.0                                                  | 5,272.0                     | 5,227.2                     | 4,992.8                     | 19.8                | 28.1             | -169.02                     | -958.7                 | 229.7           | 849.2                        | 809.2                         | 40.01                           | 21.226               |                    |          |
| 5,400.0                                                  | 5,372.0                     | 5,320.6                     | 5,080.0                     | 20.1                | 28.7             | -169.85                     | -991.6                 | 235.5           | 883.1                        | 842.4                         | 40.67                           | 21.713               |                    |          |
| 5,500.0                                                  | 5,472.0                     | 5,413.9                     | 5,167.2                     | 20.4                | 29.4             | -170.62                     | -1,024.6               | 241.3           | 917.0                        | 875.7                         | 41.33                           | 22.186               |                    |          |
| 5,600.0                                                  | 5,572.0                     | 5,507.3                     | 5,254.3                     | 20.8                | 30.0             | -171.33                     | -1,057.5               | 247.1           | 951.2                        | 909.1                         | 42.01                           | 22.644               |                    |          |
| 5,700.0                                                  | 5,672.0                     | 5,600.6                     | 5,341.5                     | 21.1                | 30.6             | -171.99                     | -1,090.5               | 252.9           | 985.4                        | 942.7                         | 42.68                           | 23.087               |                    |          |

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

Reference Depths are relative to KB @ 3183.6usft

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: BAKED ZITI 123H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.07°

## Ladder Plot

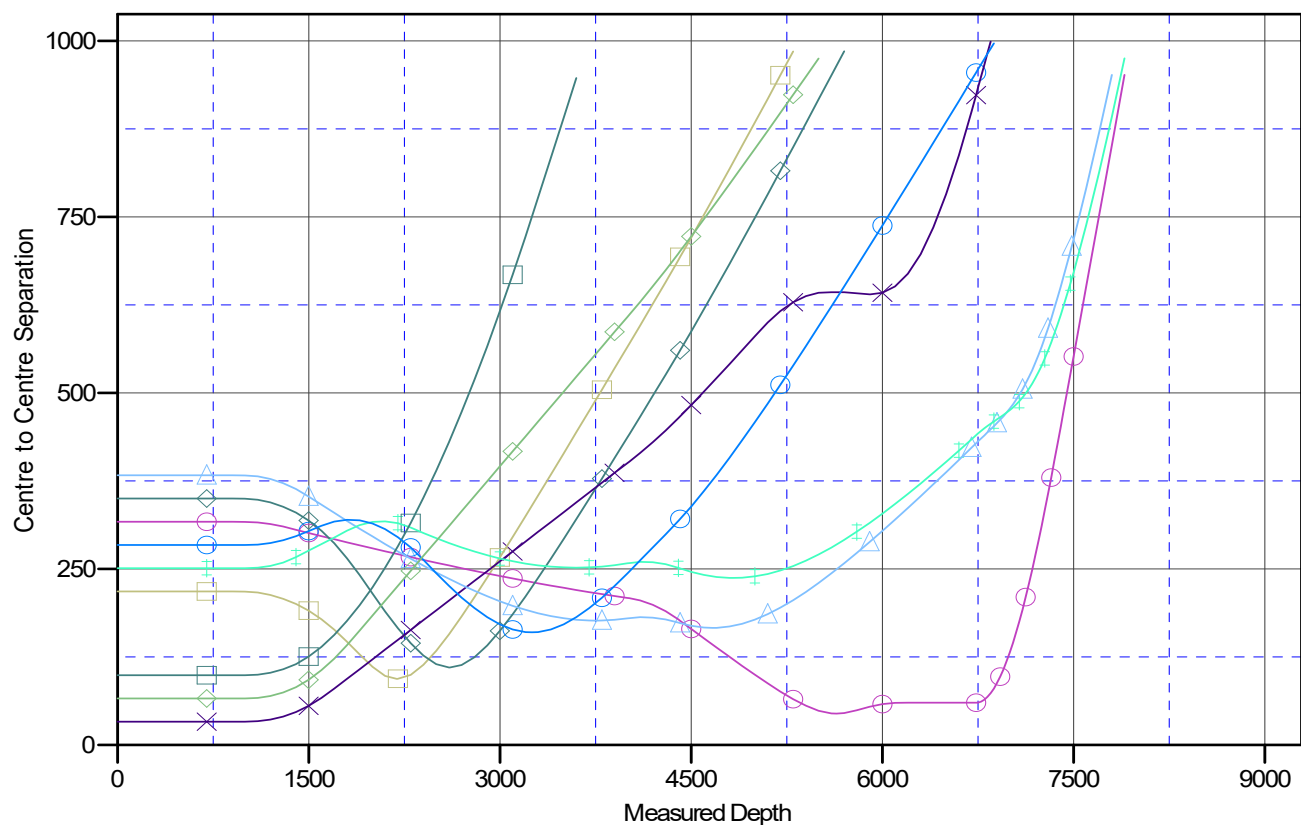

### LEGEND

|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| BAKED ZITI13H,OWB,PWP0 V0  | BAKED ZITI113H,OWB,PWP0 V0 | BAKED ZITI114H,OWB,PWP0 V0 |
| BAKED ZITI213H,OWB,PWP0 V0 | BAKED ZITI142H,OWB,PWP0 V0 | BAKED ZITI214H,OWB,PWP0 V0 |
| BAKED ZITI142H,OWB,PWP0 V0 | BAKED ZITI133H,OWB,PWP0 V0 | BAKED ZITI123H,OWB,PWP0 V0 |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

# PERMIAN

## RESOURCES

### Anticollision Report

|                           |                 |                                     |                      |
|---------------------------|-----------------|-------------------------------------|----------------------|
| <b>Company:</b>           | NEW MEXICO      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Project:</b>           | (SP) EDDY       | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Reference Site:</b>    | BAKED ZITI      | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site Error:</b>        | 0.0 usft        | <b>North Reference:</b>             | Grid                 |
| <b>Reference Well:</b>    | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Well Error:</b>        | 0.0 usft        | <b>Output errors are at</b>         | 2.00 sigma           |
| <b>Reference Wellbore</b> | OWB             | <b>Database:</b>                    | Compass_17           |
| <b>Reference Design:</b>  | PWP0            | <b>Offset TVD Reference:</b>        | Offset Datum         |

Reference Depths are relative to KB @ 3183.6usft

Offset Depths are relative to Offset Datum


Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: BAKED ZITI 123H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.07°

## Separation Factor Plot

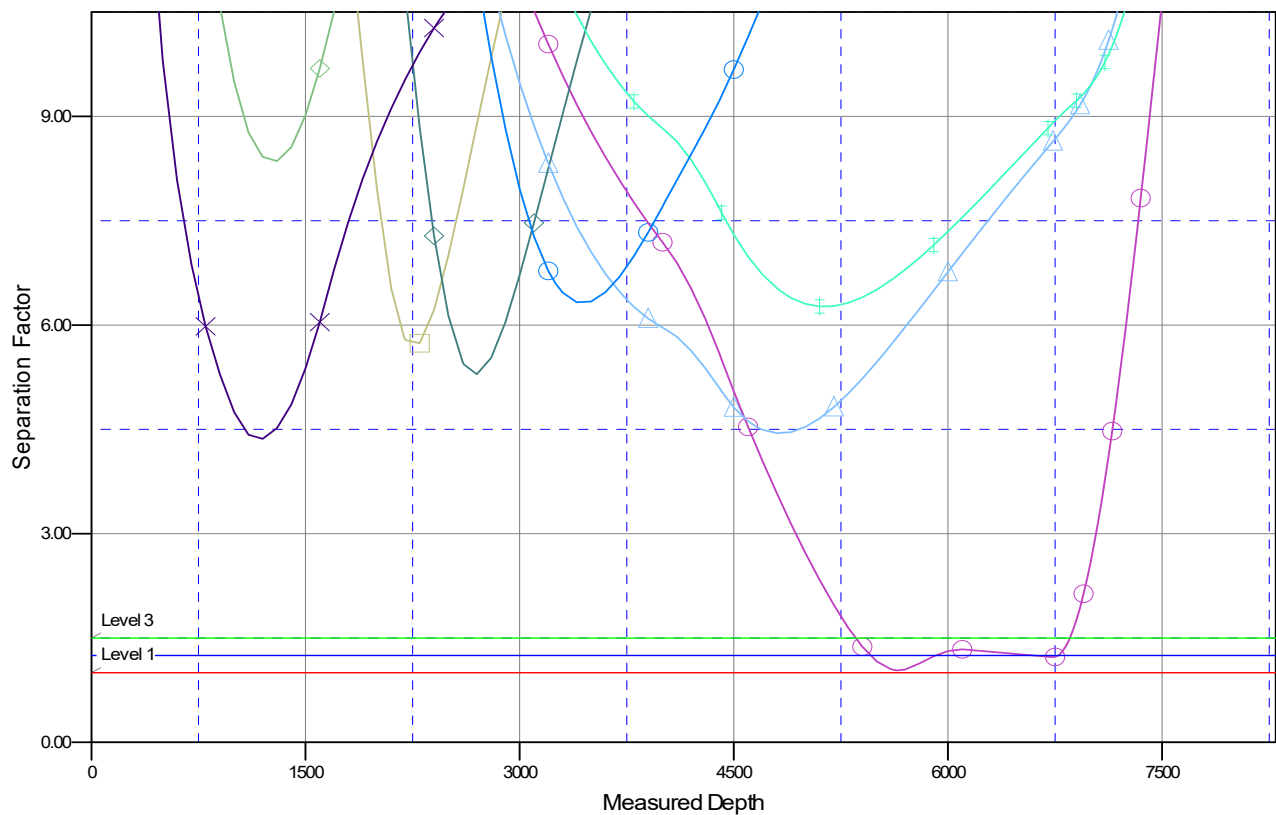

### LEGEND

|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| BAKED ZITI131H,OWB,PWP0 V0 | BAKED ZITI113H,OWB,PWP0 V0 | BAKED ZITI114H,OWB,PWP0 V0 |
| BAKED ZITI213H,OWB,PWP0 V0 | BAKED ZITI423H,OWB,PWP0 V0 | BAKED ZITI214H,OWB,PWP0 V0 |
| BAKED ZITI424H,OWB,PWP0 V0 | BAKED ZITI133H,OWB,PWP0 V0 | BAKED ZITI121H,OWB,PWP0 V0 |

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



# **PERMIAN**

## **R E S O U R C E S**

### **NEW MEXICO**

**(SP) EDDY**

**BAKED ZITI**

**BAKED ZITI 123H**

**OWB**

**Plan: PWP0**

## **Standard Planning Report - Geographic**

**29 January, 2025**

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

|                    |                           |                      |                |
|--------------------|---------------------------|----------------------|----------------|
| <b>Project</b>     | (SP) EDDY                 |                      |                |
| <b>Map System:</b> | US State Plane 1983       | <b>System Datum:</b> | Mean Sea Level |
| <b>Geo Datum:</b>  | North American Datum 1983 |                      |                |
| <b>Map Zone:</b>   | New Mexico Eastern Zone   |                      |                |

|                              |            |                     |                   |
|------------------------------|------------|---------------------|-------------------|
| <b>Site</b>                  | BAKED ZITI |                     |                   |
| <b>Site Position:</b>        |            | <b>Northing:</b>    | 527,996.36 usft   |
| <b>From:</b>                 | Map        | <b>Easting:</b>     | 580,848.36 usft   |
| <b>Position Uncertainty:</b> | 0.0 usft   | <b>Slot Radius:</b> | 13-3/16 "         |
|                              |            | <b>Latitude:</b>    | 32° 27' 5.261 N   |
|                              |            | <b>Longitude:</b>   | 104° 12' 18.873 W |

|                             |                 |                            |                   |
|-----------------------------|-----------------|----------------------------|-------------------|
| <b>Well</b>                 | BAKED ZITI 123H |                            |                   |
| <b>Well Position</b>        | <b>+N/-S</b>    | 0.0 usft                   | <b>Northing:</b>  |
|                             | <b>+E/-W</b>    | 0.0 usft                   | <b>Easting:</b>   |
| <b>Position Uncertainty</b> | 0.0 usft        | <b>Wellhead Elevation:</b> | usft              |
| <b>Grid Convergence:</b>    | 0.07 °          | <b>Latitude:</b>           | 32° 27' 1.489 N   |
|                             |                 | <b>Longitude:</b>          | 104° 12' 18.951 W |
|                             |                 | <b>Ground Level:</b>       | 3,153.6 usft      |

|                  |                   |                    |                    |                  |                       |
|------------------|-------------------|--------------------|--------------------|------------------|-----------------------|
| <b>Wellbore</b>  | OWB               |                    |                    |                  |                       |
| <b>Magnetics</b> | <b>Model Name</b> | <b>Sample Date</b> | <b>Declination</b> | <b>Dip Angle</b> | <b>Field Strength</b> |
|                  |                   |                    | (°)                | (°)              | (nT)                  |
|                  | IGRF200510        | 12/31/2009         | 8.05               | 60.34            | 48,860.25891027       |

|                          |                         |              |                      |                  |
|--------------------------|-------------------------|--------------|----------------------|------------------|
| <b>Design</b>            | PWP0                    |              |                      |                  |
| <b>Audit Notes:</b>      |                         |              |                      |                  |
| <b>Version:</b>          | <b>Phase:</b>           | PROTOTYPE    | <b>Tie On Depth:</b> | 0.0              |
| <b>Vertical Section:</b> | <b>Depth From (TVD)</b> | <b>+N/-S</b> | <b>+E/-W</b>         | <b>Direction</b> |
|                          | (usft)                  | (usft)       | (usft)               | (°)              |
|                          | 0.0                     | 0.0          | 0.0                  | 269.67           |

|                                 |                 |                          |                          |                |
|---------------------------------|-----------------|--------------------------|--------------------------|----------------|
| <b>Plan Survey Tool Program</b> | <b>Date</b>     | 1/29/2025                |                          |                |
| <b>Depth From</b>               | <b>Depth To</b> | <b>Survey (Wellbore)</b> | <b>Tool Name</b>         | <b>Remarks</b> |
| (usft)                          | (usft)          |                          |                          |                |
| 1                               | 0.0             | 26,456.7 PWP0 (OWB)      | MWD                      |                |
|                                 |                 |                          | OWSG_Rev2_ MWD - Standal |                |

|                      |                    |                |                 |              |              |               |              |             |            |               |
|----------------------|--------------------|----------------|-----------------|--------------|--------------|---------------|--------------|-------------|------------|---------------|
| <b>Plan Sections</b> |                    |                |                 |              |              |               |              |             |            |               |
| <b>Measured</b>      | <b>Inclination</b> | <b>Azimuth</b> | <b>Vertical</b> | <b>+N/-S</b> | <b>+E/-W</b> | <b>Dogleg</b> | <b>Build</b> | <b>Turn</b> | <b>TFO</b> | <b>Target</b> |
| <b>Depth</b>         | (°)                | (°)            | <b>Depth</b>    | (usft)       | (usft)       | <b>Rate</b>   | <b>Rate</b>  | <b>Rate</b> | (°)        |               |
| (usft)               |                    |                | (usft)          |              |              | (°/100usft)   | (°/100usft)  | (°/100usft) |            |               |
| 0.0                  | 0.00               | 0.00           | 0.0             | 0.0          | 0.0          | 0.00          | 0.00         | 0.00        | 0.00       |               |
| 1,000.0              | 0.00               | 0.00           | 1,000.0         | 0.0          | 0.0          | 0.00          | 0.00         | 0.00        | 0.00       |               |
| 1,400.0              | 8.00               | 114.47         | 1,398.7         | -11.6        | 25.4         | 2.00          | 2.00         | 0.00        | 114.47     |               |
| 4,014.3              | 8.00               | 114.47         | 3,987.6         | -162.3       | 356.5        | 0.00          | 0.00         | 0.00        | 0.00       |               |
| 4,414.3              | 0.00               | 0.00           | 4,386.3         | -173.8       | 381.9        | 2.00          | -2.00        | 0.00        | 180.00     |               |
| 6,735.5              | 0.00               | 0.00           | 6,707.5         | -173.8       | 381.9        | 0.00          | 0.00         | 0.00        | 0.00       |               |
| 7,485.5              | 90.00              | 270.19         | 7,185.0         | -172.3       | -95.6        | 12.00         | 12.00        | -11.97      | 270.19     |               |
| 26,456.7             | 90.00              | 270.19         | 7,185.0         | -109.2       | -19,066.6    | 0.00          | 0.00         | 0.00        | 0.00       | BZ 123H LTP   |

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey                        |                 |             |                       |              |              |                     |                    |                  |                   |
|---------------------------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|------------------|-------------------|
| Measured Depth (usft)                 | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude         | Longitude         |
| 0.0                                   | 0.00            | 0.00        | 0.0                   | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 100.0                                 | 0.00            | 0.00        | 100.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 200.0                                 | 0.00            | 0.00        | 200.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 300.0                                 | 0.00            | 0.00        | 300.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 400.0                                 | 0.00            | 0.00        | 400.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 500.0                                 | 0.00            | 0.00        | 500.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 600.0                                 | 0.00            | 0.00        | 600.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 700.0                                 | 0.00            | 0.00        | 700.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 800.0                                 | 0.00            | 0.00        | 800.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 900.0                                 | 0.00            | 0.00        | 900.0                 | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| 1,000.0                               | 0.00            | 0.00        | 1,000.0               | 0.0          | 0.0          | 527,615.11          | 580,842.13         | 32° 27' 1.489 N  | 104° 12' 18.951 W |
| <b>Start Build 2.00</b>               |                 |             |                       |              |              |                     |                    |                  |                   |
| 1,100.0                               | 2.00            | 114.47      | 1,100.0               | -0.7         | 1.6          | 527,614.39          | 580,843.72         | 32° 27' 1.481 N  | 104° 12' 18.932 W |
| 1,200.0                               | 4.00            | 114.47      | 1,199.8               | -2.9         | 6.4          | 527,612.22          | 580,848.48         | 32° 27' 1.460 N  | 104° 12' 18.877 W |
| 1,300.0                               | 6.00            | 114.47      | 1,299.5               | -6.5         | 14.3         | 527,608.61          | 580,856.42         | 32° 27' 1.424 N  | 104° 12' 18.784 W |
| 1,400.0                               | 8.00            | 114.47      | 1,398.7               | -11.6        | 25.4         | 527,603.56          | 580,867.51         | 32° 27' 1.374 N  | 104° 12' 18.655 W |
| <b>Start 2614.3 hold at 1400.0 MD</b> |                 |             |                       |              |              |                     |                    |                  |                   |
| 1,500.0                               | 8.00            | 114.47      | 1,497.7               | -17.3        | 38.0         | 527,597.80          | 580,880.17         | 32° 27' 1.317 N  | 104° 12' 18.507 W |
| 1,600.0                               | 8.00            | 114.47      | 1,596.8               | -23.1        | 50.7         | 527,592.03          | 580,892.84         | 32° 27' 1.260 N  | 104° 12' 18.359 W |
| 1,700.0                               | 8.00            | 114.47      | 1,695.8               | -28.8        | 63.4         | 527,586.26          | 580,905.51         | 32° 27' 1.202 N  | 104° 12' 18.212 W |
| 1,800.0                               | 8.00            | 114.47      | 1,794.8               | -34.6        | 76.0         | 527,580.50          | 580,918.17         | 32° 27' 1.145 N  | 104° 12' 18.064 W |
| 1,900.0                               | 8.00            | 114.47      | 1,893.8               | -40.4        | 88.7         | 527,574.73          | 580,930.84         | 32° 27' 1.088 N  | 104° 12' 17.916 W |
| 2,000.0                               | 8.00            | 114.47      | 1,992.9               | -46.1        | 101.4        | 527,568.97          | 580,943.51         | 32° 27' 1.031 N  | 104° 12' 17.768 W |
| 2,100.0                               | 8.00            | 114.47      | 2,091.9               | -51.9        | 114.0        | 527,563.20          | 580,956.17         | 32° 27' 0.974 N  | 104° 12' 17.621 W |
| 2,200.0                               | 8.00            | 114.47      | 2,190.9               | -57.7        | 126.7        | 527,557.43          | 580,968.84         | 32° 27' 0.916 N  | 104° 12' 17.473 W |
| 2,300.0                               | 8.00            | 114.47      | 2,289.9               | -63.4        | 139.4        | 527,551.67          | 580,981.51         | 32° 27' 0.859 N  | 104° 12' 17.325 W |
| 2,400.0                               | 8.00            | 114.47      | 2,389.0               | -69.2        | 152.0        | 527,545.90          | 580,994.18         | 32° 27' 0.802 N  | 104° 12' 17.177 W |
| 2,500.0                               | 8.00            | 114.47      | 2,488.0               | -75.0        | 164.7        | 527,540.14          | 581,006.84         | 32° 27' 0.745 N  | 104° 12' 17.030 W |
| 2,600.0                               | 8.00            | 114.47      | 2,587.0               | -80.7        | 177.4        | 527,534.37          | 581,019.51         | 32° 27' 0.688 N  | 104° 12' 16.882 W |
| 2,700.0                               | 8.00            | 114.47      | 2,686.1               | -86.5        | 190.0        | 527,528.60          | 581,032.18         | 32° 27' 0.630 N  | 104° 12' 16.734 W |
| 2,800.0                               | 8.00            | 114.47      | 2,785.1               | -92.3        | 202.7        | 527,522.84          | 581,044.84         | 32° 27' 0.573 N  | 104° 12' 16.587 W |
| 2,900.0                               | 8.00            | 114.47      | 2,884.1               | -98.0        | 215.4        | 527,517.07          | 581,057.51         | 32° 27' 0.516 N  | 104° 12' 16.439 W |
| 3,000.0                               | 8.00            | 114.47      | 2,983.1               | -103.8       | 228.0        | 527,511.31          | 581,070.18         | 32° 27' 0.459 N  | 104° 12' 16.291 W |
| 3,100.0                               | 8.00            | 114.47      | 3,082.2               | -109.6       | 240.7        | 527,505.54          | 581,082.84         | 32° 27' 0.401 N  | 104° 12' 16.143 W |
| 3,200.0                               | 8.00            | 114.47      | 3,181.2               | -115.3       | 253.4        | 527,499.78          | 581,095.51         | 32° 27' 0.344 N  | 104° 12' 15.996 W |
| 3,300.0                               | 8.00            | 114.47      | 3,280.2               | -121.1       | 266.0        | 527,494.01          | 581,108.18         | 32° 27' 0.287 N  | 104° 12' 15.848 W |
| 3,400.0                               | 8.00            | 114.47      | 3,379.2               | -126.9       | 278.7        | 527,488.24          | 581,120.84         | 32° 27' 0.230 N  | 104° 12' 15.700 W |
| 3,500.0                               | 8.00            | 114.47      | 3,478.3               | -132.6       | 291.4        | 527,482.48          | 581,133.51         | 32° 27' 0.173 N  | 104° 12' 15.552 W |
| 3,600.0                               | 8.00            | 114.47      | 3,577.3               | -138.4       | 304.0        | 527,476.71          | 581,146.18         | 32° 27' 0.115 N  | 104° 12' 15.405 W |
| 3,700.0                               | 8.00            | 114.47      | 3,676.3               | -144.2       | 316.7        | 527,470.95          | 581,158.84         | 32° 27' 0.058 N  | 104° 12' 15.257 W |
| 3,800.0                               | 8.00            | 114.47      | 3,775.3               | -149.9       | 329.4        | 527,465.18          | 581,171.51         | 32° 27' 0.001 N  | 104° 12' 15.109 W |
| 3,900.0                               | 8.00            | 114.47      | 3,874.4               | -155.7       | 342.0        | 527,459.41          | 581,184.18         | 32° 26' 59.944 N | 104° 12' 14.961 W |
| 4,000.0                               | 8.00            | 114.47      | 3,973.4               | -161.5       | 354.7        | 527,453.65          | 581,196.84         | 32° 26' 59.887 N | 104° 12' 14.814 W |
| 4,014.3                               | 8.00            | 114.47      | 3,987.6               | -162.3       | 356.5        | 527,452.82          | 581,198.66         | 32° 26' 59.878 N | 104° 12' 14.792 W |
| <b>Start Drop -2.00</b>               |                 |             |                       |              |              |                     |                    |                  |                   |
| 4,100.0                               | 6.29            | 114.47      | 4,072.6               | -166.7       | 366.2        | 527,448.41          | 581,208.35         | 32° 26' 59.835 N | 104° 12' 14.679 W |
| 4,200.0                               | 4.29            | 114.47      | 4,172.2               | -170.5       | 374.6        | 527,444.59          | 581,216.74         | 32° 26' 59.797 N | 104° 12' 14.581 W |
| 4,300.0                               | 2.29            | 114.47      | 4,272.0               | -172.9       | 379.8        | 527,442.22          | 581,221.96         | 32° 26' 59.773 N | 104° 12' 14.521 W |
| 4,400.0                               | 0.29            | 114.47      | 4,372.0               | -173.8       | 381.9        | 527,441.29          | 581,224.00         | 32° 26' 59.764 N | 104° 12' 14.497 W |
| 4,414.3                               | 0.00            | 0.00        | 4,386.3               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| <b>Start 2321.2 hold at 4414.3 MD</b> |                 |             |                       |              |              |                     |                    |                  |                   |
| 4,500.0                               | 0.00            | 0.00        | 4,472.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 4,600.0                               | 0.00            | 0.00        | 4,572.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 4,700.0                               | 0.00            | 0.00        | 4,672.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey                    |                 |             |                       |              |              |                     |                    |                  |                   |
|-----------------------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|------------------|-------------------|
| Measured Depth (usft)             | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude         | Longitude         |
| 4,800.0                           | 0.00            | 0.00        | 4,772.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 4,900.0                           | 0.00            | 0.00        | 4,872.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,000.0                           | 0.00            | 0.00        | 4,972.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,100.0                           | 0.00            | 0.00        | 5,072.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,200.0                           | 0.00            | 0.00        | 5,172.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,300.0                           | 0.00            | 0.00        | 5,272.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,400.0                           | 0.00            | 0.00        | 5,372.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,500.0                           | 0.00            | 0.00        | 5,472.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,600.0                           | 0.00            | 0.00        | 5,572.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,700.0                           | 0.00            | 0.00        | 5,672.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,800.0                           | 0.00            | 0.00        | 5,772.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 5,900.0                           | 0.00            | 0.00        | 5,872.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,000.0                           | 0.00            | 0.00        | 5,972.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,100.0                           | 0.00            | 0.00        | 6,072.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,200.0                           | 0.00            | 0.00        | 6,172.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,300.0                           | 0.00            | 0.00        | 6,272.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,400.0                           | 0.00            | 0.00        | 6,372.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,500.0                           | 0.00            | 0.00        | 6,472.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,600.0                           | 0.00            | 0.00        | 6,572.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,700.0                           | 0.00            | 0.00        | 6,672.0               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| 6,735.5                           | 0.00            | 0.00        | 6,707.5               | -173.8       | 381.9        | 527,441.27          | 581,224.03         | 32° 26' 59.764 N | 104° 12' 14.496 W |
| <b>Start DLS 12.00 TFO 270.19</b> |                 |             |                       |              |              |                     |                    |                  |                   |
| 6,750.0                           | 1.74            | 270.19      | 6,722.0               | -173.8       | 381.7        | 527,441.27          | 581,223.81         | 32° 26' 59.764 N | 104° 12' 14.499 W |
| 6,775.0                           | 4.74            | 270.19      | 6,746.9               | -173.8       | 380.3        | 527,441.28          | 581,222.40         | 32° 26' 59.764 N | 104° 12' 14.515 W |
| 6,800.0                           | 7.74            | 270.19      | 6,771.8               | -173.8       | 377.6        | 527,441.29          | 581,219.69         | 32° 26' 59.764 N | 104° 12' 14.547 W |
| 6,825.0                           | 10.74           | 270.19      | 6,796.4               | -173.8       | 373.5        | 527,441.30          | 581,215.68         | 32° 26' 59.764 N | 104° 12' 14.594 W |
| 6,850.0                           | 13.74           | 270.19      | 6,820.9               | -173.8       | 368.2        | 527,441.32          | 581,210.38         | 32° 26' 59.764 N | 104° 12' 14.656 W |
| 6,875.0                           | 16.74           | 270.19      | 6,845.0               | -173.8       | 361.7        | 527,441.34          | 581,203.81         | 32° 26' 59.765 N | 104° 12' 14.732 W |
| 6,900.0                           | 19.74           | 270.19      | 6,868.7               | -173.7       | 353.9        | 527,441.37          | 581,195.99         | 32° 26' 59.765 N | 104° 12' 14.824 W |
| 6,925.0                           | 22.74           | 270.19      | 6,892.0               | -173.7       | 344.8        | 527,441.40          | 581,186.93         | 32° 26' 59.765 N | 104° 12' 14.929 W |
| 6,950.0                           | 25.74           | 270.19      | 6,914.8               | -173.7       | 334.5        | 527,441.43          | 581,176.67         | 32° 26' 59.766 N | 104° 12' 15.049 W |
| 6,975.0                           | 28.74           | 270.19      | 6,937.0               | -173.6       | 323.1        | 527,441.47          | 581,165.23         | 32° 26' 59.766 N | 104° 12' 15.183 W |
| 7,000.0                           | 31.74           | 270.19      | 6,958.6               | -173.6       | 310.5        | 527,441.51          | 581,152.65         | 32° 26' 59.767 N | 104° 12' 15.329 W |
| 7,025.0                           | 34.74           | 270.19      | 6,979.6               | -173.6       | 296.8        | 527,441.55          | 581,138.95         | 32° 26' 59.768 N | 104° 12' 15.489 W |
| 7,050.0                           | 37.74           | 270.19      | 6,999.7               | -173.5       | 282.0        | 527,441.60          | 581,124.17         | 32° 26' 59.768 N | 104° 12' 15.662 W |
| 7,075.0                           | 40.74           | 270.19      | 7,019.1               | -173.5       | 266.2        | 527,441.66          | 581,108.36         | 32° 26' 59.769 N | 104° 12' 15.846 W |
| 7,079.8                           | 41.31           | 270.19      | 7,022.7               | -173.4       | 263.1        | 527,441.67          | 581,105.24         | 32° 26' 59.769 N | 104° 12' 15.883 W |
| <b>BZ 123H FTP</b>                |                 |             |                       |              |              |                     |                    |                  |                   |
| 7,100.0                           | 43.74           | 270.19      | 7,037.6               | -173.4       | 249.4        | 527,441.71          | 581,091.56         | 32° 26' 59.770 N | 104° 12' 16.042 W |
| 7,125.0                           | 46.74           | 270.19      | 7,055.2               | -173.3       | 231.7        | 527,441.77          | 581,073.81         | 32° 26' 59.771 N | 104° 12' 16.250 W |
| 7,150.0                           | 49.74           | 270.19      | 7,071.8               | -173.3       | 213.0        | 527,441.83          | 581,055.16         | 32° 26' 59.771 N | 104° 12' 16.467 W |
| 7,175.0                           | 52.74           | 270.19      | 7,087.5               | -173.2       | 193.5        | 527,441.90          | 581,035.67         | 32° 26' 59.772 N | 104° 12' 16.695 W |
| 7,200.0                           | 55.74           | 270.19      | 7,102.1               | -173.1       | 173.3        | 527,441.97          | 581,015.39         | 32° 26' 59.773 N | 104° 12' 16.931 W |
| 7,225.0                           | 58.74           | 270.19      | 7,115.6               | -173.1       | 152.2        | 527,442.04          | 580,994.37         | 32° 26' 59.774 N | 104° 12' 17.177 W |
| 7,250.0                           | 61.74           | 270.19      | 7,128.0               | -173.0       | 130.5        | 527,442.11          | 580,972.67         | 32° 26' 59.775 N | 104° 12' 17.430 W |
| 7,275.0                           | 64.74           | 270.19      | 7,139.3               | -172.9       | 108.2        | 527,442.18          | 580,950.35         | 32° 26' 59.776 N | 104° 12' 17.690 W |
| 7,300.0                           | 67.74           | 270.19      | 7,149.4               | -172.9       | 85.3         | 527,442.26          | 580,927.47         | 32° 26' 59.777 N | 104° 12' 17.957 W |
| 7,325.0                           | 70.74           | 270.19      | 7,158.2               | -172.8       | 62.0         | 527,442.34          | 580,904.10         | 32° 26' 59.778 N | 104° 12' 18.230 W |
| 7,350.0                           | 73.74           | 270.19      | 7,165.9               | -172.7       | 38.2         | 527,442.41          | 580,880.30         | 32° 26' 59.779 N | 104° 12' 18.508 W |
| 7,375.0                           | 76.74           | 270.19      | 7,172.2               | -172.6       | 14.0         | 527,442.49          | 580,856.12         | 32° 26' 59.780 N | 104° 12' 18.790 W |
| 7,400.0                           | 79.74           | 270.19      | 7,177.3               | -172.5       | -10.5        | 527,442.58          | 580,831.65         | 32° 26' 59.781 N | 104° 12' 19.076 W |
| 7,425.0                           | 82.74           | 270.19      | 7,181.1               | -172.5       | -35.2        | 527,442.66          | 580,806.95         | 32° 26' 59.782 N | 104° 12' 19.364 W |
| 7,450.0                           | 85.74           | 270.19      | 7,183.6               | -172.4       | -60.1        | 527,442.74          | 580,782.08         | 32° 26' 59.784 N | 104° 12' 19.654 W |
| 7,475.0                           | 88.74           | 270.19      | 7,184.8               | -172.3       | -85.0        | 527,442.82          | 580,757.11         | 32° 26' 59.785 N | 104° 12' 19.946 W |

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey                  |                    |                |                             |                 |                 |                           |                          |                  |                   |  |
|---------------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|---------------------------|--------------------------|------------------|-------------------|--|
| Measured<br>Depth<br>(usft)     | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Map<br>Northing<br>(usft) | Map<br>Easting<br>(usft) | Latitude         | Longitude         |  |
| 7,485.5                         | 90.00              | 270.19         | 7,185.0                     | -172.3          | -95.6           | 527,442.86                | 580,746.57               | 32° 26' 59.785 N | 104° 12' 20.069 W |  |
| Start 18971.2 hold at 7485.5 MD |                    |                |                             |                 |                 |                           |                          |                  |                   |  |
| 7,500.0                         | 90.00              | 270.19         | 7,185.0                     | -172.2          | -110.0          | 527,442.91                | 580,732.11               | 32° 26' 59.786 N | 104° 12' 20.237 W |  |
| 7,600.0                         | 90.00              | 270.19         | 7,185.0                     | -171.9          | -210.0          | 527,443.24                | 580,632.11               | 32° 26' 59.790 N | 104° 12' 21.404 W |  |
| 7,700.0                         | 90.00              | 270.19         | 7,185.0                     | -171.5          | -310.0          | 527,443.57                | 580,532.11               | 32° 26' 59.795 N | 104° 12' 22.572 W |  |
| 7,800.0                         | 90.00              | 270.19         | 7,185.0                     | -171.2          | -410.0          | 527,443.90                | 580,432.11               | 32° 26' 59.799 N | 104° 12' 23.739 W |  |
| 7,900.0                         | 90.00              | 270.19         | 7,185.0                     | -170.9          | -510.0          | 527,444.24                | 580,332.11               | 32° 26' 59.804 N | 104° 12' 24.906 W |  |
| 8,000.0                         | 90.00              | 270.19         | 7,185.0                     | -170.5          | -610.0          | 527,444.57                | 580,232.11               | 32° 26' 59.808 N | 104° 12' 26.073 W |  |
| 8,100.0                         | 90.00              | 270.19         | 7,185.0                     | -170.2          | -710.0          | 527,444.90                | 580,132.11               | 32° 26' 59.813 N | 104° 12' 27.240 W |  |
| 8,200.0                         | 90.00              | 270.19         | 7,185.0                     | -169.9          | -810.0          | 527,445.23                | 580,032.11               | 32° 26' 59.817 N | 104° 12' 28.407 W |  |
| 8,300.0                         | 90.00              | 270.19         | 7,185.0                     | -169.5          | -910.0          | 527,445.57                | 579,932.11               | 32° 26' 59.822 N | 104° 12' 29.574 W |  |
| 8,400.0                         | 90.00              | 270.19         | 7,185.0                     | -169.2          | -1,010.0        | 527,445.90                | 579,832.12               | 32° 26' 59.826 N | 104° 12' 30.741 W |  |
| 8,500.0                         | 90.00              | 270.19         | 7,185.0                     | -168.9          | -1,110.0        | 527,446.23                | 579,732.12               | 32° 26' 59.830 N | 104° 12' 31.908 W |  |
| 8,600.0                         | 90.00              | 270.19         | 7,185.0                     | -168.5          | -1,210.0        | 527,446.56                | 579,632.12               | 32° 26' 59.835 N | 104° 12' 33.075 W |  |
| 8,700.0                         | 90.00              | 270.19         | 7,185.0                     | -168.2          | -1,310.0        | 527,446.90                | 579,532.12               | 32° 26' 59.839 N | 104° 12' 34.242 W |  |
| 8,800.0                         | 90.00              | 270.19         | 7,185.0                     | -167.9          | -1,410.0        | 527,447.23                | 579,432.12               | 32° 26' 59.844 N | 104° 12' 35.409 W |  |
| 8,900.0                         | 90.00              | 270.19         | 7,185.0                     | -167.6          | -1,510.0        | 527,447.56                | 579,332.12               | 32° 26' 59.848 N | 104° 12' 36.576 W |  |
| 9,000.0                         | 90.00              | 270.19         | 7,185.0                     | -167.2          | -1,610.0        | 527,447.89                | 579,232.12               | 32° 26' 59.853 N | 104° 12' 37.743 W |  |
| 9,100.0                         | 90.00              | 270.19         | 7,185.0                     | -166.9          | -1,710.0        | 527,448.22                | 579,132.12               | 32° 26' 59.857 N | 104° 12' 38.910 W |  |
| 9,200.0                         | 90.00              | 270.19         | 7,185.0                     | -166.6          | -1,810.0        | 527,448.56                | 579,032.12               | 32° 26' 59.861 N | 104° 12' 40.077 W |  |
| 9,300.0                         | 90.00              | 270.19         | 7,185.0                     | -166.2          | -1,910.0        | 527,448.89                | 578,932.12               | 32° 26' 59.866 N | 104° 12' 41.244 W |  |
| 9,400.0                         | 90.00              | 270.19         | 7,185.0                     | -165.9          | -2,010.0        | 527,449.22                | 578,832.12               | 32° 26' 59.870 N | 104° 12' 42.411 W |  |
| 9,500.0                         | 90.00              | 270.19         | 7,185.0                     | -165.6          | -2,110.0        | 527,449.55                | 578,732.12               | 32° 26' 59.875 N | 104° 12' 43.579 W |  |
| 9,600.0                         | 90.00              | 270.19         | 7,185.0                     | -165.2          | -2,210.0        | 527,449.89                | 578,632.12               | 32° 26' 59.879 N | 104° 12' 44.746 W |  |
| 9,700.0                         | 90.00              | 270.19         | 7,185.0                     | -164.9          | -2,310.0        | 527,450.22                | 578,532.12               | 32° 26' 59.883 N | 104° 12' 45.913 W |  |
| 9,800.0                         | 90.00              | 270.19         | 7,185.0                     | -164.6          | -2,410.0        | 527,450.55                | 578,432.12               | 32° 26' 59.888 N | 104° 12' 47.080 W |  |
| 9,900.0                         | 90.00              | 270.19         | 7,185.0                     | -164.2          | -2,510.0        | 527,450.88                | 578,332.12               | 32° 26' 59.892 N | 104° 12' 48.247 W |  |
| 10,000.0                        | 90.00              | 270.19         | 7,185.0                     | -163.9          | -2,610.0        | 527,451.22                | 578,232.12               | 32° 26' 59.897 N | 104° 12' 49.414 W |  |
| 10,100.0                        | 90.00              | 270.19         | 7,185.0                     | -163.6          | -2,710.0        | 527,451.55                | 578,132.12               | 32° 26' 59.901 N | 104° 12' 50.581 W |  |
| 10,200.0                        | 90.00              | 270.19         | 7,185.0                     | -163.2          | -2,810.0        | 527,451.88                | 578,032.13               | 32° 26' 59.905 N | 104° 12' 51.748 W |  |
| 10,300.0                        | 90.00              | 270.19         | 7,185.0                     | -162.9          | -2,910.0        | 527,452.21                | 577,932.13               | 32° 26' 59.910 N | 104° 12' 52.915 W |  |
| 10,400.0                        | 90.00              | 270.19         | 7,185.0                     | -162.6          | -3,010.0        | 527,452.55                | 577,832.13               | 32° 26' 59.914 N | 104° 12' 54.082 W |  |
| 10,500.0                        | 90.00              | 270.19         | 7,185.0                     | -162.2          | -3,110.0        | 527,452.88                | 577,732.13               | 32° 26' 59.919 N | 104° 12' 55.249 W |  |
| 10,600.0                        | 90.00              | 270.19         | 7,185.0                     | -161.9          | -3,210.0        | 527,453.21                | 577,632.13               | 32° 26' 59.923 N | 104° 12' 56.416 W |  |
| 10,700.0                        | 90.00              | 270.19         | 7,185.0                     | -161.6          | -3,310.0        | 527,453.54                | 577,532.13               | 32° 26' 59.927 N | 104° 12' 57.583 W |  |
| 10,800.0                        | 90.00              | 270.19         | 7,185.0                     | -161.2          | -3,410.0        | 527,453.87                | 577,432.13               | 32° 26' 59.932 N | 104° 12' 58.750 W |  |
| 10,900.0                        | 90.00              | 270.19         | 7,185.0                     | -160.9          | -3,510.0        | 527,454.21                | 577,332.13               | 32° 26' 59.936 N | 104° 12' 59.917 W |  |
| 11,000.0                        | 90.00              | 270.19         | 7,185.0                     | -160.6          | -3,610.0        | 527,454.54                | 577,232.13               | 32° 26' 59.941 N | 104° 13' 1.084 W  |  |
| 11,100.0                        | 90.00              | 270.19         | 7,185.0                     | -160.2          | -3,710.0        | 527,454.87                | 577,132.13               | 32° 26' 59.945 N | 104° 13' 2.251 W  |  |
| 11,200.0                        | 90.00              | 270.19         | 7,185.0                     | -159.9          | -3,810.0        | 527,455.20                | 577,032.13               | 32° 26' 59.949 N | 104° 13' 3.419 W  |  |
| 11,300.0                        | 90.00              | 270.19         | 7,185.0                     | -159.6          | -3,910.0        | 527,455.54                | 576,932.13               | 32° 26' 59.954 N | 104° 13' 4.586 W  |  |
| 11,400.0                        | 90.00              | 270.19         | 7,185.0                     | -159.2          | -4,010.0        | 527,455.87                | 576,832.13               | 32° 26' 59.958 N | 104° 13' 5.753 W  |  |
| 11,500.0                        | 90.00              | 270.19         | 7,185.0                     | -158.9          | -4,110.0        | 527,456.20                | 576,732.13               | 32° 26' 59.962 N | 104° 13' 6.920 W  |  |
| 11,600.0                        | 90.00              | 270.19         | 7,185.0                     | -158.6          | -4,210.0        | 527,456.53                | 576,632.13               | 32° 26' 59.967 N | 104° 13' 8.087 W  |  |
| 11,700.0                        | 90.00              | 270.19         | 7,185.0                     | -158.2          | -4,310.0        | 527,456.87                | 576,532.13               | 32° 26' 59.971 N | 104° 13' 9.254 W  |  |
| 11,800.0                        | 90.00              | 270.19         | 7,185.0                     | -157.9          | -4,410.0        | 527,457.20                | 576,432.13               | 32° 26' 59.975 N | 104° 13' 10.421 W |  |
| 11,900.0                        | 90.00              | 270.19         | 7,185.0                     | -157.6          | -4,510.0        | 527,457.53                | 576,332.13               | 32° 26' 59.980 N | 104° 13' 11.588 W |  |
| 12,000.0                        | 90.00              | 270.19         | 7,185.0                     | -157.2          | -4,610.0        | 527,457.86                | 576,232.13               | 32° 26' 59.984 N | 104° 13' 12.755 W |  |
| 12,100.0                        | 90.00              | 270.19         | 7,185.0                     | -156.9          | -4,710.0        | 527,458.20                | 576,132.14               | 32° 26' 59.988 N | 104° 13' 13.922 W |  |
| 12,200.0                        | 90.00              | 270.19         | 7,185.0                     | -156.6          | -4,810.0        | 527,458.53                | 576,032.14               | 32° 26' 59.993 N | 104° 13' 15.089 W |  |
| 12,300.0                        | 90.00              | 270.19         | 7,185.0                     | -156.3          | -4,910.0        | 527,458.86                | 575,932.14               | 32° 26' 59.997 N | 104° 13' 16.256 W |  |
| 12,400.0                        | 90.00              | 270.19         | 7,185.0                     | -155.9          | -5,010.0        | 527,459.19                | 575,832.14               | 32° 27' 0.001 N  | 104° 13' 17.423 W |  |
| 12,500.0                        | 90.00              | 270.19         | 7,185.0                     | -155.6          | -5,110.0        | 527,459.52                | 575,732.14               | 32° 27' 0.006 N  | 104° 13' 18.590 W |  |
| 12,600.0                        | 90.00              | 270.19         | 7,185.0                     | -155.3          | -5,210.0        | 527,459.86                | 575,632.14               | 32° 27' 0.010 N  | 104° 13' 19.757 W |  |

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey        |                 |             |                       |              |              |                     |                    |                 |                   |  |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------------|-------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude        | Longitude         |  |
| 12,700.0              | 90.00           | 270.19      | 7,185.0               | -154.9       | -5,310.0     | 527,460.19          | 575,532.14         | 32° 27' 0.014 N | 104° 13' 20.924 W |  |
| 12,800.0              | 90.00           | 270.19      | 7,185.0               | -154.6       | -5,410.0     | 527,460.52          | 575,432.14         | 32° 27' 0.019 N | 104° 13' 22.091 W |  |
| 12,900.0              | 90.00           | 270.19      | 7,185.0               | -154.3       | -5,510.0     | 527,460.85          | 575,332.14         | 32° 27' 0.023 N | 104° 13' 23.259 W |  |
| 13,000.0              | 90.00           | 270.19      | 7,185.0               | -153.9       | -5,610.0     | 527,461.19          | 575,232.14         | 32° 27' 0.027 N | 104° 13' 24.426 W |  |
| 13,100.0              | 90.00           | 270.19      | 7,185.0               | -153.6       | -5,710.0     | 527,461.52          | 575,132.14         | 32° 27' 0.032 N | 104° 13' 25.593 W |  |
| 13,200.0              | 90.00           | 270.19      | 7,185.0               | -153.3       | -5,810.0     | 527,461.85          | 575,032.14         | 32° 27' 0.036 N | 104° 13' 26.760 W |  |
| 13,300.0              | 90.00           | 270.19      | 7,185.0               | -152.9       | -5,910.0     | 527,462.18          | 574,932.14         | 32° 27' 0.040 N | 104° 13' 27.927 W |  |
| 13,400.0              | 90.00           | 270.19      | 7,185.0               | -152.6       | -6,010.0     | 527,462.52          | 574,832.14         | 32° 27' 0.044 N | 104° 13' 29.094 W |  |
| 13,500.0              | 90.00           | 270.19      | 7,185.0               | -152.3       | -6,110.0     | 527,462.85          | 574,732.14         | 32° 27' 0.049 N | 104° 13' 30.261 W |  |
| 13,600.0              | 90.00           | 270.19      | 7,185.0               | -151.9       | -6,210.0     | 527,463.18          | 574,632.14         | 32° 27' 0.053 N | 104° 13' 31.428 W |  |
| 13,700.0              | 90.00           | 270.19      | 7,185.0               | -151.6       | -6,310.0     | 527,463.51          | 574,532.14         | 32° 27' 0.057 N | 104° 13' 32.595 W |  |
| 13,800.0              | 90.00           | 270.19      | 7,185.0               | -151.3       | -6,410.0     | 527,463.85          | 574,432.14         | 32° 27' 0.062 N | 104° 13' 33.762 W |  |
| 13,900.0              | 90.00           | 270.19      | 7,185.0               | -150.9       | -6,510.0     | 527,464.18          | 574,332.15         | 32° 27' 0.066 N | 104° 13' 34.929 W |  |
| 14,000.0              | 90.00           | 270.19      | 7,185.0               | -150.6       | -6,610.0     | 527,464.51          | 574,232.15         | 32° 27' 0.070 N | 104° 13' 36.096 W |  |
| 14,100.0              | 90.00           | 270.19      | 7,185.0               | -150.3       | -6,710.0     | 527,464.84          | 574,132.15         | 32° 27' 0.074 N | 104° 13' 37.263 W |  |
| 14,200.0              | 90.00           | 270.19      | 7,185.0               | -149.9       | -6,810.0     | 527,465.18          | 574,032.15         | 32° 27' 0.079 N | 104° 13' 38.430 W |  |
| 14,300.0              | 90.00           | 270.19      | 7,185.0               | -149.6       | -6,910.0     | 527,465.51          | 573,932.15         | 32° 27' 0.083 N | 104° 13' 39.597 W |  |
| 14,400.0              | 90.00           | 270.19      | 7,185.0               | -149.3       | -7,010.0     | 527,465.84          | 573,832.15         | 32° 27' 0.087 N | 104° 13' 40.764 W |  |
| 14,500.0              | 90.00           | 270.19      | 7,185.0               | -148.9       | -7,110.0     | 527,466.17          | 573,732.15         | 32° 27' 0.092 N | 104° 13' 41.931 W |  |
| 14,600.0              | 90.00           | 270.19      | 7,185.0               | -148.6       | -7,210.0     | 527,466.50          | 573,632.15         | 32° 27' 0.096 N | 104° 13' 43.099 W |  |
| 14,700.0              | 90.00           | 270.19      | 7,185.0               | -148.3       | -7,310.0     | 527,466.84          | 573,532.15         | 32° 27' 0.100 N | 104° 13' 44.266 W |  |
| 14,800.0              | 90.00           | 270.19      | 7,185.0               | -147.9       | -7,410.0     | 527,467.17          | 573,432.15         | 32° 27' 0.104 N | 104° 13' 45.433 W |  |
| 14,900.0              | 90.00           | 270.19      | 7,185.0               | -147.6       | -7,510.0     | 527,467.50          | 573,332.15         | 32° 27' 0.109 N | 104° 13' 46.600 W |  |
| 15,000.0              | 90.00           | 270.19      | 7,185.0               | -147.3       | -7,610.0     | 527,467.83          | 573,232.15         | 32° 27' 0.113 N | 104° 13' 47.767 W |  |
| 15,100.0              | 90.00           | 270.19      | 7,185.0               | -146.9       | -7,710.0     | 527,468.17          | 573,132.15         | 32° 27' 0.117 N | 104° 13' 48.934 W |  |
| 15,200.0              | 90.00           | 270.19      | 7,185.0               | -146.6       | -7,810.0     | 527,468.50          | 573,032.15         | 32° 27' 0.121 N | 104° 13' 50.101 W |  |
| 15,300.0              | 90.00           | 270.19      | 7,185.0               | -146.3       | -7,910.0     | 527,468.83          | 572,932.15         | 32° 27' 0.126 N | 104° 13' 51.268 W |  |
| 15,400.0              | 90.00           | 270.19      | 7,185.0               | -145.9       | -8,010.0     | 527,469.16          | 572,832.15         | 32° 27' 0.130 N | 104° 13' 52.435 W |  |
| 15,500.0              | 90.00           | 270.19      | 7,185.0               | -145.6       | -8,110.0     | 527,469.50          | 572,732.15         | 32° 27' 0.134 N | 104° 13' 53.602 W |  |
| 15,600.0              | 90.00           | 270.19      | 7,185.0               | -145.3       | -8,210.0     | 527,469.83          | 572,632.15         | 32° 27' 0.138 N | 104° 13' 54.769 W |  |
| 15,700.0              | 90.00           | 270.19      | 7,185.0               | -145.0       | -8,310.0     | 527,470.16          | 572,532.16         | 32° 27' 0.142 N | 104° 13' 55.936 W |  |
| 15,800.0              | 90.00           | 270.19      | 7,185.0               | -144.6       | -8,410.0     | 527,470.49          | 572,432.16         | 32° 27' 0.147 N | 104° 13' 57.103 W |  |
| 15,900.0              | 90.00           | 270.19      | 7,185.0               | -144.3       | -8,510.0     | 527,470.83          | 572,332.16         | 32° 27' 0.151 N | 104° 13' 58.270 W |  |
| 16,000.0              | 90.00           | 270.19      | 7,185.0               | -144.0       | -8,610.0     | 527,471.16          | 572,232.16         | 32° 27' 0.155 N | 104° 13' 59.437 W |  |
| 16,100.0              | 90.00           | 270.19      | 7,185.0               | -143.6       | -8,710.0     | 527,471.49          | 572,132.16         | 32° 27' 0.159 N | 104° 14' 0.604 W  |  |
| 16,200.0              | 90.00           | 270.19      | 7,185.0               | -143.3       | -8,810.0     | 527,471.82          | 572,032.16         | 32° 27' 0.164 N | 104° 14' 1.771 W  |  |
| 16,300.0              | 90.00           | 270.19      | 7,185.0               | -143.0       | -8,910.0     | 527,472.15          | 571,932.16         | 32° 27' 0.168 N | 104° 14' 2.939 W  |  |
| 16,400.0              | 90.00           | 270.19      | 7,185.0               | -142.6       | -9,010.0     | 527,472.49          | 571,832.16         | 32° 27' 0.172 N | 104° 14' 4.106 W  |  |
| 16,500.0              | 90.00           | 270.19      | 7,185.0               | -142.3       | -9,110.0     | 527,472.82          | 571,732.16         | 32° 27' 0.176 N | 104° 14' 5.273 W  |  |
| 16,600.0              | 90.00           | 270.19      | 7,185.0               | -142.0       | -9,210.0     | 527,473.15          | 571,632.16         | 32° 27' 0.180 N | 104° 14' 6.440 W  |  |
| 16,700.0              | 90.00           | 270.19      | 7,185.0               | -141.6       | -9,310.0     | 527,473.48          | 571,532.16         | 32° 27' 0.185 N | 104° 14' 7.607 W  |  |
| 16,800.0              | 90.00           | 270.19      | 7,185.0               | -141.3       | -9,410.0     | 527,473.82          | 571,432.16         | 32° 27' 0.189 N | 104° 14' 8.774 W  |  |
| 16,900.0              | 90.00           | 270.19      | 7,185.0               | -141.0       | -9,510.0     | 527,474.15          | 571,332.16         | 32° 27' 0.193 N | 104° 14' 9.941 W  |  |
| 17,000.0              | 90.00           | 270.19      | 7,185.0               | -140.6       | -9,610.0     | 527,474.48          | 571,232.16         | 32° 27' 0.197 N | 104° 14' 11.108 W |  |
| 17,100.0              | 90.00           | 270.19      | 7,185.0               | -140.3       | -9,710.0     | 527,474.81          | 571,132.16         | 32° 27' 0.201 N | 104° 14' 12.275 W |  |
| 17,200.0              | 90.00           | 270.19      | 7,185.0               | -140.0       | -9,810.0     | 527,475.15          | 571,032.16         | 32° 27' 0.206 N | 104° 14' 13.442 W |  |
| 17,300.0              | 90.00           | 270.19      | 7,185.0               | -139.6       | -9,910.0     | 527,475.48          | 570,932.16         | 32° 27' 0.210 N | 104° 14' 14.609 W |  |
| 17,400.0              | 90.00           | 270.19      | 7,185.0               | -139.3       | -10,010.0    | 527,475.81          | 570,832.16         | 32° 27' 0.214 N | 104° 14' 15.776 W |  |
| 17,500.0              | 90.00           | 270.19      | 7,185.0               | -139.0       | -10,110.0    | 527,476.14          | 570,732.17         | 32° 27' 0.218 N | 104° 14' 16.943 W |  |
| 17,600.0              | 90.00           | 270.19      | 7,185.0               | -138.6       | -10,210.0    | 527,476.48          | 570,632.17         | 32° 27' 0.222 N | 104° 14' 18.110 W |  |
| 17,700.0              | 90.00           | 270.19      | 7,185.0               | -138.3       | -10,310.0    | 527,476.81          | 570,532.17         | 32° 27' 0.226 N | 104° 14' 19.277 W |  |
| 17,800.0              | 90.00           | 270.19      | 7,185.0               | -138.0       | -10,410.0    | 527,477.14          | 570,432.17         | 32° 27' 0.231 N | 104° 14' 20.444 W |  |
| 17,900.0              | 90.00           | 270.19      | 7,185.0               | -137.6       | -10,510.0    | 527,477.47          | 570,332.17         | 32° 27' 0.235 N | 104° 14' 21.611 W |  |
| 18,000.0              | 90.00           | 270.19      | 7,185.0               | -137.3       | -10,610.0    | 527,477.80          | 570,232.17         | 32° 27' 0.239 N | 104° 14' 22.779 W |  |
| 18,100.0              | 90.00           | 270.19      | 7,185.0               | -137.0       | -10,710.0    | 527,478.14          | 570,132.17         | 32° 27' 0.243 N | 104° 14' 23.946 W |  |



# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey        |                 |             |                       |              |              |                     |                    |                 |                   |  |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------------|-------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude        | Longitude         |  |
| 18,200.0              | 90.00           | 270.19      | 7,185.0               | -136.6       | -10,810.0    | 527,478.47          | 570,032.17         | 32° 27' 0.247 N | 104° 14' 25.113 W |  |
| 18,300.0              | 90.00           | 270.19      | 7,185.0               | -136.3       | -10,910.0    | 527,478.80          | 569,932.17         | 32° 27' 0.251 N | 104° 14' 26.280 W |  |
| 18,400.0              | 90.00           | 270.19      | 7,185.0               | -136.0       | -11,010.0    | 527,479.13          | 569,832.17         | 32° 27' 0.255 N | 104° 14' 27.447 W |  |
| 18,500.0              | 90.00           | 270.19      | 7,185.0               | -135.6       | -11,110.0    | 527,479.47          | 569,732.17         | 32° 27' 0.260 N | 104° 14' 28.614 W |  |
| 18,600.0              | 90.00           | 270.19      | 7,185.0               | -135.3       | -11,210.0    | 527,479.80          | 569,632.17         | 32° 27' 0.264 N | 104° 14' 29.781 W |  |
| 18,700.0              | 90.00           | 270.19      | 7,185.0               | -135.0       | -11,310.0    | 527,480.13          | 569,532.17         | 32° 27' 0.268 N | 104° 14' 30.948 W |  |
| 18,800.0              | 90.00           | 270.19      | 7,185.0               | -134.6       | -11,410.0    | 527,480.46          | 569,432.17         | 32° 27' 0.272 N | 104° 14' 32.115 W |  |
| 18,900.0              | 90.00           | 270.19      | 7,185.0               | -134.3       | -11,510.0    | 527,480.80          | 569,332.17         | 32° 27' 0.276 N | 104° 14' 33.282 W |  |
| 19,000.0              | 90.00           | 270.19      | 7,185.0               | -134.0       | -11,610.0    | 527,481.13          | 569,232.17         | 32° 27' 0.280 N | 104° 14' 34.449 W |  |
| 19,100.0              | 90.00           | 270.19      | 7,185.0               | -133.7       | -11,710.0    | 527,481.46          | 569,132.17         | 32° 27' 0.284 N | 104° 14' 35.616 W |  |
| 19,200.0              | 90.00           | 270.19      | 7,185.0               | -133.3       | -11,810.0    | 527,481.79          | 569,032.17         | 32° 27' 0.289 N | 104° 14' 36.783 W |  |
| 19,300.0              | 90.00           | 270.19      | 7,185.0               | -133.0       | -11,910.0    | 527,482.13          | 568,932.18         | 32° 27' 0.293 N | 104° 14' 37.950 W |  |
| 19,400.0              | 90.00           | 270.19      | 7,185.0               | -132.7       | -12,010.0    | 527,482.46          | 568,832.18         | 32° 27' 0.297 N | 104° 14' 39.117 W |  |
| 19,500.0              | 90.00           | 270.19      | 7,185.0               | -132.3       | -12,110.0    | 527,482.79          | 568,732.18         | 32° 27' 0.301 N | 104° 14' 40.284 W |  |
| 19,600.0              | 90.00           | 270.19      | 7,185.0               | -132.0       | -12,210.0    | 527,483.12          | 568,632.18         | 32° 27' 0.305 N | 104° 14' 41.452 W |  |
| 19,700.0              | 90.00           | 270.19      | 7,185.0               | -131.7       | -12,310.0    | 527,483.45          | 568,532.18         | 32° 27' 0.309 N | 104° 14' 42.619 W |  |
| 19,800.0              | 90.00           | 270.19      | 7,185.0               | -131.3       | -12,410.0    | 527,483.79          | 568,432.18         | 32° 27' 0.313 N | 104° 14' 43.786 W |  |
| 19,900.0              | 90.00           | 270.19      | 7,185.0               | -131.0       | -12,510.0    | 527,484.12          | 568,332.18         | 32° 27' 0.317 N | 104° 14' 44.953 W |  |
| 20,000.0              | 90.00           | 270.19      | 7,185.0               | -130.7       | -12,610.0    | 527,484.45          | 568,232.18         | 32° 27' 0.321 N | 104° 14' 46.120 W |  |
| 20,100.0              | 90.00           | 270.19      | 7,185.0               | -130.3       | -12,710.0    | 527,484.78          | 568,132.18         | 32° 27' 0.326 N | 104° 14' 47.287 W |  |
| 20,200.0              | 90.00           | 270.19      | 7,185.0               | -130.0       | -12,810.0    | 527,485.12          | 568,032.18         | 32° 27' 0.330 N | 104° 14' 48.454 W |  |
| 20,300.0              | 90.00           | 270.19      | 7,185.0               | -129.7       | -12,910.0    | 527,485.45          | 567,932.18         | 32° 27' 0.334 N | 104° 14' 49.621 W |  |
| 20,400.0              | 90.00           | 270.19      | 7,185.0               | -129.3       | -13,010.0    | 527,485.78          | 567,832.18         | 32° 27' 0.338 N | 104° 14' 50.788 W |  |
| 20,500.0              | 90.00           | 270.19      | 7,185.0               | -129.0       | -13,110.0    | 527,486.11          | 567,732.18         | 32° 27' 0.342 N | 104° 14' 51.955 W |  |
| 20,600.0              | 90.00           | 270.19      | 7,185.0               | -128.7       | -13,210.0    | 527,486.45          | 567,632.18         | 32° 27' 0.346 N | 104° 14' 53.122 W |  |
| 20,700.0              | 90.00           | 270.19      | 7,185.0               | -128.3       | -13,309.9    | 527,486.78          | 567,532.18         | 32° 27' 0.350 N | 104° 14' 54.289 W |  |
| 20,800.0              | 90.00           | 270.19      | 7,185.0               | -128.0       | -13,409.9    | 527,487.11          | 567,432.18         | 32° 27' 0.354 N | 104° 14' 55.456 W |  |
| 20,900.0              | 90.00           | 270.19      | 7,185.0               | -127.7       | -13,509.9    | 527,487.44          | 567,332.18         | 32° 27' 0.358 N | 104° 14' 56.623 W |  |
| 21,000.0              | 90.00           | 270.19      | 7,185.0               | -127.3       | -13,609.9    | 527,487.78          | 567,232.18         | 32° 27' 0.362 N | 104° 14' 57.790 W |  |
| 21,100.0              | 90.00           | 270.19      | 7,185.0               | -127.0       | -13,709.9    | 527,488.11          | 567,132.19         | 32° 27' 0.366 N | 104° 14' 58.957 W |  |
| 21,200.0              | 90.00           | 270.19      | 7,185.0               | -126.7       | -13,809.9    | 527,488.44          | 567,032.19         | 32° 27' 0.370 N | 104° 15' 0.125 W  |  |
| 21,300.0              | 90.00           | 270.19      | 7,185.0               | -126.3       | -13,909.9    | 527,488.77          | 566,932.19         | 32° 27' 0.374 N | 104° 15' 1.292 W  |  |
| 21,400.0              | 90.00           | 270.19      | 7,185.0               | -126.0       | -14,009.9    | 527,489.11          | 566,832.19         | 32° 27' 0.378 N | 104° 15' 2.459 W  |  |
| 21,500.0              | 90.00           | 270.19      | 7,185.0               | -125.7       | -14,109.9    | 527,489.44          | 566,732.19         | 32° 27' 0.383 N | 104° 15' 3.626 W  |  |
| 21,600.0              | 90.00           | 270.19      | 7,185.0               | -125.3       | -14,209.9    | 527,489.77          | 566,632.19         | 32° 27' 0.387 N | 104° 15' 4.793 W  |  |
| 21,700.0              | 90.00           | 270.19      | 7,185.0               | -125.0       | -14,309.9    | 527,490.10          | 566,532.19         | 32° 27' 0.391 N | 104° 15' 5.960 W  |  |
| 21,800.0              | 90.00           | 270.19      | 7,185.0               | -124.7       | -14,409.9    | 527,490.43          | 566,432.19         | 32° 27' 0.395 N | 104° 15' 7.127 W  |  |
| 21,900.0              | 90.00           | 270.19      | 7,185.0               | -124.3       | -14,509.9    | 527,490.77          | 566,332.19         | 32° 27' 0.399 N | 104° 15' 8.294 W  |  |
| 22,000.0              | 90.00           | 270.19      | 7,185.0               | -124.0       | -14,609.9    | 527,491.10          | 566,232.19         | 32° 27' 0.403 N | 104° 15' 9.461 W  |  |
| 22,100.0              | 90.00           | 270.19      | 7,185.0               | -123.7       | -14,709.9    | 527,491.43          | 566,132.19         | 32° 27' 0.407 N | 104° 15' 10.628 W |  |
| 22,200.0              | 90.00           | 270.19      | 7,185.0               | -123.3       | -14,809.9    | 527,491.76          | 566,032.19         | 32° 27' 0.411 N | 104° 15' 11.795 W |  |
| 22,300.0              | 90.00           | 270.19      | 7,185.0               | -123.0       | -14,909.9    | 527,492.10          | 565,932.19         | 32° 27' 0.415 N | 104° 15' 12.962 W |  |
| 22,400.0              | 90.00           | 270.19      | 7,185.0               | -122.7       | -15,009.9    | 527,492.43          | 565,832.19         | 32° 27' 0.419 N | 104° 15' 14.129 W |  |
| 22,500.0              | 90.00           | 270.19      | 7,185.0               | -122.4       | -15,109.9    | 527,492.76          | 565,732.19         | 32° 27' 0.423 N | 104° 15' 15.296 W |  |
| 22,600.0              | 90.00           | 270.19      | 7,185.0               | -122.0       | -15,209.9    | 527,493.09          | 565,632.19         | 32° 27' 0.427 N | 104° 15' 16.463 W |  |
| 22,700.0              | 90.00           | 270.19      | 7,185.0               | -121.7       | -15,309.9    | 527,493.43          | 565,532.19         | 32° 27' 0.431 N | 104° 15' 17.630 W |  |
| 22,800.0              | 90.00           | 270.19      | 7,185.0               | -121.4       | -15,409.9    | 527,493.76          | 565,432.19         | 32° 27' 0.435 N | 104° 15' 18.797 W |  |
| 22,900.0              | 90.00           | 270.19      | 7,185.0               | -121.0       | -15,509.9    | 527,494.09          | 565,332.19         | 32° 27' 0.439 N | 104° 15' 19.965 W |  |
| 23,000.0              | 90.00           | 270.19      | 7,185.0               | -120.7       | -15,609.9    | 527,494.42          | 565,232.20         | 32° 27' 0.443 N | 104° 15' 21.132 W |  |
| 23,100.0              | 90.00           | 270.19      | 7,185.0               | -120.4       | -15,709.9    | 527,494.76          | 565,132.20         | 32° 27' 0.447 N | 104° 15' 22.299 W |  |
| 23,200.0              | 90.00           | 270.19      | 7,185.0               | -120.0       | -15,809.9    | 527,495.09          | 565,032.20         | 32° 27' 0.451 N | 104° 15' 23.466 W |  |
| 23,300.0              | 90.00           | 270.19      | 7,185.0               | -119.7       | -15,909.9    | 527,495.42          | 564,932.20         | 32° 27' 0.455 N | 104° 15' 24.633 W |  |
| 23,400.0              | 90.00           | 270.19      | 7,185.0               | -119.4       | -16,009.9    | 527,495.75          | 564,832.20         | 32° 27' 0.459 N | 104° 15' 25.800 W |  |
| 23,500.0              | 90.00           | 270.19      | 7,185.0               | -119.0       | -16,109.9    | 527,496.08          | 564,732.20         | 32° 27' 0.463 N | 104° 15' 26.967 W |  |
| 23,600.0              | 90.00           | 270.19      | 7,185.0               | -118.7       | -16,209.9    | 527,496.42          | 564,632.20         | 32° 27' 0.467 N | 104° 15' 28.134 W |  |

# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Planned Survey              |                    |                |                             |                 |                 |                           |                          |                 |                   |  |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|---------------------------|--------------------------|-----------------|-------------------|--|
| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Map<br>Northing<br>(usft) | Map<br>Easting<br>(usft) | Latitude        | Longitude         |  |
| 23,700.0                    | 90.00              | 270.19         | 7,185.0                     | -118.4          | -16,309.9       | 527,496.75                | 564,532.20               | 32° 27' 0.471 N | 104° 15' 29.301 W |  |
| 23,800.0                    | 90.00              | 270.19         | 7,185.0                     | -118.0          | -16,409.9       | 527,497.08                | 564,432.20               | 32° 27' 0.475 N | 104° 15' 30.468 W |  |
| 23,900.0                    | 90.00              | 270.19         | 7,185.0                     | -117.7          | -16,509.9       | 527,497.41                | 564,332.20               | 32° 27' 0.479 N | 104° 15' 31.635 W |  |
| 24,000.0                    | 90.00              | 270.19         | 7,185.0                     | -117.4          | -16,609.9       | 527,497.75                | 564,232.20               | 32° 27' 0.483 N | 104° 15' 32.802 W |  |
| 24,100.0                    | 90.00              | 270.19         | 7,185.0                     | -117.0          | -16,709.9       | 527,498.08                | 564,132.20               | 32° 27' 0.487 N | 104° 15' 33.969 W |  |
| 24,200.0                    | 90.00              | 270.19         | 7,185.0                     | -116.7          | -16,809.9       | 527,498.41                | 564,032.20               | 32° 27' 0.491 N | 104° 15' 35.136 W |  |
| 24,300.0                    | 90.00              | 270.19         | 7,185.0                     | -116.4          | -16,909.9       | 527,498.74                | 563,932.20               | 32° 27' 0.495 N | 104° 15' 36.303 W |  |
| 24,400.0                    | 90.00              | 270.19         | 7,185.0                     | -116.0          | -17,009.9       | 527,499.08                | 563,832.20               | 32° 27' 0.499 N | 104° 15' 37.470 W |  |
| 24,500.0                    | 90.00              | 270.19         | 7,185.0                     | -115.7          | -17,109.9       | 527,499.41                | 563,732.20               | 32° 27' 0.503 N | 104° 15' 38.638 W |  |
| 24,600.0                    | 90.00              | 270.19         | 7,185.0                     | -115.4          | -17,209.9       | 527,499.74                | 563,632.20               | 32° 27' 0.507 N | 104° 15' 39.805 W |  |
| 24,700.0                    | 90.00              | 270.19         | 7,185.0                     | -115.0          | -17,309.9       | 527,500.07                | 563,532.20               | 32° 27' 0.511 N | 104° 15' 40.972 W |  |
| 24,800.0                    | 90.00              | 270.19         | 7,185.0                     | -114.7          | -17,409.9       | 527,500.41                | 563,432.21               | 32° 27' 0.515 N | 104° 15' 42.139 W |  |
| 24,900.0                    | 90.00              | 270.19         | 7,185.0                     | -114.4          | -17,509.9       | 527,500.74                | 563,332.21               | 32° 27' 0.519 N | 104° 15' 43.306 W |  |
| 25,000.0                    | 90.00              | 270.19         | 7,185.0                     | -114.0          | -17,609.9       | 527,501.07                | 563,232.21               | 32° 27' 0.523 N | 104° 15' 44.473 W |  |
| 25,100.0                    | 90.00              | 270.19         | 7,185.0                     | -113.7          | -17,709.9       | 527,501.40                | 563,132.21               | 32° 27' 0.526 N | 104° 15' 45.640 W |  |
| 25,200.0                    | 90.00              | 270.19         | 7,185.0                     | -113.4          | -17,809.9       | 527,501.73                | 563,032.21               | 32° 27' 0.530 N | 104° 15' 46.807 W |  |
| 25,300.0                    | 90.00              | 270.19         | 7,185.0                     | -113.0          | -17,909.9       | 527,502.07                | 562,932.21               | 32° 27' 0.534 N | 104° 15' 47.974 W |  |
| 25,400.0                    | 90.00              | 270.19         | 7,185.0                     | -112.7          | -18,009.9       | 527,502.40                | 562,832.21               | 32° 27' 0.538 N | 104° 15' 49.141 W |  |
| 25,500.0                    | 90.00              | 270.19         | 7,185.0                     | -112.4          | -18,109.9       | 527,502.73                | 562,732.21               | 32° 27' 0.542 N | 104° 15' 50.308 W |  |
| 25,600.0                    | 90.00              | 270.19         | 7,185.0                     | -112.0          | -18,209.9       | 527,503.06                | 562,632.21               | 32° 27' 0.546 N | 104° 15' 51.475 W |  |
| 25,700.0                    | 90.00              | 270.19         | 7,185.0                     | -111.7          | -18,309.9       | 527,503.40                | 562,532.21               | 32° 27' 0.550 N | 104° 15' 52.642 W |  |
| 25,800.0                    | 90.00              | 270.19         | 7,185.0                     | -111.4          | -18,409.9       | 527,503.73                | 562,432.21               | 32° 27' 0.554 N | 104° 15' 53.809 W |  |
| 25,900.0                    | 90.00              | 270.19         | 7,185.0                     | -111.1          | -18,509.9       | 527,504.06                | 562,332.21               | 32° 27' 0.558 N | 104° 15' 54.976 W |  |
| 26,000.0                    | 90.00              | 270.19         | 7,185.0                     | -110.7          | -18,609.9       | 527,504.39                | 562,232.21               | 32° 27' 0.562 N | 104° 15' 56.144 W |  |
| 26,100.0                    | 90.00              | 270.19         | 7,185.0                     | -110.4          | -18,709.9       | 527,504.73                | 562,132.21               | 32° 27' 0.566 N | 104° 15' 57.311 W |  |
| 26,200.0                    | 90.00              | 270.19         | 7,185.0                     | -110.1          | -18,809.9       | 527,505.06                | 562,032.21               | 32° 27' 0.570 N | 104° 15' 58.478 W |  |
| 26,300.0                    | 90.00              | 270.19         | 7,185.0                     | -109.7          | -18,909.9       | 527,505.39                | 561,932.21               | 32° 27' 0.574 N | 104° 15' 59.645 W |  |
| 26,400.0                    | 90.00              | 270.19         | 7,185.0                     | -109.4          | -19,009.9       | 527,505.72                | 561,832.21               | 32° 27' 0.577 N | 104° 16' 0.812 W  |  |
| 26,456.7                    | 90.00              | 270.19         | 7,185.0                     | -109.2          | -19,066.6       | 527,505.91                | 561,775.48               | 32° 27' 0.580 N | 104° 16' 1.474 W  |  |
| TD at 26456.7 - BZ 123H LTP |                    |                |                             |                 |                 |                           |                          |                 |                   |  |

| Design Targets                                                                            |           |          |         |        |           |            |            |                  |                   |  |
|-------------------------------------------------------------------------------------------|-----------|----------|---------|--------|-----------|------------|------------|------------------|-------------------|--|
| Target Name                                                                               |           |          |         |        |           |            |            |                  |                   |  |
| - hit/miss target                                                                         | Dip Angle | Dip Dir. | TVD     | +N/-S  | +E/-W     | Northing   | Easting    |                  |                   |  |
| - Shape                                                                                   | (°)       | (°)      | (usft)  | (usft) | (usft)    | (usft)     | (usft)     | Latitude         | Longitude         |  |
| BZ 123H FTP                                                                               | 0.00      | 0.01     | 7,185.0 | -173.8 | 441.9     | 527,441.27 | 581,284.05 | 32° 26' 59.763 N | 104° 12' 13.796 W |  |
| - plan misses target center by 241.5usft at 7079.8usft MD (7022.7 TVD, -173.4 N, 263.1 E) |           |          |         |        |           |            |            |                  |                   |  |
| - Point                                                                                   |           |          |         |        |           |            |            |                  |                   |  |
| BZ 123H LTP                                                                               | 0.00      | 0.01     | 7,185.0 | -109.2 | -19,066.6 | 527,505.91 | 561,775.48 | 32° 27' 0.580 N  | 104° 16' 1.474 W  |  |
| - plan hits target center                                                                 |           |          |         |        |           |            |            |                  |                   |  |
| - Point                                                                                   |           |          |         |        |           |            |            |                  |                   |  |



# PERMIAN

## RESOURCES

### Planning Report - Geographic

|                  |                 |                                     |                      |
|------------------|-----------------|-------------------------------------|----------------------|
| <b>Database:</b> | Compass_17      | <b>Local Co-ordinate Reference:</b> | Well BAKED ZITI 123H |
| <b>Company:</b>  | NEW MEXICO      | <b>TVD Reference:</b>               | KB @ 3183.6usft      |
| <b>Project:</b>  | (SP) EDDY       | <b>MD Reference:</b>                | KB @ 3183.6usft      |
| <b>Site:</b>     | BAKED ZITI      | <b>North Reference:</b>             | Grid                 |
| <b>Well:</b>     | BAKED ZITI 123H | <b>Survey Calculation Method:</b>   | Minimum Curvature    |
| <b>Wellbore:</b> | OWB             |                                     |                      |
| <b>Design:</b>   | PWP0            |                                     |                      |

| Plan Annotations            |                             |                   |                 |                                 |  |
|-----------------------------|-----------------------------|-------------------|-----------------|---------------------------------|--|
| Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Local Coordinates |                 | Comment                         |  |
|                             |                             | +N/-S<br>(usft)   | +E/-W<br>(usft) |                                 |  |
| 1,000.0                     | 1,000.0                     | 0.0               | 0.0             | Start Build 2.00                |  |
| 1,400.0                     | 1,398.7                     | -11.6             | 25.4            | Start 2614.3 hold at 1400.0 MD  |  |
| 4,014.3                     | 3,987.6                     | -162.3            | 356.5           | Start Drop -2.00                |  |
| 4,414.3                     | 4,386.3                     | -173.8            | 381.9           | Start 2321.2 hold at 4414.3 MD  |  |
| 6,735.5                     | 6,707.5                     | -173.8            | 381.9           | Start DLS 12.00 TFO 270.19      |  |
| 7,485.5                     | 7,185.0                     | -172.3            | -95.6           | Start 18971.2 hold at 7485.5 MD |  |
| 26,456.7                    | 7,185.0                     | -109.2            | -19,066.6       | TD at 26456.7                   |  |

## Permian Resources - BAKED ZITI 123H

## 1. Geologic Formations

| Formation            | Lithology                 | Elevation | TVD  | Target |
|----------------------|---------------------------|-----------|------|--------|
| Rustler              | Sandstone                 | 3179      | 5    | No     |
| Top of Salt          | Salt                      | 2884      | 300  | No     |
| Tansill              | Sandstone                 | NP        | NP   | No     |
| Yates                | Anhydrite/Shale           | NP        | NP   | No     |
| Seven Rivers         | Limestone                 | NP        | NP   | No     |
| Capitan              | Sandstone                 | 2404      | 780  | No     |
| Delaware Sands       | Sandstone                 | 674       | 2510 | No     |
| Brushy Canyon        | Sandstone                 | -1226     | 4410 | No     |
| Bone Spring Lime     | Limestone/Shale           | -1616     | 4800 | No     |
| 1st Bone Spring Sand | Sandstone/Limestone/Shale | -2886     | 6070 | No     |
| 2nd Bone Spring Sand | Sandstone/Limestone/Shale | -3714     | 6898 | Yes    |
| 3rd Bone Spring Sand | Sandstone/Limestone/Shale | -5116     | 8300 | No     |
| Wolfcamp             | Shale                     | -5446     | 8630 | No     |

## 2. Blowout Prevention

| BOP installed and tested before drilling which hole? | Size?   | Min. Required WP | Type       | x | Tested to: |
|------------------------------------------------------|---------|------------------|------------|---|------------|
| 12.25                                                | 13-5/8" | 5M               | Annular    | x | 2500 psi   |
|                                                      |         |                  | Blind Ram  | x | 5000 psi   |
|                                                      |         |                  | Pipe Ram   | x |            |
|                                                      |         |                  | Double Ram |   |            |
|                                                      |         |                  | Other*     |   |            |
| 9.875                                                | 13-5/8" | 5M               | Annular    | x | 2500 psi   |
|                                                      |         |                  | Blind Ram  | x | 5000 psi   |
|                                                      |         |                  | Pipe Ram   | x |            |
|                                                      |         |                  | Double Ram |   |            |
|                                                      |         |                  | Other*     |   |            |
| 7.875                                                | 13-5/8" | 5M               | Annular    | x | 2500 psi   |
|                                                      |         |                  | Blind Ram  | x | 5000 psi   |
|                                                      |         |                  | Pipe Ram   | x |            |
|                                                      |         |                  | Double Ram |   |            |
|                                                      |         |                  | Other*     |   |            |

**Equipment:** BOPE will meet all requirements for above listed system per 43 CFR 3172. BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The system may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional, tested, and will meet all requirements per 43 CFR 3172. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing of the surface x intermediate annulus without breaking the connection between the BOP & wellhead. A variance is requested to utilize a flexible choke line (flexhose) from the BOP to choke manifold.

**Requesting Variance? YES**

**Variance request: Multibowl Wellhead, Flexhose, Breaktesting, Offline Cementing Variances. Attachments in Section 8.**

**Testing Procedure:** Operator requests to ONLY test broken pressure seals per API Standard 53 and the attachments in Section 8. The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed, b. whenever any seal subject to test pressure is broken, c. following related repairs, d. at 21-day intervals. Testing of the ram type preventer(s) and annual type preventer(s) shall be tested per 43 CFR 3172. The BOPE configuration, choke manifold layout, and accumulator system will be in compliance with 43 CFR 3172. Bleed lines will discharge 100' from wellhead in non-H2S scenarios and 150' from wellhead in H2S scenarios.

Choke Diagram Attachment: 5M Choke Manifold  
BOP Diagram Attachment: BOP Schematics

**3. Casing**

| String                | Hole Size | Casing Size | Top  | Bottom | Top TVD | Bottom TVD | Length | Grade   | Weight | Connection | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------------------|-----------|-------------|------|--------|---------|------------|--------|---------|--------|------------|-------------|----------|---------------|----------|--------------|---------|
| Surface               | 17.5      | 13.375      | 0    | 300    | 0       | 300        | 300    | J55     | 54.5   | BTC        | 7.62        | 8.26     | Dry           | 7.81     | Dry          | 7.33    |
| Intermediate 1        | 12.25     | 10.75       | 0    | 790    | 0       | 790        | 790    | J55     | 45.5   | BTC        | 10.06       | 3.16     | Dry           | 7.82     | Dry          | 5.26    |
| Intermediate 2        | 9.875     | 8.625       | 0    | 3163   | 0       | 3163       | 3163   | P110 HS | 32     | MO-FXL     | 7.13        | 2.75     | Dry           | 3.92     | Dry          | 5.69    |
| Production            | 7.875     | 5.5         | 0    | 9465   | 0       | 7185       | 9465   | P110RY  | 20     | Rattler    | 2.00        | 2.09     | Dry           | 2.24     | Dry          | 2.24    |
| Production            | 7.875     | 5.5         | 9465 | 26457  | 7185    | 7185       | 16992  | P110RY  | 20     | Rattler    | 2.00        | 2.09     | Dry           | 2.24     | Dry          | 2.24    |
| BLM Min Safety Factor |           |             |      |        |         |            |        |         |        |            | 1.125       | 1        |               | 1.6      |              | 1.6     |

Non API casing spec sheets and casing design assumptions attached.

**4. Cement**

| String         | Lead/Tail | Top MD | Bottom MD | Quantity (sx) | Yield | Density | Cu Ft | Excess % | Cement Type | Additives                                       |
|----------------|-----------|--------|-----------|---------------|-------|---------|-------|----------|-------------|-------------------------------------------------|
| Surface        | Tail      | 0      | 300       | 240           | 1.34  | 14.8    | 320   | 50%      | Class C     | Accelerator                                     |
| Intermediate 1 | Lead      | 0      | 630       | 100           | 1.88  | 12.9    | 170   | 50%      | Class C     | EconoCem-HLC + 5% Salt + 5% Kol-Seal            |
| Intermediate 1 | Tail      | 630    | 790       | 40            | 1.34  | 14.8    | 50    | 50%      | Class C     | Retarder                                        |
| Intermediate 2 | Lead      | 0      | 2530      | 150           | 2.96  | 11      | 440   | 50%      | Class C     | EconoCem-HLC + 5% Salt + 5% Kol-Seal            |
| Intermediate 2 | Tail      | 2530   | 3163      | 80            | 1.33  | 14.8    | 100   | 25%      | Class C     | Salt                                            |
| Production     | Lead      | 2663   | 6736      | 400           | 2.41  | 11.5    | 960   | 40%      | Class H     | POZ, Extender, Fluid Loss, Dispersant, Retarder |
| Production     | Tail      | 6736   | 26457     | 2480          | 1.73  | 12.5    | 4280  | 25%      | Class H     | POZ, Extender, Fluid Loss, Dispersant, Retarder |

Permian Resources requests to pump a two-stage cement job on the 8-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Cherry Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If cement is not visually confirmed to circulate to surface, the final cement top after the second stage job will be verified by Echo-meter. If necessary, a top out consisting of 1,500 sack of Class C cement + 3% Salt + Bentonite Gel (2.30 yld, 12.9 ppg) will be executed as a contingency. If cement is still unable to circulate to surface, another Echo-meter run will be performed for cement top verification.

Permian Resources will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

Permian Resources will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Permian Resources requests to pump an Optional Lead if well conditions dictate in an attempt to bring cement inside the surface casing. If cement reaches the desired height, the BLM will be notified and the second stage bradenhead squeeze and subsequent TOC verification will be negated.

Permian Resources requests the option to conduct the bradenhead squeeze and TOC verification offline as per standard approval from BLM when unplanned remediation is needed and batch drilling is approved. In the event the bradenhead is conducted, we will ensure the first stage cement job is cemented properly and the well is static with floats holding and no pressure on the csg annulus as with all other casing strings where batch drilling operations occur before moving off the rig. The TA cap will also be installed per Cactus procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

**5. Circulating Medium**

Mud System Type: Closed

Will an air or gas system be used: No

-----  
**Describe what will be on location to control well or mitigate oter conditions:** Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

**Describe the mud monitoring system utilized:** Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

**Cuttings Volume: 10050 Cu Ft**

| Circulating Medium Table |              |                |            |            |
|--------------------------|--------------|----------------|------------|------------|
| Top Depth                | Bottom Depth | Mud Type       | Min Weight | Max Weight |
| 0                        | 300          | Spud Mud       | 8.6        | 9.5        |
| 300                      | 790          | Salt Saturated | 10         | 10         |
| 790                      | 3163         | Fresh Water    | 8.6        | 9.5        |
| 3163                     | 9465         | Oil Based Mud  | 9          | 10         |

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY

Coring operation description for the well:

N/A

7. Pressure

|                                                     |      |     |
|-----------------------------------------------------|------|-----|
| Anticipated Bottom Hole Pressure                    | 3740 | psi |
| Anticipated Surface Pressure                        | 2156 | psi |
| Anticipated Bottom Hole Temperature                 | 130  | °F  |
| Anticipated Abnormal pressure, temp, or geo hazards | No   |     |

# **PERMIAN**

## **R E S O U R C E S**

### **H<sub>2</sub>S CONTINGENCY PLAN**

**FOR**

**Permian Resources Corporation**

**Baked Ziti 423H, 424H, 213H, 214H, 133H, 134H, 123H, 113H,  
124H, 114H**

**Eddy County, New Mexico**

**03-03-2025**

**This plan is subject to updating**

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

Table of Contents

**Section 1.0 – Introduction ..... 3**

    I. Purpose

    II. Scope & Applicability

**Section 2.0 - Plan Implementation.....3**

    I. Activation Requirements

    II. Emergency Evacuation

    III. Emergency Response Activities

**Section 3.0 - Potential Hazardous Conditions.....4**

**Section 4.0 - Notification of H<sub>2</sub>S Release Event.....6**

    I. Local & State Law Enforcement

    II. General Public

    III. New Mexico Oil Conservation Division

    IV. New Mexico Environment Department

    V. Bureau of Land Management

**Section 5.0 - Emergency Contact List.....7**

    I. Permian Resources Management Personnel

    II. Eddy County Sheriff

    III. New Mexico State Highway Patrol

    IV. Fire / EMS

    V. Carlsbad Memorial Hospital

    VI. Emergency Response Contractors

    VII. New Mexico Oil Conservation Division

    VIII. New Mexico Environment Department

    IX. Bureau of Land Management

    X. Other Agencies

**Section 6.0 – Drilling Location Information.....9-12**

    I. Site Safety Information

    II. Directions to Location

    III. Plat of Location including GPS Coordinates

    IV. Routes of Ingress & Egress (MAP)

    V. ROE Map

    VI. Residences in ROE

    VII. Public Roads in ROE

**Section 7.0 – Hazard Communication.....13-15**

    I. Physical Characteristics of Hydrogen Sulfide Gas

    II. Human Health Hazards / Toxicological Information

    III. Environmental Hazards

**Section 8.0 - Regulatory Information.....15-17**

    I. OSHA Information

    II. New Mexico Oil Conservation Division & Bureau of Land Management

**Section 9.0 - Training Requirements.....17**

**Section 10.0 - Personal Protective Equipment.....18**

**Appendices**

    I. Appendix A – H<sub>2</sub>S SDS

    II. Appendix B – SO<sub>2</sub> SDS



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

## **Section 1.0 – Introduction**

### **I. Purpose**

The purpose of this contingency plan (Plan) is to provide Permian Resources Corporation. (Permian Resources) with an organized plan of action for alerting and protecting Permian Resources employees, the general public, and any potential first responders prior to any intentional release or immediately following the accidental / unintentional release of a potentially hazardous volume / concentration of Hydrogen Sulfide Gas (H<sub>2</sub>S).

### **II. Scope & Applicability**

This Plan applies to all planned, unplanned, uncontrolled and/or unauthorized releases of hazardous concentrations of H<sub>2</sub>S or any associated hazardous byproducts of combustion, occurring at any Permian Resources owned or operated facilities including but not limited to: wells, flowlines, pipelines, tank batteries, production facilities, SWD facilities, compressor stations, gas processing plants, drilling / completions / workover operations, and any other applicable company owned property.

## **Section 2.0 - Plan Implementation**

### **I. Activation Requirements**

In accordance with the requirements of Bureau of Land Management Onshore Order #6 and NMAC 19.15.11, this Plan shall be activated in advance of any authorized, planned, unplanned, uncontrolled, or unauthorized release of a hazardous volume / concentration of H<sub>2</sub>S gas, or SO<sub>2</sub>, which could potentially adversely impact the workers, general public or the environment.

### **II. Emergency Evacuation**

In the event of an unplanned, uncontrolled, or unauthorized release of a hazardous volume / concentration of H<sub>2</sub>S gas, the first priority is to ensure the safety of the workers and general public. Upon discovery and subsequent determination of an applicable release, which cannot be quickly mitigated, immediately by using 911, notify local authorities to begin the process of alerting the general public, evacuate any residents within the Radius of Exposure (ROE), and limit any general public or employee access to any areas within the ROE of the affected facility.

### **III. Emergency Response Activities**

The purpose of emergency response actions is to take steps to quickly mitigate / stop the ongoing release of the hazardous source of H<sub>2</sub>S. Upon discovery of any hazardous release, immediately notify Permian Resources management to activate the Emergency Response Team (ERT). Once Permian Resources supervision arrives and assesses the situation, a work plan identifying the proper procedures shall be developed to stop the release.

## **Section 3.0 - Potential Hazardous Conditions & Response Actions**

During a planned or unplanned release of H<sub>2</sub>S, there are several hazardous conditions that are presented both to employees, the general public, and emergency responders. These specific hazardous conditions

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

are identified in the tables below.

| H <sub>2</sub> S OPERATING CONDITIONS – RESPONSE ACTIONS TO CONSIDER                                                                                                                                                                                  |  | ✓                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------|
| <b>H<sub>2</sub>S CONDITION 1: POTENTIAL DANGER TO LIFE AND HEALTH → WARNING SIGN GREEN</b>                                                                                                                                                           |  |                          |
| <b>H<sub>2</sub>S concentration &lt;10 ppm</b> detected by location monitors                                                                                                                                                                          |  | <input type="checkbox"/> |
| <b>General Actions During Condition 1</b>                                                                                                                                                                                                             |  | <input type="checkbox"/> |
| Notify Site Supervisor / Permian Resources Person-in-Charge (PIC) of any observed increase in ambient H <sub>2</sub> S concentrations                                                                                                                 |  | <input type="checkbox"/> |
| All personnel check safety equipment is in adequate working order & store in accessible location                                                                                                                                                      |  | <input type="checkbox"/> |
| Sensitize crews with safety meetings.                                                                                                                                                                                                                 |  | <input type="checkbox"/> |
| Limit visitors and non-essential personnel on location                                                                                                                                                                                                |  | <input type="checkbox"/> |
| Continuously monitor H <sub>2</sub> S concentrations and check calibration of sensors                                                                                                                                                                 |  | <input type="checkbox"/> |
| Ensure H <sub>2</sub> S scavenger is on location.                                                                                                                                                                                                     |  | <input type="checkbox"/> |
| <b>H<sub>2</sub>S CONDITION 2: MODERATE DANGER TO LIFE AND HEALTH → WARNING SIGN YELLOW</b>                                                                                                                                                           |  |                          |
| <b>H<sub>2</sub>S concentration &gt;10 ppm and &lt; 30 ppm</b> in atmosphere detected by location monitors:                                                                                                                                           |  | <input type="checkbox"/> |
| <b>General Actions During Condition 2</b>                                                                                                                                                                                                             |  | <input type="checkbox"/> |
| Sound H <sub>2</sub> S alarm and/or display yellow flag.                                                                                                                                                                                              |  | <input type="checkbox"/> |
| Account for on-site personnel                                                                                                                                                                                                                         |  | <input type="checkbox"/> |
| Upon sounding of an area or personal H <sub>2</sub> S monitor alarm when 10 ppm is reached, proceed to a safe briefing area upwind of the location immediately (see <b>MA-4, Figure 5-1</b> ).                                                        |  | <input type="checkbox"/> |
| Don proper respiratory protection.                                                                                                                                                                                                                    |  | <input type="checkbox"/> |
| Alert other affected personnel                                                                                                                                                                                                                        |  | <input type="checkbox"/> |
| <b>If trained and safe to do so</b> undertake measures to control source H <sub>2</sub> S discharge and eliminate possible ignition sources. Initiate Emergency Shutdown procedures as deemed necessary to correct or control the specific situation. |  | <input type="checkbox"/> |
| Account for on-site personnel at safe briefing area.                                                                                                                                                                                                  |  | <input type="checkbox"/> |
| Stay in safe briefing area if not working to correct the situation.                                                                                                                                                                                   |  | <input type="checkbox"/> |
| Keep Site Supervisor / Permian Resources PIC informed.<br>Notify applicable government agencies ( <b>Appendix A</b> )<br>If off-site impact; notify any neighbors within Radius of Exposure ( <b>ROE</b> ), <b>Fig 5.11</b>                           |  | <input type="checkbox"/> |
| Continuously monitor H <sub>2</sub> S until readings below 10 ppm.                                                                                                                                                                                    |  | <input type="checkbox"/> |
| Evacuated area shall not be re-entered except by trained and authorized personnel utilizing appropriate respiratory protection; or until “all clear” sounded by Permian Resources PIC / Site Supervisor.                                              |  |                          |
| <b>H<sub>2</sub>S CONDITION 3: EXTREME DANGER TO LIFE AND HEALTH → WARNING SIGN RED</b>                                                                                                                                                               |  |                          |
| <b>&gt; 30 ppm H<sub>2</sub>S concentration</b> in air detected by location monitors: Extreme danger to life                                                                                                                                          |  |                          |
| <b>General Actions During Condition 3</b>                                                                                                                                                                                                             |  |                          |

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Sound H <sub>2</sub> S alarm and/or display red flag.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> |
| Account for on-site personnel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/> |
| Move away from H <sub>2</sub> S source and get out of the affected area.                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> |
| Proceed to designated safe briefing area; alert other affected personnel.                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <input type="checkbox"/> |
| Account for personnel at safe briefing area.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <input type="checkbox"/> |
| If trained and safe to do so undertake measures to control source H <sub>2</sub> S discharge and eliminate possible ignition sources. Initiate Emergency Shutdown procedures as deemed necessary to correct or control the specific situation.                                                                                                                                                                                                                                                                               | <input type="checkbox"/> |
| Notify vehicles or situation and divert all traffic away from location.                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> |
| Permian Resources Person-in-Charge will make appropriate community notifications.                                                                                                                                                                                                                                                                                                                                                                                                                                            | <input type="checkbox"/> |
| Red warning flag must be on display until the situation has been corrected and the Permian Resources Person-in-Charge determines it is safe to resume operations under <b>Condition 1</b> .                                                                                                                                                                                                                                                                                                                                  | <input type="checkbox"/> |
| Notify management of the condition and action taken. If H <sub>2</sub> S concentration is increasing and steps to correct the situation are not successful – or at any time if well control is questionable – alert all responsible parties for possible activation of the H <sub>2</sub> S Contingency Plan. If well control at the surface is lost, determine if situation warrants igniting the well.                                                                                                                     | <input type="checkbox"/> |
| If uncontrolled flow at the surface occurs, the Permian Resources PIC, with approval, if possible, from those coordinating the emergency ( <b>as specified in the site-specific H<sub>2</sub>S Contingency Plan</b> ) are responsible for determining if the situation warrants igniting the flow of the uncontrolled well. This decision should be made only as a last resort and in a situation where it is obvious that human life is in danger and there is no hope of controlling the flow under prevailing conditions. | <input type="checkbox"/> |
| If the flow is ignited, burning H <sub>2</sub> S will be converted to sulfur dioxide (SO <sub>2</sub> ), which is also highly toxic. Do not assume that area is safe after the flow is ignited. If the well is ignited, evacuation of the area is mandatory, because SO <sub>2</sub> will remain in low-lying places under no-wind conditions.                                                                                                                                                                               | <input type="checkbox"/> |
| Keep Site Supervisor / Permian Resources PIC informed.<br>Notify applicable government agencies and local law enforcement ( <b>Appendix A</b> )<br>If off-site impact; notify any neighbors within the Radius of Exposure ( <b>ROE</b> ), see example in <b>Figure 5-11</b> .                                                                                                                                                                                                                                                | <input type="checkbox"/> |
| Continuously monitor H <sub>2</sub> S until readings fall below 10 ppm.                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <input type="checkbox"/> |
| Evacuated area shall not be re-entered except by trained and authorized personnel utilizing appropriate respiratory protection; or until “all clear” sounded by Permian Resources PIC / Site Supervisor.                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> |
| <b>IF ABOVE ACTIONS CANNOT BE ACCOMPLISHED IN TIME TO PREVENT EXPOSURE TO THE PUBLIC</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> |
| Alert public (directly or through appropriate government agencies) who may be subject to potentially harmful exposure levels.                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/> |
| Make recommendations to public officials regarding blocking unauthorized access to the unsafe area and assist as appropriate.                                                                                                                                                                                                                                                                                                                                                                                                |                          |
| Make recommendations to public officials regarding evacuating the public and assist as appropriate.                                                                                                                                                                                                                                                                                                                                                                                                                          | <input type="checkbox"/> |

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

|                                                                                                                             |                          |
|-----------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Monitor ambient air in the area of exposure (after following abatement measures) to determine when it is safe for re-entry. | <input type="checkbox"/> |
|                                                                                                                             | <input type="checkbox"/> |
|                                                                                                                             | <input type="checkbox"/> |

#### **Section 4.0 - Notification of H<sub>2</sub>S Release Event**

##### **I. Local & State Law Enforcement**

Prior to the planned / controlled release of a hazardous concentration of H<sub>2</sub>S gas or any associated byproducts of the combustion of H<sub>2</sub>S gas, notify local law enforcement agencies regarding the contents of this plan.

In the event of the discovery of an unplanned/uncontrolled release of a hazardous concentration of H<sub>2</sub>S gas or any associated byproducts of combustion, immediately notify local and/or state law enforcement agencies of the situation and ask for their assistance.

##### **II. General Public**

In the event of a planned or unplanned release of a hazardous concentration of H<sub>2</sub>S gas or any associated byproducts of combustion, notify local law enforcement agencies and ask for their assistance in alerting the general public and limiting access to any public roads that may be impacted by such a release.

##### **III. New Mexico Oil Conservation Division**

The Permian Resources HSE Department will make any applicable notification to the New Mexico OCD regarding any release of a hazardous concentration of H<sub>2</sub>S Gas or any associated byproducts of combustion.

##### **IV. New Mexico Environment Department**

The Permian Resources HSE Department will make any applicable notifications to the NMED regarding any release of a hazardous concentration of H<sub>2</sub>S gas or any associated byproducts of combustion.

##### **V. Bureau of Land Management**

The Permian Resources Regulatory Department will make any applicable notifications to the BLM regarding any release of a hazardous concentration of H<sub>2</sub>S gas or any associated byproducts of combustion.

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**Section 5.0 - Emergency Contact List**

| <b>EMERGENCY CONTACT LIST</b>                                             |                   |               |                |                  |
|---------------------------------------------------------------------------|-------------------|---------------|----------------|------------------|
| <b>PERMIAN RESOURCES CORPORATION.</b>                                     |                   |               |                |                  |
| <b>POSITION</b>                                                           | <b>NAME</b>       | <b>OFFICE</b> | <b>CELL</b>    | <b>ALT PHONE</b> |
| <b>Operations</b>                                                         |                   |               |                |                  |
| Operations Superintendent                                                 | Rick Lawson       |               | 432.530.3188   |                  |
| TX Operations Superintendent                                              | Josh Graham       | 432.940.3191  | 432.940.3191   |                  |
| NM Operations Superintendent                                              | Manual Mata       | 432.664.0278  | 575.408.0216   |                  |
| Drilling Manager                                                          | Jason Fitzgerald  | 432.315.0146  | 318.347.3916   |                  |
| Drilling Engineer                                                         | Parker Simmons    | 432.400.1038  | 281.536.9813   |                  |
| Production Manager                                                        | Levi Harris       | 432.219.8568  | 720.261.4633   |                  |
| SVP Development Ops                                                       | Clayton Smith     | 720.499.1416  | 361.215.2494   |                  |
| SVP Production Ops                                                        | Casey McCain      | 432.695.4239  | 432.664.6140   |                  |
| <b>HSE &amp; Regulatory</b>                                               |                   |               |                |                  |
| H&S Manager                                                               | Adam Hicks        | 720.499.2377  | 903.426.4556   |                  |
| Regulatory Manager                                                        | Stephanie Rabadue |               | 432.260.4388   |                  |
| Environmental Manager                                                     | Montgomery Floyd  | 432-315-0123  | 432-425-8321   |                  |
|                                                                           |                   |               |                |                  |
| HSE Consultant                                                            | Blake Wisdom      |               | 918-323-2343   |                  |
| <b>Local, State, &amp; Federal Agencies</b>                               |                   |               |                |                  |
| Eddy County Sheriff                                                       |                   | 575-887-7551  |                | 911              |
| New Mexico State Highway Patrol                                           |                   | 505-757-2297  |                | 911              |
| Carlsbad Fire / EMS                                                       |                   | 575-885-3125  |                | 911              |
| Carlsbad Memorial Hospital                                                |                   | 575-887-4100  |                |                  |
| Secorp – Safety Contractor                                                | Ricky Stephens    |               | (325)-262-0707 |                  |
| New Mexico Oil Conservation Division<br>– District 1 Office – Hobbs, NM.  |                   | 575-393-6161  |                |                  |
| New Mexico Environment<br>Department – District III Office –<br>Hobbs, NM |                   | 575-397-6910  |                |                  |
| New Mexico Oil Conservation Division<br>– Hobbs, NM                       | 24 Hour Emergency | 575-393-6161  |                |                  |
| Bureau of Land Management –<br>Carlsbad, NM                               |                   | 575-706-2779  |                |                  |
| Eddy County PET Inspector                                                 |                   | 575-361-2822  |                |                  |
| U.S. Fish & Wildlife                                                      |                   | 502-248-6911  |                |                  |

**Section 6.0 – Drilling Location Information****I. Site Safety Information****1. Safe Briefing Area**

- a. There shall be two areas that will be designated as "SAFE BRIEFING AREAS". If H<sub>2</sub>S is detected in concentrations equal to or in excess of 10 ppm all personnel not assigned emergency duties are to assemble in the designated Safe Briefing area for instructions. These two areas shall be positioned in accessible locations to facilitate the availability of self-contained breathing air devices. The briefing areas shall be positioned no less than 250' from the wellhead and in such locations that at least one briefing area will be up-wind from the well at all times.


|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

2. Wind Indicators

- a. 4 Windsocks will be installed at strategic points on the facility.

3. Danger Signs

- a. A warning sign indicating the possible well conditions will be displayed at the location entrance.

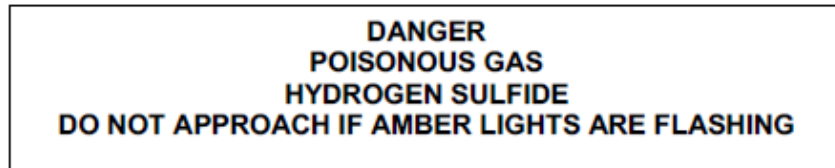

4. H<sub>2</sub>S Detectors and Alarms

- a. Continuous monitoring type H<sub>2</sub>S detectors, capable of sensing a minimum of 5ppm H<sub>2</sub>S in air will be located centrally located at the tanks, heater treater, and combustor. Continuous monitoring type SO<sub>2</sub> detector will also be located at the combustor. The automatic H<sub>2</sub>S alarm/flashing light will be located at the site entrance and in front of tank battery.

5. Safety Trailer

- a. A safety trailer equipped with an emergency cascade breathing air system with 2 ea. Work/escape packs, a stretcher, 2 OSHA approved full body harnesses, and a 20# Class ABC fire extinguisher shall be available at the site in close proximity to the safe briefing area. The cascade system shall be able to be deployed to the drill floor when needed to provide safe breathing air to the workers as needed.

6. Well Control Equipment

- a. The location shall have a flare line to a remote automatic ignitor and back up flare gun, placed 150' from the wellhead.  
b. The location shall be equipped with a remotely operated choke system and a mud gas separator.

7. Mud Program

- a. Company shall have a mud program that contains sufficient weight and additives to control H<sub>2</sub>S.

8. Metallurgy

- a. All drill strings, casing, tubing, wellhead, BOP, spools, kill lines, choke manifold and lines, and valves shall be suitable for anticipated H<sub>2</sub>S volume and pressure.

9. Communication

- a. The location shall be equipped with a means of effective communication such as a cell phones, intercoms, satellite phones or landlines.

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**II. Directions to Location**

FROM THE INTERSECTION OF US-285 AND US-180 IN CARLSBAD, NEW MEXICO

1. MOVE EAST ON US-180 APPROX. 3.2 MILES.
2. TURN LEFT AND MOVE NORTH ON GEORGE SHOUP RELIEF RTE APPROX. 1.2 MILES.
3. TURN LEFT AND MOVE WEST ON LEASE RD. APPROX. 1.2 FEET.
4. TURN LEFT AND MOVE SOUTH ON ACCESS ROAD APPROX. 108 FEET.
5. TURN LEFT AND MOVE EAST 60 FEET TO NORTH WEST WELL PAD CORNER.




Permian Resources Corporation

H<sub>2</sub>S Contingency Plan  
Baked Ziti 423H, 424H, 213H, 214H,  
133H, 134H, 123H, 113H, 124H, 114H

Eddy County, New Mexico


## Plat of Location

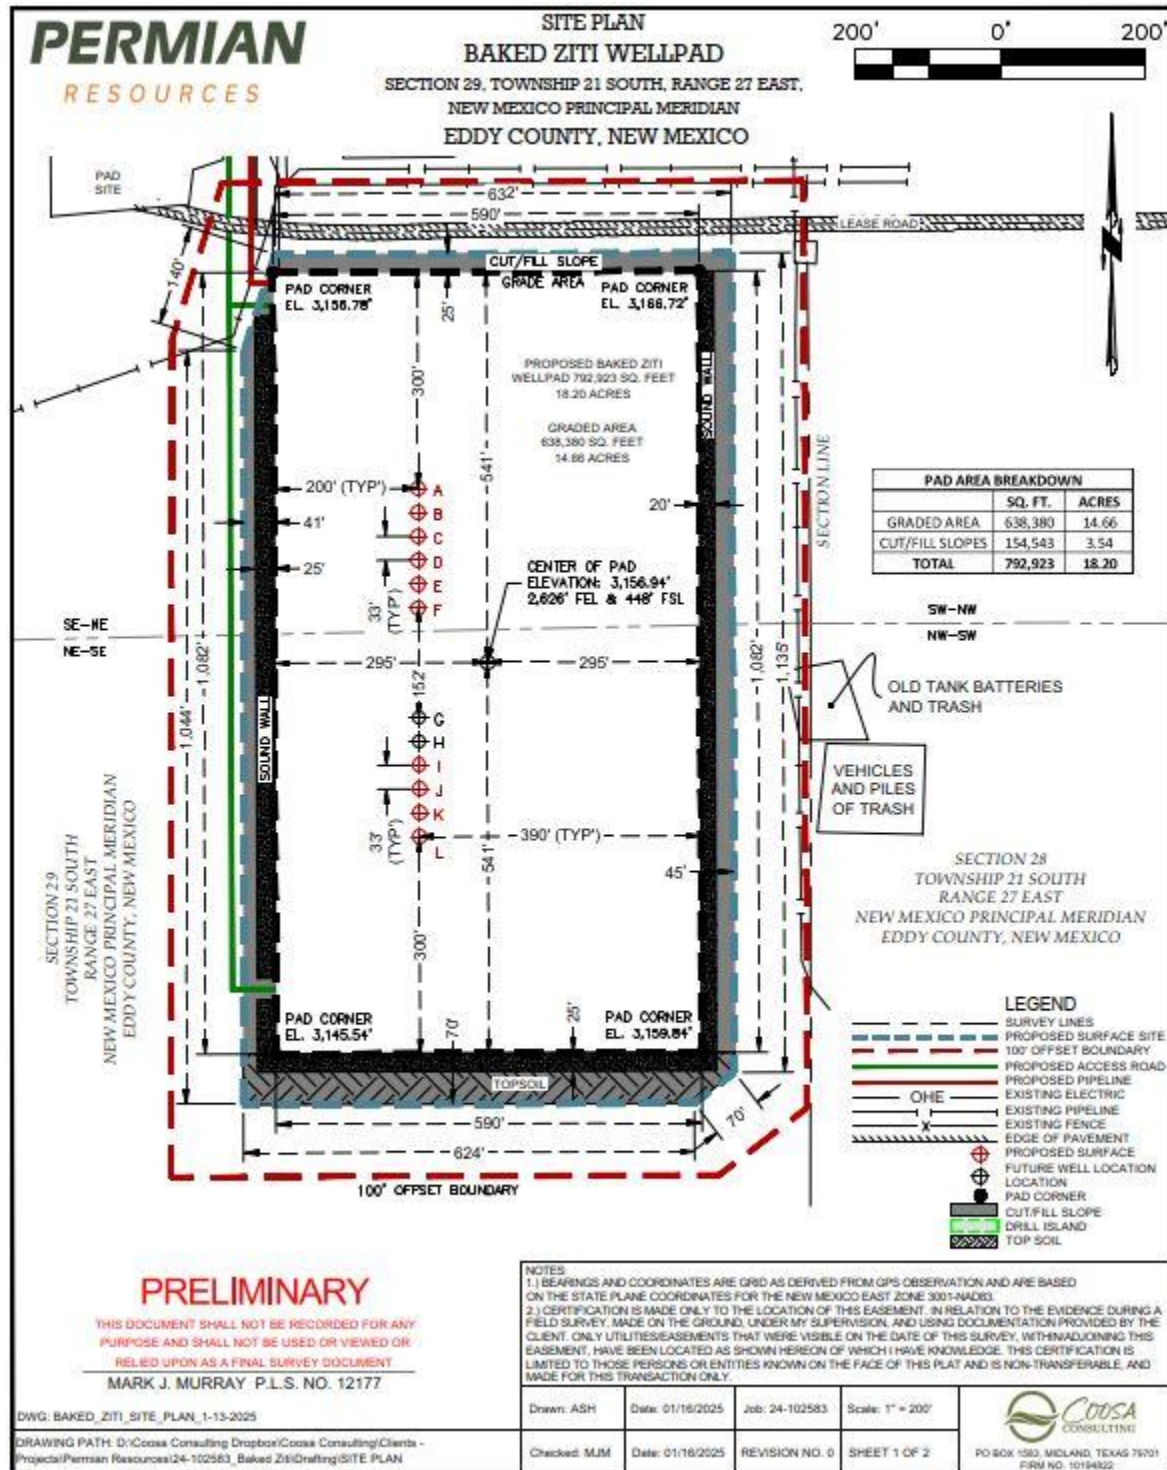



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

## 1. Routes of Ingress &amp; Egress (MAP)

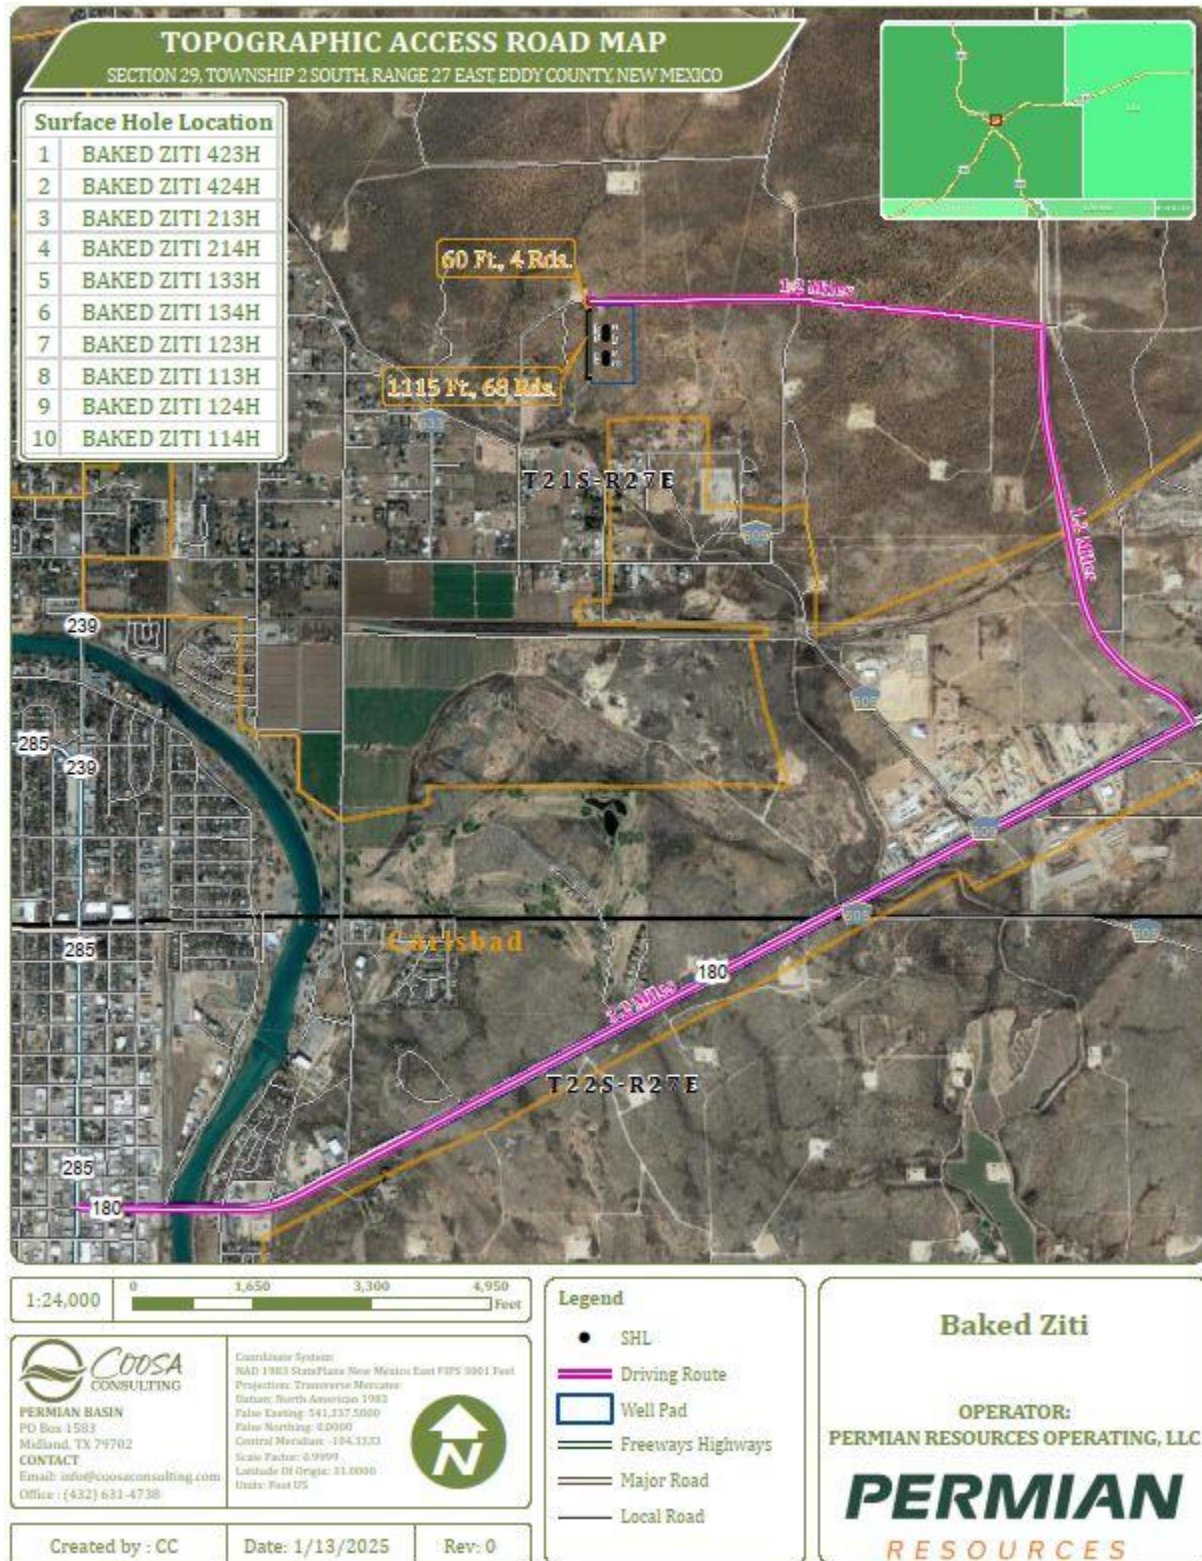


## 2. Residences in proximity to the 3000' Radius of Exposure (ROE) (MAP)

There are no residences or public gathering places with the 100 PPM, 300 PPM, or 500 PPM ROE.



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

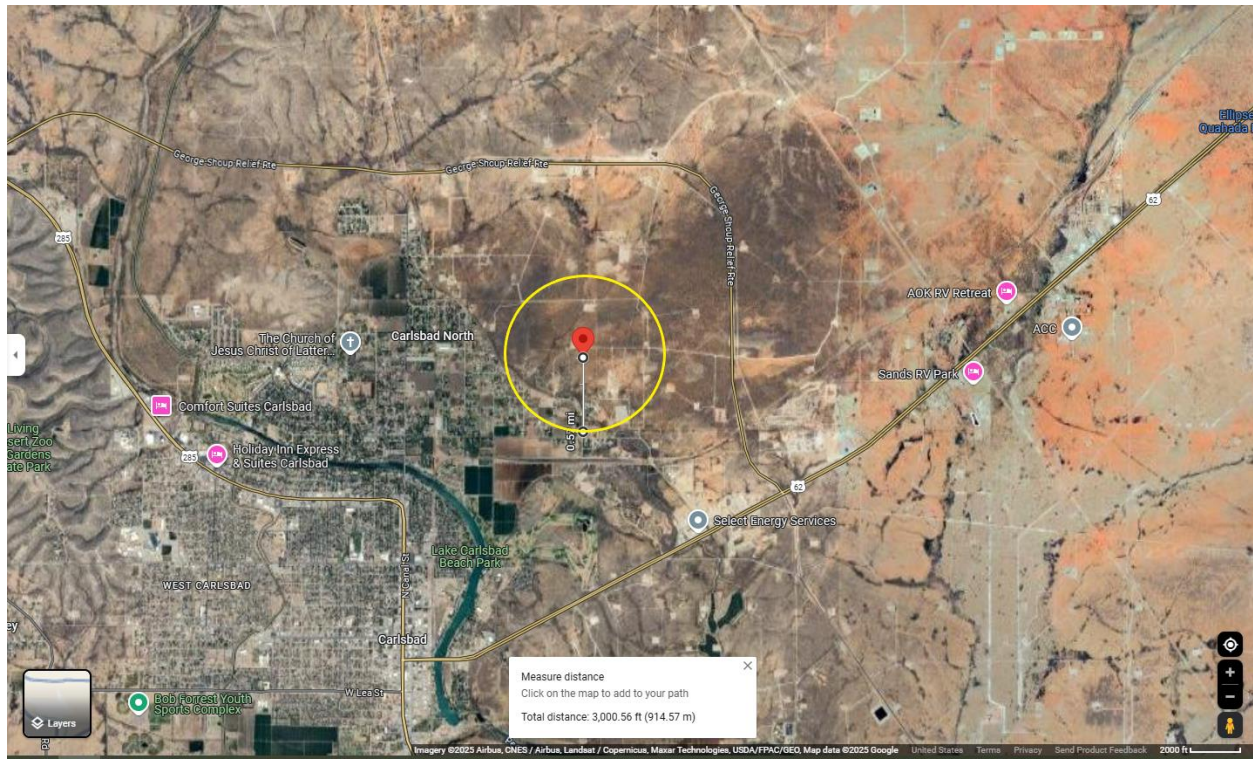**Map of 3000' ROE Perimeter****100 PPM, 300 PPM, & 500 PPM Max ROE under worst case scenario**Enter H<sub>2</sub>S in PPM

1500

Enter Gas flow in mcf/day (maximum worst case conditions)

2500

500 ppm radius of exposure (public road)

**105**

feet

300 ppm radius of exposure

**146**

feet

100 ppm radius of exposure (public area)

**230**

feet

- Location NAD 83 GPS Coordinates **Lat: 32.319691, Long: -104.019110**

**3. Public Roads in proximity of the Radius of Exposure (ROE)**

There are no public roads that would be within the 500 PPM ROE. The closest public road is Tokay Ave, which is approx. 375' from the location.

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

## Section 7.0 – Hazard Communication

### I. Physical Characteristics of Hydrogen Sulfide Gas

Hydrogen sulfide (H<sub>2</sub>S) is a colorless, poisonous gas that is soluble in water. It can be present in crude oils, condensates, natural gas and wastewater streams.

H<sub>2</sub>S is heavier than air with a vapor density of 1.189 (air = 1.0); however, H<sub>2</sub>S is most often mixed with other gases. These mixtures of H<sub>2</sub>S and other gases can be heavier or lighter than air. If the H<sub>2</sub>S-containing mixture is heavier, it can collect in low areas such as ditches, ravines, firewalls, and pits; in storage tanks; and in areas of poor ventilation. Please see physical properties in **Table 7.0**.

With H<sub>2</sub>S the sense of smell is rapidly lost allowing lethal concentrations to be accumulated without warning. The toxicity of hydrogen sulfide at varying concentrations is indicated in the **Table 7.1**.

**Warning:** Do not use the mouth-to-mouth method if a victim ingested or inhaled hydrogen sulfide. Give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.

**Table 7.0. Physical Properties of H<sub>2</sub>S**

| Properties of H <sub>2</sub> S                     | Description                                                                                                                                                                                                                                                       |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Vapor Density > 1 = 1.189<br>Air = 1               | <ul style="list-style-type: none"> <li>H<sub>2</sub>S gas is slightly heavier than air, which can cause it to settle in low places and build in concentration.</li> <li>Produced as a mixture with other gases associated with oil and gas production.</li> </ul> |
| Flammable Range 4.3%-46%<br>43000 ppm – 460000 ppm | <ul style="list-style-type: none"> <li>H<sub>2</sub>S can be extremely flammable / explosive when these concentrations are reached by volume in air.</li> </ul>                                                                                                   |

Although H<sub>2</sub>S is primarily a respiratory hazard, it is also flammable and forms an explosive mixture at concentrations of 4.3%–46.0% (40,000ppm – 460,000 ppm) by volume in air.

#### H<sub>2</sub>S can be encountered when:

- Venting and draining equipment.
- Opening equipment (separators, pumps, and tanks).
- Opening piping connections (“line breaking”).
- Gauging and sampling storage tanks.
- Entering confined spaces.
- Working around wastewater pits, skimmers, and treatment facilities.

### II. Human Health Hazards - Toxicological Information

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**Table 7.1. Hazards & Toxicity**

| Concentration (ppm) | Symptoms/Effects                                                                                                                                                                                                                                                |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0.00011-0.00033 ppm | Typical background concentrations                                                                                                                                                                                                                               |
| 0.01-1.5 ppm        | Odor threshold (when rotten egg smell is first noticeable to some). Odor becomes more offensive at 3-5 ppm. Above 30 ppm, odor described as sweet or sickeningly sweet.                                                                                         |
| 2-5 ppm             | Prolonged exposure may cause nausea, tearing of the eyes, headaches or loss of sleep. Airway problems (bronchial constriction) in some asthma patients.                                                                                                         |
| 20 ppm              | Possible fatigue, loss of appetite, headache, irritability, poor memory, dizziness.                                                                                                                                                                             |
| 50-100 ppm          | Slight conjunctivitis ("gas eye") and respiratory tract irritation after 1 hour. May cause digestive upset and loss of appetite.                                                                                                                                |
| 100 ppm             | Coughing, eye irritation, loss of smell after 2-15 minutes (olfactory fatigue). Altered breathing, drowsiness after 15-30 minutes. Throat irritation after 1 hour. Gradual increase in severity of symptoms over several hours. Death may occur after 48 hours. |
| 100-150 ppm         | Loss of smell (olfactory fatigue or paralysis).                                                                                                                                                                                                                 |
| 200-300 ppm         | Marked conjunctivitis and respiratory tract irritation after 1 hour. Pulmonary edema may occur from prolonged exposure.                                                                                                                                         |
| 500-700 ppm         | Staggering, collapse in 5 minutes. Serious damage to the eyes in 30 minutes. Death after 30-60 minutes.                                                                                                                                                         |
| 700-1000 ppm        | Rapid unconsciousness, "knockdown" or immediate collapse within 1 to 2 breaths, breathing stops, death within minutes.                                                                                                                                          |
| 1000-2000 ppm       | Nearly instant death                                                                                                                                                                                                                                            |

### III. Environmental Hazards

H<sub>2</sub>S and its associated byproducts from combustion presents a serious environmental hazard. Sulphur Dioxide SO<sub>2</sub> is produced as a constituent of flaring H<sub>2</sub>S Gas and can present hazards associated, which are

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

similar to H<sub>2</sub>S. Although SO<sub>2</sub> is heavier than air, it will be picked up by a breeze and carried downwind at elevated temperatures. Since Sulfur Dioxide is extremely irritating to the eyes and mucous membranes of the upper respiratory tract, it has exceptionally good warning powers in this respect. The following table indicates the toxic nature of the gas. Please see the attached SDS in Appendix B for reference.

| SULFUR DIOXIDE TOXICITY |        |                                                                                          |
|-------------------------|--------|------------------------------------------------------------------------------------------|
| Concentration           |        | Effects                                                                                  |
| %SO <sub>2</sub>        | PPM    |                                                                                          |
| 0.0005                  | 3 to 5 | Pungent odor-normally a person can detect SO <sub>2</sub> in this range.                 |
| 0.0012                  | 12     | Throat irritation, coughing, and constriction of the chest tearing and smarting of eyes. |
| 0.15                    | 150    | So irritating that it can only be endured for a few minutes.                             |
| 0.05                    | 500    | Causes a sense of suffocation, even with first breath.                                   |

### Section 8.0 - Regulatory Information

#### I. OSHA & NIOSH Information

#### II. Table 8.0. OSHA & NIOSH H<sub>2</sub>S Information

| PEL, IDLH, TLV                             | Description                                                                                                                               |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| NIOSH PEL 10 PPM                           | <ul style="list-style-type: none"> <li>PEL is the Permissible Exposure Limit that an employee may be exposed up to 8 hr / day.</li> </ul> |
| OSHA General Industry Ceiling PEL – 20 PPM | <ul style="list-style-type: none"> <li>The maximum exposure limit, which cannot be exceeded for any length of time.</li> </ul>            |
| IDLH 100 PPM                               | <ul style="list-style-type: none"> <li>Immediately Dangerous to Life and Health</li> </ul>                                                |
| Permian Resources PEL 10 PPM               | <ul style="list-style-type: none"> <li>Permian Resources Policy Regarding H<sub>2</sub>S for employee safety</li> </ul>                   |

#### III. New Mexico OCD & BLM – H<sub>2</sub>S Concentration Threshold Requirements

New Mexico NMAC 19.15.11 and Onshore Order #6 identify two Radii of Exposure (ROE) that identify potential danger to the public and require additional compliance measures. Permian Resources is required to install safety devices, establish safety procedures and develop a written H<sub>2</sub>S contingency plan for sites where the H<sub>2</sub>S concentrations are as follows.

**Table 8.1. Calculating H<sub>2</sub>S Radius of Exposure**

| H <sub>2</sub> S Radius of Exposure | Description                                                                                             | Control and Equipment Requirements                                                                                                          |
|-------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 100 ppm                             | Distance from a release to where the H <sub>2</sub> S concentration in the air will dilute below 100ppm | ROE > 50-ft and includes any part of a “public area” (residence, school, business, etc., or any area that can be expected to be populated). |

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

|         |                                                                                                         |                                                                                                                                     |
|---------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|         |                                                                                                         | ROE > 3,000-ft                                                                                                                      |
| 500 ppm | Distance from a release to where the H <sub>2</sub> S concentration in the air will dilute below 500ppm | ROE > 50-ft and includes any part of a public road (public roads are tax supported roads or any road used for public access or use) |

### Calculating H<sub>2</sub>S Radius of Exposure

The ROE of an H<sub>2</sub>S release is calculated to determine if a potentially hazardous volume of H<sub>2</sub>S gas at 100 or 500 parts per million (ppm) is within a regulated distance requiring further action. If information about the concentration of H<sub>2</sub>S and the potential gas release volume is known, the location of the Muster Areas will be set, and safety measures will be implemented based on the calculated radius of exposure (ROE). NMAC 19.15.11 – Hydrogen Sulfide Safety defines the ROE as the radius constructed with the gas's point of escape as its center and its length calculated by the following Pasquill-Gifford equations:

To determine the extent of the **100 ppm ROE**:

$$x = [(1.589) (\text{mole fraction H}_2\text{S})(Q)]^{(.6258)}.$$

To determine the extent of the **500 ppm ROE**:

$$x = [(0.4546) (\text{mole fraction H}_2\text{S})(Q)]^{(.6258)}.$$

**Table 8.2. Calculating H<sub>2</sub>S Radius of Exposure**

| ROE Variable                          | Description                                                                                                                                                               |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X =                                   | ROE in feet                                                                                                                                                               |
| Q =                                   | <b>Max volume of gas released determined to be released in cubic feet per day (ft<sup>3</sup>/d)</b> normalized to standard temperature and pressure, 60°F and 14.65 psia |
| <i>Mole fraction H<sub>2</sub>S</i> = | Mole fraction of H <sub>2</sub> S in the gaseous mixture released.                                                                                                        |

The volume used as the escape rate in determining the ROE is specified in the rule as follows:

- The maximum daily volume rate of gas containing H<sub>2</sub>S handled by that system element for which the ROE is calculated.
- For existing gas wells, the current adjusted open-flow rate, or the operator's estimate of the well's capacity to flow against zero back-pressure at the wellhead.

### New Mexico Oil Conservation Division & BLM Site Requirements under NMAC 19.15.11 & Onshore Order #6

- Two cleared areas will be designated as Safe Briefing Areas. During an emergency, personnel will assemble in one of these areas for instructions from the Permian Resources Person-in-Charge. Prevailing wind direction should be considered in locating the briefing areas 200' or more on either side of the well head. One area should offset the other at an angle of 45° to 90° with respect to prevailing wind direction to allow for wind shifts during the work period.

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

- In the event of either an intentional or accidental releases of hydrogen sulfide, safeguards to protect the general public from the harmful effects of hydrogen sulfide must be in place for operations. A summary of the provisions in each of three H<sub>2</sub>S ROE cases is included in **Table 8.3**.
  - **CASE 1** -100 ppm ROE < 50'
  - **CASE 2** - 100 ppm ROE is 50' or greater, but < 3000' and does not penetrate public area.
  - **CASE 3** -100 ppm ROE is 50' or greater and penetrates a public area or 500 ppm ROE includes a public road. Also if 100 ppm ROE > 3000' regardless of public area.

**Table 8.3. NMAC 19.15.11 Compliance Requirements Drilling & Production**

| NMAC 19.15.11 & BLM COMPLIANCE REQUIREMENTS – DRILLING & PRODUCTION |        |        |        |
|---------------------------------------------------------------------|--------|--------|--------|
| PROVISION                                                           | CASE 1 | CASE 2 | CASE 3 |
| H <sub>2</sub> S Concentration Test                                 | X      | X      | X      |
| H-9                                                                 | X      | X      | X      |
| Training                                                            | X      | X      | X      |
| District Office Notification                                        | X      | X      | X      |
| Drill Stem Tests Restricted                                         | X*     | X*     | X      |
| BOP Test                                                            | X*     | X*     | X      |
| Materials                                                           |        | X      | X      |
| Warning and Marker                                                  |        | X      | X      |
| Security                                                            |        | X      | X      |
| Contingency Plan                                                    |        |        | X      |
| Control and Equipment Safety                                        |        |        | X      |
| Monitors                                                            |        | X**    | X**    |
| Mud (ph Control or Scavenger)                                       |        |        | X*     |
| Wind Indicators                                                     |        | X**    | X      |
| Protective Breathing Equipment                                      |        | X**    | X      |
| Choke Manifold, Secondary Remote Control, and Mud-Gas Separator     |        |        | X      |
| Flare Stacks                                                        |        |        | X*     |

**Section 9.0 - Training Requirements****Training**

The following elements are considered a minimum level of training for personnel assigned to operations who may encounter H<sub>2</sub>S as part of routine or maintenance work.

- The hazards, characteristics, and properties of hydrogen sulfide (H<sub>2</sub>S) and (SO<sub>2</sub>).
- Sources of H<sub>2</sub>S and SO<sub>2</sub>.
- Proper use of H<sub>2</sub>S and SO<sub>2</sub> detection methods used at the workplace.
- Recognition of, and proper response to, the warning signals initiated by H<sub>2</sub>S and SO<sub>2</sub> detection systems in use at the workplace.
- Symptoms of H<sub>2</sub>S exposure; symptoms of SO<sub>2</sub> exposure
- Rescue techniques and first aid to victims of H<sub>2</sub>S and SO<sub>2</sub> exposure.
- Proper use and maintenance of breathing equipment for working in H<sub>2</sub>S and SO<sub>2</sub> atmospheres, as appropriate theory and hands-on practice, with demonstrated proficiency (29 CFR Part 1910.134).



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

- Workplace practices and relevant maintenance procedures that have been established to protect personnel from the hazards of H<sub>2</sub>S and SO<sub>2</sub>.
- Wind direction awareness and routes of egress.
- Confined space and enclosed facility entry procedures (if applicable).
- Emergency response procedures that have been developed for the facility or operations.
- Locations and use of safety equipment.
- Locations of safe briefing areas.

***Refresher training will be conducted annually.***

### ***Section 10.0 - Personal Protective Equipment***

#### ***I. Personal H<sub>2</sub>S Monitors***

All personnel engaged in planned or unplanned work activity to mitigate the release of a hazardous concentration of H<sub>2</sub>S shall have on their person a personal H<sub>2</sub>S monitor.

#### ***II. Fixed H<sub>2</sub>S Detection and Alarms***

- 4 channel H<sub>2</sub>S monitor
- 4 wireless H<sub>2</sub>S monitors
- H<sub>2</sub>S alarm system (Audible/Red strobe)
- Personal gas monitor for each person on location
- Gas sample tubes

#### ***III. Flame Resistant Clothing***

All personnel engaged in planned or unplanned work activity associated with this Plan shall have on the appropriate level of FRC clothing.

#### ***IV. Respiratory Protection***

The following respiratory protection equipment shall be available at each drilling location.

- Working cascade system available on rig floor and pit system & 750' of air line hose
- Four (4) breathing air manifolds
- Four (4) 30-minute rescue packs
- Five (5) work/Escape units
- Five (5) escape units
- One (1) filler hose for the work/escape/rescue units

Supplied air (airline or SCBA) respiratory protection against hydrogen sulfide exposure is required in the following situations:

- When routine or maintenance work tasks involve exposure to H<sub>2</sub>S concentrations of 10 ppm or greater.
- When a fixed location area monitor alarms, and re-entry to the work area is required to complete a job.
- When confined spaces are to be entered without knowledge of H<sub>2</sub>S levels present, or if initial measurements are to be taken of H<sub>2</sub>S levels.
- During rescue of employees suspected of H<sub>2</sub>S overexposure.
- For specific tasks identified with significant exposure potential and outlined in local program guidelines.



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

- All respiratory equipment for hydrogen sulfide must be of the supplied-air type, equipped with pressure-demand regulators and operated in the pressure-demand mode only. This is the only type of respiratory protection recommended for hydrogen sulfide application. Equipment should be approved by NIOSH/MSHA or other recognized national authority as required. If airline units are used, a five-minute egress bottle should also be carried.
- Gas masks or other air-purifying respirators MUST NEVER BE USED FOR HYDROGEN SULFIDE due to the poor warning properties of the gas.
- Use of respiratory protection should be accompanied by a written respiratory protection program.

Appendix A  
H<sub>2</sub>S SDS

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

#### SECTION 1: Identification

##### 1.1. Product identifier

Product form : Substance  
Name : Hydrogen sulfide  
CAS No : 7783-06-4  
Formula : H<sub>2</sub>S  
Other means of identification : Hydrogen sulfide  
Product group : Core Products

##### 1.2. Recommended use and restrictions on use

Recommended uses and restrictions : Industrial use  
Use as directed

##### 1.3. Supplier

Praxair Canada inc.  
1200 – 1 City Centre Drive  
Mississauga - Canada L5B 1M2  
T 1-905-803-1600 - F 1-905-803-1682  
[www.praxair.ca](http://www.praxair.ca)

##### 1.4. Emergency telephone number

Emergency number : 1-800-363-0042  
Call emergency number 24 hours a day only for spills, leaks, fire, exposure, or accidents involving this product.  
For routine information, contact your supplier or Praxair sales representative.

#### SECTION 2: Hazard identification

##### 2.1. Classification of the substance or mixture


###### GHS-CA classification

Flam. Gas 1 H220  
Liquefied gas H280  
Acute Tox. 2 (Inhalation: gas) H330  
STOT SE 3 H335

##### 2.2. GHS Label elements, including precautionary statements

###### GHS-CA labelling

Hazard pictograms



Signal word

: DANGER

Hazard statements

: **EXTREMELY FLAMMABLE GAS**  
CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED  
FATAL IF INHALED  
MAY CAUSE RESPIRATORY IRRITATION  
MAY FORM EXPLOSIVE MIXTURES WITH AIR  
SYMPTOMS MAY BE DELAYED  
EXTENDED EXPOSURE TO GAS REDUCES THE ABILITY TO SMELL SULFIDES

Precautionary statements

: Do not handle until all safety precautions have been read and understood  
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

1/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Do not breathe gas  
Use and store only outdoors or in a well-ventilated area  
Avoid release to the environment  
Wear protective gloves, protective clothing, eye protection, respiratory protection, and/or face protection  
Leaking gas fire: Do not extinguish, unless leak can be stopped safely  
In case of leakage, eliminate all ignition sources  
Store locked up  
Dispose of contents/container in accordance with container Supplier/owner instructions  
Protect from sunlight when ambient temperature exceeds 52°C (125°F)  
Close valve after each use and when empty  
Do not open valve until connected to equipment prepared for use  
When returning cylinder, install leak tight valve outlet cap or plug  
Do not depend on odour to detect the presence of gas

#### 2.3. Other hazards

Other hazards not contributing to the classification : Contact with liquid may cause cold burns/frostbite.

#### 2.4. Unknown acute toxicity (GHS-CA)

No data available

### SECTION 3: Composition/information on ingredients

#### 3.1. Substances

| Name                                   | CAS No.            | % (Vol.) | Common Name (synonyms)                                                                                                                 |
|----------------------------------------|--------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------|
| Hydrogen sulfide<br>(Main constituent) | (CAS No) 7783-06-4 | 100      | Hydrogen sulfide (H <sub>2</sub> S) / Hydrogen sulphide / Sulfur hydride / Sulfureted hydrogen / Dihydrogen sulphide / Hydrogensulfide |

#### 3.2. Mixtures

Not applicable

### SECTION 4: First-aid measures

#### 4.1. Description of first aid measures

First-aid measures after inhalation : Remove to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. If breathing is difficult, trained personnel should give oxygen. Call a physician.

First-aid measures after skin contact : The liquid may cause frostbite. For exposure to liquid, immediately warm frostbite area with warm water not to exceed 105°F (41°C). Water temperature should be tolerable to normal skin. Maintain skin warming for at least 15 minutes or until normal coloring and sensation have returned to the affected area. In case of massive exposure, remove clothing while showering with warm water. Seek medical evaluation and treatment as soon as possible.

First-aid measures after eye contact : Immediately flush eyes thoroughly with water for at least 15 minutes. Hold the eyelids open and away from the eyeballs to ensure that all surfaces are flushed thoroughly. Contact an ophthalmologist immediately.

First-aid measures after ingestion : Ingestion is not considered a potential route of exposure.

#### 4.2. Most important symptoms and effects (acute and delayed)

No additional information available

#### 4.3. Immediate medical attention and special treatment, if necessary

Other medical advice or treatment : Obtain medical assistance. Treat with corticosteroid spray as soon as possible after inhalation.

### SECTION 5: Fire-fighting measures

#### 5.1. Suitable extinguishing media

Suitable extinguishing media : Carbon dioxide, Dry chemical, Water spray or fog. Use extinguishing media appropriate for surrounding fire.

#### 5.2. Unsuitable extinguishing media

No additional information available

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

2/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

#### 5.3. Specific hazards arising from the hazardous product

- Fire hazard : **EXTREMELY FLAMMABLE GAS.** If venting or leaking gas catches fire, do not extinguish flames. Flammable vapors may spread from leak, creating an explosive reignition hazard. Vapors can be ignited by pilot lights, other flames, smoking, sparks, heaters, electrical equipment, static discharge, or other ignition sources at locations distant from product handling point. Explosive atmospheres may linger. Before entering an area, especially a confined area, check the atmosphere with an appropriate device.
- Explosion hazard : **EXTREMELY FLAMMABLE GAS.** Forms explosive mixtures with air and oxidizing agents.
- Reactivity : No reactivity hazard other than the effects described in sub-sections below.
- Reactivity in case of fire : No reactivity hazard other than the effects described in sub-sections below.

#### 5.4. Special protective equipment and precautions for fire-fighters

- Firefighting instructions : **DANGER! Toxic, flammable liquefied gas**
- Evacuate all personnel from the danger area. Use self-contained breathing apparatus (SCBA) and protective clothing. Immediately cool containers with water from maximum distance. Stop flow of gas if safe to do so, while continuing cooling water spray. Remove ignition sources if safe to do so. Remove containers from area of fire if safe to do so. On-site fire brigades must comply with their provincial and local fire code regulations.
- Special protective equipment for fire fighters : Standard protective clothing and equipment (Self Contained Breathing Apparatus) for fire fighters.
- Other information : Containers are equipped with a pressure relief device. (Exceptions may exist where authorized by TC.).

### SECTION 6: Accidental release measures

#### 6.1. Personal precautions, protective equipment and emergency procedures

- General measures : **DANGER! Toxic, flammable liquefied gas .** Forms explosive mixtures with air and oxidizing agents. Immediately evacuate all personnel from danger area. Use self-contained breathing apparatus where needed. Remove all sources of ignition if safe to do so. Reduce vapors with fog or fine water spray, taking care not to spread liquid with water. Shut off flow if safe to do so. Ventilate area or move container to a well-ventilated area. Flammable vapors may spread from leak and could explode if reignited by sparks or flames. Explosive atmospheres may linger. Before entering area, especially confined areas, check atmosphere with an appropriate device.

#### 6.2. Methods and materials for containment and cleaning up

- Methods for cleaning up : Try to stop release. Reduce vapour with fog or fine water spray. Prevent waste from contaminating the surrounding environment. Prevent soil and water pollution. Dispose of contents/container in accordance with local/regional/national/international regulations. Contact supplier for any special requirements.

#### 6.3. Reference to other sections

For further information refer to section 8: Exposure controls/personal protection

### SECTION 7: Handling and storage

#### 7.1. Precautions for safe handling

- Precautions for safe handling : Leak-check system with soapy water; never use a flame
- All piped systems and associated equipment must be grounded
- Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use only non-sparking tools. Use only explosion-proof equipment
- Wear leather safety gloves and safety shoes when handling cylinders. Protect cylinders from physical damage; do not drag, roll, slide or drop. While moving cylinder, always keep in place removable valve cover. Never attempt to lift a cylinder by its cap; the cap is intended solely to protect the valve. When moving cylinders, even for short distances, use a cart (trolley, hand truck, etc.) designed to transport cylinders. Never insert an object (e.g. wrench, screwdriver, pry bar) into cap openings; doing so may damage the valve and cause a leak. Use an adjustable strap wrench to remove over-tight or rusted caps. Slowly open the valve. If the valve is hard to open, discontinue use and contact your supplier. Close the container valve after each use; keep closed even when empty. Never apply flame or localized heat directly to any part of the container. High temperatures may damage the container and could cause the pressure relief device to fail prematurely, venting the container contents. For other precautions in using this product, see section 16.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

3/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

#### 7.2. Conditions for safe storage, including any incompatibilities

##### Storage conditions

: Store only where temperature will not exceed 125°F (52°C). Post "No Smoking/No Open Flames" signs in storage and use areas. There must be no sources of ignition. Separate packages and protect against potential fire and/or explosion damage following appropriate codes and requirements (e.g. NFPA 30, NFPA 55, NFPA 70, and/or NFPA 221 in the U.S.) or according to requirements determined by the Authority Having Jurisdiction (AHJ). Always secure containers upright to keep them from falling or being knocked over. Install valve protection cap, if provided, firmly in place by hand when the container is not in use. Store full and empty containers separately. Use a first-in, first-out inventory system to prevent storing full containers for long periods. For other precautions in using this product, see section 16

**OTHER PRECAUTIONS FOR HANDLING, STORAGE, AND USE:** When handling product under pressure, use piping and equipment adequately designed to withstand the pressures to be encountered. Never work on a pressurized system. Use a back flow preventive device in the piping. Gases can cause rapid suffocation because of oxygen deficiency; store and use with adequate ventilation. If a leak occurs, close the container valve and blow down the system in a safe and environmentally correct manner in compliance with all international, federal/national, state/provincial, and local laws; then repair the leak. Never place a container where it may become part of an electrical circuit.

## SECTION 8: Exposure controls/personal protection

### 8.1. Control parameters

| Hydrogen sulfide (7783-06-4) |                                  |                      |
|------------------------------|----------------------------------|----------------------|
| USA - ACGIH                  | ACGIH TLV-TWA (ppm)              | 1 ppm                |
| USA - ACGIH                  | ACGIH TLV-STEL (ppm)             | 5 ppm                |
| USA - OSHA                   | OSHA PEL (Ceiling) (ppm)         | 20 ppm               |
| Canada (Quebec)              | VECD (mg/m <sup>3</sup> )        | 21 mg/m <sup>3</sup> |
| Canada (Quebec)              | VECD (ppm)                       | 15 ppm               |
| Canada (Quebec)              | VEMP (mg/m <sup>3</sup> )        | 14 mg/m <sup>3</sup> |
| Canada (Quebec)              | VEMP (ppm)                       | 10 ppm               |
| Alberta                      | OEL Ceiling (mg/m <sup>3</sup> ) | 21 mg/m <sup>3</sup> |
| Alberta                      | OEL Ceiling (ppm)                | 15 ppm               |
| Alberta                      | OEL TWA (mg/m <sup>3</sup> )     | 14 mg/m <sup>3</sup> |
| Alberta                      | OEL TWA (ppm)                    | 10 ppm               |
| British Columbia             | OEL Ceiling (ppm)                | 10 ppm               |
| Manitoba                     | OEL STEL (ppm)                   | 5 ppm                |
| Manitoba                     | OEL TWA (ppm)                    | 1 ppm                |
| New Brunswick                | OEL STEL (mg/m <sup>3</sup> )    | 21 mg/m <sup>3</sup> |
| New Brunswick                | OEL STEL (ppm)                   | 15 ppm               |
| New Brunswick                | OEL TWA (mg/m <sup>3</sup> )     | 14 mg/m <sup>3</sup> |
| New Brunswick                | OEL TWA (ppm)                    | 10 ppm               |
| Newfoundland & Labrador      | OEL STEL (ppm)                   | 5 ppm                |
| Newfoundland & Labrador      | OEL TWA (ppm)                    | 1 ppm                |
| Nova Scotia                  | OEL STEL (ppm)                   | 5 ppm                |
| Nova Scotia                  | OEL TWA (ppm)                    | 1 ppm                |
| Nunavut                      | OEL Ceiling (mg/m <sup>3</sup> ) | 28 mg/m <sup>3</sup> |
| Nunavut                      | OEL Ceiling (ppm)                | 20 ppm               |
| Nunavut                      | OEL STEL (mg/m <sup>3</sup> )    | 21 mg/m <sup>3</sup> |
| Nunavut                      | OEL STEL (ppm)                   | 15 ppm               |
| Nunavut                      | OEL TWA (mg/m <sup>3</sup> )     | 14 mg/m <sup>3</sup> |
| Nunavut                      | OEL TWA (ppm)                    | 10 ppm               |
| Northwest Territories        | OEL STEL (ppm)                   | 15 ppm               |

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

4/9



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

| Hydrogen sulfide (7783-06-4) |                               |                      |
|------------------------------|-------------------------------|----------------------|
| Northwest Territories        | OEL TWA (ppm)                 | 10 ppm               |
| Ontario                      | OEL STEL (ppm)                | 15 ppm               |
| Ontario                      | OEL TWA (ppm)                 | 10 ppm               |
| Prince Edward Island         | OEL STEL (ppm)                | 5 ppm                |
| Prince Edward Island         | OEL TWA (ppm)                 | 1 ppm                |
| Québec                       | VECD (mg/m <sup>3</sup> )     | 21 mg/m <sup>3</sup> |
| Québec                       | VECD (ppm)                    | 15 ppm               |
| Québec                       | VEMP (mg/m <sup>3</sup> )     | 14 mg/m <sup>3</sup> |
| Québec                       | VEMP (ppm)                    | 10 ppm               |
| Saskatchewan                 | OEL STEL (ppm)                | 15 ppm               |
| Saskatchewan                 | OEL TWA (ppm)                 | 10 ppm               |
| Yukon                        | OEL STEL (mg/m <sup>3</sup> ) | 27 mg/m <sup>3</sup> |
| Yukon                        | OEL STEL (ppm)                | 15 ppm               |
| Yukon                        | OEL TWA (mg/m <sup>3</sup> )  | 15 mg/m <sup>3</sup> |
| Yukon                        | OEL TWA (ppm)                 | 10 ppm               |

#### 8.2. Appropriate engineering controls

Appropriate engineering controls

: Use corrosion-resistant equipment. Use an explosion-proof local exhaust system. Local exhaust and general ventilation must be adequate to meet exposure standards. **MECHANICAL (GENERAL): Inadequate - Use only in a closed system.** Use explosion proof equipment and lighting.

#### 8.3. Individual protection measures/Personal protective equipment

Personal protective equipment

: Safety glasses. Face shield. Gloves.



Hand protection

: Wear work gloves when handling containers. Wear heavy rubber gloves where contact with product may occur.

Eye protection

: Wear goggles and a face shield when transfilling or breaking transfer connections. Select in accordance with the current CSA standard Z94.3, "Industrial Eye and Face Protection", and any provincial regulations, local bylaws or guidelines.

Respiratory protection

: **Respiratory protection:** Use respirable fume respirator or air supplied respirator when working in confined space or where local exhaust or ventilation does not keep exposure below TLV. Select in accordance with provincial regulations, local bylaws or guidelines. Selection should be based on the current CSA standard Z94.4, "Selection, Care, and Use of Respirators." Respirators should also be approved by NIOSH and MSHA. For emergencies or instances with unknown exposure levels, use a self-contained breathing apparatus (SCBA).

Thermal hazard protection

: Wear cold insulating gloves when transfilling or breaking transfer connections. Standard EN 511 - Cold insulating gloves.

Other information

: **Other protection :** Safety shoes for general handling at customer sites. Metatarsal shoes and cuffless trousers for cylinder handling at packaging and filling plants. Select in accordance with the current CSA standard Z195, "Protective Foot Wear", and any provincial regulations, local bylaws or guidelines. For working with flammable and oxidizing materials, consider the use of flame resistant anti-static safety clothing.

## SECTION 9: Physical and chemical properties

### 9.1. Information on basic physical and chemical properties

|                 |                                                                                  |
|-----------------|----------------------------------------------------------------------------------|
| Physical state  | : Gas                                                                            |
| Appearance      | : Colorless gas. Colorless liquid at low temperature or under high pressure.     |
| Molecular mass  | : 34 g/mol                                                                       |
| Colour          | : Colourless.                                                                    |
| Odour           | : Odour can persist. Poor warning properties at low concentrations. Rotten eggs. |
| Odour threshold | : Odour threshold is subjective and inadequate to warn of overexposure.          |

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

5/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

|                                                 |                     |
|-------------------------------------------------|---------------------|
| pH                                              | : Not applicable.   |
| pH solution                                     | : No data available |
| Relative evaporation rate (butylacetate=1)      | : No data available |
| Relative evaporation rate (ether=1)             | : Not applicable.   |
| Melting point                                   | : -86 °C            |
| Freezing point                                  | : -82.9 °C          |
| Boiling point                                   | : -60.3 °C          |
| Flash point                                     | : Not applicable.   |
| Critical temperature                            | : 100.4 °C          |
| Auto-ignition temperature                       | : 260 °C            |
| Decomposition temperature                       | : No data available |
| Vapour pressure                                 | : 1880 kPa          |
| Vapour pressure at 50 °C                        | : No data available |
| Critical pressure                               | : 8940 kPa          |
| Relative vapour density at 20 °C                | : >=                |
| Relative density                                | : No data available |
| Relative density of saturated gas/air mixture   | : No data available |
| Density                                         | : No data available |
| Relative gas density                            | : 1.2               |
| Solubility                                      | : Water: 3980 mg/l  |
| Log Pow                                         | : Not applicable.   |
| Log Kow                                         | : Not applicable.   |
| Viscosity, kinematic                            | : Not applicable.   |
| Viscosity, dynamic                              | : Not applicable.   |
| Viscosity, kinematic (calculated value) (40 °C) | : No data available |
| Explosive properties                            | : Not applicable.   |
| Oxidizing properties                            | : None.             |
| Flammability (solid, gas)                       | :<br>4.3 - 46 vol % |

#### 9.2. Other information

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Gas group              | : Liquefied gas                                                                                         |
| Additional information | : Gas/vapour heavier than air. May accumulate in confined spaces, particularly at or below ground level |

## SECTION 10: Stability and reactivity

#### 10.1. Reactivity

|                                    |                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reactivity                         | : No reactivity hazard other than the effects described in sub-sections below.                                                                                                                                                                                                                             |
| Chemical stability                 | : Stable under normal conditions.                                                                                                                                                                                                                                                                          |
| Possibility of hazardous reactions | : May react violently with oxidants. Can form explosive mixture with air.                                                                                                                                                                                                                                  |
| Conditions to avoid                | : Avoid moisture in installation systems. Keep away from heat/sparks/open flames/hot surfaces.<br>– No smoking.                                                                                                                                                                                            |
| Incompatible materials             | : Ammonia. Bases. Bromine pentafluoride. Chlorine trifluoride. chromium trioxide. (and heat). Copper. (powdered). Fluorine. Lead. Lead oxide. Mercury. Nitric acid. Nitrogen trifluoride. nitrogen sulfide. Organic compounds. Oxidizing agents. Oxygen difluoride. Rubber. Sodium. (and moisture). Water. |
| Hazardous decomposition products   | : Thermal decomposition may produce : Sulfur. Hydrogen.                                                                                                                                                                                                                                                    |

## SECTION 11: Toxicological information

#### 11.1. Information on toxicological effects

|                         |                  |
|-------------------------|------------------|
| Acute toxicity (oral)   | : Not classified |
| Acute toxicity (dermal) | : Not classified |

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

6/9



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

Acute toxicity (inhalation) : Inhalation:gas: FATAL IF INHALED.

| Hydrogen sulfide ( \ f ) 7783-06-4 |                                |
|------------------------------------|--------------------------------|
| LC50 inhalation rat (mg/l)         | 0.99 mg/l (Exposure time: 1 h) |
| LC50 inhalation rat (ppm)          | 356 ppm/4h                     |
| ATE CA (gases)                     | 356.00000000 ppmv/4h           |
| ATE CA (vapours)                   | 0.99000000 mg/l/4h             |
| ATE CA (dust,mist)                 | 0.99000000 mg/l/4h             |

Skin corrosion/irritation : Not classified  
pH: Not applicable.

Serious eye damage/irritation : Not classified  
pH: Not applicable.

Respiratory or skin sensitization : Not classified

Germ cell mutagenicity : Not classified

Carcinogenicity : Not classified

Reproductive toxicity : Not classified

Specific target organ toxicity (single exposure) : MAY CAUSE RESPIRATORY IRRITATION.

Specific target organ toxicity (repeated exposure) : Not classified

Aspiration hazard : Not classified

## SECTION 12: Ecological information

### 12.1. Toxicity

Ecology - general : VERY TOXIC TO AQUATIC LIFE.

| Hydrogen sulfide (7783-06-4) |                                                                                 |
|------------------------------|---------------------------------------------------------------------------------|
| LC50 fish 1                  | 0.0448 mg/l (Exposure time: 96 h - Species: Lepomis macrochirus [flow-through]) |
| LC50 fish 2                  | 0.016 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through])  |

### 12.2. Persistence and degradability

| Hydrogen sulfide (7783-06-4)  |                                     |
|-------------------------------|-------------------------------------|
| Persistence and degradability | Not applicable for inorganic gases. |

### 12.3. Bioaccumulative potential

| Hydrogen sulfide (7783-06-4) |                               |
|------------------------------|-------------------------------|
| BCF fish 1                   | (no bioaccumulation expected) |
| Log Pow                      | Not applicable.               |
| Log Kow                      | Not applicable.               |
| Bioaccumulative potential    | No data available.            |

### 12.4. Mobility in soil

| Hydrogen sulfide (7783-06-4) |                                                                                             |
|------------------------------|---------------------------------------------------------------------------------------------|
| Mobility in soil             | No data available.                                                                          |
| Log Pow                      | Not applicable.                                                                             |
| Log Kow                      | Not applicable.                                                                             |
| Ecology - soil               | Because of its high volatility, the product is unlikely to cause ground or water pollution. |

### 12.5. Other adverse effects

Other adverse effects : May cause pH changes in aqueous ecological systems.

Effect on the ozone layer : None

Effect on global warming : No known effects from this product

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

7/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

#### SECTION 13: Disposal considerations

##### 13.1. Disposal methods

Waste disposal recommendations : Do not attempt to dispose of residual or unused quantities. Return container to supplier.

#### SECTION 14: Transport information

##### 14.1. Basic shipping description

In accordance with TDG

##### TDG

UN-No. (TDG) : UN1053  
 TDG Primary Hazard Classes : 2.3 - Class 2.3 - Toxic Gas.  
 TDG Subsidiary Classes : 2.1  
 Proper shipping name : HYDROGEN SULPHIDE

ERAP Index : 500  
 Explosive Limit and Limited Quantity Index : 0  
 Passenger Carrying Ship Index : Forbidden  
 Passenger Carrying Road Vehicle or Passenger : Forbidden  
 Carrying Railway Vehicle Index

##### 14.3. Air and sea transport

##### IMDG

UN-No. (IMDG) : 1053  
 Proper Shipping Name (IMDG) : HYDROGEN SULPHIDE  
 Class (IMDG) : 2 - Gases  
 MFAG-No : 117

##### IATA

UN-No. (IATA) : 1053  
 Proper Shipping Name (IATA) : Hydrogen sulphide  
 Class (IATA) : 2

#### SECTION 15: Regulatory information

##### 15.1. National regulations

##### Hydrogen sulfide (7783-06-4)

Listed on the Canadian DSL (Domestic Substances List)

##### 15.2. International regulations

##### Hydrogen sulfide (7783-06-4)

Listed on the AICS (Australian Inventory of Chemical Substances)  
 Listed on IECSC (Inventory of Existing Chemical Substances Produced or Imported in China)  
 Listed on the EEC inventory EINECS (European Inventory of Existing Commercial Chemical Substances)  
 Listed on the Japanese ENCS (Existing & New Chemical Substances) inventory  
 Listed on the Korean ECL (Existing Chemicals List)  
 Listed on NZIoC (New Zealand Inventory of Chemicals)  
 Listed on PICCS (Philippines Inventory of Chemicals and Chemical Substances)  
 Listed on the United States TSCA (Toxic Substances Control Act) inventory  
 Listed on INSQ (Mexican national Inventory of Chemical Substances)

#### SECTION 16: Other information

Date of issue : 15/10/1979  
 Revision date : 10/08/2016  
 Supersedes : 15/10/2013

Indication of changes:

Training advice : Users of breathing apparatus must be trained. Ensure operators understand the toxicity hazard.  
 Ensure operators understand the flammability hazard.

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

8/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Hydrogen sulfide

### Safety Data Sheet E-4611

according to the Hazardous Products Regulation (February 11, 2015)

Date of issue: 10-15-1979

Revision date: 08-10-2016

Supersedes: 10-15-2013

#### Other information

: When you mix two or more chemicals, you can create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an industrial hygienist or other trained person when you evaluate the end product. Before using any plastics, confirm their compatibility with this product

Praxair asks users of this product to study this SDS and become aware of the product hazards and safety information. To promote safe use of this product, a user should (1) notify employees, agents, and contractors of the information in this SDS and of any other known product hazards and safety information, (2) furnish this information to each purchaser of the product, and (3) ask each purchaser to notify its employees and customers of the product hazards and safety information

The opinions expressed herein are those of qualified experts within Praxair Canada Inc. We believe that the information contained herein is current as of the date of this Safety Data Sheet. Since the use of this information and the conditions of use are not within the control of Praxair Canada Inc, it is the user's obligation to determine the conditions of safe use of the product. Praxair Canada Inc, SDSs are furnished on sale or delivery by Praxair Canada Inc, or the independent distributors and suppliers who package and sell our products. To obtain current SDSs for these products, contact your Praxair sales representative, local distributor, or supplier, or download from [www.praxair.ca](http://www.praxair.ca). If you have questions regarding Praxair SDSs, would like the document number and date of the latest SDS, or would like the names of the Praxair suppliers in your area, phone or write Praxair Canada Inc, (Phone: 1-888-257-5149; Address: Praxair Canada Inc, 1 City Centre Drive, Suite 1200, Mississauga, Ontario, L5B 1M2).

PRAXAIR and the Flowing Airstream design are trademarks or registered trademarks of Praxair Technology, Inc. in the United States and/or other countries.

#### NFPA health hazard


: 4 - Very short exposure could cause death or serious residual injury even though prompt medical attention was given.

#### NFPA fire hazard

: 4 - Will rapidly or completely vaporize at normal pressure and temperature, or is readily dispersed in air and will burn readily.

#### NFPA reactivity

: 0 - Normally stable, even under fire exposure conditions, and are not reactive with water.



#### HMIS III Rating

##### Health

: 2 Moderate Hazard - Temporary or minor injury may occur

##### Flammability

: 4 Severe Hazard - Flammable gases, or very volatile flammable liquids with flash points below 73 F, and boiling points below 100 F. Materials may ignite spontaneously with air. (Class IA)

##### Physical

: 2 Moderate Hazard - Materials that are unstable and may undergo violent chemical changes at normal temperature and pressure with low risk for explosion. Materials may react violently with water or form peroxides upon exposure to air.

#### SDS Canada (GHS) - Praxair

*This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.*

This document is only controlled while on the Praxair Canada Inc. website and a copy of this controlled version is available for download. Praxair cannot assure the integrity or accuracy of any version of this document after it has been downloaded or removed from our website.

EN (English)

SDS ID : E-4611

9/9

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

Appendix B  
SO<sub>2</sub> SDS



## Safety Data Sheet

**Material Name: SULFUR DIOXIDE**

**SDS ID: MAT22290**

### Section 1 - PRODUCT AND COMPANY IDENTIFICATION

**Material Name**

SULFUR DIOXIDE

**Synonyms**

MTG MSDS 80; SULFUROUS ACID ANHYDRIDE; SULFUROUS OXIDE; SULPHUR DIOXIDE;  
SULFUROUS ANHYDRIDE; FERMENTICIDE LIQUID; SULFUR DIOXIDE(SO<sub>2</sub>); SULFUR OXIDE;  
SULFUR OXIDE(SO<sub>2</sub>)

**Chemical Family**

inorganic, gas

**Product Description**

Classification determined in accordance with Compressed Gas Association standards.

**Product Use**

Industrial and Specialty Gas Applications.

**Restrictions on Use**

None known.

**Details of the supplier of the safety data sheet**

MATHESON TRI-GAS, INC.

3 Mountainview Road

Warren, NJ 07059

General Information: 1-800-416-2505

Emergency #: 1-800-424-9300 (CHEMTREC)

Outside the US: 703-527-3887 (Call collect)

### Section 2 - HAZARDS IDENTIFICATION

**Classification in accordance with paragraph (d) of 29 CFR 1910.1200.**

Gases Under Pressure - Liquefied gas

Acute Toxicity - Inhalation - Gas - Category 3

Skin Corrosion/Irritation - Category 1B

Serious Eye Damage/Eye Irritation - Category 1

Simple Asphyxiant

**GHS Label Elements**

**Symbol(s)**



**Signal Word**

Danger

**Hazard Statement(s)**

Contains gas under pressure; may explode if heated.

Toxic if inhaled.

Causes severe skin burns and eye damage.

May displace oxygen and cause rapid suffocation.

**Precautionary Statement(s)**

**Prevention**

Use only outdoors or in a well-ventilated area.

Wear protective gloves/protective clothing/eye protection/face protection.

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Safety Data Sheet

**Material Name: SULFUR DIOXIDE**

**SDS ID: MAT22290**

Wash thoroughly after handling.

Do not breathe dusts or mists.

**Response**

IF INHALED: Remove person to fresh air and keep comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing.

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower.

Wash contaminated clothing before reuse.

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.

Immediately call a POISON CENTER or doctor.

Specific treatment (see label).

**Storage**

Store in a well-ventilated place. Keep container tightly closed.

Store locked up.

Protect from sunlight.

**Disposal**

Dispose of contents/container in accordance with local/regional/national/international regulations.

**Other Hazards**

Contact with liquified gas may cause frostbite.

### Section 3 - COMPOSITION / INFORMATION ON INGREDIENTS

| CAS       | Component Name | Percent |
|-----------|----------------|---------|
| 7446-09-5 | Sulfur dioxide | 100.0   |

### Section 4 - FIRST AID MEASURES

**Inhalation**

IF INHALED: Remove person to fresh air and keep at rest in a position comfortable for breathing. Get immediate medical attention.

**Skin**

IF ON SKIN (or hair): Remove/take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse. If frostbite or freezing occur, immediately flush with plenty of lukewarm water (105-115°F; 41-46°C). If warm water is not available, gently wrap affected parts in blankets. DO NOT induce vomiting. Get immediate medical attention.

**Eyes**

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do.

Continue rinsing. Get immediate medical attention.

**Ingestion**

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Get immediate medical attention.

**Most Important Symptoms/Effects**

**Acute**

Toxic if inhaled, frostbite, suffocation, respiratory tract burns, skin burns, eye burns

**Delayed**

No information on significant adverse effects.

**Indication of any immediate medical attention and special treatment needed**

Treat symptomatically and supportively.

**Note to Physicians**

For inhalation, consider oxygen.



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Safety Data Sheet

**Material Name: SULFUR DIOXIDE**

**SDS ID: MAT22290**

### Section 5 - FIRE FIGHTING MEASURES

**Extinguishing Media**

**Suitable Extinguishing Media**

carbon dioxide, regular dry chemical, Large fires: Use regular foam or flood with fine water spray.

**Unsuitable Extinguishing Media**

None known.

**Special Hazards Arising from the Chemical**

Negligible fire hazard.

**Hazardous Combustion Products**

sulfur oxides

**Fire Fighting Measures**

Move container from fire area if it can be done without risk. Cool containers with water spray until well after the fire is out. Stay away from the ends of tanks. Keep unnecessary people away, isolate hazard area and deny entry.

**Special Protective Equipment and Precautions for Firefighters**

Wear full protective fire fighting gear including self contained breathing apparatus (SCBA) for protection against possible exposure.

### Section 6 - ACCIDENTAL RELEASE MEASURES

**Personal Precautions, Protective Equipment and Emergency Procedures**

Wear personal protective clothing and equipment, see Section 8.

**Methods and Materials for Containment and Cleaning Up**

Keep unnecessary people away, isolate hazard area and deny entry. Stay upwind and keep out of low areas.

Ventilate closed spaces before entering. Evacuation radius: 150 feet. Stop leak if possible without personal risk.

Reduce vapors with water spray. Do not get water directly on material.

**Environmental Precautions**

Avoid release to the environment.

### Section 7 - HANDLING AND STORAGE

**Precautions for Safe Handling**

Do not get in eyes, on skin, or on clothing. Do not breathe gas, fumes, vapor, or spray. Wash hands thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Contaminated work clothing should not be allowed out of the workplace. Do not eat, drink or smoke when using this product. Keep only in original container. Avoid release to the environment.

**Conditions for Safe Storage, Including any Incompatibilities**

Store in a well-ventilated place. Keep container tightly closed.

Store locked up.

Protect from sunlight.

Store and handle in accordance with all current regulations and standards. Protect from physical damage. Store outside or in a detached building. Keep separated from incompatible substances.

**Incompatible Materials**

bases, combustible materials, halogens, metal carbide, metal oxides, metals, oxidizing materials, peroxides, reducing agents

### Section 8 - EXPOSURE CONTROLS / PERSONAL PROTECTION

**Component Exposure Limits**

|                |               |
|----------------|---------------|
| Sulfur dioxide | 7446-09-5     |
| ACGIH:         | 0.25 ppm STEL |

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

|            |                                        |
|------------|----------------------------------------|
| NIOSH:     | 2 ppm TWA ; 5 mg/m <sup>3</sup> TWA    |
|            | 5 ppm STEL ; 13 mg/m <sup>3</sup> STEL |
|            | 100 ppm IDLH                           |
| OSHA (US): | 5 ppm TWA ; 13 mg/m <sup>3</sup> TWA   |
| Mexico:    | 0.25 ppm STEL [PPT-CT ]                |

### ACGIH - Threshold Limit Values - Biological Exposure Indices (BEI)

There are no biological limit values for any of this product's components.

### Engineering Controls

Provide local exhaust or process enclosure ventilation system. Ensure compliance with applicable exposure limits.

### Individual Protection Measures, such as Personal Protective Equipment

#### Eye/face protection

Wear splash resistant safety goggles with a faceshield. Contact lenses should not be worn. Provide an emergency eye wash fountain and quick drench shower in the immediate work area.

#### Skin Protection

Wear appropriate chemical resistant clothing. Wear chemical resistant clothing to prevent skin contact.

#### Respiratory Protection

Any self-contained breathing apparatus that has a full facepiece and is operated in a pressure-demand or other positive-pressure mode.

#### Glove Recommendations

Wear appropriate chemical resistant gloves.

## Section 9 - PHYSICAL AND CHEMICAL PROPERTIES

|                          |                         |                            |                       |
|--------------------------|-------------------------|----------------------------|-----------------------|
| Appearance               | colorless gas           | Physical State             | gas                   |
| Odor                     | irritating odor         | Color                      | colorless             |
| Odor Threshold           | 3 - 5 ppm               | pH                         | (Acidic in solution ) |
| Melting Point            | -73 °C (-99 °F )        | Boiling Point              | -10 °C (14 °F )       |
| Boiling Point Range      | Not available           | Freezing point             | Not available         |
| Evaporation Rate         | >1 (Butyl acetate = 1 ) | Flammability (solid, gas)  | Not available         |
| Autoignition Temperature | Not available           | Flash Point                | (Not flammable )      |
| Lower Explosive Limit    | Not available           | Decomposition temperature  | Not available         |
| Upper Explosive Limit    | Not available           | Vapor Pressure             | 2432 mmHg @ 20 °C     |
| Vapor Density (air=1)    | 2.26                    | Specific Gravity (water=1) | 1.462 at -10 °C       |



|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|



## Safety Data Sheet

Material Name: SULFUR DIOXIDE

SDS ID: MAT22290

|                    |                  |                                        |                  |
|--------------------|------------------|----------------------------------------|------------------|
| Water Solubility   | 22.8 % (@ 0 °C ) | Partition coefficient: n-octanol/water | Not available    |
| Viscosity          | Not available    | Kinematic viscosity                    | Not available    |
| Solubility (Other) | Not available    | Density                                | Not available    |
| Physical Form      | liquified gas    | Molecular Formula                      | S-O <sub>2</sub> |
| Molecular Weight   | 64.06            |                                        |                  |

**Solvent Solubility****Soluble**

alcohol, acetic acid, sulfuric acid, ether, chloroform, Benzene, sulfuryl chloride, nitrobenzenes, Toluene, acetone

**Section 10 - STABILITY AND REACTIVITY****Reactivity**

No reactivity hazard is expected.

**Chemical Stability**

Stable at normal temperatures and pressure.

**Possibility of Hazardous Reactions**

Will not polymerize.

**Conditions to Avoid**

Minimize contact with material. Containers may rupture or explode if exposed to heat.

**Incompatible Materials**

bases, combustible materials, halogens, metal carbide, metal oxides, metals, oxidizing materials, peroxides, reducing agents

**Hazardous decomposition products**

oxides of sulfur

**Section 11 - TOXICOLOGICAL INFORMATION****Information on Likely Routes of Exposure****Inhalation**

Toxic if inhaled. Causes damage to respiratory system, burns, difficulty breathing

**Skin Contact**

skin burns

**Eye Contact**

eye burns

**Ingestion**

burns, nausea, vomiting, diarrhea, stomach pain

**Acute and Chronic Toxicity****Component Analysis - LD50/LC50**

The components of this material have been reviewed in various sources and the following selected endpoints are published:

**Sulfur dioxide (7446-09-5)**

Inhalation LC50 Rat 965 - 1168 ppm 4 h

**Product Toxicity Data****Acute Toxicity Estimate**

No data available.

**Immediate Effects**

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**MATHESON**

ask. . .The Gas Professionals™

## Safety Data Sheet

**Material Name: SULFUR DIOXIDE****SDS ID: MAT22290**

Toxic if inhaled, frostbite, suffocation, respiratory tract burns, skin burns, eye burns

**Delayed Effects**

No information on significant adverse effects.

**Irritation/Corrosivity Data**

respiratory tract burns, skin burns, eye burns

**Respiratory Sensitization**

No data available.

**Dermal Sensitization**

No data available.

**Component Carcinogenicity**

|                |                                                  |
|----------------|--------------------------------------------------|
| Sulfur dioxide | 7446-09-5                                        |
| ACGIH:         | A4 - Not Classifiable as a Human Carcinogen      |
| IARC:          | Monograph 54 [1992] (Group 3 (not classifiable)) |

**Germ Cell Mutagenicity**

No data available.

**Tumorigenic Data**

No data available

**Reproductive Toxicity**

No data available.

**Specific Target Organ Toxicity - Single Exposure**

No target organs identified.

**Specific Target Organ Toxicity - Repeated Exposure**

No target organs identified.

**Aspiration hazard**

Not applicable.

**Medical Conditions Aggravated by Exposure**

respiratory disorders

**Section 12 - ECOLOGICAL INFORMATION****Component Analysis - Aquatic Toxicity**

No LOLI ecotoxicity data are available for this product's components.

**Persistence and Degradability**

No data available.

**Bioaccumulative Potential**

No data available.

**Mobility**

No data available.

**Section 13 - DISPOSAL CONSIDERATIONS****Disposal Methods**

Dispose of contents/container in accordance with local/regional/national/international regulations.

**Component Waste Numbers**

The U.S. EPA has not published waste numbers for this product's components.

**Section 14 - TRANSPORT INFORMATION****US DOT Information:****Shipping Name:** SULFUR DIOXIDE

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**MATHESON**

ask. . . The Gas Professionals™

**Safety Data Sheet****Material Name: SULFUR DIOXIDE****SDS ID: MAT22290****Hazard Class: 2.3****UN/NA #: UN1079****Required Label(s): 2.3****IMDG Information:****Shipping Name: SULPHUR DIOXIDE****Hazard Class: 2.3****UN#: UN1079****Required Label(s): 2.3****TDG Information:****Shipping Name: SULFUR DIOXIDE****Hazard Class: 2.3****UN#: UN1079****Required Label(s): 2.3****International Bulk Chemical Code**

This material does not contain any chemicals required by the IBC Code to be identified as dangerous chemicals in bulk.

**Section 15 - REGULATORY INFORMATION****U.S. Federal Regulations**

This material contains one or more of the following chemicals required to be identified under SARA Section 302 (40 CFR 355 Appendix A), SARA Section 313 (40 CFR 372.65), CERCLA (40 CFR 302.4), TSCA 12(b), and/or require an OSHA process safety plan.

|                       |                             |
|-----------------------|-----------------------------|
| <b>Sulfur dioxide</b> | <b>7446-09-5</b>            |
| <b>SARA 302:</b>      | <b>500 lb TPQ</b>           |
| <b>OSHA (safety):</b> | <b>1000 lb TQ (Liquid )</b> |
| <b>SARA 304:</b>      | <b>500 lb EPCRA RQ</b>      |

**SARA Section 311/312 (40 CFR 370 Subparts B and C) reporting categories**

Gas Under Pressure; Acute toxicity; Skin Corrosion/Irritation; Serious Eye Damage/Eye Irritation; Simple Asphyxiant

**U.S. State Regulations**

The following components appear on one or more of the following state hazardous substances lists:

| Component             | CAS              | CA  | MA  | MN  | NJ  | PA  |
|-----------------------|------------------|-----|-----|-----|-----|-----|
| <b>Sulfur dioxide</b> | <b>7446-09-5</b> | Yes | Yes | Yes | Yes | Yes |

**California Safe Drinking Water and Toxic Enforcement Act (Proposition 65)****WARNING**This product can expose you to chemicals including Sulfur dioxide , which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

|                               |                                                                                                               |                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|
| Permian Resources Corporation | H <sub>2</sub> S Contingency Plan<br>Baked Ziti 423H, 424H, 213H, 214H,<br>133H, 134H, 123H, 113H, 124H, 114H | Eddy County, New Mexico |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------|

**MATHESON**

ask. . The Gas Professionals™

**Safety Data Sheet****Material Name: SULFUR DIOXIDE****SDS ID: MAT22290**

|                |                                    |
|----------------|------------------------------------|
| Sulfur dioxide | 7446-09-5                          |
| Repro/Dev. Tox | developmental toxicity , 7/29/2011 |

**Component Analysis - Inventory****Sulfur dioxide (7446-09-5)**

|     |     |     |     |     |           |           |                   |                   |
|-----|-----|-----|-----|-----|-----------|-----------|-------------------|-------------------|
| US  | CA  | AU  | CN  | EU  | JP - ENCS | JP - ISHL | KR KECI - Annex 1 | KR KECI - Annex 2 |
| Yes | DSL | Yes | Yes | EIN | Yes       | Yes       | Yes               | No                |

|                |     |     |     |         |        |            |
|----------------|-----|-----|-----|---------|--------|------------|
| KR - REACH CCA | MX  | NZ  | PH  | TH-TECI | TW, CN | VN (Draft) |
| No             | Yes | Yes | Yes | Yes     | Yes    | Yes        |

**Section 16 - OTHER INFORMATION****NFPA Ratings**

Health: 3 Fire: 0 Instability: 0

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe

**Summary of Changes**

SDS update: 02/10/2016

**Key / Legend**

ACGIH - American Conference of Governmental Industrial Hygienists; ADR - European Road Transport; AU - Australia; BOD - Biochemical Oxygen Demand; C - Celsius; CA - Canada; CA/MA/MN/NJ/PA - California/Massachusetts/Minnesota/New Jersey/Pennsylvania\*; CAS - Chemical Abstracts Service; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CFR - Code of Federal Regulations (US); CLP - Classification, Labelling, and Packaging; CN - China; CPR - Controlled Products Regulations; DFG - Deutsche Forschungsgemeinschaft; DOT - Department of Transportation; DSD - Dangerous Substance Directive; DSL - Domestic Substances List; EC - European Commission; EEC - European Economic Community; EIN - European Inventory of (Existing Commercial Chemical Substances); EINECS - European Inventory of Existing Commercial Chemical Substances; ENCS - Japan Existing and New Chemical Substance Inventory; EPA - Environmental Protection Agency; EU - European Union; F - Fahrenheit; F - Background (for Venezuela Biological Exposure Indices); IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; ICAO - International Civil Aviation Organization; IDL - Ingredient Disclosure List; IDLH - Immediately Dangerous to Life and Health; IMDG - International Maritime Dangerous Goods; ISHL - Japan Industrial Safety and Health Law; IUCLID - International Uniform Chemical Information Database; JP - Japan; Kow - Octanol/water partition coefficient; KR KECI Annex 1 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL); KR KECI Annex 2 - Korea Existing Chemicals Inventory (KECI) / Korea Existing Chemicals List (KECL); KR - Korea; LD50/LC50 - Lethal Dose/ Lethal Concentration; KR REACH CCA - Korea Registration and Evaluation of Chemical Substances Chemical Control Act; LEL - Lower Explosive Limit; LLV - Level Limit Value; LOLI - List Of Lists™ - ChemADVISOR's Regulatory Database; MAK - Maximum Concentration Value in the Workplace; MEL - Maximum Exposure Limits; MX - Mexico; Ne- Non-specific; NFPA - National Fire Protection Agency; NIOSH - National Institute for Occupational Safety and Health; NJTSR - New Jersey Trade Secret Registry; Nq - Non-quantitative; NSL - Non-Domestic Substance List (Canada); NTP - National Toxicology Program; NZ - New Zealand; OSHA - Occupational Safety and Health Administration; PEL - Permissible Exposure Limit; PH - Philippines; RCRA - Resource Conservation and Recovery Act; REACH - Registration, Evaluation, Authorisation, and restriction of Chemicals; RID - European Rail Transport; SARA - Superfund Amendments and Reauthorization Act; Se - Semi-quantitative; STEL - Short-term Exposure Limit;

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** Permian Resources Operating, LLC **OGRID:** 372165 **Date:** 4/23/2025

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name       | API | ULSTR        | Footages            | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|-----------------|-----|--------------|---------------------|-----------------------|-----------------------|----------------------------------|
| BAKED ZITI 113H | TBD | I-29-21S-27E | 2451' FSL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 114H | TBD | I-29-21S-27E | 2385' FSL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 123H | TBD | I-29-21S-27E | 2484' FSL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 124H | TBD | I-29-21S-27E | 2418' FSL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 133H | TBD | H-29-21S-27E | 2589' FNL, 543' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 134H | TBD | H-29-21S-27E | 2622' FNL, 543' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 213H | TBD | H-29-21S-27E | 2523' FNL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 214H | TBD | H-29-21S-27E | 2556' FNL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 423H | TBD | H-29-21S-27E | 2457' FNL, 542' FEL | 670                   | 1980                  | 2100                             |
| BAKED ZITI 424H | TBD | H-29-21S-27E | 2490' FNL, 542' FEL | 670                   | 1980                  | 2100                             |

**IV. Central Delivery Point Name:** Uncle June CTB [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name       | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|-----------------|-----|-----------|-----------------|------------------------------|------------------------|-----------------------|
| BAKED ZITI 113H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 114H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 123H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 124H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 133H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 134H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 213H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 214H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 423H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |
| BAKED ZITI 424H | TBD |           | TBD             | TBD                          | TBD                    | TBD                   |

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

## **Section 2 – Enhanced Plan** **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

### **IX. Anticipated Natural Gas Production:**

| Well Name | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|-----------|-----|--------------------------------------------|----------------------------------------------------------|
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |
|           |     |                                            |                                                          |

### **X. Natural Gas Gathering System (NGGS):**

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
|          |        |                 |                                  |                                                           |
|          |        |                 |                                  |                                                           |

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.



### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☐ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☒ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☒ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.



I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Cassie Evans*

Printed Name: Cassie Evans

Title: Regulatory Supervisor

E-mail Address: cassie.evans@permianres.com

Date: 4/23/2025

Phone: (432) 313-1732

**OIL CONSERVATION DIVISION**  
**(Only applicable when submitted as a standalone form)**

Approved By:

Title:

Approval Date:

Conditions of Approval:

## Permian Resources Operating, LLC (372165)

**Natural Gas Management Plan Descriptions****VI. Separation Equipment:**

Permian utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations. Our goal is to maintain 5 minutes of retention time in the test vessel and 20 minutes in the heater treater at peak production rates. The gas produced is routed from the separator to the gas sales line.

**VII. Operational Practices:***Drilling*

During Permian's drilling operations it is uncommon for venting or flaring to occur. If flaring is needed due to safety concerns, gas will be routed to a flare and volumes will be estimated.

*Flowback*

During completion/recompletion flowback operations, after separation flowback begins and as soon as it is technically feasible, Permian routes gas through a permanent separator and the controlled facility where the gas is either sold or flared through a high-pressure flare if needed.

*Production*

Per 19.15.27.8.D, Permian's facilities are designed to minimize waste. Our produced gas will only be vented or flared in an emergency or malfunction situation, except as allowed for normal operations noted in 19.15.27.8.D(2) & (4). All gas that is flared is metered. All gas that may be vented will be estimated.

*Performance Standards*

Permian utilizes a production forecast from our Reservoir Engineering team to appropriately size each permanent, 3-phase separator and heater treater utilized for production operations.

All of Permian's permanent storage tanks associated with production operations which are routed to a flare or control device are equipped with an automatic gauging system.

All of Permian's flare stacks, both currently installed and for future installation, are:

- 1) Appropriately sized and designed to ensure proper combustion efficiency.
- 2) Equipped with an automatic ignitor or continuous pilot.
- 3) Anchored and located at least 100 feet from the well and storage tanks.

Permian's field operations and HSE teams have implemented an AVO inspection schedule that adheres to the requirements of 19.15.27.8.E(5).

All of our operations and facilities are designed to minimize waste. We routinely employ the following methods and practices:

- Closed-loop systems
- Enclosed and properly sized tanks

## Permian Resources Operating, LLC (372165)

- Vapor recovery units to maximize recovery of low-pressure gas streams and potential unauthorized emissions
- Low-emitting or electric engines whenever practical
- Combustors and flare stacks in the event of a malfunction or emergency
- Routine facility inspections to identify leaking components, functioning control devices, such as flares and combustors, and repair / replacement of malfunctioning components where applicable

*Measurement or estimation*

Permian measures or estimates the volumes of natural gas vented, flared and/or beneficially used for all of our drilling, completing and producing wells. We utilize accepted industry standards and methodology which can be independently verified. Annual GOR testing is completed on our wells and will be submitted as required by the OCD. None of our equipment is designed to allow diversion around metering elements except during inspection, maintenance and repair operations.

**VIII. Best Management Practices:**

Permian utilizes the following BMPs to minimize venting during active and planned maintenance activities:

- Use a closed-loop process wherever possible during planned maintenance activities, such as blowdowns, liquid removal, and work over operations.
- Employ low-emitting or electric engines for equipment, such as compressors
- Adhere to a strict preventative maintenance program which includes routine facility inspections, identification of component malfunctions, and repairing or replacing components such as hatches, seals, valves, etc. where applicable
- Utilize vapor recovery units (VRU's) to maximize recovery of volumes of low-pressure gas streams and potential unauthorized emissions
- Route low pressure gas and emissions streams to a combustion device to prevent venting where necessary