Santa Fe Main Office Phone: (505) 476-3441 General Information Phone: (505) 629-6116	State of New Mexico Energy, Minerals and Natural Resource	
Online Phone Directory Visit: https://www.cmnrd.nni.gov/ood/contact-us.	OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505	WELL API NO. 30-015-02148 5. Indicate Type of Lease STATE FEE 6. State Oil & Gas Lease No.
(DO NOT USE THIS FORM FOR PROPOS	CES AND REPORTS ON WELLS SALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A ATION FOR PERMIT" (FORM C-101) FOR SUCH	7. Lease Name or Unit Agreement Name Resler Yates State
1. Type of Well: Oil Well	Gas Well Other Injection	8. Well Number #355
Name of Operator Sandlott E	nergy (Jackie Brewer DBA)	9. OGRID Number
3. Address of Operator P.O. Box	711	154329 10. Pool name or Wildeat (3230)
4. Well Location	, NM 88260	Artesia; Queen-Grayburg-San Andre
Unit Letter A Section 32	:330feet from theNorth line an Township 18S Range 28E	d 990feet from theEastline NMPM Eddy County
	11. Elevation (Show whether DR, RKB, RT, GR	R, etc.)
	appropriate Box to Indicate Nature of Not	ice, Report or Other Data
NOTICE OF IN PERFORM REMEDIAL WORK TEMPORARILY ABANDON DULL OR ALTER CASING DOWNHOLE COMMINGLE CLOSED-LOOP SYSTEM OTHER:	PLUG AND ABANDON REMEDIAL V CHANGE PLANS COMMENCE MULTIPLE COMPL CASING/CEM	DRILLING OPNS. P AND A
13. Describe proposed or compl	eted operations. (Clearly state all pertinent details	s, and give pertinent dates, including estimated date
Please see attached	ck). SEE RULE 19.15.7.14 NMAC. For Multiple	Completions: Attach wellbore diagram of
Spud Date:	Rig Release Date:	
I hereby certify that the information a	bove is true and complete to the best of my knowl	edge and belief.
SIGNATURE . Drive	TITLE	DATE 11\2\2025
Type or print name For State Use Only	E-mail address:	PHONE:
· -	TITLE	DATE

Mowisqueme Ott. Company

Plug and Abandon

Submitted By: C. Casey

Wellname:	RESLER YATES STAT			
Location:	330' FNL & 990' FEL, Sec. A-32-18S-28E - Eddy Co, NM			
Date:	August 7, 2025			
API#:	API 30-015-02148	Surf Csg Set:	7" 20# J-55	
Csg Size:	4 ½" 9.5# J-55	Set @:	509'	
Set @:	2061	Inter #1:		
Perfs:	2021'-2036' (30 shots)	Set @:		


Well is to be plugged & abandoned.


Procedure:

- 1. MIRU plugging crew.
- ND WH & NU BOP.
- 3. POOH w/tbg & pkr.
- 4. RIH w/4 ½ "CIBP & set @ 2000'. (Top Upper Grayburg perf @ 2021').
- 5. Circulate capacity of MLF.
- 6. Test csg to 500# for 30 mins.
- 7. POOH w/tbg & MIRU WL.
- 8. Perform cmt bond log.
- 9. RDMO WL.
- 10. RIH w/tbg & spot 40 sks Class C neat cmt (544' ±) on top of CIBP.
- 11. WOC 6 hrs & tag plug @ 1506' or higher.
- 12. POOH w/tbg to 559' & circulate 40 sks Class C neat cmt. (559 ±)
- 13. WOC & confirm that wellbore remains full.
- 14. Cut off WH & install dry hole marker. Cut off anchors & clean location.

RESLER YATES STATE #355 P&A Schematic

330' FNL & 990' FEL, Sec. A-32-18S-28E - Eddy Co, NM API 30-015-02148

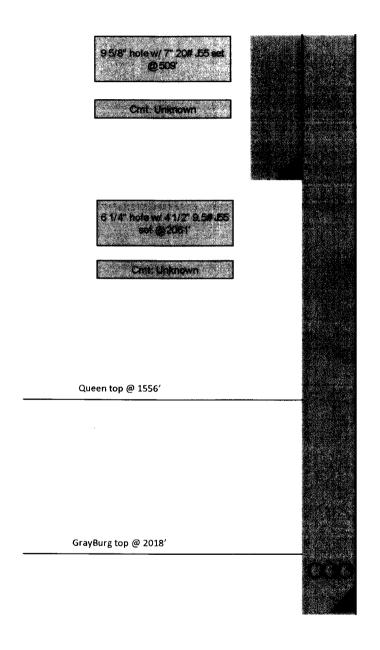




Gray@rg perfs (0 2021'-2036 (2 SPF)

RESLER YATES STATE #355 P&A Schematic

330' FNL & 990' FEL, Sec. A-32-18S-28E - Eddy Co, NM API 30-015-02148

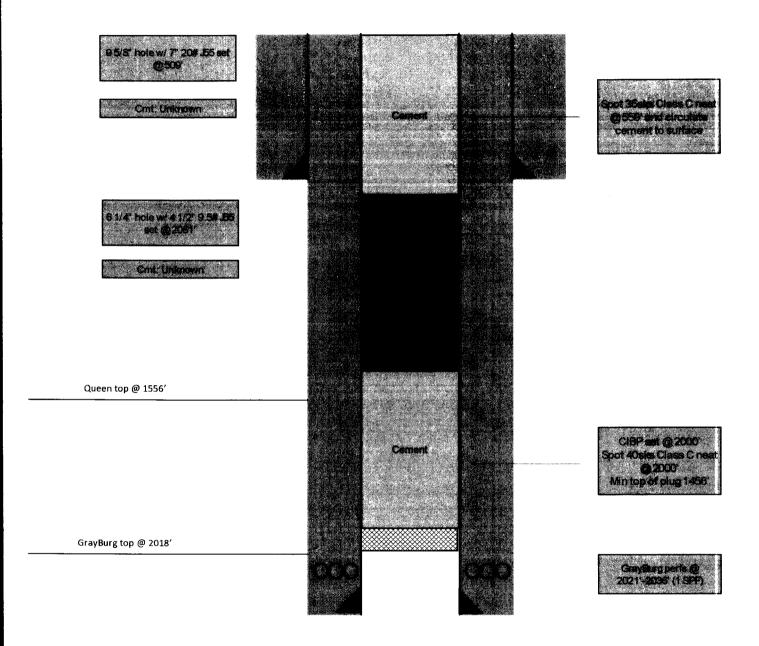

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 524498

CONDITIONS

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270 Action Number:	
Hobbs, NM 88241	524498
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	Notify the OCD inspection supervisor via email 24 hours prior to beginning Plug & Abandon (P&A) operations.	11/14/2025
loren.diede	NMOCD does not consider this well to be within the LPCH restricted area and an above ground P&A marker is required. NMOCD requires that plug(s) be added to cover the 7 Rivers = (970') and Yates = (620') formation tops. Submit photo and GPS coordinates of the P&A marker with the final P&A reports. The API# on the marker is to be clearly legible. Run CBL from CIBP to surface. Submit the CBL tif file to NMOCD for uploading into the Well Log File.	