

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 403315

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Avant Operating II, LLC 1515 Wynkoop Street Denver, CO 80202		2. OGRID Number 332947
		3. API Number 30-025-55505
4. Property Code 338098	5. Property Name MOONWATCH 17 8 STATE COM	6. Well No. 831H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
M	17	18S	35E	M	405	S	1174	W	Lea

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
L	8	18S	35E	L	2540	S	330	W	Lea

9. Pool Information

VACUUM;UPPER PENN	62320
-------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3949
16. Multiple N	17. Proposed Depth 18143	18. Formation Cisco	19. Contractor	20. Spud Date 2/1/2026
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	14.75	10.75	40.5	1736	625	0
Int1	9.875	8.625	32	8341	735	0
Prod	7.875	5.5	20	18143	1930	0

Casing/Cement Program: Additional Comments

Kick off plug set @11,581' with 670 sx cement, top of lead cement @ 10,581'. Please see attached cement proposal for more details.
--


22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Pipe	10000	5000	CAMERON

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature:	OIL CONSERVATION DIVISION
Printed Name: Electronically filed by Sarah Ferreyros	Approved By: Jeffrey Harrison
Title: Director of Regulatory	Title: Petroleum Specialist III
Email Address: sarah@avantnr.com	Approved Date: 12/1/2025 Expiration Date: 12/1/2027
Date: 11/14/2025 Phone: 720-854-9020	Conditions of Approval Attached

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024							
		Submittal Type: ☒ Initial Submittal ☐ Amended Report ☐ As Drilled							
WELL LOCATION INFORMATION									
API Number 30-025-55505	Pool Code 62320 62350	Pool Name VACUUM; UPPER PENN VACUUM; WOLF CAMP, EAST							
Property Code 338098	Property Name MOONWATCH 17 8 STATE COM	Well Number #831H							
OGRID No. 332947	Operator Name AVANT OPERATING II, LLC	Ground Level Elevation 3949'							
Surface Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal							
Surface Location									
UL M	Section 17	Township 18 S	Range 35 E	Lot	Ft. from N/S 405' FSL	Ft. from E/W 1174' FWL	Latitude 32.741626°	Longitude -103.484446°	County LEA
Bottom Hole Location									
UL L	Section 8	Township 18 S	Range 35 E	Lot	Ft. from N/S 2540' FSL	Ft. from E/W 330' FWL	Latitude 32.762064°	Longitude -103.487292°	County LEA
Dedicated Acres 960.00	Infill or Defining Well Defining	Defining Well API n/a	Overlapping Spacing Unit (Y/N) No		Consolidation Code n/a				
Order Numbers. n/a			Well setbacks are under Common Ownership: ☐ Yes ☒ No						
Kick Off Point (KOP)									
UL M	Section 17	Township 18 S	Range 35 E	Lot	Ft. from N/S 405' FSL	Ft. from E/W 1174' FWL	Latitude 32.741626°	Longitude -103.484446°	County LEA
First Take Point (FTP)									
UL M	Section 17	Township 18 S	Range 35 E	Lot	Ft. from N/S 100' FSL	Ft. from E/W 330' FWL	Latitude 32.740801°	Longitude -103.487186°	County LEA
Last Take Point (LTP)									
UL L	Section 8	Township 18 S	Range 35 E	Lot	Ft. from N/S 2540' FSL	Ft. from E/W 330' FWL	Latitude 32.762064°	Longitude -103.487292°	County LEA
Unitized Area or Area of Uniform Interest No		Spacing Unit Type ☒ Horizontal ☐ Vertical				Ground Floor Elevation: 3949'			
OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i>					SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>				
 11/12/2025									
Signature Sarah Ferreyros					Signature and Seal of Professional Surveyor 23203 OCTOBER 28, 2025				
Printed Name sarah@avantnr.com					Certificate Number		Date of Survey		
Email Address									

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

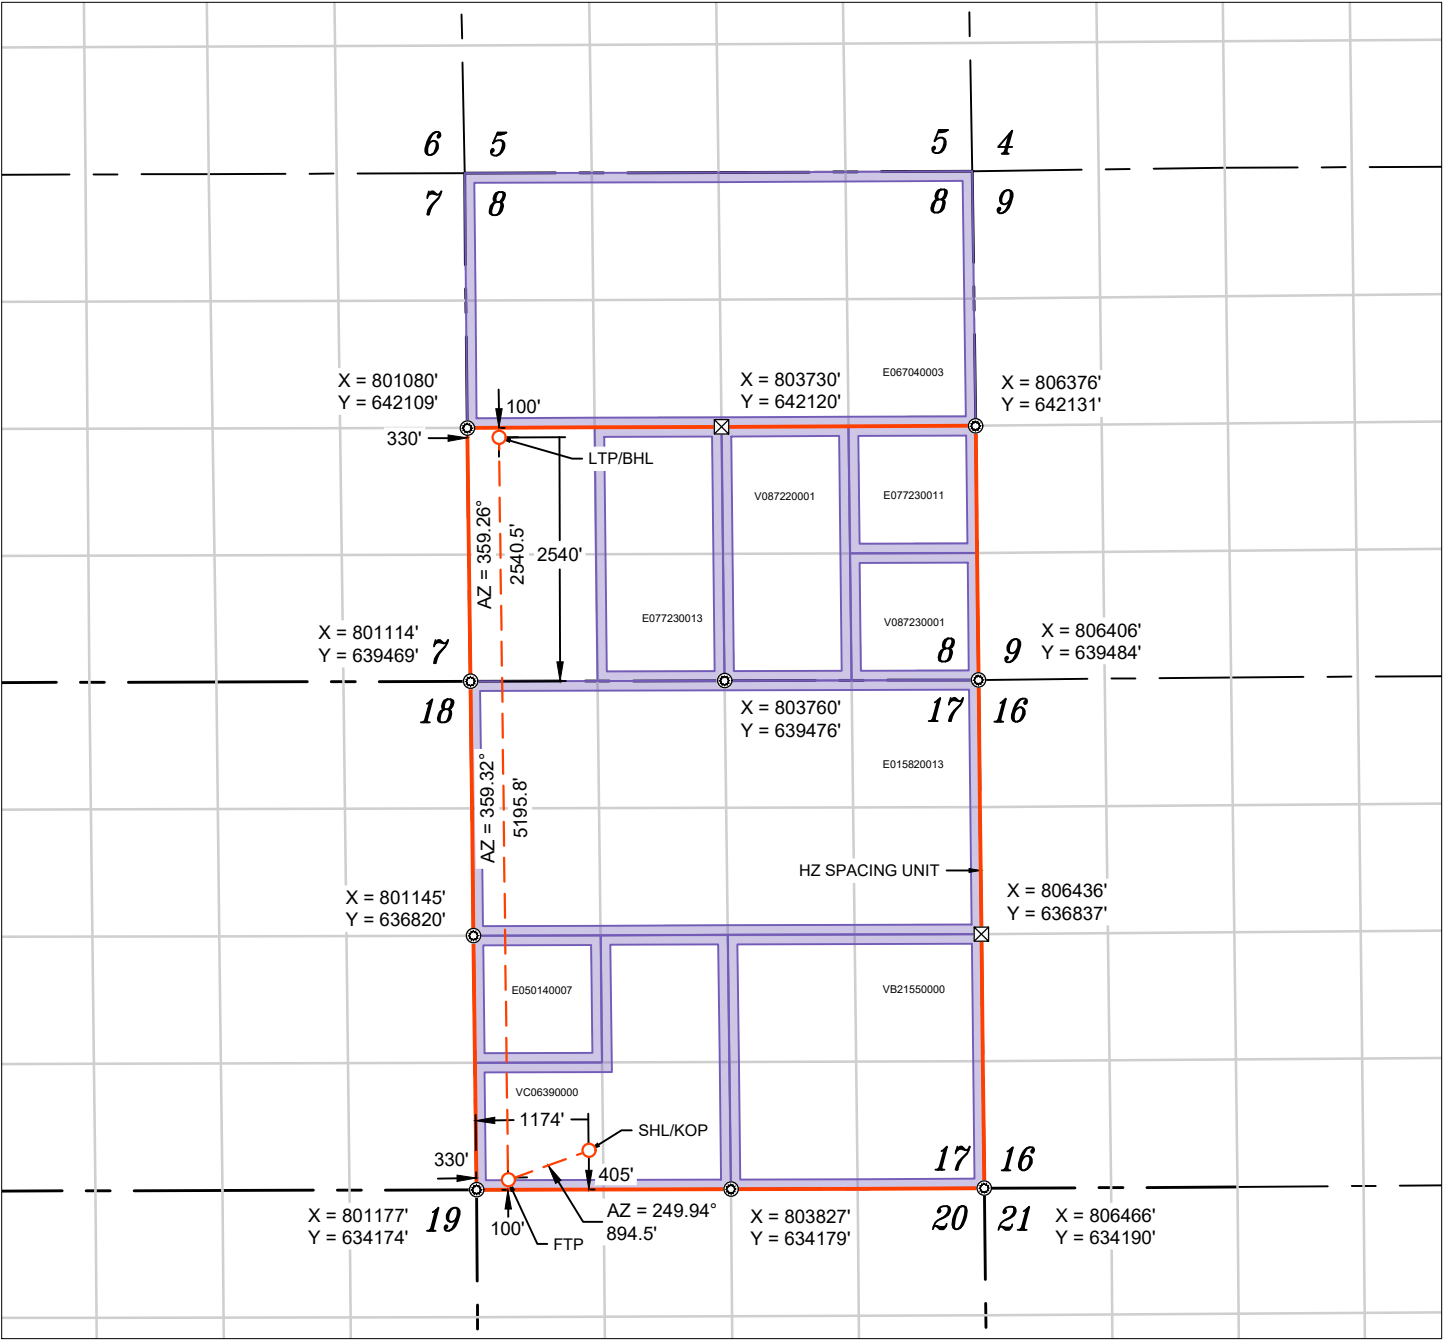

WELL NAME: MOONWATCH 17 8 STATE COM #831H
ELEVATION: 3949'

NAD 83 (SHL/KOP) 405' FSL & 1174' FWL
LATITUDE = 32.741626°
LONGITUDE = -103.484446°
NAD 27 (SHL/KOP)
LATITUDE = 32.741509°
LONGITUDE = -103.483949°
STATE PLANE NAD 83 (N.M. EAST)
N: 634581.11' E: 802346.40'
STATE PLANE NAD 27 (N.M. EAST)
N: 634518.94' E: 761167.69'

NAD 83 (FTP) 100' FSL & 330' FWL
LATITUDE = 32.740801°
LONGITUDE = -103.487186°
NAD 27 (FTP)
LATITUDE = 32.740684°
LONGITUDE = -103.486689°
STATE PLANE NAD 83 (N.M. EAST)
N: 634274.23' E: 801506.23'
STATE PLANE NAD 27 (N.M. EAST)
N: 634212.06' E: 760327.51'


NAD 83 (LTP/BHL) 2540' FSL & 330' FWL
LATITUDE = 32.762064°
LONGITUDE = -103.487292°
NAD 27 (LTP/BHL)
LATITUDE = 32.761947°
LONGITUDE = -103.486795°
STATE PLANE NAD 83 (N.M. EAST)
N: 642010.04' E: 801411.70'
STATE PLANE NAD 27 (N.M. EAST)
N: 641947.63' E: 760233.20'

- FOUND MONUMENT
- CALC. CORNER
- SHL/ KOP/ FTP / PPP/ LTP / BHL
- WELLBORE
- HORIZONTAL SPACING UNIT
- STATE OIL & GAS LEASE
- BLM OIL & GAS LEASE

APPROXIMATE WELL BORE DISTANCE FROM FTP TO LTP	
VC06390000	1223.83'
E050140007	1323.52'
E015820013	2648.49'
W1/2 OF THE SW1/4	2540.55'
TOTAL	7736.39'

NOTES

- ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001).
- THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING OCTOBER, 2025. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS INFORMATION IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments
Permit 403315

PERMIT COMMENTS

Operator Name and Address: Avant Operating II, LLC [332947] 1515 Wynkoop Street Denver, CO 80202		API Number: 30-025-55505
		Well: MOONWATCH 17 8 STATE COM #831H
Created By	Comment	Comment Date
twelem	Moonwatch 17 8 State Com 831H is a planned pilot hole, please see atatched PH directional plan and preliminary wellbore schematic for more details. Pilot hole plug #1: Cement plug spotted from 50' below the top of the Woodford to 50' above Strawn per Onshore Order 2.Pilot hole plug #2: Cement plug spotted 50' above & below Wolfcamp formation.	11/14/2025

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions


Permit 403315

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Avant Operating II, LLC [332947] 1515 Wynkoop Street Denver, CO 80202	API Number: 30-025-55505
	Well: MOONWATCH 17 8 STATE COM #831H

OCD Reviewer	Condition
jeffrey.harrison	Cement is required to circulate on both surface and intermediate1 strings of casing.
jeffrey.harrison	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.
jeffrey.harrison	NSP required if not included in an existing order or not an infill to an appropriate defining well in the same pool and spacing unit.
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.
jeffrey.harrison	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
jeffrey.harrison	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.

PROPOSAL#: 251108130138-B

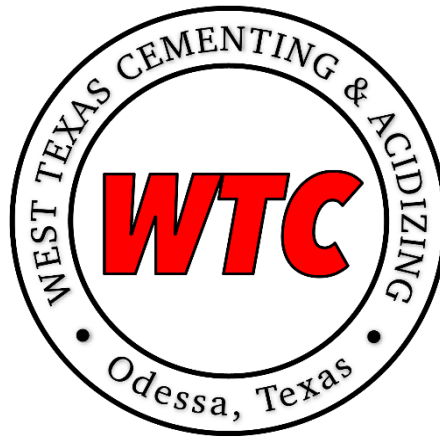

CEMENT PROCEDURE & PROPOSAL

PREPARED FOR:

Mr. Ryan Harris

EMAIL: ryan@avantnr.com

PHONE NUMBER: 406-853-6490

Avant Operating II Moonwatch 17 8 State Com #831H Lea County, NM

AFE Number: NM1469

Service Point

Odessa

1400 S JBS Parkway Odessa, TX 79766

432-701-8955

Technical Writer

Jonathan Smith

jonathan@wtcementers.com

432-701-3719

WTC Representative

Jon Reynolds

jon@wtcementers.com

432-257-1234

.Disclaimer Notice:

The ability of West Texas Cementing & Acidizing to complete this work is subject to the availability of the raw materials required to complete the job.

This information is presented in good faith, but no warranty is given by and West Texas Cementers LLC assumes no liability for advice or recommendations made concerning results to be obtained from the use of any product or service. The results given are estimates based on calculations produced by a computer model including various assumptions on the well, reservoir and treatment. The results depend on input data provided by the Operator and estimates as to unknown data and can be no more accurate than the model, the assumptions and such input data. The information presented is WTC LLC best estimate of the actual results that may be achieved and should be used for comparison purposes rather than absolute values. The quality of input data, and hence results, may be improved through the use of certain tests and procedures which West Texas Cementers LLC can assist in selecting. The Operator has superior knowledge of the well, the reservoir, the field and conditions affecting them. If the Operator is aware of any conditions whereby a neighboring well or wells might be affected by the treatment proposed herein it is the Operator's responsibility to notify the owner or owners of the well or wells accordingly. Prices quoted are estimates only and are good for 30 days from the date of issue. Actual charges may vary depending upon time, equipment, and material ultimately required to perform these services. Freedom from infringement of patents of West Texas Cementers LLC or others is not to be inferred.

PRINTED

11/11/2025 9:52

VERSION: v0.29d

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Surface



PROPOSAL#: 251108130138-B

WELL INFORMATION						
MUD	8.4# Fresh Water					
PREVIOUS PIPE	20" 94# CSG to 120					
OPEN HOLE	14.75" OH to 1736					
CASING/INJECTION	10.75" 40.5# J-55/BTC to 1736					
MD	1736					
EST BHST/BHCT	94-F / 87-F (0.8-F/100-FT)					
NOTES	Standby charges start after WTC has been on location for more than 4-hrs.					
VOLUMES						
FLUID NAME	LENGTH (ft)	OD (in.)	ID (in.)	XS (%)	FACTOR (bbl/ft)	VOLUME (bbl)
Lead	120	19.124	10.75		0.2430	29.2
Lead	1268	14.75	10.75	0%	0.0991	125.6
Tail	348	14.75	10.75	0%	0.0991	34.5
SHOE JOINT	40	10.75	10.05		0.0981	3.9
FLUIDS						
SPACER						
Fresh Water						
VOLUME	20-bbl					
Lead						
35% B_Poz+65% Class C+6% Gel+5% SALT+0.25PPS Pol-E-Flake+0.5PPS TCA100						
VOLUME	460-SX				Slurry Volume: 155.7-bbls	
DENSITY	12.8-ppg				Mix Water Required: 112-bbls	
YIELD	1.9-cf/sx					
MIX WATER	10.19-gps					
TOP OF CEMENT	Surface					
EXCESS	0%					

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Surface




PROPOSAL#: 251108130138-B

Tail		
	100% Class C+0.5% CaCl2+0.25PPS TCA100	
VOLUME	165-SX	Slurry Volume: 39.1-bbls
DENSITY	14.8-ppg	Mix Water Required: 25-bbls
YIELD	1.33-cf/sx	
MIX WATER	6.33-gps	
TOP OF CEMENT	1388-ft	
EXCESS	0%	
DISPLACEMENT		
	Displacement	
VOLUME	166.4-bbl	

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Intermediate



PROPOSAL#: 251108130138-B

WELL INFORMATION						
MUD	10# Brine					
PREVIOUS PIPE	10.75" 40.5# CSG to 1736					
OPEN HOLE	9.875" OH to 8341					
CASING/INJECTION	8.625" 32# L-80 HC BK to 8341					
MD	8341					
TVD	8293					
EST BHST/BHCT	147-F / 127-F (0.8-F/100-FT)					
NOTES	Standby charges start after WTC has been on location for more than 6-hrs.					
VOLUMES						
FLUID NAME	LENGTH (ft)	OD (in.)	ID (in.)	XS (%)	FACTOR (bbl/ft)	VOLUME (bbl)
Lead	1736	10.05	8.625		0.0258	44.9
Lead	4936	9.875	8.625	20%	0.0270	133.1
Tail	1669	9.875	8.625	20%	0.0270	45.0
SHOE JOINT	40	8.625	7.921		0.0609	2.4
FLUIDS						
SPACER						
Fresh Water						
VOLUME	25-bbl					
Lead						
35% B_Poz+65% Class C+6% Gel+5% SALT+0.4% R-1300+0.25PPS Pol-E-Flake+0.5PPS TCA100						
VOLUME	525-SX			Slurry Volume: 178.6-bbls		
DENSITY	12.8-ppg			Mix Water Required: 128-bbls		
YIELD	1.91-cf/sx					
MIX WATER	10.2-gps					
TOP OF CEMENT	Surface					
EXCESS	20%					

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Intermediate




PROPOSAL#: 251108130138-B

Tail		
50% B_Poz+50% Class H+5% SALT+0.2% SMS+0.3% CRT-201+0.25PPS TCA100		
VOLUME	210-SX	Slurry Volume: 47.9-bbls
DENSITY	14.2-ppg	Mix Water Required: 29-bbls
YIELD	1.28-cf/sx	
MIX WATER	5.8-gps	
TOP OF CEMENT	6672-ft	
EXCESS	20%	
DISPLACEMENT		
Displacement		
VOLUME	505.9-bbl	

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Kick Off Plug



PROPOSAL#: 251108130138-B

WELL INFORMATION						
MUD	9.2# OBM					
PREVIOUS PIPE	8.625" 32# CSG to 8341					
OPEN HOLE	7.875" OH to 11581					
MD	11581					
EST BHST/BHCT	173-F / 140-F (0.8-F/100-FT)					
DRILL PIPE	5" 19.5# DP					
NOTES	Standby charges start after WTC has been on location for more than 6-hrs.					
VOLUMES						
FLUID NAME	LENGTH (ft)	OD (in.)	ID (in.)	XS (%)	FACTOR (bbl/ft)	VOLUME (bbl)
Plug Back	1000	7.875	0	20%	0.0723	72.3
KOP	716	7.875	0	20%	0.0723	51.8
FLUIDS						
SPACER						
Wt. Spacer 37.97GPB Water+8PPB PolyScrub 4320+73.68PPB Barite+1GPB HoleScrub 4311+1PPB R-1300+1PPB TCA100						
VOLUME	30-bbl					
DENSITY	9.7-ppg					
Plug Back						
100% Class C+0.005GPS NoFoam V1A						
VOLUME	345-SX				Slurry Volume: 72.5-bbls	
DENSITY	15.6-ppg				Mix Water Required: 43-bbls	
YIELD	1.18-cf/sx					
MIX WATER	5.23-gps					
TOP OF CEMENT	10581-ft					
EXCESS	20%					
SPACER						
Wt. Spacer 37.97GPB Water+8PPB PolyScrub 4320+73.68PPB Barite+1GPB HoleScrub 4311+1PPB R-1300+1PPB TCA100						
VOLUME	15-bbl					
DENSITY	9.7-ppg					

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Kick Off Plug



PROPOSAL#: 251108130138-B

DISPLACEMENT		
OBM		
VOLUME	166.8-bbl	
SPACER		
Wt. Spacer 37.97GPB Water+8PPB PolyScrub 4320+73.68PPB Barite+1GPB HoleScrub 4311+1PPB R-1300+1PPB TCA100		
VOLUME	30-bbl	
DENSITY	9.7-ppg	
KOP		
100% Class H+5% SALT+1.6% CD-22+0.25PPS TCA100		
VOLUME	325-SX	Slurry Volume: 52.1-bbls
DENSITY	18-ppg	Mix Water Required: 23-bbls
YIELD	0.9-cf/sx	
MIX WATER	2.96-gps	
TOP OF CEMENT	9689-ft	
EXCESS	20%	
SPACER		
Wt. Spacer 37.97GPB Water+8PPB PolyScrub 4320+73.68PPB Barite+1GPB HoleScrub 4311+1PPB R-1300+1PPB TCA100		
VOLUME	15-bbl	
DENSITY	9.7-ppg	
DISPLACEMENT		
OBM		
VOLUME	152.7-bbl	

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Production



PROPOSAL#: 251108130138-B

WELL INFORMATION						
MUD	9.2# OBM					
PREVIOUS PIPE	8.625" 32# CSG to 8341					
OPEN HOLE	7.875" OH to 18143					
CASING/INJECTION	5.5" 20# P-110 HC GBCD to 18143					
MD	18143					
TVD	10510					
EST BHST/BHCT	170-F / 170-F (0.85-F/100-FT)					
KOP	10089					
NOTES	Standby charges start after WTC has been on location for more than 8-hrs.					
VOLUMES						
FLUID NAME	LENGTH (ft)	OD (in.)	ID (in.)	XS (%)	FACTOR (bbl/ft)	VOLUME (bbl)
Lead	8341	7.921	5.5		0.0316	263.3
Lead	1748	7.875	5.5	20%	0.0370	64.7
Tail	8054	7.875	5.5	20%	0.0370	298.2
SHOE JOINT	80	5.5	4.778		0.0222	1.8
FLUIDS						
SPACER						
Wt. Spacer 37.97GPB Water+8PPB PolyScrub 4320+73.68PPB Barite+1GPB HoleScrub 4311+1PPB R-1300+1PPB TCA100						
VOLUME	40-bbl					
DENSITY	9.7-ppg					
Lead						
100% ProLite+5PPS Plexcrete STE+2% SMS+0.65% R-1300+0.5% FL-24+3PPS Gilsonite+0.5PPS TCA100						
VOLUME	545-SX				Slurry Volume: 330-bbls	
DENSITY	10.7-ppg				Mix Water Required: 275-bbls	
YIELD	3.4-cf/sx					
MIX WATER	21.14-gps					
TOP OF CEMENT	Surface					
EXCESS	20%					

Avant Operating II
Moonwatch 17 8 State Com #831H
Lea County, NM

Production



PROPOSAL#: 251108130138-B

Tail		
50% B_Poz+50% Class H+5% SALT+0.3% SMS+0.4% CRT-201+0.5% FL-24+0.5PPS TCA100		
VOLUME	1385-SX	Slurry Volume: 300.9-bbls
DENSITY	14.5-ppg	Mix Water Required: 175-bbls
YIELD	1.22-cf/sx	
MIX WATER	5.3-gps	
TOP OF CEMENT	10089-ft	
EXCESS	20%	
DISPLACEMENT		
Displacement 0.25GPT Plexicide 24L+1GPT Corplex		
VOLUME	400.6-bbl	
DENSITY	8.34-ppg	

CHEMICAL DESCRIPTIONS		
CHEMICAL NAME	CODE	DESCRIPTION
B_Poz	WTC228	Poz - Fly Ash, Extender
Class H	WTC101	API Cement
Class C	WTC100	API Cement
M_Poz	WTC280	Poz - Fly Ash, Extender
ProLite		Blended Based Cement
Plexcrete SFA	WTC129	Cement Strength Enhancer
Gel	WTC102	Extender
GB-52	WTC008	Microspheres, Extender
Micro Shell	WTC209	Cement Strength Enhancer
WTC1	WTC250	Extender
CS-9	WTC285	Cement Strength Enhancer
Plexcrete STE	WTC127	Cement Strength Enhancer
CSE-NP	WTC236	Cement Strength Enhancer
Gypsum	WTC111	Free Water Control, Extender
CaCl ₂	WTC112	Accelerator
SMS	WTC115	Free Water Control, Extender
RCKCAS-100	WTC276	Free Water Control, Anti-Settling Agent
R-1300	WTC201	Low Temperature Retarder
CR-150	WTC275	Lignosulfonate Retarder
CRT-201	WTC278	Lignosulfonate Retarder
CD-22	WTC290	Dispersant, Friction Reducer
CFL-312	WTC265	Fluid Loss and Gas Migration Control
FL-24	WTC277	Fluid Loss (polymers/copolymers - 300-F max)
FL-17	WTC130	Fluid Loss and Gas Migration Control (400-F max)
MagBond	WTC271	Expanding Agent
Gilsonite	WTC003	Premium Lost Circulation Material, Free Water Control
Pol-E-Flake	WTC106	Lost Circulation Material
Web Seal	WTC133	Premium Fiber Lost Circulation Material
TCA100	WTC284	Powdered Defoamer
NoFoam V1A	WTC105	Liquid Defoamer
Water		Fresh Water
PolyScrub 4320	WTC232	Spacer Gelling Agent
RCKCAS-100	WTC276	Free Water Control, Anti-Settling Agent
Barite	WTC116	Weighting Agent
HoleScrub 4311	WTC281	Surfactant
HoleScrub 4305	WTC213	Surfactant
Soda Ash	WTC164	pH Control
R-1300	WTC201	Low Temperature Retarder
RCKCAS-100	WTC276	Free Water Control, Anti-Settling Agent
Sugar	WTC119	Retarder
TCA100	WTC284	Powdered Defoamer
Plexcide 24L	WTC166	Biocide
Corplex	WTC134	Corrosion Inhibitor
Clay Max	WTC096	KCL Substitute
Zone Seal	WTC207	Premium Lost Circulation Material


Ground Elev: 3949.0 KB: 3974.0

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	634581.11	802346.40	32.741626	-103.484446

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone


System Datum: Mean Sea Level

G
T **M**
 Azimuths to Grid North
 True North: -0.46°
 Magnetic North: 7.29°
 Magnetic Field
 Strength: 49110.6nT
 Dip Angle: 60.74°
 Date: 12/31/2009
 Model: IGRF200510

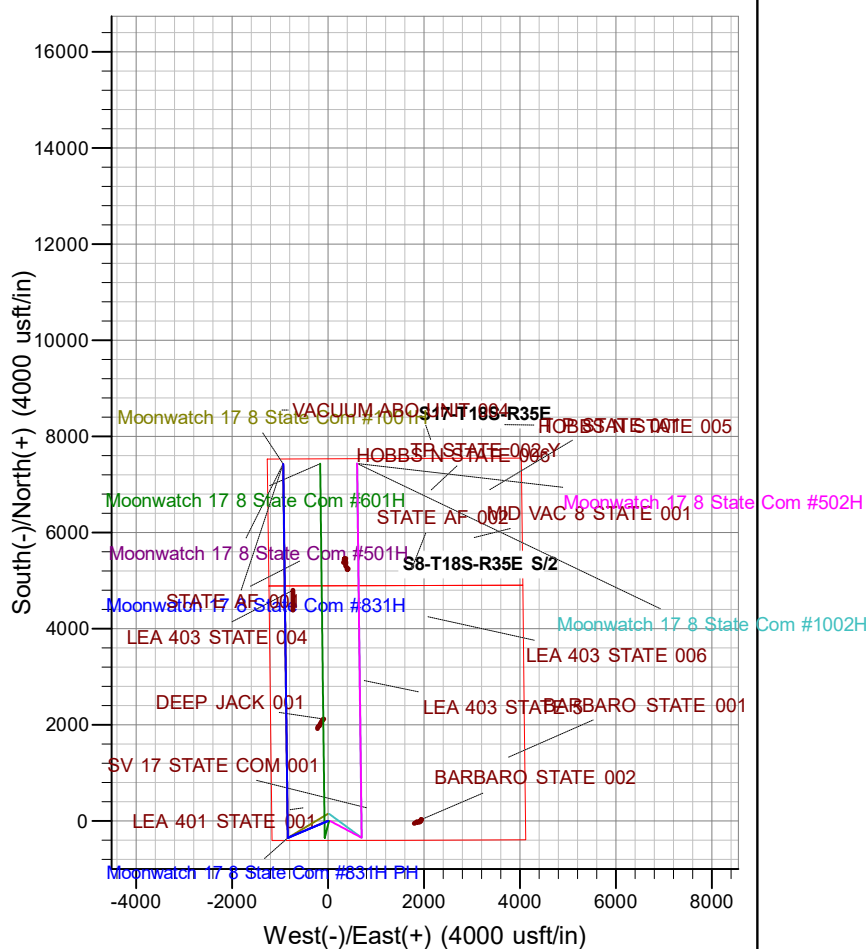

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Ann
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	2000.0	0.00	0.00	2000.0	0.0	0.0	0.00	0.00	0.0	Start
3	2363.7	7.27	247.27	2362.8	-8.9	-21.3	2.00	247.27	23.1	Start
4	9193.2	7.27	247.27	9137.2	-343.0	-818.9	0.00	0.00	887.9	Start
5	9556.9	0.00	0.00	9500.0	-351.9	-840.2	2.00	180.00	910.9	Start
6	12056.9	0.00	0.00	12000.0	-351.9	-840.2	0.00	0.00	910.9	TDia

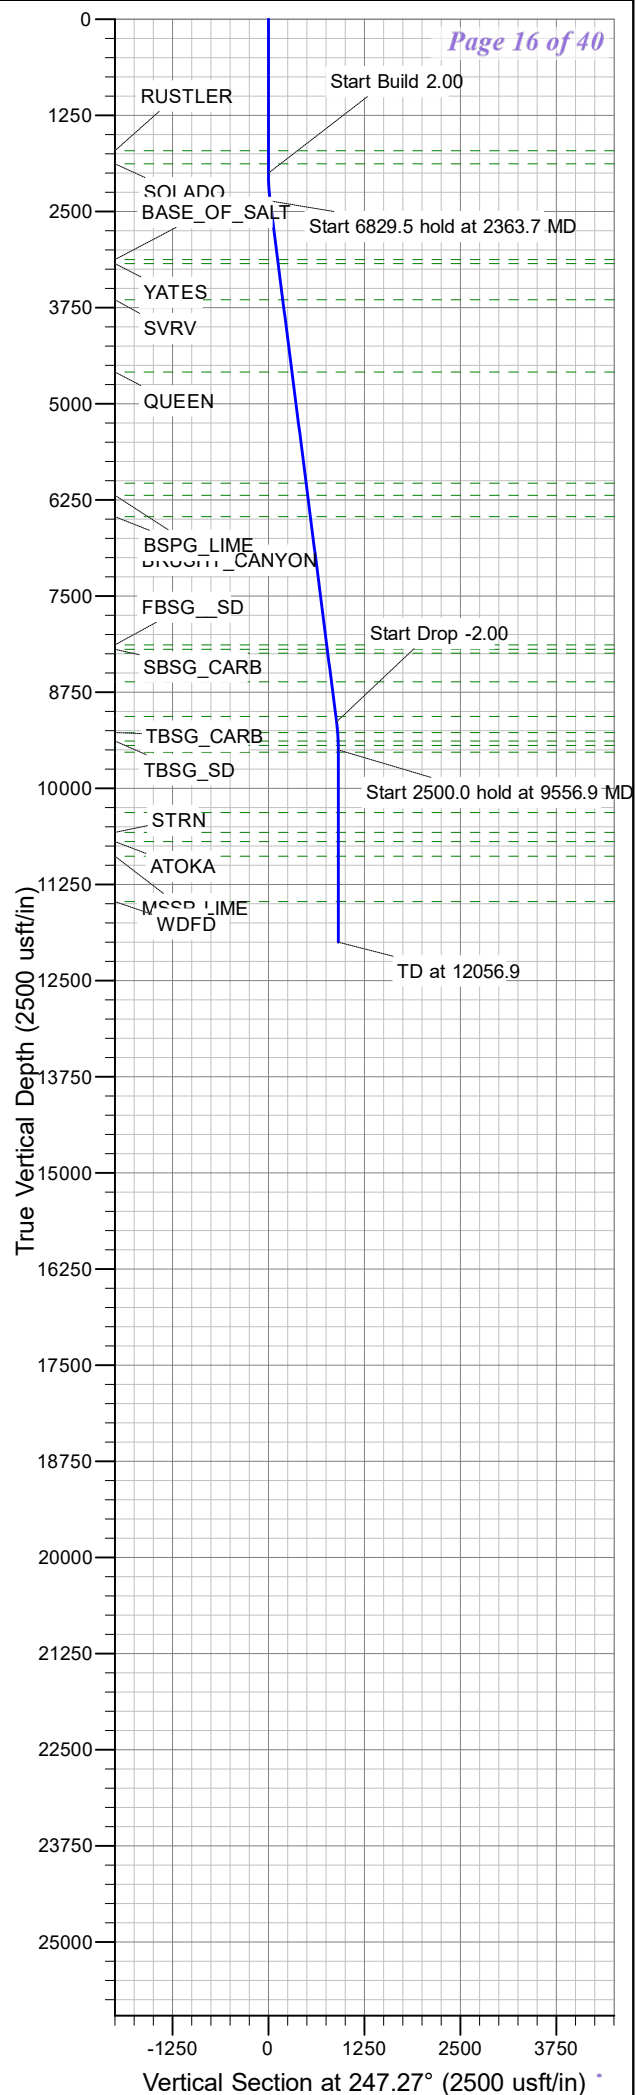

Avant Operating II, LLC

Lea County, NM (NAD 83)

Moonwatch 17 8 State Com Pad 1

Moonwatch 17 8 State Com #831H

PH

Plan: Plan 0.1

Standard Planning Report

11 November, 2025

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Project	Lea County, NM (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Moonwatch 17 8 State Com Pad 1			
Site Position:		Northing:	634,581.05 usft	Latitude:	32.741627
From:	Map	Easting:	802,326.40 usft	Longitude:	-103.484511
Position Uncertainty:		0.0 usft	Slot Radius:	13-3/16 "	

Well	Moonwatch 17 8 State Com #831H					
Well Position	+N/-S	0.0 usft	Northing:	634,581.11 usft	Latitude:	32.741626
	+E/-W	0.0 usft	Easting:	802,346.40 usft	Longitude:	-103.484446
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,949.0 usft
Grid Convergence:		0.46 °				

Wellbore	PH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.75	60.74	49,110.64927782

Design	Plan 0.1				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	247.27	

Plan Survey Tool Program	Date	11/11/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	12,056.9 Plan 0.1 (PH)	B001Mb_MWD+HRGM		
			OWSG MWD + HRGM		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,363.7	7.27	247.27	2,362.8	-8.9	-21.3	2.00	2.00	0.00	247.27	
9,193.2	7.27	247.27	9,137.2	-343.0	-818.9	0.00	0.00	0.00	0.00	
9,556.9	0.00	0.00	9,500.0	-351.9	-840.2	2.00	-2.00	0.00	180.00	
12,056.9	0.00	0.00	12,000.0	-351.9	-840.2	0.00	0.00	0.00	0.00	

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,711.0	0.00	0.00	1,711.0	0.0	0.0	0.0	0.00	0.00	0.00
RUSTLER									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,882.0	0.00	0.00	1,882.0	0.0	0.0	0.0	0.00	0.00	0.00
SOLADO									
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 2.00									
2,100.0	2.00	247.27	2,100.0	-0.7	-1.6	1.7	2.00	2.00	0.00
2,200.0	4.00	247.27	2,199.8	-2.7	-6.4	7.0	2.00	2.00	0.00
2,300.0	6.00	247.27	2,299.5	-6.1	-14.5	15.7	2.00	2.00	0.00
2,363.7	7.27	247.27	2,362.8	-8.9	-21.3	23.1	2.00	2.00	0.00
Start 6829.5 hold at 2363.7 MD									
2,400.0	7.27	247.27	2,398.7	-10.7	-25.5	27.7	0.00	0.00	0.00
2,500.0	7.27	247.27	2,497.9	-15.6	-37.2	40.3	0.00	0.00	0.00
2,600.0	7.27	247.27	2,597.1	-20.5	-48.9	53.0	0.00	0.00	0.00
2,700.0	7.27	247.27	2,696.3	-25.4	-60.5	65.6	0.00	0.00	0.00
2,800.0	7.27	247.27	2,795.5	-30.2	-72.2	78.3	0.00	0.00	0.00
2,900.0	7.27	247.27	2,894.7	-35.1	-83.9	91.0	0.00	0.00	0.00
3,000.0	7.27	247.27	2,993.9	-40.0	-95.6	103.6	0.00	0.00	0.00
3,100.0	7.27	247.27	3,093.1	-44.9	-107.3	116.3	0.00	0.00	0.00
3,134.2	7.27	247.27	3,127.0	-46.6	-111.3	120.6	0.00	0.00	0.00
BASE_OF_SALT									
3,187.6	7.27	247.27	3,180.0	-49.2	-117.5	127.4	0.00	0.00	0.00
YATES									
3,200.0	7.27	247.27	3,192.3	-49.8	-118.9	129.0	0.00	0.00	0.00
3,300.0	7.27	247.27	3,291.5	-54.7	-130.6	141.6	0.00	0.00	0.00
3,400.0	7.27	247.27	3,390.7	-59.6	-142.3	154.3	0.00	0.00	0.00
3,500.0	7.27	247.27	3,489.9	-64.5	-154.0	166.9	0.00	0.00	0.00
3,600.0	7.27	247.27	3,589.1	-69.4	-165.7	179.6	0.00	0.00	0.00
3,660.4	7.27	247.27	3,649.0	-72.3	-172.7	187.3	0.00	0.00	0.00
SVRV									
3,700.0	7.27	247.27	3,688.3	-74.3	-177.3	192.3	0.00	0.00	0.00
3,800.0	7.27	247.27	3,787.5	-79.2	-189.0	204.9	0.00	0.00	0.00
3,900.0	7.27	247.27	3,886.7	-84.1	-200.7	217.6	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,000.0	7.27	247.27	3,985.9	-89.0	-212.4	230.3	0.00	0.00	0.00
4,100.0	7.27	247.27	4,085.0	-93.8	-224.1	242.9	0.00	0.00	0.00
4,200.0	7.27	247.27	4,184.2	-98.7	-235.7	255.6	0.00	0.00	0.00
4,300.0	7.27	247.27	4,283.4	-103.6	-247.4	268.2	0.00	0.00	0.00
4,400.0	7.27	247.27	4,382.6	-108.5	-259.1	280.9	0.00	0.00	0.00
4,500.0	7.27	247.27	4,481.8	-113.4	-270.8	293.6	0.00	0.00	0.00
4,600.0	7.27	247.27	4,581.0	-118.3	-282.5	306.2	0.00	0.00	0.00
4,608.0	7.27	247.27	4,589.0	-118.7	-283.4	307.2	0.00	0.00	0.00
QUEEN									
4,700.0	7.27	247.27	4,680.2	-123.2	-294.1	318.9	0.00	0.00	0.00
4,800.0	7.27	247.27	4,779.4	-128.1	-305.8	331.6	0.00	0.00	0.00
4,900.0	7.27	247.27	4,878.6	-133.0	-317.5	344.2	0.00	0.00	0.00
5,000.0	7.27	247.27	4,977.8	-137.9	-329.2	356.9	0.00	0.00	0.00
5,100.0	7.27	247.27	5,077.0	-142.8	-340.9	369.5	0.00	0.00	0.00
5,200.0	7.27	247.27	5,176.2	-147.7	-352.5	382.2	0.00	0.00	0.00
5,300.0	7.27	247.27	5,275.4	-152.5	-364.2	394.9	0.00	0.00	0.00
5,400.0	7.27	247.27	5,374.6	-157.4	-375.9	407.5	0.00	0.00	0.00
5,500.0	7.27	247.27	5,473.8	-162.3	-387.6	420.2	0.00	0.00	0.00
5,600.0	7.27	247.27	5,573.0	-167.2	-399.3	432.9	0.00	0.00	0.00
5,700.0	7.27	247.27	5,672.2	-172.1	-410.9	445.5	0.00	0.00	0.00
5,800.0	7.27	247.27	5,771.4	-177.0	-422.6	458.2	0.00	0.00	0.00
5,900.0	7.27	247.27	5,870.6	-181.9	-434.3	470.8	0.00	0.00	0.00
6,000.0	7.27	247.27	5,969.8	-186.8	-446.0	483.5	0.00	0.00	0.00
6,063.8	7.27	247.27	6,033.0	-189.9	-453.4	491.6	0.00	0.00	0.00
DELAWARE_SANDS									
6,100.0	7.27	247.27	6,068.9	-191.7	-457.7	496.2	0.00	0.00	0.00
6,200.0	7.27	247.27	6,168.1	-196.6	-469.3	508.8	0.00	0.00	0.00
6,224.0	7.27	247.27	6,191.9	-197.7	-472.1	511.9	0.00	0.00	0.00
BRUSHY_CANYON									
6,300.0	7.27	247.27	6,267.3	-201.5	-481.0	521.5	0.00	0.00	0.00
6,400.0	7.27	247.27	6,366.5	-206.4	-492.7	534.2	0.00	0.00	0.00
6,500.0	7.27	247.27	6,465.7	-211.2	-504.4	546.8	0.00	0.00	0.00
6,502.3	7.27	247.27	6,468.0	-211.4	-504.6	547.1	0.00	0.00	0.00
BSPG_LIME									
6,600.0	7.27	247.27	6,564.9	-216.1	-516.1	559.5	0.00	0.00	0.00
6,700.0	7.27	247.27	6,664.1	-221.0	-527.7	572.2	0.00	0.00	0.00
6,800.0	7.27	247.27	6,763.3	-225.9	-539.4	584.8	0.00	0.00	0.00
6,900.0	7.27	247.27	6,862.5	-230.8	-551.1	597.5	0.00	0.00	0.00
7,000.0	7.27	247.27	6,961.7	-235.7	-562.8	610.1	0.00	0.00	0.00
7,100.0	7.27	247.27	7,060.9	-240.6	-574.5	622.8	0.00	0.00	0.00
7,200.0	7.27	247.27	7,160.1	-245.5	-586.1	635.5	0.00	0.00	0.00
7,300.0	7.27	247.27	7,259.3	-250.4	-597.8	648.1	0.00	0.00	0.00
7,400.0	7.27	247.27	7,358.5	-255.3	-609.5	660.8	0.00	0.00	0.00
7,500.0	7.27	247.27	7,457.7	-260.2	-621.2	673.5	0.00	0.00	0.00
7,600.0	7.27	247.27	7,556.9	-265.1	-632.8	686.1	0.00	0.00	0.00
7,700.0	7.27	247.27	7,656.1	-269.9	-644.5	698.8	0.00	0.00	0.00
7,800.0	7.27	247.27	7,755.3	-274.8	-656.2	711.4	0.00	0.00	0.00
7,900.0	7.27	247.27	7,854.5	-279.7	-667.9	724.1	0.00	0.00	0.00
8,000.0	7.27	247.27	7,953.7	-284.6	-679.6	736.8	0.00	0.00	0.00
8,100.0	7.27	247.27	8,052.8	-289.5	-691.2	749.4	0.00	0.00	0.00
8,183.8	7.27	247.27	8,136.0	-293.6	-701.0	760.0	0.00	0.00	0.00
FBSG_SD									
8,200.0	7.27	247.27	8,152.0	-294.4	-702.9	762.1	0.00	0.00	0.00
8,241.3	7.27	247.27	8,193.0	-296.4	-707.8	767.3	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
SBSG_CARB									
8,292.7	7.27	247.27	8,244.0	-298.9	-713.8	773.8	0.00	0.00	0.00
SBSG_SHALE									
8,300.0	7.27	247.27	8,251.2	-299.3	-714.6	774.8	0.00	0.00	0.00
8,400.0	7.27	247.27	8,350.4	-304.2	-726.3	787.4	0.00	0.00	0.00
8,500.0	7.27	247.27	8,449.6	-309.1	-738.0	800.1	0.00	0.00	0.00
8,600.0	7.27	247.27	8,548.8	-314.0	-749.6	812.7	0.00	0.00	0.00
8,668.7	7.27	247.27	8,617.0	-317.3	-757.7	821.4	0.00	0.00	0.00
SBSG_SD									
8,700.0	7.27	247.27	8,648.0	-318.9	-761.3	825.4	0.00	0.00	0.00
8,800.0	7.27	247.27	8,747.2	-323.8	-773.0	838.1	0.00	0.00	0.00
8,900.0	7.27	247.27	8,846.4	-328.6	-784.7	850.7	0.00	0.00	0.00
9,000.0	7.27	247.27	8,945.6	-333.5	-796.4	863.4	0.00	0.00	0.00
9,100.0	7.27	247.27	9,044.8	-338.4	-808.0	876.1	0.00	0.00	0.00
9,121.4	7.27	247.27	9,066.0	-339.5	-810.5	878.8	0.00	0.00	0.00
SBSG_SD_LWR									
9,193.2	7.27	247.27	9,137.2	-343.0	-818.9	887.9	0.00	0.00	0.00
Start Drop -2.00									
9,200.0	7.14	247.27	9,144.0	-343.3	-819.7	888.7	2.00	-2.00	0.00
9,300.0	5.14	247.27	9,243.4	-347.5	-829.6	899.4	2.00	-2.00	0.00
9,331.7	4.50	247.27	9,275.0	-348.5	-832.0	902.1	2.00	-2.00	0.00
TBSG_CARB									
9,400.0	3.14	247.27	9,343.2	-350.2	-836.2	906.6	2.00	-2.00	0.00
9,442.9	2.28	247.27	9,386.0	-351.0	-838.1	908.6	2.00	-2.00	0.00
TBSG_SD									
9,500.0	1.14	247.27	9,443.1	-351.7	-839.7	910.4	2.00	-2.00	0.00
9,501.9	1.10	247.27	9,445.0	-351.7	-839.7	910.4	2.00	-2.00	0.00
TBSG_FS									
9,556.9	0.00	0.00	9,500.0	-351.9	-840.2	910.9	2.00	-2.00	0.00
Start 2500.0 hold at 9556.9 MD									
9,588.9	0.00	0.00	9,532.0	-351.9	-840.2	910.9	0.00	0.00	0.00
WFMP									
9,600.0	0.00	0.00	9,543.1	-351.9	-840.2	910.9	0.00	0.00	0.00
9,700.0	0.00	0.00	9,643.1	-351.9	-840.2	910.9	0.00	0.00	0.00
9,800.0	0.00	0.00	9,743.1	-351.9	-840.2	910.9	0.00	0.00	0.00
9,900.0	0.00	0.00	9,843.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,000.0	0.00	0.00	9,943.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,100.0	0.00	0.00	10,043.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,200.0	0.00	0.00	10,143.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,300.0	0.00	0.00	10,243.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,372.2	0.00	0.00	10,315.3	-351.9	-840.2	910.9	0.00	0.00	0.00
CISCO									
10,400.0	0.00	0.00	10,343.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,500.0	0.00	0.00	10,443.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,600.0	0.00	0.00	10,543.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,630.9	0.00	0.00	10,574.0	-351.9	-840.2	910.9	0.00	0.00	0.00
STRN									
10,700.0	0.00	0.00	10,643.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,750.9	0.00	0.00	10,694.0	-351.9	-840.2	910.9	0.00	0.00	0.00
ATOKA									
10,800.0	0.00	0.00	10,743.1	-351.9	-840.2	910.9	0.00	0.00	0.00
10,900.0	0.00	0.00	10,843.1	-351.9	-840.2	910.9	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,940.9	0.00	0.00	10,884.0	-351.9	-840.2	910.9	0.00	0.00	0.00
MSSP LIME									
11,000.0	0.00	0.00	10,943.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,100.0	0.00	0.00	11,043.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,200.0	0.00	0.00	11,143.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,300.0	0.00	0.00	11,243.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,400.0	0.00	0.00	11,343.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,500.0	0.00	0.00	11,443.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,530.9	0.00	0.00	11,474.0	-351.9	-840.2	910.9	0.00	0.00	0.00
WDFD									
11,600.0	0.00	0.00	11,543.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,700.0	0.00	0.00	11,643.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,800.0	0.00	0.00	11,743.1	-351.9	-840.2	910.9	0.00	0.00	0.00
11,900.0	0.00	0.00	11,843.1	-351.9	-840.2	910.9	0.00	0.00	0.00
12,000.0	0.00	0.00	11,943.1	-351.9	-840.2	910.9	0.00	0.00	0.00
12,056.9	0.00	0.00	12,000.0	-351.9	-840.2	910.9	0.00	0.00	0.00
TD at 12056.9									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,711.0	1,711.0	RUSTLER				
1,882.0	1,882.0	SOLADO				
3,134.2	3,127.0	BASE_OF_SALT				
3,187.6	3,180.0	YATES				
3,660.4	3,649.0	SVRV				
4,608.0	4,589.0	QUEEN				
6,063.8	6,033.0	DELAWARE_SANDS				
6,224.0	6,191.9	BRUSHY_CANYON				
6,502.3	6,468.0	BSPG_LIME				
8,183.8	8,136.0	FBSG_SD				
8,241.3	8,193.0	SBSG_CARB				
8,292.7	8,244.0	SBSG_SHALE				
8,668.7	8,617.0	SBSG_SD				
9,121.4	9,066.0	SBSG_SD_LWR				
9,331.7	9,275.0	TBSG_CARB				
9,442.9	9,386.0	TBSG_SD				
9,501.9	9,445.0	TBSG_FS				
9,588.9	9,532.0	WFMP				
10,372.2	10,315.3	CISCO				
10,630.9	10,574.0	STRN				
10,750.9	10,694.0	ATOKA		0.00		
10,940.9	10,884.0	MSSP LIME		0.00		
11,530.9	11,474.0	WDFD		0.00		

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	PH		
Design:	Plan 0.1		

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
2,000.0	2,000.0	0.0	0.0	Start Build 2.00	
2,363.7	2,362.8	-8.9	-21.3	Start 6829.5 hold at 2363.7 MD	
9,193.2	9,137.2	-343.0	-818.9	Start Drop -2.00	
9,556.9	9,500.0	-351.9	-840.2	Start 2500.0 hold at 9556.9 MD	
12,056.9	12,000.0	-351.9	-840.2	TD at 12056.9	

WELL DETAILS: Moonwatch 17 8 State Com #831H


Ground Elev: 3949.0 KB: 3974

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	634581.11	802346.40	32.741626	-103.484446

PROJECT DETAILS: Lea County, NM (NAD 83)



Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone

System Datum: Mean Sea Level

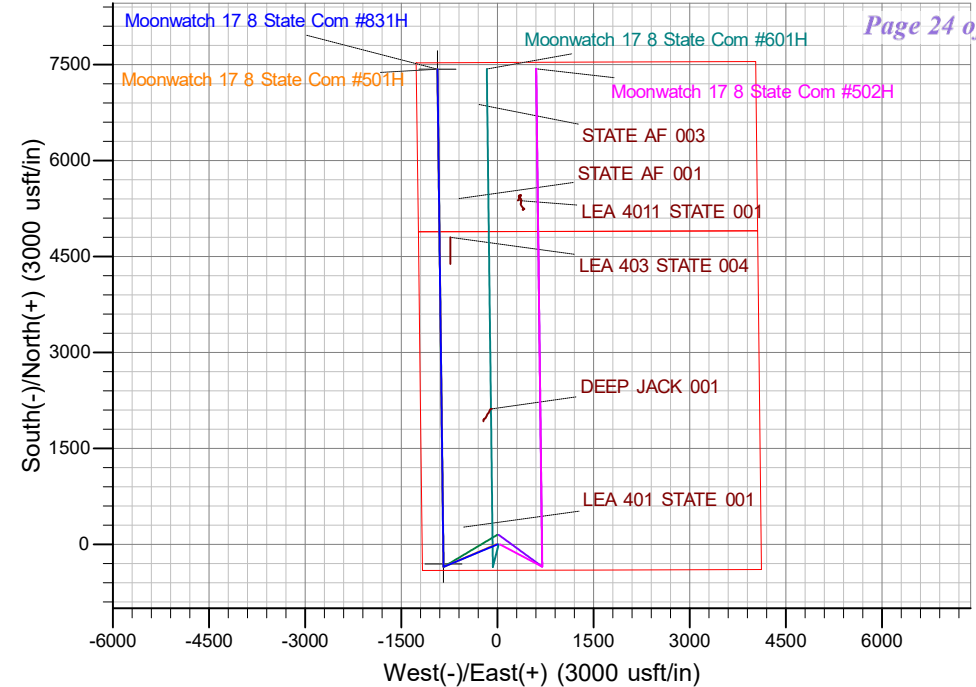

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	2000.0	0.00	0.00	2000.0	0.0	0.0	0.00	0.00	0.0	KOP - Start Build 2.00
3	2363.7	7.27	247.27	2362.7	-8.9	-21.3	2.00	247.27	-8.6	Start 6829.5 hold at 2363.7 MD
4	9193.2	7.27	247.27	9137.3	-343.0	-818.9	0.00	0.00	-333.0	Start Drop -2.00
5	9556.9	0.00	0.00	9500.0	-351.9	-840.2	2.00	180.00	-341.6	Start 532.5 hold at 9556.9 MD
6	10089.4	0.00	0.00	10032.5	-351.9	-840.2	0.00	0.00	-341.6	KOP #2 - Start DLS 12.00 TFO 359.30
7	10839.4	90.00	359.30	10510.0	125.5	-846.0	12.00	359.30	135.9	LP - Start 7303.9 hold at 10839.4 MD
8	18143.4	90.00	359.30	10510.0	7428.9	-934.7	0.00	0.00	7439.8	TD at 18143.4

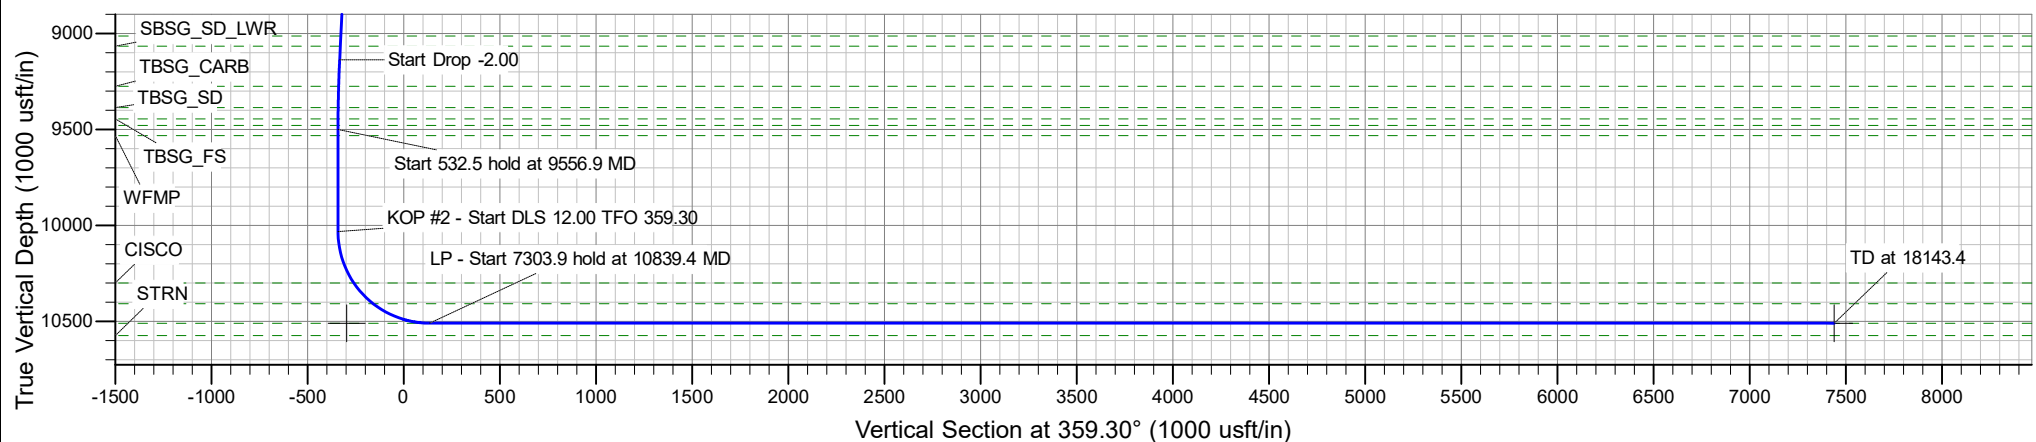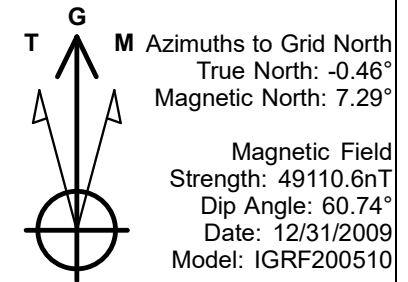

Avant Operating II, LLC

Lea County, NM (NAD 83)

Moonwatch 17 8 State Com Pad 1

Moonwatch 17 8 State Com #831H

OH

Plan: Plan 0.1

Standard Planning Report

05 November, 2025

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Project	Lea County, NM (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Moonwatch 17 8 State Com Pad 1			
Site Position:		Northing:	634,581.05 usft	Latitude: 32.741627
From:	Map	Easting:	802,326.40 usft	Longitude: -103.484511
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	

Well	Moonwatch 17 8 State Com #831H			
Well Position	+N/-S	0.0 usft	Northing:	634,581.11 usft
	+E/-W	0.0 usft	Easting:	802,346.40 usft
Position Uncertainty	0.0 usft		Wellhead Elevation:	usft
Grid Convergence:	0.46 °		Ground Level:	3,949.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.75	60.74	49,110.64927782

Design	Plan 0.1				
Audit Notes:					
Version:		Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	359.30	

Plan Survey Tool Program	Date	11/5/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	18,143.4 Plan 0.1 (OH)	B001Mb_MWD+HRGM		
			OWSG MWD + HRGM		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,363.7	7.27	247.27	2,362.7	-8.9	-21.3	2.00	2.00	0.00	247.27	
9,193.2	7.27	247.27	9,137.3	-343.0	-818.9	0.00	0.00	0.00	0.00	
9,556.9	0.00	0.00	9,500.0	-351.9	-840.2	2.00	-2.00	0.00	180.00	
10,089.4	0.00	0.00	10,032.5	-351.9	-840.2	0.00	0.00	0.00	0.00	
10,839.4	90.00	359.30	10,510.0	125.5	-846.0	12.00	12.00	-0.09	359.30	
18,143.4	90.00	359.30	10,510.0	7,428.9	-934.7	0.00	0.00	0.00	0.00	LTP/BHL - Moonwatcl

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,711.0	0.00	0.00	1,711.0	0.0	0.0	0.0	0.00	0.00	0.00
RUSTLER									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,882.0	0.00	0.00	1,882.0	0.0	0.0	0.0	0.00	0.00	0.00
SOLADO									
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
KOP - Start Build 2.00									
2,100.0	2.00	247.27	2,100.0	-0.7	-1.6	-0.7	2.00	2.00	0.00
2,200.0	4.00	247.27	2,199.8	-2.7	-6.4	-2.6	2.00	2.00	0.00
2,300.0	6.00	247.27	2,299.5	-6.1	-14.5	-5.9	2.00	2.00	0.00
2,363.7	7.27	247.27	2,362.7	-8.9	-21.3	-8.6	2.00	2.00	0.00
Start 6829.5 hold at 2363.7 MD									
2,400.0	7.27	247.27	2,398.7	-10.7	-25.5	-10.4	0.00	0.00	0.00
2,500.0	7.27	247.27	2,497.9	-15.6	-37.2	-15.1	0.00	0.00	0.00
2,600.0	7.27	247.27	2,597.1	-20.5	-48.9	-19.9	0.00	0.00	0.00
2,700.0	7.27	247.27	2,696.3	-25.4	-60.5	-24.6	0.00	0.00	0.00
2,800.0	7.27	247.27	2,795.5	-30.2	-72.2	-29.4	0.00	0.00	0.00
2,900.0	7.27	247.27	2,894.7	-35.1	-83.9	-34.1	0.00	0.00	0.00
3,000.0	7.27	247.27	2,993.9	-40.0	-95.6	-38.9	0.00	0.00	0.00
3,100.0	7.27	247.27	3,093.1	-44.9	-107.3	-43.6	0.00	0.00	0.00
3,134.2	7.27	247.27	3,127.0	-46.6	-111.3	-45.2	0.00	0.00	0.00
BASE_OF_SALT									
3,187.6	7.27	247.27	3,180.0	-49.2	-117.5	-47.8	0.00	0.00	0.00
YATES									
3,200.0	7.27	247.27	3,192.3	-49.8	-118.9	-48.4	0.00	0.00	0.00
3,300.0	7.27	247.27	3,291.5	-54.7	-130.6	-53.1	0.00	0.00	0.00
3,400.0	7.27	247.27	3,390.7	-59.6	-142.3	-57.9	0.00	0.00	0.00
3,500.0	7.27	247.27	3,489.9	-64.5	-154.0	-62.6	0.00	0.00	0.00
3,600.0	7.27	247.27	3,589.1	-69.4	-165.7	-67.4	0.00	0.00	0.00
3,660.4	7.27	247.27	3,649.0	-72.3	-172.7	-70.2	0.00	0.00	0.00
SVRV									
3,700.0	7.27	247.27	3,688.3	-74.3	-177.3	-72.1	0.00	0.00	0.00
3,800.0	7.27	247.27	3,787.5	-79.2	-189.0	-76.9	0.00	0.00	0.00
3,900.0	7.27	247.27	3,886.7	-84.1	-200.7	-81.6	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,000.0	7.27	247.27	3,985.9	-89.0	-212.4	-86.4	0.00	0.00	0.00
4,100.0	7.27	247.27	4,085.0	-93.8	-224.1	-91.1	0.00	0.00	0.00
4,200.0	7.27	247.27	4,184.2	-98.7	-235.7	-95.8	0.00	0.00	0.00
4,300.0	7.27	247.27	4,283.4	-103.6	-247.4	-100.6	0.00	0.00	0.00
4,400.0	7.27	247.27	4,382.6	-108.5	-259.1	-105.3	0.00	0.00	0.00
4,500.0	7.27	247.27	4,481.8	-113.4	-270.8	-110.1	0.00	0.00	0.00
4,600.0	7.27	247.27	4,581.0	-118.3	-282.4	-114.8	0.00	0.00	0.00
4,608.0	7.27	247.27	4,589.0	-118.7	-283.4	-115.2	0.00	0.00	0.00
QUEEN									
4,700.0	7.27	247.27	4,680.2	-123.2	-294.1	-119.6	0.00	0.00	0.00
4,800.0	7.27	247.27	4,779.4	-128.1	-305.8	-124.3	0.00	0.00	0.00
4,900.0	7.27	247.27	4,878.6	-133.0	-317.5	-129.1	0.00	0.00	0.00
5,000.0	7.27	247.27	4,977.8	-137.9	-329.2	-133.8	0.00	0.00	0.00
5,100.0	7.27	247.27	5,077.0	-142.8	-340.8	-138.6	0.00	0.00	0.00
5,200.0	7.27	247.27	5,176.2	-147.7	-352.5	-143.3	0.00	0.00	0.00
5,300.0	7.27	247.27	5,275.4	-152.5	-364.2	-148.1	0.00	0.00	0.00
5,400.0	7.27	247.27	5,374.6	-157.4	-375.9	-152.8	0.00	0.00	0.00
5,500.0	7.27	247.27	5,473.8	-162.3	-387.6	-157.6	0.00	0.00	0.00
5,600.0	7.27	247.27	5,573.0	-167.2	-399.2	-162.3	0.00	0.00	0.00
5,700.0	7.27	247.27	5,672.2	-172.1	-410.9	-167.1	0.00	0.00	0.00
5,800.0	7.27	247.27	5,771.4	-177.0	-422.6	-171.8	0.00	0.00	0.00
5,900.0	7.27	247.27	5,870.6	-181.9	-434.3	-176.6	0.00	0.00	0.00
6,000.0	7.27	247.27	5,969.8	-186.8	-446.0	-181.3	0.00	0.00	0.00
6,063.8	7.27	247.27	6,033.0	-189.9	-453.4	-184.4	0.00	0.00	0.00
DELAWARE_SANDS									
6,100.0	7.27	247.27	6,068.9	-191.7	-457.6	-186.1	0.00	0.00	0.00
6,200.0	7.27	247.27	6,168.1	-196.6	-469.3	-190.8	0.00	0.00	0.00
6,224.0	7.27	247.27	6,192.0	-197.7	-472.1	-192.0	0.00	0.00	0.00
BRUSHY_CANYON									
6,300.0	7.27	247.27	6,267.3	-201.5	-481.0	-195.6	0.00	0.00	0.00
6,400.0	7.27	247.27	6,366.5	-206.4	-492.7	-200.3	0.00	0.00	0.00
6,500.0	7.27	247.27	6,465.7	-211.2	-504.4	-205.1	0.00	0.00	0.00
6,502.3	7.27	247.27	6,468.0	-211.4	-504.6	-205.2	0.00	0.00	0.00
BSPG_LIME									
6,600.0	7.27	247.27	6,564.9	-216.1	-516.0	-209.8	0.00	0.00	0.00
6,700.0	7.27	247.27	6,664.1	-221.0	-527.7	-214.6	0.00	0.00	0.00
6,800.0	7.27	247.27	6,763.3	-225.9	-539.4	-219.3	0.00	0.00	0.00
6,900.0	7.27	247.27	6,862.5	-230.8	-551.1	-224.1	0.00	0.00	0.00
7,000.0	7.27	247.27	6,961.7	-235.7	-562.8	-228.8	0.00	0.00	0.00
7,100.0	7.27	247.27	7,060.9	-240.6	-574.4	-233.6	0.00	0.00	0.00
7,200.0	7.27	247.27	7,160.1	-245.5	-586.1	-238.3	0.00	0.00	0.00
7,300.0	7.27	247.27	7,259.3	-250.4	-597.8	-243.1	0.00	0.00	0.00
7,400.0	7.27	247.27	7,358.5	-255.3	-609.5	-247.8	0.00	0.00	0.00
7,500.0	7.27	247.27	7,457.7	-260.2	-621.1	-252.6	0.00	0.00	0.00
7,600.0	7.27	247.27	7,556.9	-265.1	-632.8	-257.3	0.00	0.00	0.00
7,700.0	7.27	247.27	7,656.1	-269.9	-644.5	-262.1	0.00	0.00	0.00
7,800.0	7.27	247.27	7,755.3	-274.8	-656.2	-266.8	0.00	0.00	0.00
7,900.0	7.27	247.27	7,854.5	-279.7	-667.9	-271.6	0.00	0.00	0.00
8,000.0	7.27	247.27	7,953.7	-284.6	-679.5	-276.3	0.00	0.00	0.00
8,100.0	7.27	247.27	8,052.9	-289.5	-691.2	-281.0	0.00	0.00	0.00
8,183.8	7.27	247.27	8,136.0	-293.6	-701.0	-285.0	0.00	0.00	0.00
FBSG_SD									
8,200.0	7.27	247.27	8,152.0	-294.4	-702.9	-285.8	0.00	0.00	0.00
8,241.3	7.27	247.27	8,193.0	-296.4	-707.7	-287.8	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
SBSG_CARB										
8,292.7	7.27	247.27	8,244.0	-298.9	-713.7	-290.2	0.00	0.00	0.00	
SBSG_SHALE										
8,300.0	7.27	247.27	8,251.2	-299.3	-714.6	-290.5	0.00	0.00	0.00	
8,400.0	7.27	247.27	8,350.4	-304.2	-726.3	-295.3	0.00	0.00	0.00	
8,500.0	7.27	247.27	8,449.6	-309.1	-737.9	-300.0	0.00	0.00	0.00	
8,600.0	7.27	247.27	8,548.8	-314.0	-749.6	-304.8	0.00	0.00	0.00	
8,668.7	7.27	247.27	8,617.0	-317.3	-757.6	-308.1	0.00	0.00	0.00	
SBSG_SD										
8,700.0	7.27	247.27	8,648.0	-318.9	-761.3	-309.5	0.00	0.00	0.00	
8,800.0	7.27	247.27	8,747.2	-323.8	-773.0	-314.3	0.00	0.00	0.00	
8,900.0	7.27	247.27	8,846.4	-328.6	-784.7	-319.0	0.00	0.00	0.00	
9,000.0	7.27	247.27	8,945.6	-333.5	-796.3	-323.8	0.00	0.00	0.00	
9,067.9	7.27	247.27	9,013.0	-336.9	-804.3	-327.0	0.00	0.00	0.00	
500S										
9,100.0	7.27	247.27	9,044.8	-338.4	-808.0	-328.5	0.00	0.00	0.00	
9,121.4	7.27	247.27	9,066.0	-339.5	-810.5	-329.6	0.00	0.00	0.00	
SBSG_SD_LWR										
9,193.2	7.27	247.27	9,137.3	-343.0	-818.9	-333.0	0.00	0.00	0.00	
Start Drop -2.00										
9,200.0	7.14	247.27	9,144.0	-343.3	-819.7	-333.3	2.00	-2.00	0.00	
9,300.0	5.14	247.27	9,243.4	-347.5	-829.6	-337.3	2.00	-2.00	0.00	
9,331.7	4.50	247.27	9,275.0	-348.5	-832.0	-338.3	2.00	-2.00	0.00	
TBSG_CARB										
9,400.0	3.14	247.27	9,343.2	-350.2	-836.2	-340.0	2.00	-2.00	0.00	
9,442.9	2.28	247.27	9,386.0	-351.0	-838.1	-340.8	2.00	-2.00	0.00	
TBSG_SD										
9,500.0	1.14	247.27	9,443.1	-351.7	-839.6	-341.4	2.00	-2.00	0.00	
9,501.9	1.10	247.27	9,445.0	-351.7	-839.7	-341.4	2.00	-2.00	0.00	
TBSG_FS										
9,535.9	0.42	247.27	9,479.0	-351.9	-840.1	-341.6	2.00	-2.00	0.00	
600S										
9,556.9	0.00	0.00	9,500.0	-351.9	-840.2	-341.6	2.00	-2.00	0.00	
Start 532.5 hold at 9556.9 MD										
9,588.9	0.00	0.00	9,532.0	-351.9	-840.2	-341.6	0.00	0.00	0.00	
WFMP										
9,600.0	0.00	0.00	9,543.1	-351.9	-840.2	-341.6	0.00	0.00	0.00	
9,700.0	0.00	0.00	9,643.1	-351.9	-840.2	-341.6	0.00	0.00	0.00	
9,800.0	0.00	0.00	9,743.1	-351.9	-840.2	-341.6	0.00	0.00	0.00	
9,900.0	0.00	0.00	9,843.1	-351.9	-840.2	-341.6	0.00	0.00	0.00	
10,000.0	0.00	0.00	9,943.1	-351.9	-840.2	-341.6	0.00	0.00	0.00	
10,089.4	0.00	0.00	10,032.5	-351.9	-840.2	-341.6	0.00	0.00	0.00	
KOP #2 - Start DLS 12.00 TFO 359.30										
10,100.0	1.27	359.30	10,043.1	-351.8	-840.2	-341.5	12.00	12.00	0.00	
10,200.0	13.27	359.30	10,142.1	-339.2	-840.3	-328.9	12.00	12.00	0.00	
10,300.0	25.27	359.30	10,236.3	-306.2	-840.7	-295.9	12.00	12.00	0.00	
10,372.2	33.93	359.30	10,299.0	-270.6	-841.2	-260.3	12.00	12.00	0.00	
CISCO										
10,400.0	37.27	359.30	10,321.6	-254.4	-841.4	-244.1	12.00	12.00	0.00	
10,500.0	49.27	359.30	10,394.3	-186.0	-842.2	-175.7	12.00	12.00	0.00	
FTP - Moonwatch 17 8 State Com #831H										
10,521.5	51.85	359.30	10,408.0	-169.4	-842.4	-159.1	12.00	12.00	0.00	

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
810S									
10,600.0	61.27	359.30	10,451.2	-104.0	-843.2	-93.7	12.00	12.00	0.00
10,700.0	73.27	359.30	10,489.8	-11.9	-844.3	-1.6	12.00	12.00	0.00
10,800.0	85.27	359.30	10,508.3	86.2	-845.5	96.5	12.00	12.00	0.00
10,839.4	90.00	359.30	10,510.0	125.5	-846.0	135.9	12.00	12.00	0.00
LP - Start 7303.9 hold at 10839.4 MD									
10,900.0	90.00	359.30	10,510.0	186.1	-846.7	196.4	0.00	0.00	0.00
11,000.0	90.00	359.30	10,510.0	286.1	-847.9	296.4	0.00	0.00	0.00
11,100.0	90.00	359.30	10,510.0	386.1	-849.1	396.4	0.00	0.00	0.00
11,200.0	90.00	359.30	10,510.0	486.1	-850.4	496.4	0.00	0.00	0.00
11,300.0	90.00	359.30	10,510.0	586.1	-851.6	596.4	0.00	0.00	0.00
11,400.0	90.00	359.30	10,510.0	686.1	-852.8	696.4	0.00	0.00	0.00
11,500.0	90.00	359.30	10,510.0	786.1	-854.0	796.4	0.00	0.00	0.00
11,600.0	90.00	359.30	10,510.0	886.0	-855.2	896.4	0.00	0.00	0.00
11,700.0	90.00	359.30	10,510.0	986.0	-856.4	996.4	0.00	0.00	0.00
11,800.0	90.00	359.30	10,510.0	1,086.0	-857.6	1,096.4	0.00	0.00	0.00
11,900.0	90.00	359.30	10,510.0	1,186.0	-858.9	1,196.4	0.00	0.00	0.00
12,000.0	90.00	359.30	10,510.0	1,286.0	-860.1	1,296.4	0.00	0.00	0.00
12,100.0	90.00	359.30	10,510.0	1,386.0	-861.3	1,396.4	0.00	0.00	0.00
12,200.0	90.00	359.30	10,510.0	1,486.0	-862.5	1,496.4	0.00	0.00	0.00
12,300.0	90.00	359.30	10,510.0	1,586.0	-863.7	1,596.4	0.00	0.00	0.00
12,400.0	90.00	359.30	10,510.0	1,686.0	-864.9	1,696.4	0.00	0.00	0.00
12,500.0	90.00	359.30	10,510.0	1,786.0	-866.1	1,796.4	0.00	0.00	0.00
12,600.0	90.00	359.30	10,510.0	1,886.0	-867.4	1,896.4	0.00	0.00	0.00
12,700.0	90.00	359.30	10,510.0	1,986.0	-868.6	1,996.4	0.00	0.00	0.00
12,800.0	90.00	359.30	10,510.0	2,086.0	-869.8	2,096.4	0.00	0.00	0.00
12,900.0	90.00	359.30	10,510.0	2,186.0	-871.0	2,196.4	0.00	0.00	0.00
13,000.0	90.00	359.30	10,510.0	2,285.9	-872.2	2,296.4	0.00	0.00	0.00
13,100.0	90.00	359.30	10,510.0	2,385.9	-873.4	2,396.4	0.00	0.00	0.00
13,200.0	90.00	359.30	10,510.0	2,485.9	-874.6	2,496.4	0.00	0.00	0.00
13,300.0	90.00	359.30	10,510.0	2,585.9	-875.9	2,596.4	0.00	0.00	0.00
13,400.0	90.00	359.30	10,510.0	2,685.9	-877.1	2,696.4	0.00	0.00	0.00
13,500.0	90.00	359.30	10,510.0	2,785.9	-878.3	2,796.4	0.00	0.00	0.00
13,600.0	90.00	359.30	10,510.0	2,885.9	-879.5	2,896.4	0.00	0.00	0.00
13,700.0	90.00	359.30	10,510.0	2,985.9	-880.7	2,996.4	0.00	0.00	0.00
13,800.0	90.00	359.30	10,510.0	3,085.9	-881.9	3,096.4	0.00	0.00	0.00
13,900.0	90.00	359.30	10,510.0	3,185.9	-883.2	3,196.4	0.00	0.00	0.00
14,000.0	90.00	359.30	10,510.0	3,285.9	-884.4	3,296.4	0.00	0.00	0.00
14,100.0	90.00	359.30	10,510.0	3,385.9	-885.6	3,396.4	0.00	0.00	0.00
14,200.0	90.00	359.30	10,510.0	3,485.9	-886.8	3,496.4	0.00	0.00	0.00
14,300.0	90.00	359.30	10,510.0	3,585.8	-888.0	3,596.4	0.00	0.00	0.00
14,400.0	90.00	359.30	10,510.0	3,685.8	-889.2	3,696.4	0.00	0.00	0.00
14,500.0	90.00	359.30	10,510.0	3,785.8	-890.4	3,796.4	0.00	0.00	0.00
14,600.0	90.00	359.30	10,510.0	3,885.8	-891.7	3,896.4	0.00	0.00	0.00
14,700.0	90.00	359.30	10,510.0	3,985.8	-892.9	3,996.4	0.00	0.00	0.00
14,800.0	90.00	359.30	10,510.0	4,085.8	-894.1	4,096.4	0.00	0.00	0.00
14,900.0	90.00	359.30	10,510.0	4,185.8	-895.3	4,196.4	0.00	0.00	0.00
15,000.0	90.00	359.30	10,510.0	4,285.8	-896.5	4,296.4	0.00	0.00	0.00
15,100.0	90.00	359.30	10,510.0	4,385.8	-897.7	4,396.4	0.00	0.00	0.00
15,200.0	90.00	359.30	10,510.0	4,485.8	-898.9	4,496.4	0.00	0.00	0.00
15,300.0	90.00	359.30	10,510.0	4,585.8	-900.2	4,596.4	0.00	0.00	0.00
15,400.0	90.00	359.30	10,510.0	4,685.8	-901.4	4,696.4	0.00	0.00	0.00
15,500.0	90.00	359.30	10,510.0	4,785.8	-902.6	4,796.4	0.00	0.00	0.00
15,600.0	90.00	359.30	10,510.0	4,885.8	-903.8	4,896.4	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,700.0	90.00	359.30	10,510.0	4,985.7	-905.0	4,996.4	0.00	0.00	0.00	
15,800.0	90.00	359.30	10,510.0	5,085.7	-906.2	5,096.4	0.00	0.00	0.00	
15,900.0	90.00	359.30	10,510.0	5,185.7	-907.4	5,196.4	0.00	0.00	0.00	
16,000.0	90.00	359.30	10,510.0	5,285.7	-908.7	5,296.4	0.00	0.00	0.00	
16,100.0	90.00	359.30	10,510.0	5,385.7	-909.9	5,396.4	0.00	0.00	0.00	
16,200.0	90.00	359.30	10,510.0	5,485.7	-911.1	5,496.4	0.00	0.00	0.00	
16,300.0	90.00	359.30	10,510.0	5,585.7	-912.3	5,596.4	0.00	0.00	0.00	
16,400.0	90.00	359.30	10,510.0	5,685.7	-913.5	5,696.4	0.00	0.00	0.00	
16,500.0	90.00	359.30	10,510.0	5,785.7	-914.7	5,796.4	0.00	0.00	0.00	
16,600.0	90.00	359.30	10,510.0	5,885.7	-916.0	5,896.4	0.00	0.00	0.00	
16,700.0	90.00	359.30	10,510.0	5,985.7	-917.2	5,996.4	0.00	0.00	0.00	
16,800.0	90.00	359.30	10,510.0	6,085.7	-918.4	6,096.4	0.00	0.00	0.00	
16,900.0	90.00	359.30	10,510.0	6,185.7	-919.6	6,196.4	0.00	0.00	0.00	
17,000.0	90.00	359.30	10,510.0	6,285.7	-920.8	6,296.4	0.00	0.00	0.00	
17,100.0	90.00	359.30	10,510.0	6,385.6	-922.0	6,396.4	0.00	0.00	0.00	
17,200.0	90.00	359.30	10,510.0	6,485.6	-923.2	6,496.4	0.00	0.00	0.00	
17,300.0	90.00	359.30	10,510.0	6,585.6	-924.5	6,596.4	0.00	0.00	0.00	
17,400.0	90.00	359.30	10,510.0	6,685.6	-925.7	6,696.4	0.00	0.00	0.00	
17,500.0	90.00	359.30	10,510.0	6,785.6	-926.9	6,796.4	0.00	0.00	0.00	
17,600.0	90.00	359.30	10,510.0	6,885.6	-928.1	6,896.4	0.00	0.00	0.00	
17,700.0	90.00	359.30	10,510.0	6,985.6	-929.3	6,996.4	0.00	0.00	0.00	
17,800.0	90.00	359.30	10,510.0	7,085.6	-930.5	7,096.4	0.00	0.00	0.00	
17,900.0	90.00	359.30	10,510.0	7,185.6	-931.7	7,196.4	0.00	0.00	0.00	
18,000.0	90.00	359.30	10,510.0	7,285.6	-933.0	7,296.4	0.00	0.00	0.00	
18,100.0	90.00	359.30	10,510.0	7,385.6	-934.2	7,396.4	0.00	0.00	0.00	
18,143.4	90.00	359.30	10,510.0	7,428.9	-934.7	7,439.8	0.00	0.00	0.00	
TD at 18143.4 - LTP/BHL - Moonwatch 17 8 State Com #831H										

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP - Moonwatch 17 8 S	0.00	0.00	10,510.0	-306.9	-840.2	634,274.23	801,506.23	32.740801	-103.487186
- hit/miss target									
- Shape									
- plan misses target center by 167.3usft at 10500.0usft MD (10394.3 TVD, -186.0 N, -842.2 E)									
- Point									
LTP/BHL - Moonwatch 1	0.00	0.00	10,510.0	7,428.9	-934.7	642,010.04	801,411.70	32.762064	-103.487293
- plan hits target center									
- Point									

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well Moonwatch 17 8 State Com #831H
Company:	Avant Operating II, LLC	TVD Reference:	WELL @ 3974.0usft (3974)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3974.0usft (3974)
Site:	Moonwatch 17 8 State Com Pad 1	North Reference:	Grid
Well:	Moonwatch 17 8 State Com #831H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,711.0	1,711.0	RUSTLER				
1,882.0	1,882.0	SOLADO				
3,134.2	3,127.0	BASE_OF_SALT				
3,187.6	3,180.0	YATES				
3,660.4	3,649.0	SVRV				
4,608.0	4,589.0	QUEEN				
6,063.8	6,033.0	DELAWARE_SANDS				
6,224.0	6,192.0	BRUSHY_CANYON				
6,502.3	6,468.0	BSPG_LIME				
8,183.8	8,136.0	FBSG__SD				
8,241.3	8,193.0	SBSG_CARB				
8,292.7	8,244.0	SBSG_SHALE				
8,668.7	8,617.0	SBSG_SD				
9,067.9	9,013.0	500S				
9,121.4	9,066.0	SBSG_SD_LWR				
9,331.7	9,275.0	TBSG_CARB				
9,442.9	9,386.0	TBSG_SD				
9,501.9	9,445.0	TBSG_FS				
9,535.9	9,479.0	600S				
9,588.9	9,532.0	WFMP				
10,372.2	10,299.0	CISCO				
10,521.5	10,408.0	810S				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
2,000.0	2,000.0	0.0	0.0	KOP - Start Build 2.00	
2,363.7	2,362.7	-8.9	-21.3	Start 6829.5 hold at 2363.7 MD	
9,193.2	9,137.3	-343.0	-818.9	Start Drop -2.00	
9,556.9	9,500.0	-351.9	-840.2	Start 532.5 hold at 9556.9 MD	
10,089.4	10,032.5	-351.9	-840.2	KOP #2 - Start DLS 12.00 TFO 359.30	
10,839.4	10,510.0	125.5	-846.0	LP - Start 7303.9 hold at 10839.4 MD	
18,143.4	10,510.0	7,428.9	-934.7	TD at 18143.4	

AFE: NM1469



Moonwatch 17 8 State Com #831

API:

REGULATORY: NM State

PERMIT #

RIG:

KB: 3975.5 (26.5')

GL: 3949'

Wolfcamp

Lea County, NM

Sec. 17, T-18S, R-35E; 405 FSL, 1174 FWL

SHL:

Lat: 32.741626, Long: -103.484446 (NAD83)

HOLE SIZE	MD	FORMATION	TVD	MUD	CASING	CEMENT	SPECIAL INSTRUCTIONS
	120	20" Conductor	120				
14 3/4 "	1,711	Rustler	1,711	SPUD MW 8.4 ppg Fresh 9.9 ppg	10 3/4 " 40.5# J-55 BTC +/- 14 Bowsprings 1 20' pup jt 1 joint shoe track	LEAD: 12.8 PPG Top of Lead: 0 50% Excess TAIL: 14.8 PPG Top of Tail: 1389' 20% Excess	Circ cement to surface is a NMOCD requirement Casing must be set 25' into the Rustler MUD: Fresh water only
9 7/8 "	1,882 3,188 3,660 4,608 6,064 6,224 8,184 8,241 8,341	Solado Yates Seven Rivers Queen Delaware Sands Brushy Canyon 1st BS Sand 2nd BS Carb INTRM CSG PT	1,882 3,180 3,649 4,589 6,033 6,192 8,136 8,193 8,293	DRLOUT MW 10 ppg Brine TD MW 10 ppg	8 5/8 " 32# P-110 HC BK 1 20' pup jt +/- 11 Bowsprings 1 joint shoe track	LEAD: 12.5 PPG Top of Lead: 0' 20% excess TAIL: 14.5 PPG Top of Tail: 6672' 20% Excess	Circ cement to surface is a NMOCD requirement
7 7/8 " VERTICAL	9,443	3rd BS Sand	9,386	DRLOUT MW 9 Cut Brine KOP MW 9.2 EOC MW 9.2			
7 7/8 " CURVE	9,689 10,089 10,372 10,405 10,839 10,581 10,631 10,751 10,941 11,531 11,581 12,000	CEMENT PLUG #2 TOP KOP Cisco CEMENT PLUG #2 BTM EOC CEMENT PLUG #1 TOP Strawn Atoka Mississippi Lime Woodford CEMENT PLUG #1 BTM PILOT HOLE	9,633 10,033 10,299 10,349 10,510 10,524 10,574 10,694 10,884 11,474 11,524 12,000	OBM 9.2 Lat MW 9.2 EOC VS = 136' 12"/100' 5 1/2 " 20# P-110 HC GBCD		TD MW 9.2 OBM LEAD: 10.7 PPG Top of Lead: 0 20% Excess TAIL: 14.8 PPG Top of Tail: 10089 20% Excess	18,143 ' MD 7,440 ' VS 10,510 ' TVD BHL: 2540 FSL, 330 FWL Expected BH Pressure: 4835
7 7/8 " LATERAL				Plug #2 Plug #1 Pilot - 7.875"			
	MD	INC	INC	TVD	ANNOTATION		

PRELIMINARY

DIRECTIONS TO LOCATION:

Drilling Engineer: Ryan Harris

Moonwatch 17 8 State Com #831 ()

Date: 11/10/2025

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Avant Operating II, LLC **OGRID:** 332947 **Date:** 09/29/2025

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe:

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

[illegible]

IV. Central Delivery Point Name: Moonwatch CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

[illegible]

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.									
--	--	--	--	--	--	--	--	--	--

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

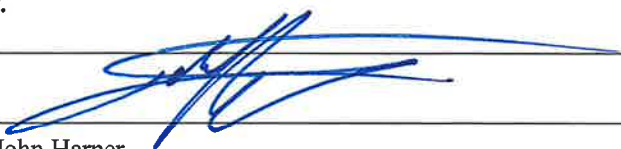Signature: 
Printed Name: John Harper
Title: SVP – Assets and Exploration
E-mail Address: John@avantnr.com
Date: 11/13/25
Phone: 678-988-6644
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Avant Operating II, LLC Natural Gas Management Plan

VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.

VII. Avant Operating, LLC (Avant) will take the following actions to comply with the regulations listed in 19.15.27.8:

- A. Avant will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. Avant will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas.
- B. All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
- C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flowback will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. Avant will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week, and the gas will be routed into a gathering system as soon as pipeline specifications are met.
- D. Avant will comply with the performance standards requirements and provisions listed in 19.15.27.8 (1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. Avant will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
- E. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. Avant will install equipment to measure
- F. Measurement meters will be in place for low- and high-pressure gas that is flared due to not being able to use for reuse or sales. Equipment will be installed off tanks to reduce vented gas and the gas will be measured with a meter.

VIII. Best Management Practices: Avant plans to communicate consistently with midstream partners to ensure sufficient takeaway capacity is available and understand planned maintenance to minimize venting. Avant will depressurize equipment and capture vented gases for reuse before any maintenance occurs. Avant will use vapor recovery units for the vented gas off the tanks to capture for reuse or sales to minimize venting during active operations. Avant will be proactive on inspections to identify and fix leaks before they escalate.