Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: OSAGE FEDERAL Well Location: T19S / R29E / SEC 34 / County or Parish/State: EDDY /

SENW / 32.6199085 / -104.063794

Well Number: 15 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM90807 Unit or CA Name: Unit or CA Number:

OPERATING LLC

Notice of Intent

Sundry ID: 2878722

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 10/15/2025 Time Sundry Submitted: 10:02

Date proposed operation will begin: 10/22/2025

Procedure Description: 1. Notify NMOCD/BLM 2. MIRU 3. RU wireline and set CIBP @ 5600'. 4. Pressure test CIBP to 500 psi for 30 min. If no CBL on file, run CBL from CIBP to Surface. Note results of CBL could change the following plugs. 5. RIH and Tag CIBP @5600'. 6. Plug #1: (B Spring) Spot 17 sxs class "C" from 5600' to 5430'. 7. Plug #2: (Delware/Inter Shoe) Perf & Sqz 122 sxs class "C" w/ 2% CaCl (87out/35in) from 3500' to 3150'. (WOC 4hrs. & Tag) 8. Plug #3: (7-Rvrs/Yates/Inter Shoe) Perf & Sqz 131 sxs class "C" w 2% CaCl (57in/74out) from 1640' to 1070'. WOC 4hrs & Tag. 9. Plug #4:(Surface) Perf & Sqz 94 sxs class "C" (41in/53out) from 410' to 0'. RDMO. 10. Cut wellhead off 3' BGL, Set above ground DHM.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Osage_Federal__015_Proposed_WBD_20251015100135.pdf

Osage_Federal__015_Current_WBD_20251015100125.pdf

eceived by OCD: 11/24/2025 2:17:15 PM Well Name: OSAGE FEDERAL

Well Location: T19S / R29E / SEC 34 /

SENW / 32.6199085 / -104.063794

County or Parish/State: EDDY 7 of

MM

Well Number: 15

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM90807

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001526271

Operator: PERMIAN RESOURCES

OPERATING LLC

Conditions of Approval

Specialist Review

Osage_Federal_15_Sundry_ID_2878722_P_A_20251124132552.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JESSICA DOOLING Signed on: OCT 15, 2025 10:01 AM

Name: PERMIAN RESOURCES OPERATING LLC

Title: Regulatory Specialist

Street Address: 300 N MARIENFELD ST STE 1000

City: MIDLAND State: TX

Phone: (432) 999-3072

Email address: JESSICA.DOOLING@PERMIANRES.COM

Field

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: LONG VO BLM POC Title: Petroleum Engineer

BLM POC Phone: 5759885402 BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved **Disposition Date:** 11/24/2025

Signature: Long Vo

Page 2 of 2

Form 3160-5 (0

LINITED STATES

FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027

(October 2024) DEF	OMB No. 1004-0220 Expires: October 31, 2027					
BUR	5. Lease Serial No.	1				
SUNDRY N	6. If Indian, Allottee or Tribe Name					
	form for proposals t Use Form 3160-3 (A					
SUBMIT IN	,	7. If Unit of CA/Agreement,	Name an	nd/or No.		
1. Type of Well				8. Well Name and No.		
Oil Well Gas V	Vell Other			8. Well Ivallie and Ivo.		
2. Name of Operator				9. API Well No.		
3a. Address		3b. Phone No. (inclu	ide area code)	10. Field and Pool or Explora	itory Are	a
4. Location of Well (Footage, Sec., T., F	R.,M., or Survey Description)			11. Country or Parish, State		
12. CHE	CK THE APPROPRIATE BO	OX(ES) TO INDICA	ΓE NATURE C	OF NOTICE, REPORT OR OT	HER DA	ATA
TYPE OF SUBMISSION			TYPE	OF ACTION		
Notice of Intent	Acidize	Deepen		Production (Start/Resume)		Water Shut-Off
Notice of Intent	Alter Casing	Hydraulic	Fracturing [Reclamation		Well Integrity
Subsequent Report	Casing Repair	New Const	truction [Recomplete		Other
Subsequent Report	Change Plans	Plug and A	bandon	Temporarily Abandon		
Final Abandonment Notice	Convert to Injection	Plug Back	[Water Disposal		
is ready for final inspection.)						
14. I hereby certify that the foregoing is	true and correct. Name (Pri	inted/Typed)				
		Title	;			
Signature		Date	2			
	THE SPACE	FOR FEDERA	L OR STA	TE OFICE USE		
Approved by						
			Title		Date	
Conditions of approval, if any, are attackerify that the applicant holds legal or of the conditions of approval in the conditions of approval.			Office			

which would entitle the applicant to conduct operations thereon. Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Location of Well

 $0. \ SHL: \ SENW \ / \ 1650 \ FNL \ / \ 2310 \ FWL \ / \ TWSP: \ 19S \ / \ RANGE: \ 29E \ / \ SECTION: \ 34 \ / \ LAT: \ 32.6199085 \ / \ LONG: \ -104.063794 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)$ $BHL: \ SENW \ / \ 1650 \ FNL \ / \ 2310 \ FWL \ / \ TWSP: \ 19S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)$

PROPOSED WELLBORE DIAGRAM Osage Federal #15

LEASE: Osage

LOCATION: . 1650'. FNL. & 2310'. FWL

WELL NO. . 15

SEC:...34 T: 19S. R: 29E...
GL:..3303' CT/ST: EDDY,NM

KB: 3319'

API.# : 30-015-26271

SPUD: 1/16/90 COMP: 2/17/90

INITIAL. FROM: BoneSpring

7. Plug #4:(Surface) Perf & Sqz 94 sxs class "C". (41in/53out) from 410' to 0'.

Formation Top
Yates 1290...
7-Rivers 1590
Deleware 3450
B. Spring 5480

 Plug #3: (7-Rvrs/Yates/Inter Shoe) Perf & Sqz 131 sxs class "C" w 2% CaCl (57in/74out) from 1640' to 1070'. WOC 4hrs & Tag.

 Plug #2: (Delware/Inter Shoe) Perf & Sqz 122 sxs class "C" w/ 2% CaCl (87out/35in) from 3500' to 3150'. (WOC 4hrs. & Tag)

TOC. @. 4364. from . CBL

- 4. Plug #1: (B Spring) Spot 17 sxs class "C" from 5600' to 5430'.
- 3. Run CBL from 5600' to 0'
- 2. Pressure test CIBP to 500 psi 30 min
- 1. Set CIBP @ 5600'.

BoneSprings Stray Sand

5650-5663'. (10. shots)


1st BoneSprings

6968-7052. (16. shots)

2nd BoneSprings

7903-8033. (56. shots)

5.1/2".17#. N-80&J-55. @.8,300'. CMT. w/4200.SXS CIRC.40.SXS.off.DV.Tool.@.6388'. CMT. w/400.SXS, Tail. in. w/300.SXS.. Did. not circ. Plug. @.6406'

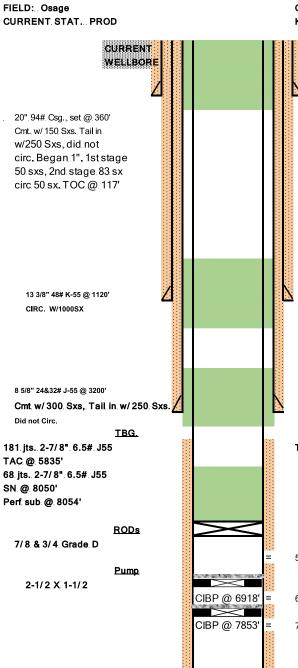

Sand. @. 8236'

DATE: 12/20/2010

PREPARED BY:

KLW

CURRENT WELLBORE DIAGRAM

Osage Federal #15

LEASE: Osage

LOCATION: 1650' FNL & 2310' FWL

FIELD: Osage

CURRENT STAT. PROD CURRENT

WELLBORE

WELL NO. 15

SEC: 34 T: 19S R: 29E

GL: 3303' CT/ST: EDDY,NM

KB: 3319'

API#: 30-015-26271 SPUD: 1/16/90

INITIAL FROM: BoneSprings

WELL HISTORY

COMP: 2/17/90

2/14/1990 perf BoneSprings 6968-7052' w/16 perfs. Acidized w/ 2000g 15% HCL. Fraced w/76,000g 20# XL, 208,000# 16/30 (32,000# Rcs) @ 25 BPM. IPF

70 Bo, 1589 Mcfpd, & 30 Bw

12/1/1990 Perf 5650-5663' w/ 10 perfs. Acidized w/ 1000g 15% HCL. Fraced w/ 47600g 30# XL, 108000# 16/30 & 44000# Rcs @ 20 Bpm & 3400psi

12/10/1990 flow and swab 137 BF, 30% Oil Cut 2/4/1997 Perf 2nd BonesSpring 7903-8014' (48 holes). Acidize w/ 2600g 7.5% HCL @ 8 bpm. Fraced w/ 47000g

30# XL, 160000# SLC 16/30 @ 30 **BPM** 3/7/1997 Pump stuck, POOH w/ rods. Found

> pump stuck in tbg. cleaned well out f/ 7900'-8140'. RIH w/ tbg. and rods.

SN @ 8035' 4/8/1997 IP 19 Bo, 120 MCF

8/13/199 rod failure 11/2/1999 rod failure

20" 94# Csg., set @ 360' Cmt. w/ 150 Sxs. Tail in

w/250 Sxs, did not circ. Began 1". 1st stage 50 sxs, 2nd stage 83 sx

circ 50 sx. TOC @ 117'

13 3/8" 48# K-55 @ 1120'

CIRC. W/1000SX

8 5/8" 24&32# J-55 @ 3200'

Cmt w/300 Sxs, Tail in w/250 Sxs.

Did not Circ.

TOC @ 4364 from CBL

BoneSprings Stray Sand

5650-5663' (10 shots)

1st BoneSprings

6968-7052 (16 shots) 2nd BoneSprings

7903-8033 (56 shots)

DATE: 12/20/2010

Sand @ 8236'

TBG.

181 jts. 2-7/8" 6.5# J55

68 jts. 2-7/8" 6.5# J55

RODs 7/8 & 3/4 Grade D

> Pump 2-1/2 X 1-1/2

TAC @ 5835'

SN @ 8050' Perf sub @ 8054'

PREPARED BY:

MHK

5 1/2" 17# N-80&J-55 @ 8,300'. CMT w/4200 SXS CIRC 40 SXS off DV Tool @ 6388'. CMT w/400 SXS,

Tail in w/300 SXS. Did not circ Plug @ 6406'

CIBP @ 6918'

CIBP @ 7853'

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Sundry Print Report

Well Name: OSAGE FEDERAL Well Location: T19S / R29E / SEC 34 /

SENW / 32.6199085 / -104.063794

County or Parish/State: EDDY /

NM

Well Number: 15

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM90807

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001526271

Operator: PERMIAN RESOURCES

OPERATING LLC

Notice of Intent

Sundry ID: 2878722

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 10/15/2025 Time Sundry Submitted: 10:02

Date proposed operation will begin: 10/22/2025

Procedure Description: 1. Notify NMOCD/BLM 2. MIRU 3. RU wireline and set CIBP @ 5600'. 4. Pressure test CIBP to 500 psi for 30 min. If no CBL on file, run plugs. 5. RIH and Tag CIBP @5600'. 6. Plu See Attached "C" from 5600' to 5430'. 7. Plug #2: (Delware/Inter Shoe) Perf & Sqz 122 sxs c for Revised Procedure om 3500' to 3150'. (WOC 4hrs. & Tag) 8. Plug #3: (7-Rvrs/Yates/Inter Shoe) Perf & Sqz 94 sxs class "C" (41in/53out) from 410' to 0'. RDMO. 10. Cut wellhead off 3' BGL, Set above ground DHM.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Osage_Federal__015_Proposed_WBD_20251015100135.pdf

Osage_Federal__015_Current_WBD_20251015100125.pdf

APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED Received by OCD: WARWARD SOLDE ISEBERAL

Well Location: T19S / R29E / SEC 34 / SENW / 32.6199085 / -104.063794

County or Parish/State: EDDY /

Page 9 of 24

Well Number: 15

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM90807

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001526271

Operator: PERMIAN RESOURCES

OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JESSICA DOOLING Signed on: OCT 15, 2025 10:01 AM

Name: PERMIAN RESOURCES OPERATING LLC

Title: Regulatory Specialist

Street Address: 300 N MARIENFELD ST STE 1000 City: MIDLAND State: TX

Phone: (432) 999-3072

Email address: JESSICA.DOOLING@PERMIANRES.COM

Field

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

APPROVED by Long Vo Petroleum Engineer Carlsbad Field Office 575-988-50402

LVO@BLM.GOV

Lea County Notification: 575-689-5981

Eddy County Notification: BLM NM CFO PluggingNotifications@BLM.GOV

Secondary Contact: 575-361-2822

Page 2 of 2

Form 3160-5 (October 2024)

UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 202

	Expires: October 31,
ease Serial No.	

BUR	EAU OF LAND MANAGEMENT		5. Lease Serial No.	MNM90807	
Do not use this t	NOTICES AND REPORTS ON W form for proposals to drill or to Use Form 3160-3 (APD) for suc	6. If Indian, Allottee or Tribe Name			
SUBMIT IN	TRIPLICATE - Other instructions on pag	ne 2	7. If Unit of CA/Agreement, 1	Name and/or No.	
1. Type of Well ✓ Oil Well Gas W	Vell Other		8. Well Name and No. OSAGE FEDERAL/15		
2. Name of Operator PERMIAN RES	OURCES OPERATING LLC		9. API Well No. 300152627	1	
	T SUITE 1000, MIDLAND 3b. Phone No. (432) 695-422		10. Field and Pool or Explora Parkway/PARKWAY	tory Area	
4. Location of Well (Footage, Sec., T., R SEC 34/T19S/R29E/NMP	R.,M., or Survey Description)		11. Country or Parish, State EDDY/NM		
12. CHE	CK THE APPROPRIATE BOX(ES) TO INI	DICATE NATURE O	F NOTICE, REPORT OR OT	HER DATA	
TYPE OF SUBMISSION		ТҮРЕ	OF ACTION		
✓ Notice of Intent	Acidize Deep Alter Casing Hydr	pen [Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity	
Subsequent Report		Construction [Recomplete	Other	
Subsequent Report	Change Plans	and Abandon	Temporarily Abandon		
Final Abandonment Notice	Convert to Injection Plug	Back	Water Disposal		
completed. Final Abandonment No is ready for final inspection.) 1. Notify NMOCD/BLM 2. MIRU 3. RU wireline and set CIBP @ 4. Pressure test CIBP to 500 pplugs. 5. RIH and Tag CIBP @5600. 6. Plug #1: (B Spring) Spot 1/7 7. Plug #2: (Delware/Inter Sho 8. Plug #3: (7-Rvrs/Yates/Inter 9. Plug #4:(Surface) Perf & Se 10. Cut wellhead off 3 BGL, Se	osi for 30 min. If no CBL on file, run CBL sxs class "C" from 5600" to 5430". 5600 be) Perf & Sqz 122 sxs class "C" w/ 2% or Shoe) Perf & Sqz 131 sxs class "C" w 242.94 sxs class "C" (41in/53eut) from 410 bet above ground DHM.	from CIBP to Surfa 'to 5375'. 25 sxs CaCl (87out/35in) fr 2% CaCl (57in/74ou) O' to 0'. RDMO. Circ	ion, have been completed and ace. Note results of CBL course om 3500' to 3150'. (WOC 4 at) from 1640' to 1070'. WOC	the operator has detennined that the site all change the following $\frac{(\ln 113 \text{ sxs/Out } 153 \text{ sxs})}{3500' \text{ to } 2365'}$	
14. I hereby certify that the foregoing is JESSICA DOOLING / Ph: (432) 99	true and correct. Name (Printed/Typed) 9-3072	Regulatory S	Specialist		
(Electronic Submission) Signature Date			10/15/2	2025	
	THE SPACE FOR FEDI	ERAL OR STA	TE OFICE USE		
Approved by Long Vo	2-2	Title	oleum Engineer	11-24-2025 Date	
	hed. Approval of this notice does not warran equitable title to those rights in the subject le iduct operations thereon.		rlsbad Field Office		
Title 18 U.S.C Section 1001 and Title 4	3 U.S.C Section 1212, make it a crime for ar	ny person knowingly	and willfully to make to any d	epartment or agency of the United States	

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Location of Well

 $0. \ SHL: \ SENW \ / \ 1650 \ FNL \ / \ 2310 \ FWL \ / \ TWSP: \ 19S \ / \ RANGE: \ 29E \ / \ SECTION: \ 34 \ / \ LAT: \ 32.6199085 \ / \ LONG: \ -104.063794 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)$ BHL: $\ SENW \ / \ 1650 \ FNL \ / \ 2310 \ FWL \ / \ TWSP: \ 19S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet)$

CURRENT WELLBORE

REVISED

12:27 pm, Nov 24, 2025

PROPOSED WELLBORE DIAGRAM Osage Federal #15

LEASE: Osage

LOCATION: . 1650'. FNL. & 2310'. FWL

FIELD: Osage

CURRENT STAT. PROD

20". 94#. Csg., set @. 360' Cmt., w/ 150, Sxs., Tail in,

w/250 Sxs. did not

circ. Began 1". 1st stage 50 sxs, 2nd stage 83 sx circ 50 sx. TOC @ . 117'

WELL NO. 15

SEC: ...34 T: 19S. R: 29E. GL: 3303' CT/ST: EDDY,NM

KB: 3319'

API#: 30-015-26271

SPUD: 1/16/90 COMP: 2/17/90

INITIAL. FROM: BoneSpring

7. Plug #4:(Surface) Perf & Sqz-94 sxs class "C" 97 sxs

(41in/53out) from 410' to 0'.

Formation Top

Yates 1290 7-Rivers 1590 Deleware 3450 B. Spring 5480

6. Plug #3: (7-Rvrs/Yates/Inter Shoe) Perf & Sqz-131 sxs class "C" w 2% CaCl (57in/74out) from 1640' to 1070'. WOC 4hrs & Tag.

1640' to 1058'. (In 58 sxs/Out 79 sxs) 137 sxs

3500' to 2365'.

5. Plug #2: (Delware/Inter Shoe) Perf & Sqz 122 sxs class "C" w/ 2% (In 113 sxs/Out 153 CaCl (87out/35in) from 3500' to 3150'. (WOC 4hrs. & Tag) sxs) 266 sxs

*Run CBL from CIBP to surface.

Submit results to BLM.

TOC. @. 4364. from . CBL

4. Plug #1: (B Spring) Spot-17 sxs class "C" from $\frac{5600'}{10} = \frac{5430'}{10} = \frac{5375'}{10} =$

3. Run CBL from 5600' to 0'

2. Pressure test CIBP to 500 psi 30 min

1. Set CIBP @ 5600'.

BoneSprings Stray Sand

5650-5663'. (10. shots)

1st BoneSprings 6968-7052 (16 shots)

2nd BoneSprings

7903-8033. (56. shots)

DATE: 12/20/2010 PREPARED BY: KLW

5. 1/2". 17#. N-80&J-55. @. 8,300'.. CMT. w/ 4200. SXS CIRC 40 SXS off DV Tool @ 6388'. CMT w/ 400 SXS, Tail in w/ 300 SXS. Did not circ Plug @ 6406'

Sand. @. 8236'

CURRENT WELLBORE DIAGRAM

Osage Federal #15

LEASE: Osage

LOCATION: 1650' FNL & 2310' FWL

FIELD: Osage

CURRENT STAT. PROD CURRENT

WELLBORE

WELL NO. 15

SEC: 34 T: 19S R: 29E GL: 3303' CT/ST: EDDY,NM

KB: 3319'

API#: 30-015-26271 SPUD: 1/16/90 COMP: 2/17/90

INITIAL FROM: BoneSprings

WELL HISTORY

2/14/1990 perf BoneSprings 6968-7052' w/16 perfs. Acidized w/ 2000g 15% HCL. Fraced w/76,000g 20# XL, 208,000# 16/30 (32,000# Rcs) @ 25 BPM. IPF 70 Bo, 1589 Mcfpd, & 30 Bw

12/1/1990 Perf 5650-5663' w/ 10 perfs. Acidized w/ 1000g 15% HCL. Fraced w/ 47600g 30# XL, 108000# 16/30 & 44000# Rcs @ 20 Bpm & 3400psi

12/10/1990 flow and swab 137 BF, 30% Oil Cut 2/4/1997 Perf 2nd BonesSpring 7903-8014' (48 holes). Acidize w/ 2600g 7.5% HCL @ 8 bpm. Fraced w/ 47000g 30# XL, 160000# SLC 16/30 @ 30 **BPM**

3/7/1997 Pump stuck, POOH w/ rods. Found pump stuck in tbg. cleaned well out f/ 7900'-8140'. RIH w/ tbg. and rods. SN @ 8035'

4/8/1997 IP 19 Bo, 120 MCF

8/13/199 rod failure 11/2/1999 rod failure

20" 94# Csg., set @ 360' Cmt. w/ 150 Sxs. Tail in w/250 Sxs, did not circ. Began 1". 1st stage 50 sxs, 2nd stage 83 sx

circ 50 sx. TOC @ 117'

13 3/8" 48# K-55 @ 1120'

CIRC. W/1000SX

CIBP @ 6918'

CIBP @ 7853'

181 jts. 2-7/8" 6.5# J55 TAC @ 5835' 68 jts. 2-7/8" 6.5# J55 SN @ 8050'

TBG.

RODs 7/8 & 3/4 Grade D

Perf sub @ 8054'

Pump 2-1/2 X 1-1/2

Sand @ 8236'

DATE: 12/20/2010 PREPARED BY:

MHK

8 5/8" 24&32# J-55 @ 3200'

Cmt w/300 Sxs, Tail in w/250 Sxs.

Did not Circ.

TOC @ 4364 from CBL

BoneSprings Stray Sand

5650-5663' (10 shots)

1st BoneSprings 6968-7052 (16 shots)

2nd BoneSprings 7903-8033 (56 shots)

5 1/2" 17# N-80&J-55 @ 8,300'. CMT w/4200 SXS CIRC 40 SXS off DV Tool @ 6388'. CMT w/400 SXS, Tail in w/300 SXS. Did not circ Plug @ 6406'

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Lea County, call 575-689-5981. Eddy County, please email notifications to: BLM_NM_CFO_PluggingNotifications@BLM.GOV. The Eddy County inspector on call phone, 575-361-2822, will remain active as a secondary contact.

<u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

<u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

Cement Requirement: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

<u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within fourteen (14) calendar days of the well being plugged. If the cut off cannot be done by the 14th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

<u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file via the AFMSS 2 WISx Module a Subsequent Report of Plugging and Abandonment to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

<u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No.

For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.

The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and

access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.

It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.

At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Angela Mohle Environmental Protection Specialist 575-234-9226

Robert Duenas Environmental Protection Specialist 575-234-2229

Terry Gregston Environmental Protection/HAZMAT Specialist 575-234-5958

Sundry ID	2878722						
						Cement	
Plug Type	Тор	Bottom	Length	Tag	Sacks	Class	Notes
Surface Plug	0.00			Tag/Verify			
Fresh Water @ 265	212.35	315.00	102.65	If solid			
							Perf and circulate
							from 410' to surface.
Top of Salt @ 361	307.39	411.00	103.61	Tag/Verify	97.00	С	Verify at surface.
13.375 inch- Shoe Plug	1058.80		111.20	Tag/Verify			ĺ
Base of Salt @ 1152	1090.48	1202.00	111.52	Tag/Verify			
				16 1: -1			
				If solid base no			
				need to			
				Tag			
				(CIBP			
				present			
				and/or			
				Mechanic			
				al Integrity			
				Test), If Perf &			
				Sqz then			
				Tag, Leak			
				Test all			
				CIBP if no			Perf and squeeze
				Open			from 1640' to 1058'.
				Perforatio			WOC and Tag. (In
Yates @ 1290	1227.10				137.00	С	58 sxs/Out 79 sxs)
Queen @ 2440	2365.60	2490.00	124.40				
				base no			
D 11 D 10 00 10	0500.00	0000 00	100.10	need to			
Capitan Reef @ 2640 8.625 inch- Shoe Plug	2563.60 3118.00			Tag/Verify			
0.023 IIICH- Shoe Flug	3110.00	3230.00	132.00	rag/verily			
				If solid			
				base no			
				need to			
				Tag			
				(CIBP			
				present and/or			
				Mechanic			
				al Integrity			
				Test), If			
				Perf &			
				Sqz then			
				Tag, Leak			Dorf and a
				Test all CIBP if no			Perf and squeeze from 3500' to 2365'.
				Open			WOC and Tag. (In
				Perforatio			113 sxs/Out 153
l l							
Delaware @ 3450	3365.50	3500.00	134.50		266.00	С	sxs)
Delaware @ 3450 Bonesprings @ 5480 Perforations Plug (If No CIBP)	3365.50 5375.20		154.80	ns	266.00	С	

				If solid			
				base no			
				need to			
				Tag			
				(CIBP			
				present			
				and/or			
				Mechanic			
				al Integrity			
				Test), If			
				Perf &			
				Sqz then			
				Tag, Leak			
				Test all			
				CIBP if no			Set CIBP at 5600'.
				Open			Leak test CIBP.
				Perforatio			Spot 25 sxs from
CIBP Plug	5565.00	5600.00			25.00	С	5600' to 5375'.
5.5 inch- Shoe Plug	8167.00			Tag/Verify	25.00		0000 10 0070.
old mon- office i rag	0107.00	0000.00	100.00	ray, verily			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H >7500' Class C<7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Bottom of Karst/take deepest fresh water/top of salt whichever is greater to

Cave Karst/Potash Cement Requirement: High surface

Wild Life

Outside of Lesser Prairie Chicken Area

42 375 inch Shoo Blue ©

 13.375 inch- Shoe Plug @
 1120.00

 8.625 inch- Shoe Plug @
 3200.00

5.5 inch- Shoe Plug @ 8300.00 TOC @ 4364.00

Perforations Top @ 5650.00 Perforations 5663.00

CIBP @ 5600.00

CURRENT WELLBORE DIAGRAM

Osage Federal #15

LEASE: Osage LOCATION: 1650' FNL & 2310' FWL FIELD: Osage **CURRENT STAT. PROD**

WELL NO. 15 T: 19S R: 29E SEC: 34 GL: 3303' CT/ST: EDDY,NM

20" 94# Csg., set @ 360'

Cmt. w/ 150 Sxs. Tail in

w/250 Sxs, did not

circ. Began 1". 1st stage

50 sxs, 2nd stage 83 sx

circ 50 sx. TOC @ 117'

SPUD: 1/16/90 COMP: 2/17/90 **INITIAL FROM: BoneSprings**

KB: 3319'

WELL HISTORY

2/14/1990 perf BoneSprings 6968-7052' w/16 perfs. Acidized w/ 2000g 15% HCL. Fraced w/76,000g 20# XL, 208,000# 16/30 (32,000# Rcs) @ 25 BPM. IPF 70 Bo, 1589 Mcfpd, & 30 Bw

API#: 30-015-26271

12/1/1990 Perf 5650-5663' w/ 10 perfs. Acidized w/ 1000g 15% HCL. Fraced w/ 47600g 30# XL, 108000# 16/30 & 44000# Rcs @ 20 Bpm & 3400psi

12/10/1990 flow and swab 137 BF, 30% Oil Cut 2/4/1997 Perf 2nd BonesSpring 7903-8014' (48 holes). Acidize w/ 2600g 7.5% HCL @ 8 bpm. Fraced w/ 47000g 30# XL, 160000# SLC 16/30 @ 30 **BPM**

3/7/1997 Pump stuck, POOH w/ rods. Found pump stuck in tbg. cleaned well out f/ 7900'-8140'. RIH w/ tbg. and rods. SN @ 8035'

4/8/1997 IP 19 Bo, 120 MCF

8/13/199 rod failure 11/2/1999 rod failure

CURRENT WELLBORE 13 3/8" 48# K-55 @ 1120' CIRC. W/1000SX

8 5/8" 24&32# J-55 @ 3200'

Cmt w/300 Sxs, Tail in w/250 Sxs.

Did not Circ.

TOC @ 4364 from CBL

TAC @ 5835' 68 jts. 2-7/8" 6.5# J55 SN @ 8050' Perf sub @ 8054' **RODs**

TBG.

181 jts. 2-7/8" 6.5# J55

7/8 & 3/4 Grade D

Pump 2-1/2 X 1-1/2

Sand @ 8236'

DATE: 12/20/2010 PREPARED BY: MHK

BoneSprings Stray Sand

5650-5663' (10 shots)

1st BoneSprings 6968-7052 (16 shots)

2nd BoneSprings 7903-8033 (56 shots)

5 1/2" 17# N-80&J-55 @ 8,300'. CMT w/4200 SXS CIRC 40 SXS off DV Tool @ 6388'. CMT w/400 SXS, Tail in w/300 SXS. Did not circ Plug @ 6406'

CIBP @ 6918'

CIBP @ 7853'

PROPOSED WELLBORE DIAGRAM Osage Federal #15

LEASE: Osage

LOCATION: . 1650'. FNL. & 2310'. FWL

FIELD: Osage

WELL NO. 15

SEC: ... 34 T: 19S. R: 29E. GL: 3303' CT/ST: EDDY,NM

KB: 3319'

API#: 30-015-26271

SPUD: 1/16/90 COMP: 2/17/90

INITIAL. FROM: BoneSpring

7. Plug #4:(Surface) Perf & Sqz 94 sxs class "C". (41in/53out) from 410' to 0'.

> Formation Top Yates 1290... 7-Rivers 1590 Deleware 3450 B. Spring 5480

6. Plug #3: (7-Rvrs/Yates/Inter Shoe) Perf & Sqz 131 sxs class "C" w 2% CaCl (57in/74out) from 1640' to 1070'. WOC 4hrs & Tag.

5. Plug #2: (Delware/Inter Shoe) Perf & Sqz 122 sxs class "C" w/ 2% CaCl (87out/35in) from 3500' to 3150'. (WOC 4hrs. & Tag)

TOC. @. 4364. from . CBL

- 4. Plug #1: (B Spring) Spot 17 sxs class "C" from 5600' to 5430'.
- 3. Run CBL from 5600' to 0'
- 2. Pressure test CIBP to 500 psi 30 min
- 1. Set CIBP @ 5600'.

BoneSprings Stray Sand

5650-5663'. (10. shots)


1st BoneSprings

6968-7052 (16. shots)

2nd BoneSprings

7903-8033. (56. shots)

5. 1/2". 17#. N-80&J-55. @. 8,300'.. CMT. w/4200. SXS CIRC 40 SXS off DV Tool @ 6388'. CMT w/ 400 SXS, Tail in w/ 300 SXS. Did not circ Plug @ 6406'

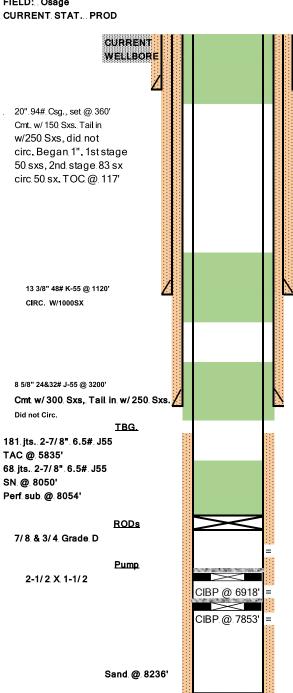

DATE: 12/20/2010

PREPARED BY:

KLW

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 529576

CONDITIONS

Operator:	OGRID:
Permian Resources Operating, LLC	372165
300 N. Marienfeld St Ste 1000	Action Number:
Midland, TX 79701	529576
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Run RCBL 5600' to Surface	12/12/2025
gcordero	dero A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	12/12/2025