

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-37170
5. Indicate Type of Lease STATE [X] FEE [ ]
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Newman 32 State
8. Well Number 002
9. OGRID Number 330522
10. Pool name or Wildcat Stateline Ellenburger
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3305' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well [X] Gas Well [ ] Other [ ]
2. Name of Operator Acacia Operating Company, LLC
3. Address of Operator ConocoPhillips, 600 W. Illinois Ave, Midland, Texas 79701
4. Well Location
Unit Letter B : 600 feet from the N line and 2310 feet from the E line
Section 32 Township 23S Range 38E NMPM County Lea
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3305' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [ ] PLUG AND ABANDON [ ]
TEMPORARILY ABANDON [ ] CHANGE PLANS [ ]
PULL OR ALTER CASING [ ] MULTIPLE COMPL [ ]
DOWNHOLE COMMINGLE [ ]
CLOSED-LOOP SYSTEM [ ]
OTHER: [ ]
SUBSEQUENT REPORT OF:
REMEDIAL WORK [ ] ALTERING CASING [ ]
COMMENCE DRILLING OPNS. [ ] P AND A [X]
CASING/CEMENT JOB [ ]
OTHER: [ ]

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Acacia Operating is granting CONOCO PHILLIPS permission to Plug and Abandon this well on their behalf.

Please see below for the P&A Subsequent Report.

Spud Date: [ ]

Rig Release Date: [ ]

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ron Satija TITLE Trustee DATE 2.2.26

Type or print name Ron Satija E-mail address: rsatija@satijatrustee.com PHONE: 737-881-7102

For State Use Only

APPROVED BY: TITLE DATE

Conditions of Approval (if any):

**Subsequent P&A Report  
Acacia Operating Company, LLC  
Newman 32 State – 002  
30-025-37170**

**12/20/25** MIRU.

**12/21/25** Picked up (249 ( 379 ) jts) workstring and tagged CIBP @ (11944'). Circulated 260bbl 10# MLF. Number of sacks 130. Tested casing to 500 psi. Plug (# 1) Spot (30 sxs) class (H) cement From (11900') to (11590'). Pumping Operations: Reverse out 60 bbls. Secure well and install night caps, equipment shutdown.

**12/22/25** RIH with (24 ( 373 ) jts) and tagged TOC @ (11786'). Spoke with Loren Diede OCD got approval to spot the following plugs 2.3.4.5.6.7 no woc no tag Till we perf and sqz at 500. Plug (# 2) Spot (25 sxs) class (H) cement From (9357') to (9207'). Plug (# 3) Spot (73 sxs) class (H) cement From (8550') to (7957'). Plug (# 4) Spot (25 sxs) class (H) cement From (7275') to (7125'). Plug (# 5) Spot (25 sxs) class (C) cement From (5782') to (5648'). Plug (# 6) Spot (60 sxs) class (C) cement From (4567') to (3958'). Plug (# 7) Spot (71 sxs) class (C) cement From (3631') to (2910'). Secure well and install night caps, equipment shutdown.

**12/23/25** Plug (# 8) Spot (25 sxs) class (C) cement From (1540') to (1390'). Load well and integrity test Packer to 500 psi. RIH and perf'd @ 500'. EIR 1.5 bbl/min @ 500 psi. Plug (# 9) Rigged up pump and circulated (150 sxs) class (C) cement from (500') to surface. Secure equipment for the holiday.


**01/05/25** Verified cement do bubble test 5 1/2 8 5/8 tested good no bubbles. RDMO.

**01/07/25** Cutoff wellhead. Install above ground P&A marker.

|             |                              |           |                                 |
|-------------|------------------------------|-----------|---------------------------------|
| Author:     | <u>Shyanne @ JMR</u>         | Well No.: | <u>2</u>                        |
| Well Name:  | <u>Newman 32 State</u>       | API #:    | <u>30-025-37170</u>             |
| Field/Pool: | <u>Stateline Ellenburger</u> | Location: | <u>660' FNL &amp; 2310' FEL</u> |
| County:     | <u>Lea</u>                   | State:    | <u>NM</u>                       |
| Spud Date:  | <u>6/19/1993</u>             | GL:       | <u>3305'/3333'</u>              |

| Description  | O.D.   | Grade | Weight | Depth  | Hole   | Cmt Sx   | TOC          |
|--------------|--------|-------|--------|--------|--------|----------|--------------|
| Surface      | 13 3/8 | H40   | 48#    | 450'   | 17 1/2 | 205 sxs  | 0'           |
| Intermediate | 8 5/8  | J55   | 32#    | 3500'  | 12 1/4 | 1495 sxs | 0'           |
| Production   | 5 1/2  | L80   | 20#    | 12354' | 7 7/8  | 1950 sxs | 1300' by CBL |

| Formation Tops |        |
|----------------|--------|
| Red Bed        | 19'    |
| T. Salt        | 1490'  |
| B. Salt        | 2960'  |
| Yates          | 3581'  |
| Queen          | 3908'  |
| San Andres     | 4517'  |
| Glorieta       | 5748'  |
| Abo            | 7225'  |
| Wolfcamp       | 8007'  |
| Atoka          | 8103'  |
| Morrow         | 8446'  |
| Devion         | 9307'  |
| Montoyo        | 10918' |

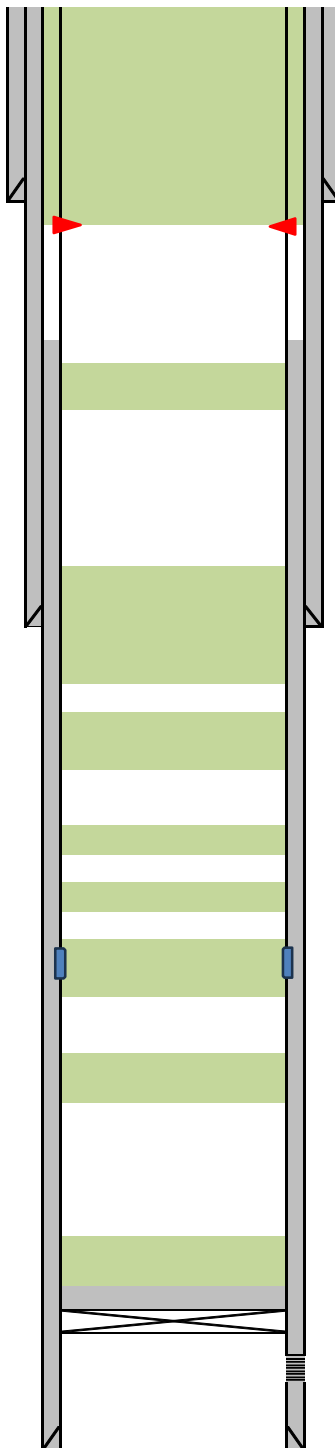

Plug (# 9) Rigged up pump and circulated (150 sxs) class (C) cement from (500') to surface.  
Perf'd @ 500'.

TOC @ 1300'

Plug (# 8) Spot (25 sxs) class (C) cement From (1540') to (1390').

Plug (# 7) Spot (71 sxs) class (C) cement From (3631') to (2910').

Plug (# 6) Spot (60 sxs) class (C) cement From (4567') to (3958').

Plug (# 5) Spot (25 sxs) class (C) cement From (5782') to (5648').

Plug (# 4) Spot (25 sxs) class (H) cement From (7275') to (7125').

DV Tool @ 8500'

Plug (# 3) Spot (73 sxs) class (H) cement From (8550') to (7957').

Plug (# 2) Spot (25 sxs) class (H) cement From (9357') to (9207').

Tagged TOC @ (11786').

Plug (# 1) Spot (30 sxs) class (H) cement From (11900') to (11590').

July 10, 2014: CIBP set @ 12,000'

July 7, 2005: Ellenburger Perfs from 12,066' to 12,200'















Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 550298

**CONDITIONS**

|  |  |
|--|--|
| Operator:<br>MARATHON OIL PERMIAN LLC<br>600 W Illinois Ave<br>Midland, TX 79701 | OGRID:<br>372098                               |
|  | Action Number:<br>550298                       |
|  | Action Type:<br>[C-103] Sub. Plugging (C-103P) |

**CONDITIONS**

| Created By  | Condition | Condition Date |
|-------------|-----------|----------------|
| loren.diede | None      | 2/4/2026       |