

<b>Well Name:</b> MAMA JO 3531 FED COM	<b>Well Location:</b> T22S / R28E / SEC 35 / SENW / 32.3516591 / -104.0617035	<b>County or Parish/State:</b> EDDY / NM
<b>Well Number:</b> 122H	<b>Type of Well:</b> OIL WELL	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM67980	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 3001556802	<b>Operator:</b> MATADOR PRODUCTION COMPANY	

**Notice of Intent**

**Sundry ID:** 2892019

**Type of Submission:** Notice of Intent

**Type of Action:** APD Change

**Date Sundry Submitted:** 01/28/2026

**Time Sundry Submitted:** 11:23

**Date proposed operation will begin:** 01/20/2026

**Procedure Description:** BLM Bond No. NMB001079 Surety Bond No. RLB0015172 Matador requests the option to amend the well design of the Mama Jo 3531 Fed Com #122H and make the following changes to the current APD: - Change well SHL from 1757' FNL & 1582' FWL section 35 to 1761' FNL & 1611' FWL section 35 - Option to drill intermediate hole size of 12-1/4" OH - Option to run intermediate casing type of 9-5/8" BTC - Option to drill production vertical hole size of 7-7/8" to KOP - Option to revise casing set depths and mud weights as described in the drill plan attached. Cement volumes will be adjusted accordingly to reflect design change.

**NOI Attachments**

**Procedure Description**

- Mama\_Jo\_3531\_Fed\_Com\_122H\_Casing\_Table\_Spec\_\_\_B\_20260204104653.pdf
- LO\_MAMA\_JO\_3531\_FED\_COM\_122H\_REV4\_Signed\_20260128112129.pdf
- Mama\_Jo\_3531\_Fed\_Com\_122H\_Directional\_Wall\_Plot\_20260128110934.pdf
- Mama\_Jo\_3531\_Fed\_Com\_122H\_Directional\_AC\_Report\_20260128110934.pdf
- Mama\_Jo\_3531\_Fed\_Com\_122H\_Sundry\_Info\_20260128110934.pdf
- Mama\_Jo\_3531\_Fed\_Com\_122H\_Directional\_Well\_Plan\_20260128110934.pdf

Well Name: MAMA JO 3531 FED COM

Well Location: T22S / R28E / SEC 35 / SENW / 32.3516591 / -104.0617035

County or Parish/State: EDDY / NM

Well Number: 122H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM67980

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001556802

Operator: MATADOR PRODUCTION COMPANY

### Conditions of Approval

#### Additional

MAMA\_JO\_3531\_FED\_COM\_122H\_Drilling\_COA\_20260217102550.pdf

### Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: NICKY FITZGERALD

Signed on: FEB 04, 2026 10:48 AM

Name: MATADOR PRODUCTION COMPANY

Title: Regulatory Consultant

Street Address: 5400 LBJ FREEWAY STE 1500

City: DALLAS

State: TX

Phone: (972) 371-5448

Email address: nicky.fitzgerald@matadorresources.com

### Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

### BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234

BLM POC Email Address: CWALLS@BLM.GOV

Disposition: Approved

Disposition Date: 02/19/2026

Signature: Chris Walls

Form 3160-5  
(October 2024)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0220  
Expires: October 31, 2027

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

<b>SUBMIT IN TRIPLICATE - Other instructions on page 2</b>		5. Lease Serial No.
1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator		7. If Unit of CA/Agreement, Name and/or No.
3a. Address	3b. Phone No. (include area code)	8. Well Name and No.
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		9. API Well No.
		10. Field and Pool or Exploratory Area
		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

**THE SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by		
	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

## GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

## SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

*Item 13*: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

## Additional Information

### Location of Well

0. SHL: SENW / 1757 FNL / 1582 FWL / TWSP: 22S / RANGE: 28E / SECTION: 35 / LAT: 32.3516591 / LONG: -104.0617035 ( TVD: 0 feet, MD: 0 feet )  
PPP: SWNE / 1650 FNL / 2538 FEL / TWSP: 22S / RANGE: 28E / SECTION: 35 / LAT: 32.3519648 / LONG: -104.0579604 ( TVD: 7951 feet, MD: 8064 feet )  
PPP: SWNW / 1662 FNL / 0 FWL / TWSP: 22S / RANGE: 28E / SECTION: 36 / LAT: 32.3519617 / LONG: -104.0497324 ( TVD: 8302 feet, MD: 10741 feet )  
PPP: SWNW / 1698 FNL / 0 FWL / TWSP: 22S / RANGE: 28E / SECTION: 31 / LAT: 32.3519532 / LONG: -104.0319026 ( TVD: 8335 feet, MD: 16246 feet )  
BHL: SENW / 1657 FNL / 2452 FWL / TWSP: 22S / RANGE: 29E / SECTION: 31 / LAT: 32.3519486 / LONG: -104.0239636 ( TVD: 8360 feet, MD: 18747 feet )

CONFIDENTIAL

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b> MATADOR PRODUCTION COMPANY
<b>WELL NAME &amp; NO.:</b> MAMA JO 3531 FED COM 122H
<b>APD ID:</b> 10400103141
<b>LOCATION:</b> Section 35, T22S, R28E. NMP.
<b>COUNTY:</b> <span style="border: 1px solid black; padding: 2px;">Eddy County, New Mexico</span>

*Changes approved through engineering via Sundry 2892019 on 02/17/2026. Any previous COAs not addressed within the updated COAs still apply.*

COA

<b>H<sub>2</sub>S</b>	<input type="radio"/> No		<input checked="" type="radio"/> Yes	
<b>Potash / WIPP</b>	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-Q	<input type="checkbox"/> Open Annulus <input type="checkbox"/> WIPP
<b>Cave / Karst</b>	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High	<input type="radio"/> Critical
<b>Wellhead</b>	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both	<input type="radio"/> Diverter
<b>Cementing</b>	<input type="checkbox"/> Primary Squeeze	<input checked="" type="checkbox"/> Cont. Squeeze	<input checked="" type="checkbox"/> EchoMeter	<input checked="" type="checkbox"/> DV Tool
<b>Special Req</b>	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit
<b>Waste Prev.</b>	<input type="radio"/> Self-Certification	<input checked="" type="radio"/> Waste Min. Plan	<input type="radio"/> APD Submitted prior to 06/10/2024	
<b>Additional Language</b>	<input checked="" type="checkbox"/> Flex Hose	<input type="checkbox"/> Casing Clearance	<input type="checkbox"/> Pilot Hole	<input checked="" type="checkbox"/> Break Testing
	<input type="checkbox"/> Four-String	<input checked="" type="checkbox"/> Offline Cementing	<input checked="" type="checkbox"/> Fluid-Filled	

**SEE ORIGINAL COA FOR ALL OTHER REQUIREMENTS.**

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H<sub>2</sub>S) Drilling Plan shall be activated at spud. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

### B. CASING PROGRAM

1. The **13-3/8 inch** surface casing shall be set at approximately **350 ft.** (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. **If salt is encountered, set casing at least 25 ft. above the salt.**
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement

- and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 psi compressive strength**, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

**Note:** Operator has requested to have option to drill either 17-1/2" or 20" surface hole. Both hole sizes meet title 43 CFR 3172 clearance requirements between casing-coupling and hole. This option is granted; adjust cement volume accordingly.

**Note:** The intermediate casing setting depth has been adjusted in accordance with the BLM geologist's recommendation.

2. The **9-5/8 inch** intermediate casing shall be set in a competent bed at approximately **2,750 ft.** The minimum required fill of cement behind the **9-5/8 inch** intermediate casing is:

**Option 1 (Single stage): Cement to surface.** If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.

**Option 2 (Two-stage):** Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- **First stage to DV tool:** Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
  - **Second stage above DV tool: Cement to surface.** If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**. Excess cement in the 2<sup>nd</sup> stage is less than 25%. More cement might be needed.
- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3<sup>rd</sup> casing string must come to surface.
3. Operator has proposed to set **5-1/2 in.** production casing at approximately **18,693 ft.** (8,350 ft. TVD). The minimum required fill of cement behind the **5-1/2 in.** production casing is:
    - Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification. Operator shall use one of the approved methods for cement verification located in the **General Requirements, Section A.1**.

**Note:** The cement volume is insufficient to achieve at least 200 feet of coverage into the previous casing string. Additional cement is needed.

## Offline Cementing

Operator has been (**Approved**) to pump the proposed cement program offline in the **Surface and intermediate(s) intervals**. Offline cementing should commence within 24 hours of landing the casing for the interval. Notify the BLM 4hrs prior to the commencement of any offline cementing procedure at **Eddy County: 575-361-2822**.

### C. PRESSURE CONTROL

1. Variance approved to use **flex line** from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi. The BOP/BOPE and annular preventer shall be pressure-tested in accordance with **title 43 CFR 3172**.
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in the **title 43 CFR 3172.6(b)(9)** must be followed.

### BOPE Break Testing Variance

- BOPE Break Testing is **ONLY** permitted for intervals utilizing a 5M BOPE or less. (**Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.**)
- BOPE Break Testing is **NOT** permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.

- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

#### D. SPECIAL REQUIREMENT (S)

##### Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

### GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

#### Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 520 East Greene St., Carlsbad, NM 88220; [BLM\\_NM\\_CFO\\_DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822.

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig
    - i. Notify the BLM when moving in and removing the Spudder Rig.
    - ii. Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.

- iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2<sup>nd</sup> Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

#### **A. CASING & CEMENTING**

1. The current acceptable methods of cement verification are as follows:
  - i. Observing cement circulated to surface,
  - ii. Cement Bond Log (CBL),
  - iii. Temperature log within 8-10 hours after completing the cement job,
  - iv. Echometer (if a second-stage bradenhead is being utilized and operator was granted approval prior to operations.)
2. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
3. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

5. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
6. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
7. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
8. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
9. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

## **B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - iii. Manufacturer representative shall install the test plug for the initial BOP test.
  - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

- v. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
    - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
    - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (Only applies to single stage cement jobs, prior to the cement setting up.)
    - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
    - iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-hour chart is used, tester shall make a notation that it is run with a two hour clock.
    - v. The results of the test shall be reported to the appropriate BLM office.
    - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
    - vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

**C. DRILLING MUD**

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

**D. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**SA 02/17/2026**


### Casing Table Specification Sheet

**Mama Jo 3531 Fed Com 122H**  
**SHL: 1761' FNL & 1611' FWL Section 35**  
**BHL: 1657' FNL & 2452' FWL Section 31**  
**Township/Range: 22S 28E**  
**Elevation Above Sea Level: 3085**

String	Hole Size (in)	Set MD (ft)	Set TVD (ft)	Casing Size (in)	Wt. (lb/ft)	Grade	Joint	Collapse	Burst	Tension
Surface	17.5	0 - 350	0 - 350	13.375	54.5	J-55	BUTT	1.125	1.125	1.8
Intermediate 1	12.25	0 - 2901	0 - 2884	9.625	40	J-55	BUTT	1.125	1.125	1.8
Production	7.875 x 6.75	0 - 7817, 7817 - 18693	0 - 7717, 7717 - 8350	5.5	20	P-110	Hunting TLW-SC	1.125	1.125	1.8




<b>C-102</b>  Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department <b>OIL CONSERVATION DIVISION</b>	Revised July 9, 2024
		Submittal Type: <input type="checkbox"/> Initial Submittal <input checked="" type="checkbox"/> Amended Report <input type="checkbox"/> As Drilled
Property Name and Well Number <b>MAMA JO 3531 FED COM 122H</b>		

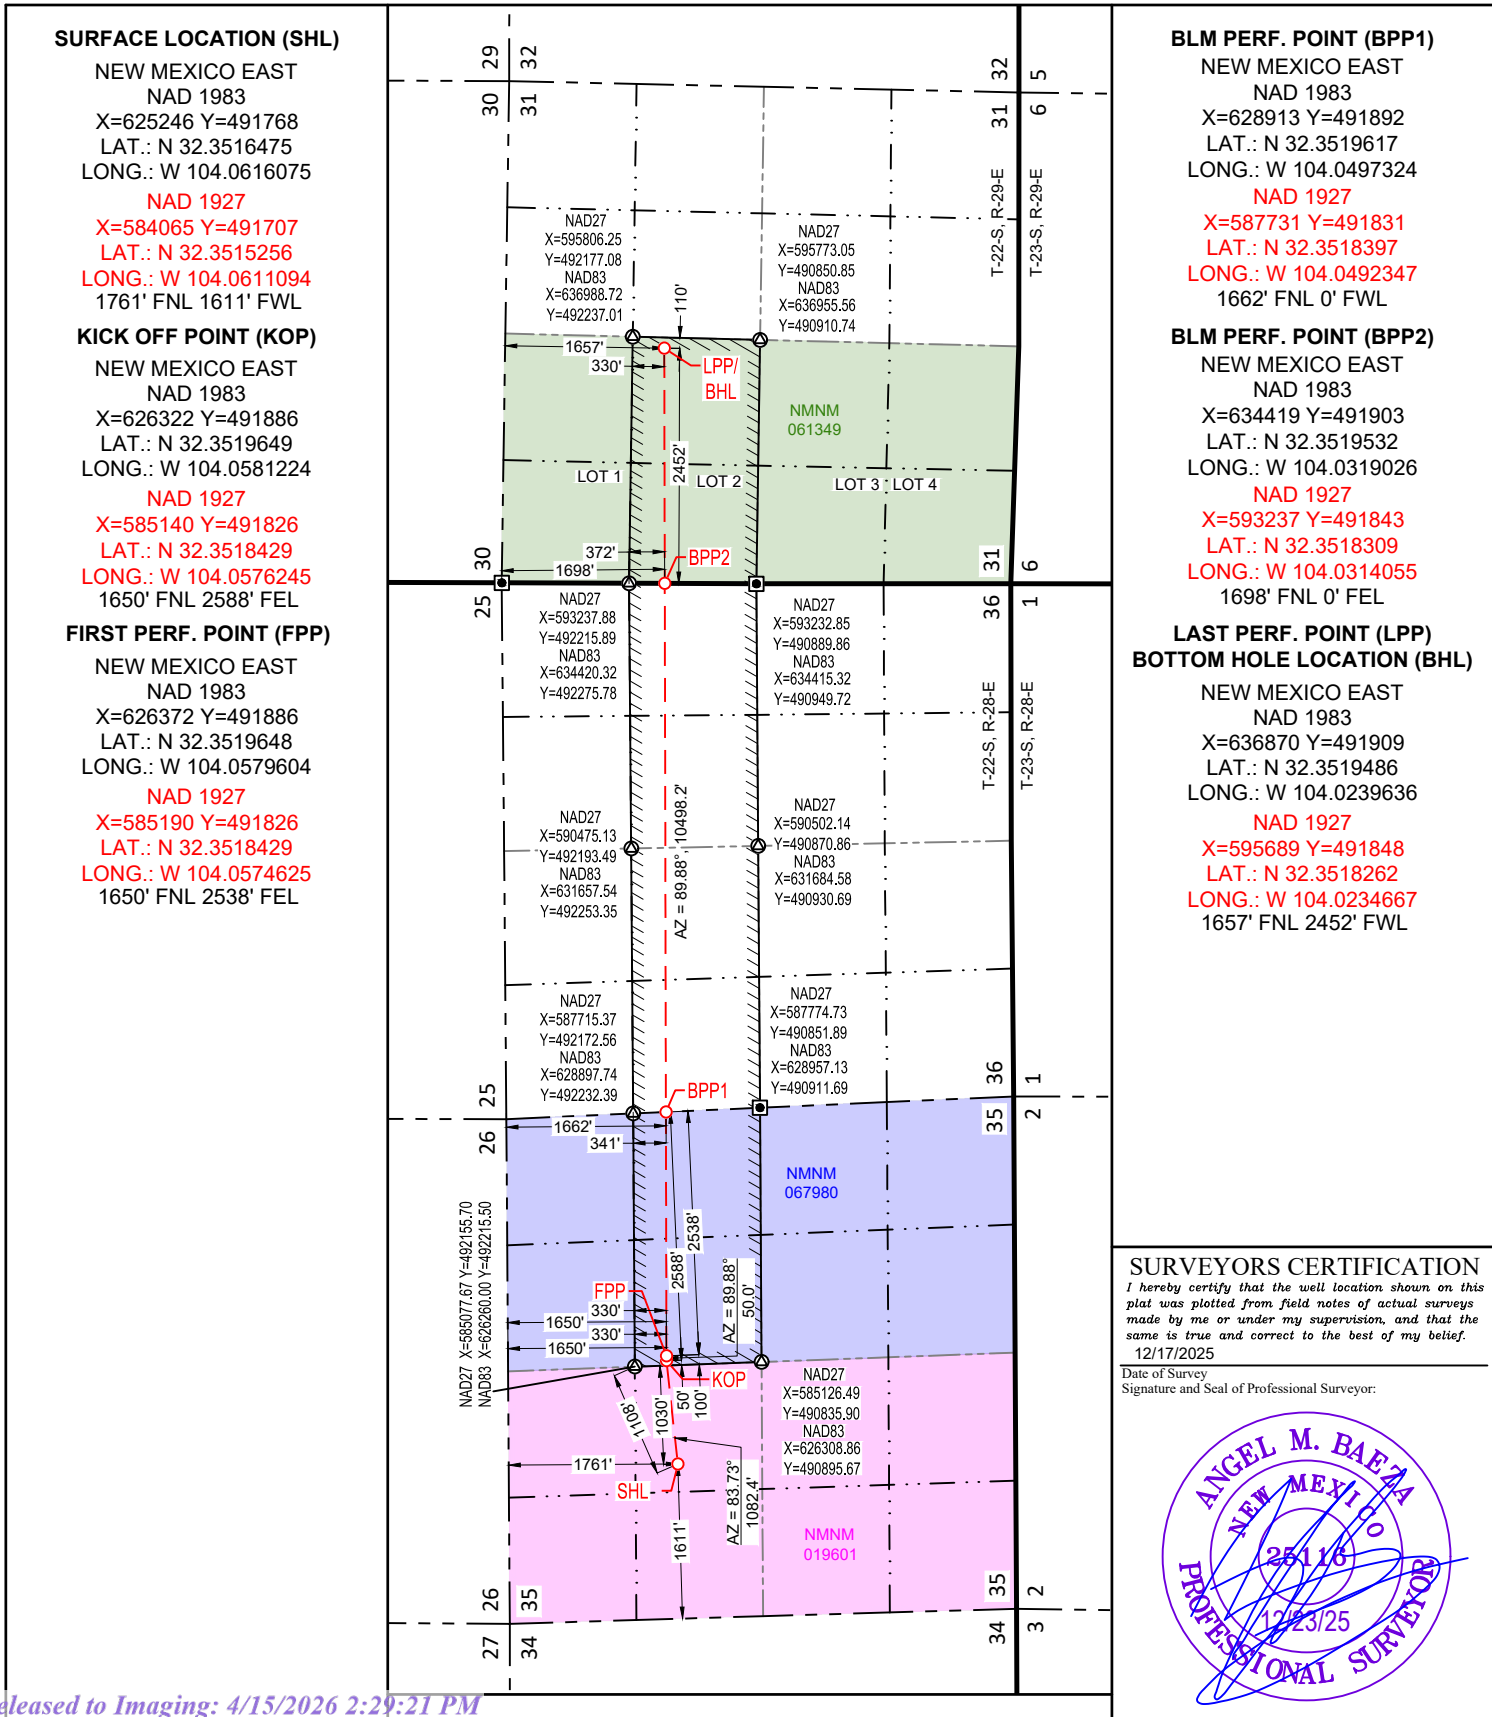

S:\SURVEY\WATER\RESOURCE\BAMA\JO\_3531\_FED\_COM\_122H\_REVING\BAMA\_12220203\_2026.PM



SECTION 35, TOWNSHIP 22-S, RANGE 28-E, N.M.P.M.  
EDDY COUNTY, NEW MEXICO

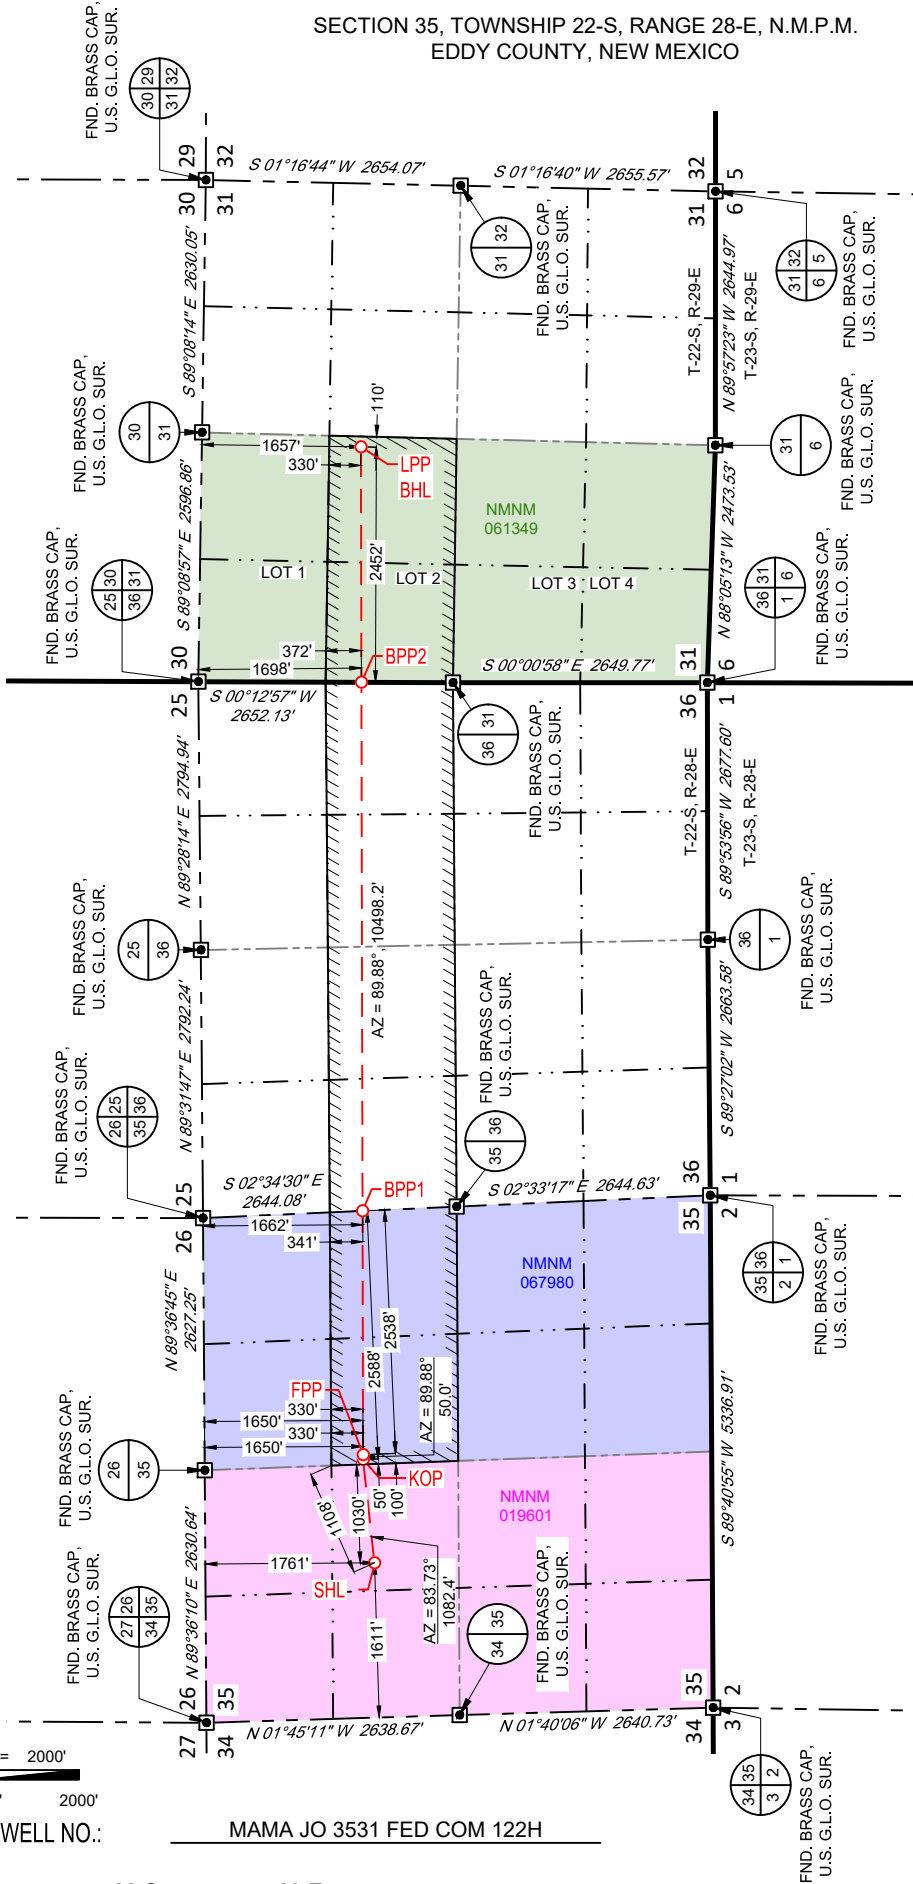

**SURFACE LOCATION (SHL)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=625246 Y=491768  
 LAT.: N 32.3516475  
 LONG.: W 104.0616075  
 1761' FNL 1611' FWL


**KICK OFF POINT (KOP)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=626322 Y=491886  
 LAT.: N 32.3519649  
 LONG.: W 104.0581224  
 1650' FNL 2588' FEL

**FIRST PERF. POINT (FPP)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=626372 Y=491886  
 LAT.: N 32.3519648  
 LONG.: W 104.0579604  
 1650' FNL 2538' FEL

**BLM PERF. POINT (BPP1)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=628913 Y=491892  
 LAT.: N 32.3519617  
 LONG.: W 104.0497324  
 1662' FNL 0' FWL

**BLM PERF. POINT (BPP2)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=634419 Y=491903  
 LAT.: N 32.3519532  
 LONG.: W 104.0319026  
 1698' FNL 0' FEL

**LAST PERF. POINT (LPP)**  
**BOTTOM HOLE LOCATION (BHL)**  
 NEW MEXICO EAST  
 NAD 1983  
 X=636870 Y=491909  
 LAT.: N 32.3519486  
 LONG.: W 104.0239636  
 1657' FNL 2452' FWL



LEASE NAME & WELL NO.: MAMA JO 3531 FED COM 122H

SECTION 35 TWP 22-S RGE 28-E SURVEY N.M.P.M.  
 COUNTY EDDY STATE NM  
 DESCRIPTION 1761' FNL & 1611' FWL

**DISTANCE & DIRECTION**  
 FROM INT. OF US-180E. & US-62W. GO EAST ON US-62 E +2.2 MILES.  
 THENCE EAST (RIGHT) ON U.S. REFINERY RD ±9.6 MILES. THENCE  
 NORTHEAST (LEFT) ON A LEASE RD ±2224 FEET, THENCE NORTH (LEFT)  
 ON A PROPOSED RD. ±65 FEET TO A POINT ±356 FEET SOUTHWEST OF  
 THE LOCATION.



Angel M. Baeza, P.S. No. 25116

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET  
 THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.  
 AS OF THE DATE OF SURVEY, ALL ABOVE GROUND APPURTENANCES WITHIN 300' OF THE STAKED LOCATION ARE SHOWN HEREON.


**TOPOGRAPHIC**  
 LOYALTY INNOVATION LEGACY  
 481 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126  
 TELEPHONE: (817) 744-7512 • FAX (817) 744-7554  
 808 WEST INDIANA • MIDLAND, TEXAS 79701  
 TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743  
 WWW.TOPOGRAPHIC.COM



LEGEND

- SECTION LINE
- PROPOSED ROAD
- SIXTEENTH SECTION LINE


SECTION 35, TOWNSHIP 22-S, RANGE 28-E, N.M.P.M.  
EDDY COUNTY, NEW MEXICO

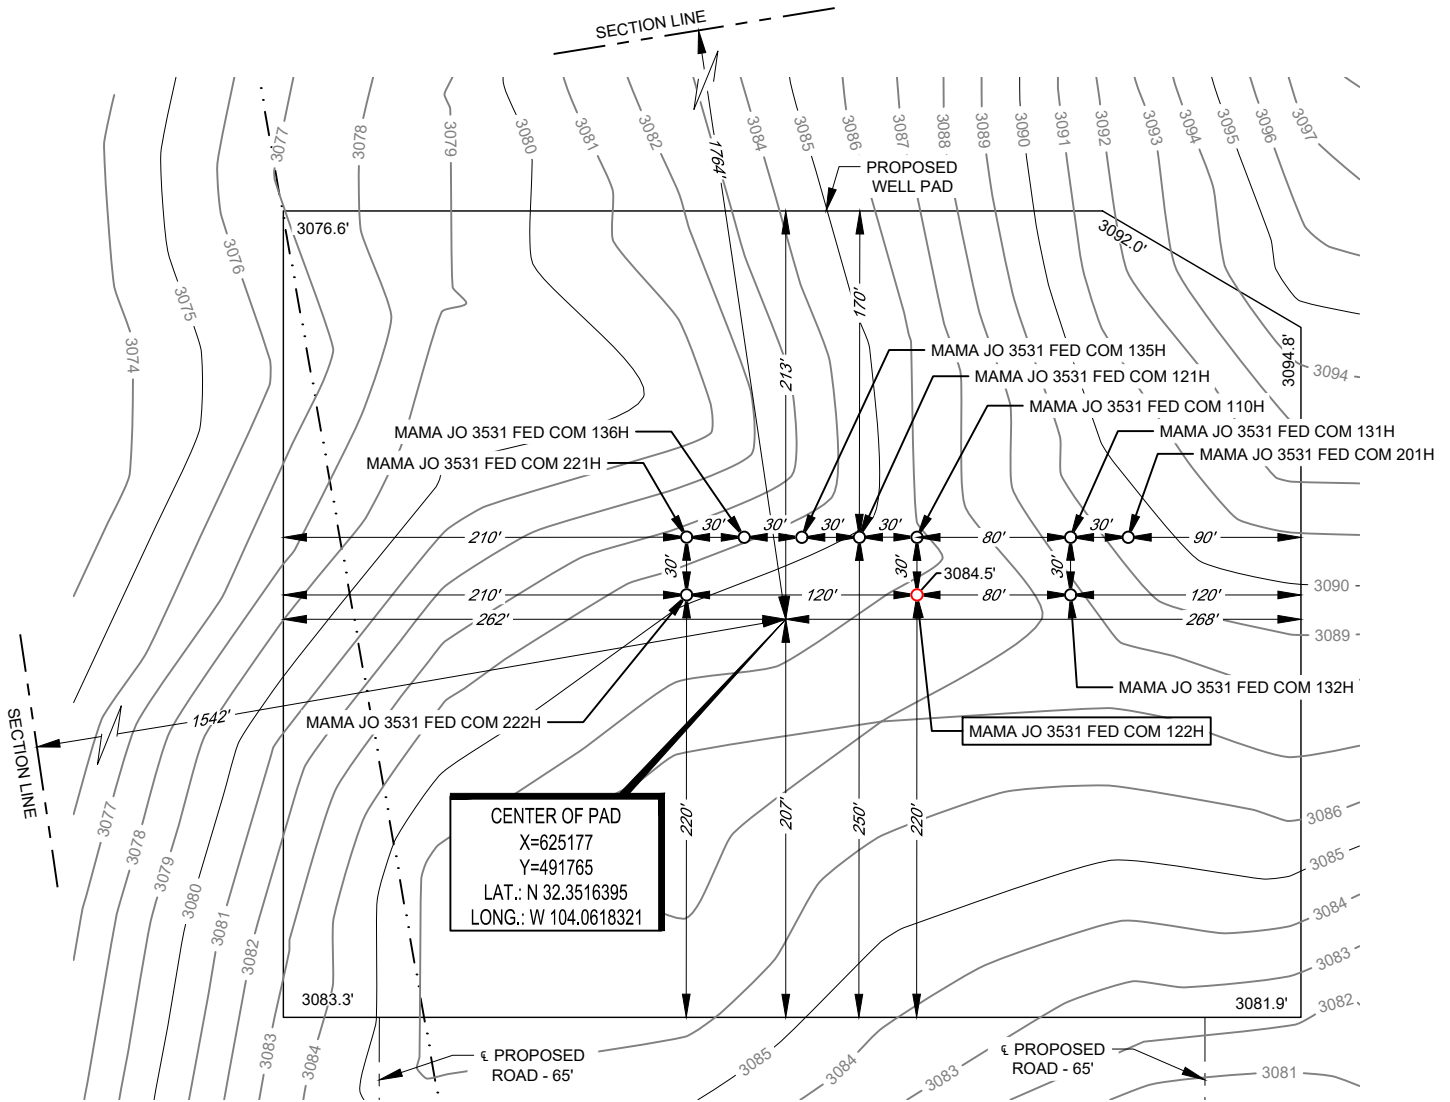

Angel M. Baeza, P.S. No. 25116

LEASE NAME & WELL NO.: MAMA JO 3531 FED COM 122H  
 122H LATITUDE N 32.3516475 122H LONGITUDE W 104.0616075

CENTER OF PAD IS 1764' FNL & 1542' FWL

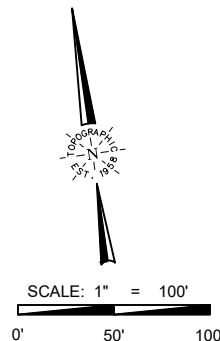

481 WINSOTT ROAD, Ste. 200 • BENBROOK, TEXAS 76126  
 TELEPHONE: (817) 744-7512 • FAX (817) 744-7554  
 808 WEST INDIANA • MIDLAND, TEXAS 79701  
 TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743  
 WWW.TOPOGRAPHIC.COM

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET. ELEVATIONS USED ARE NAVD88, OBTAINED THROUGH AN OPUS SOLUTION.

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. ONLY THE DATA SHOWN ABOVE IS BEING CERTIFIED TO, ALL OTHER INFORMATION WAS INTENTIONALLY OMITTED. THIS PLAT IS ONLY INTENDED TO BE USED FOR A PERMIT AND IS NOT A BOUNDARY SURVEY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ORIGINAL DOCUMENT SIZE: 8.5" X 11"



SURVEY PROGRAM

WELL DETAILS: Mama Jo 3531 Fed Com #122H


Depth From	Depth To	Survey/Plan	Tool	+N/-S	+E/-W	Northing	Easting	GL @ 3085.0	KB @ 3118.5usft	Latitude	Longitude	Slot
0.0	18692.3	BLM Plan #1 (Wellbore #1)	MWD	0.0	0.0	491707.46	584064.57			32° 21' 5.492 N	104° 3' 39.994 W	

**Company: Matador Production Company**  
**Well: Mama Jo 3531 Fed Com #122H**  
**County: Eddy County, NM**  
**Wellbore: Wellbore #1**  
**Plan: BLM Plan #1**  
**Date: 1/13/2026**

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KOP - Mama Jo 3531 Fed Com #122H	7717.0	118.5	1075.4	491826.00	585140.00	32° 21' 6.638 N	104° 3' 27.453 W
BHL - Mama Jo 3531 Fed Com #122H	8350.0	140.5	11624.4	491848.00	595689.00	32° 21' 6.570 N	104° 1' 24.476 W
BPP1 - Mama Jo 3531 Fed Com #122H	8302.1	123.8	3666.0	491831.24	587730.57	32° 21' 6.623 N	104° 2' 57.253 W
BPP2 - Mama Jo 3531 Fed Com #122H	8335.2	135.4	9172.0	491842.84	593236.57	32° 21' 6.589 N	104° 1' 53.065 W
FPP - Mama Jo 3531 Fed Com #122H	7950.1	118.6	1125.0	491826.09	585189.57	32° 21' 6.638 N	104° 3' 26.875 W

Geodetic System: US State Plane 1927 (Exact solution)  
 Datum: NAD 1927 (NADCON CONUS)  
 Ellipsoid: Clarke 1866  
 Zone: New Mexico East 3001  
 System Datum: Mean Sea Level

To convert a Magnetic Direction to a Grid Direction, Add 6.25°  
 To convert a Magnetic Direction to a True Direction, Add 6.40° East  
 To convert a True Direction to a Grid Direction, Subtract 0.15°






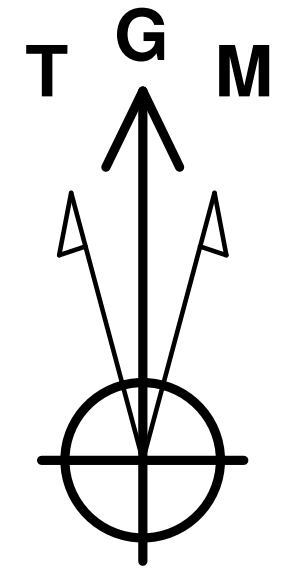


Azimuths to Grid North  
 True North: -0.15°  
 Magnetic North: 6.25°  
 Magnetic Field  
 Strength: 47216.5snT  
 Dip Angle: 60.01°  
 Date: 10/1/2024  
 Model: IGRF2015

DESIGN TARGET DETAILS

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
1500.0	0.00	0.00	1500.0	0.0	0.0	0.00	0.00	0.0	Start Build 2.00
2049.2	10.98	83.71	2045.9	5.8	52.2	2.00	83.71	52.2	Start 5035.6 hold at 2049.2 MD
7084.8	10.98	83.71	6989.2	110.9	1005.9	0.00	0.00	1006.1	Start Drop -1.50
7817.1	0.00	0.00	7717.0	118.5	1075.4	1.50	180.00	1075.7	Start Build 10.00
8717.1	90.00	89.90	8290.0	119.5	1648.4	10.00	89.90	1648.6	Start DLS 2.00 TFO -176.58
8734.4	89.65	89.88	8290.0	119.6	1665.7	2.00	-176.58	1665.9	Start 9959.0 hold at 8734.4 MD
18693.3	89.65	89.88	8350.0	140.5	11624.4	0.00	0.00	11624.7	TD at 18693.3

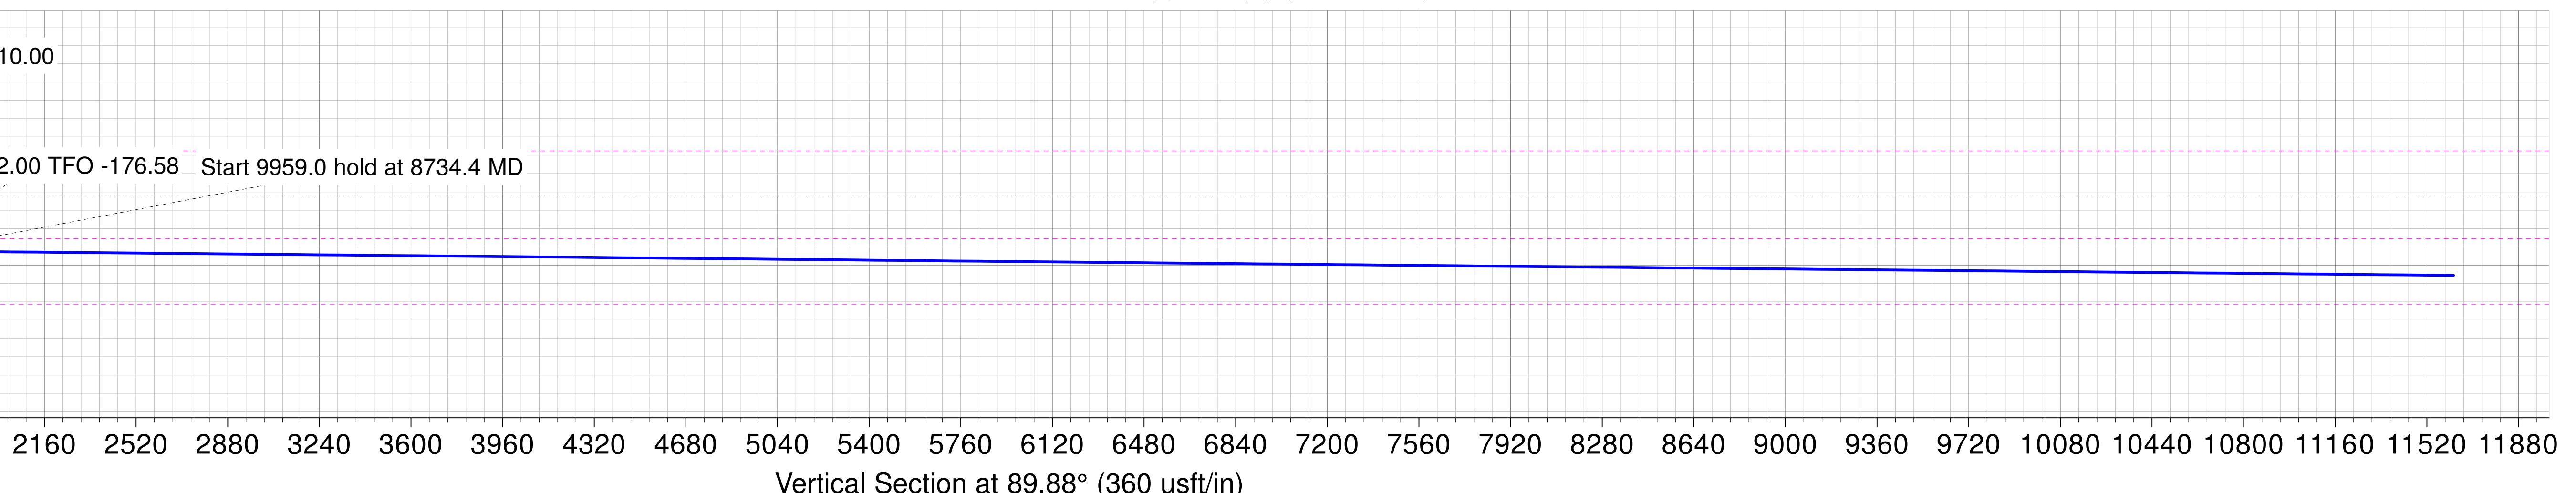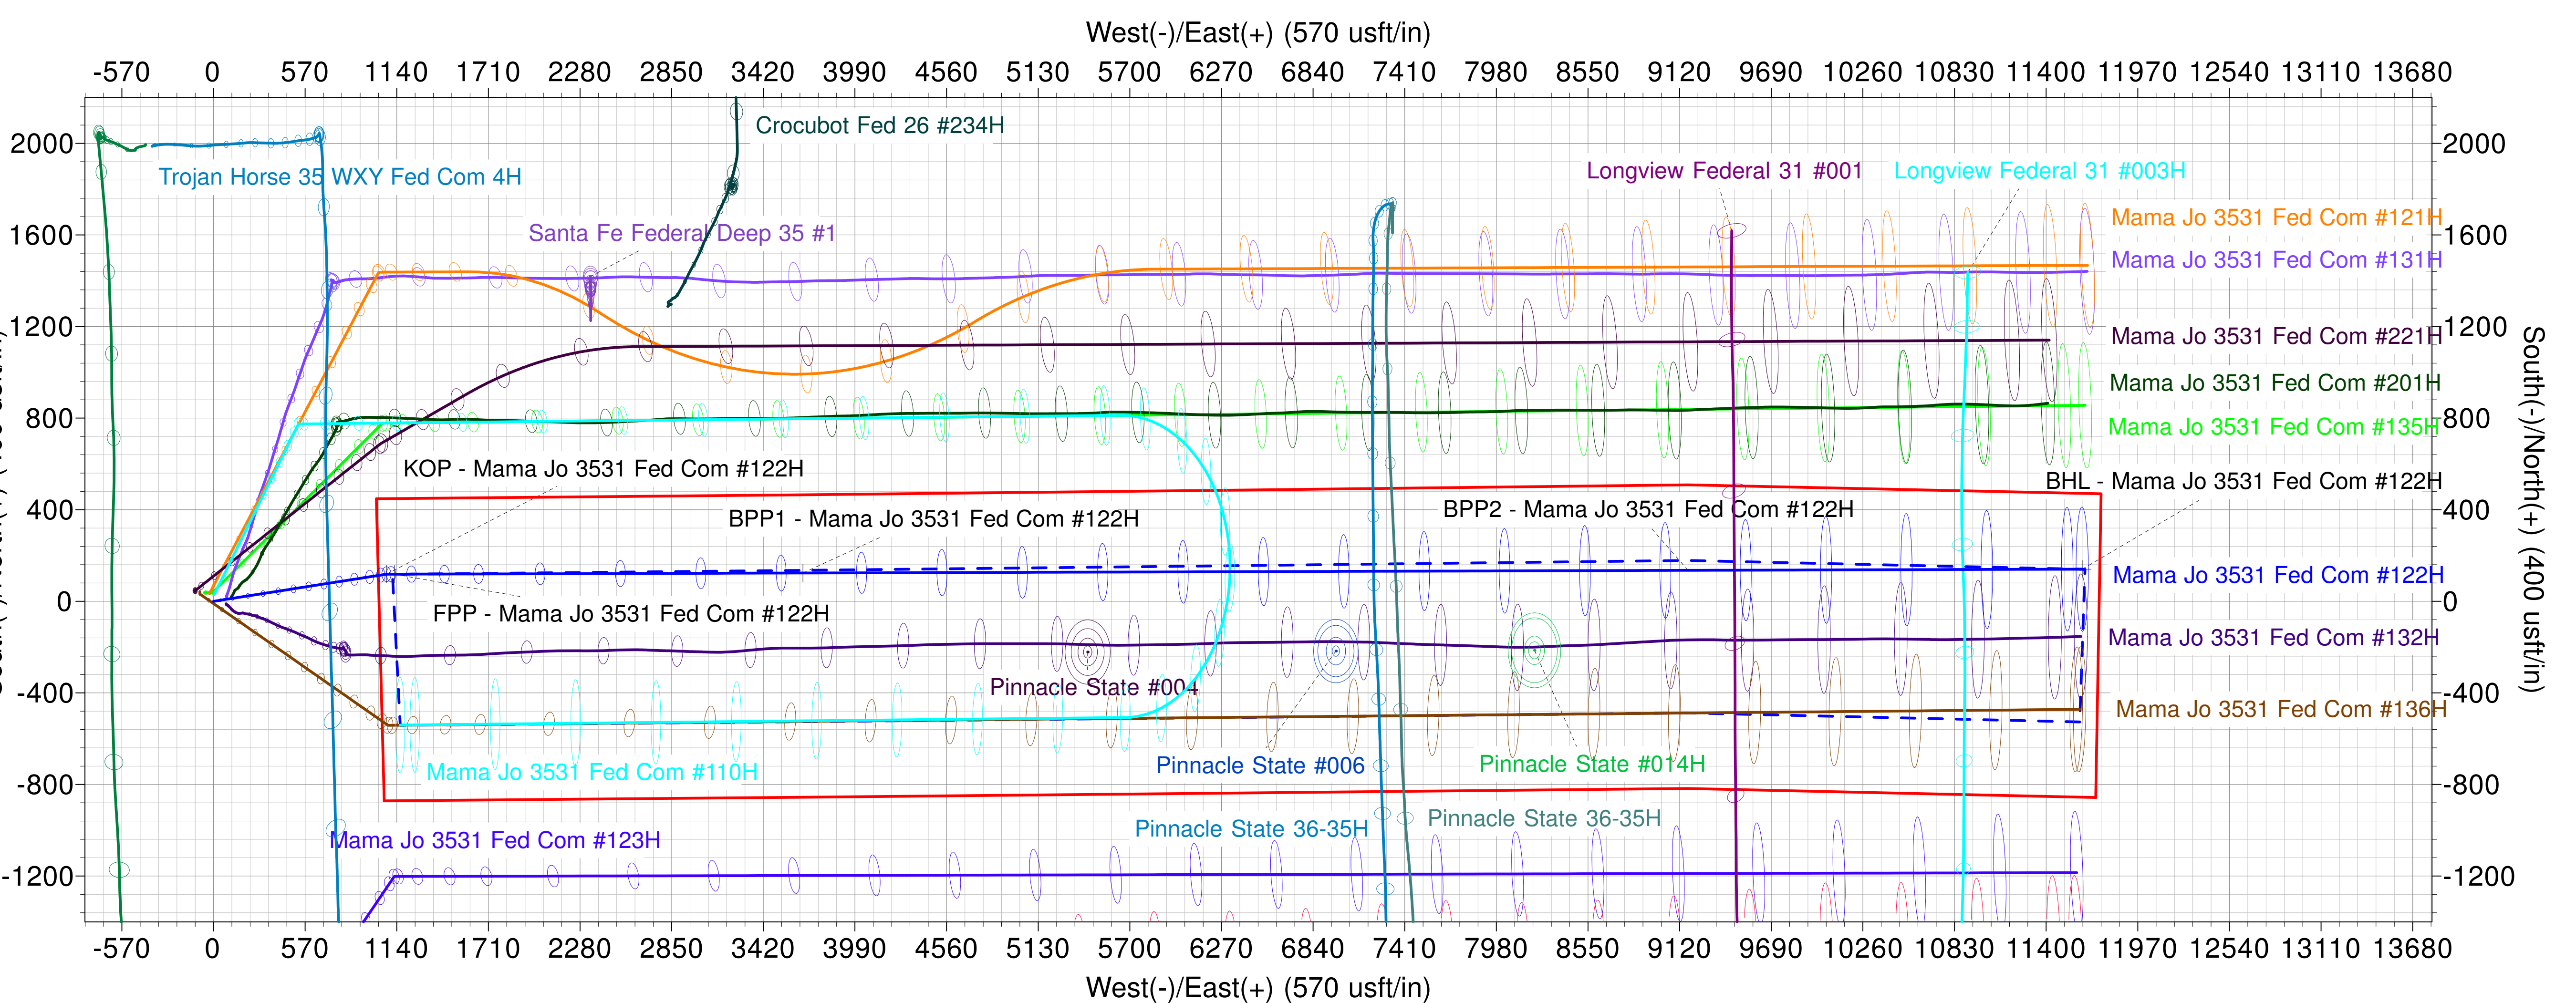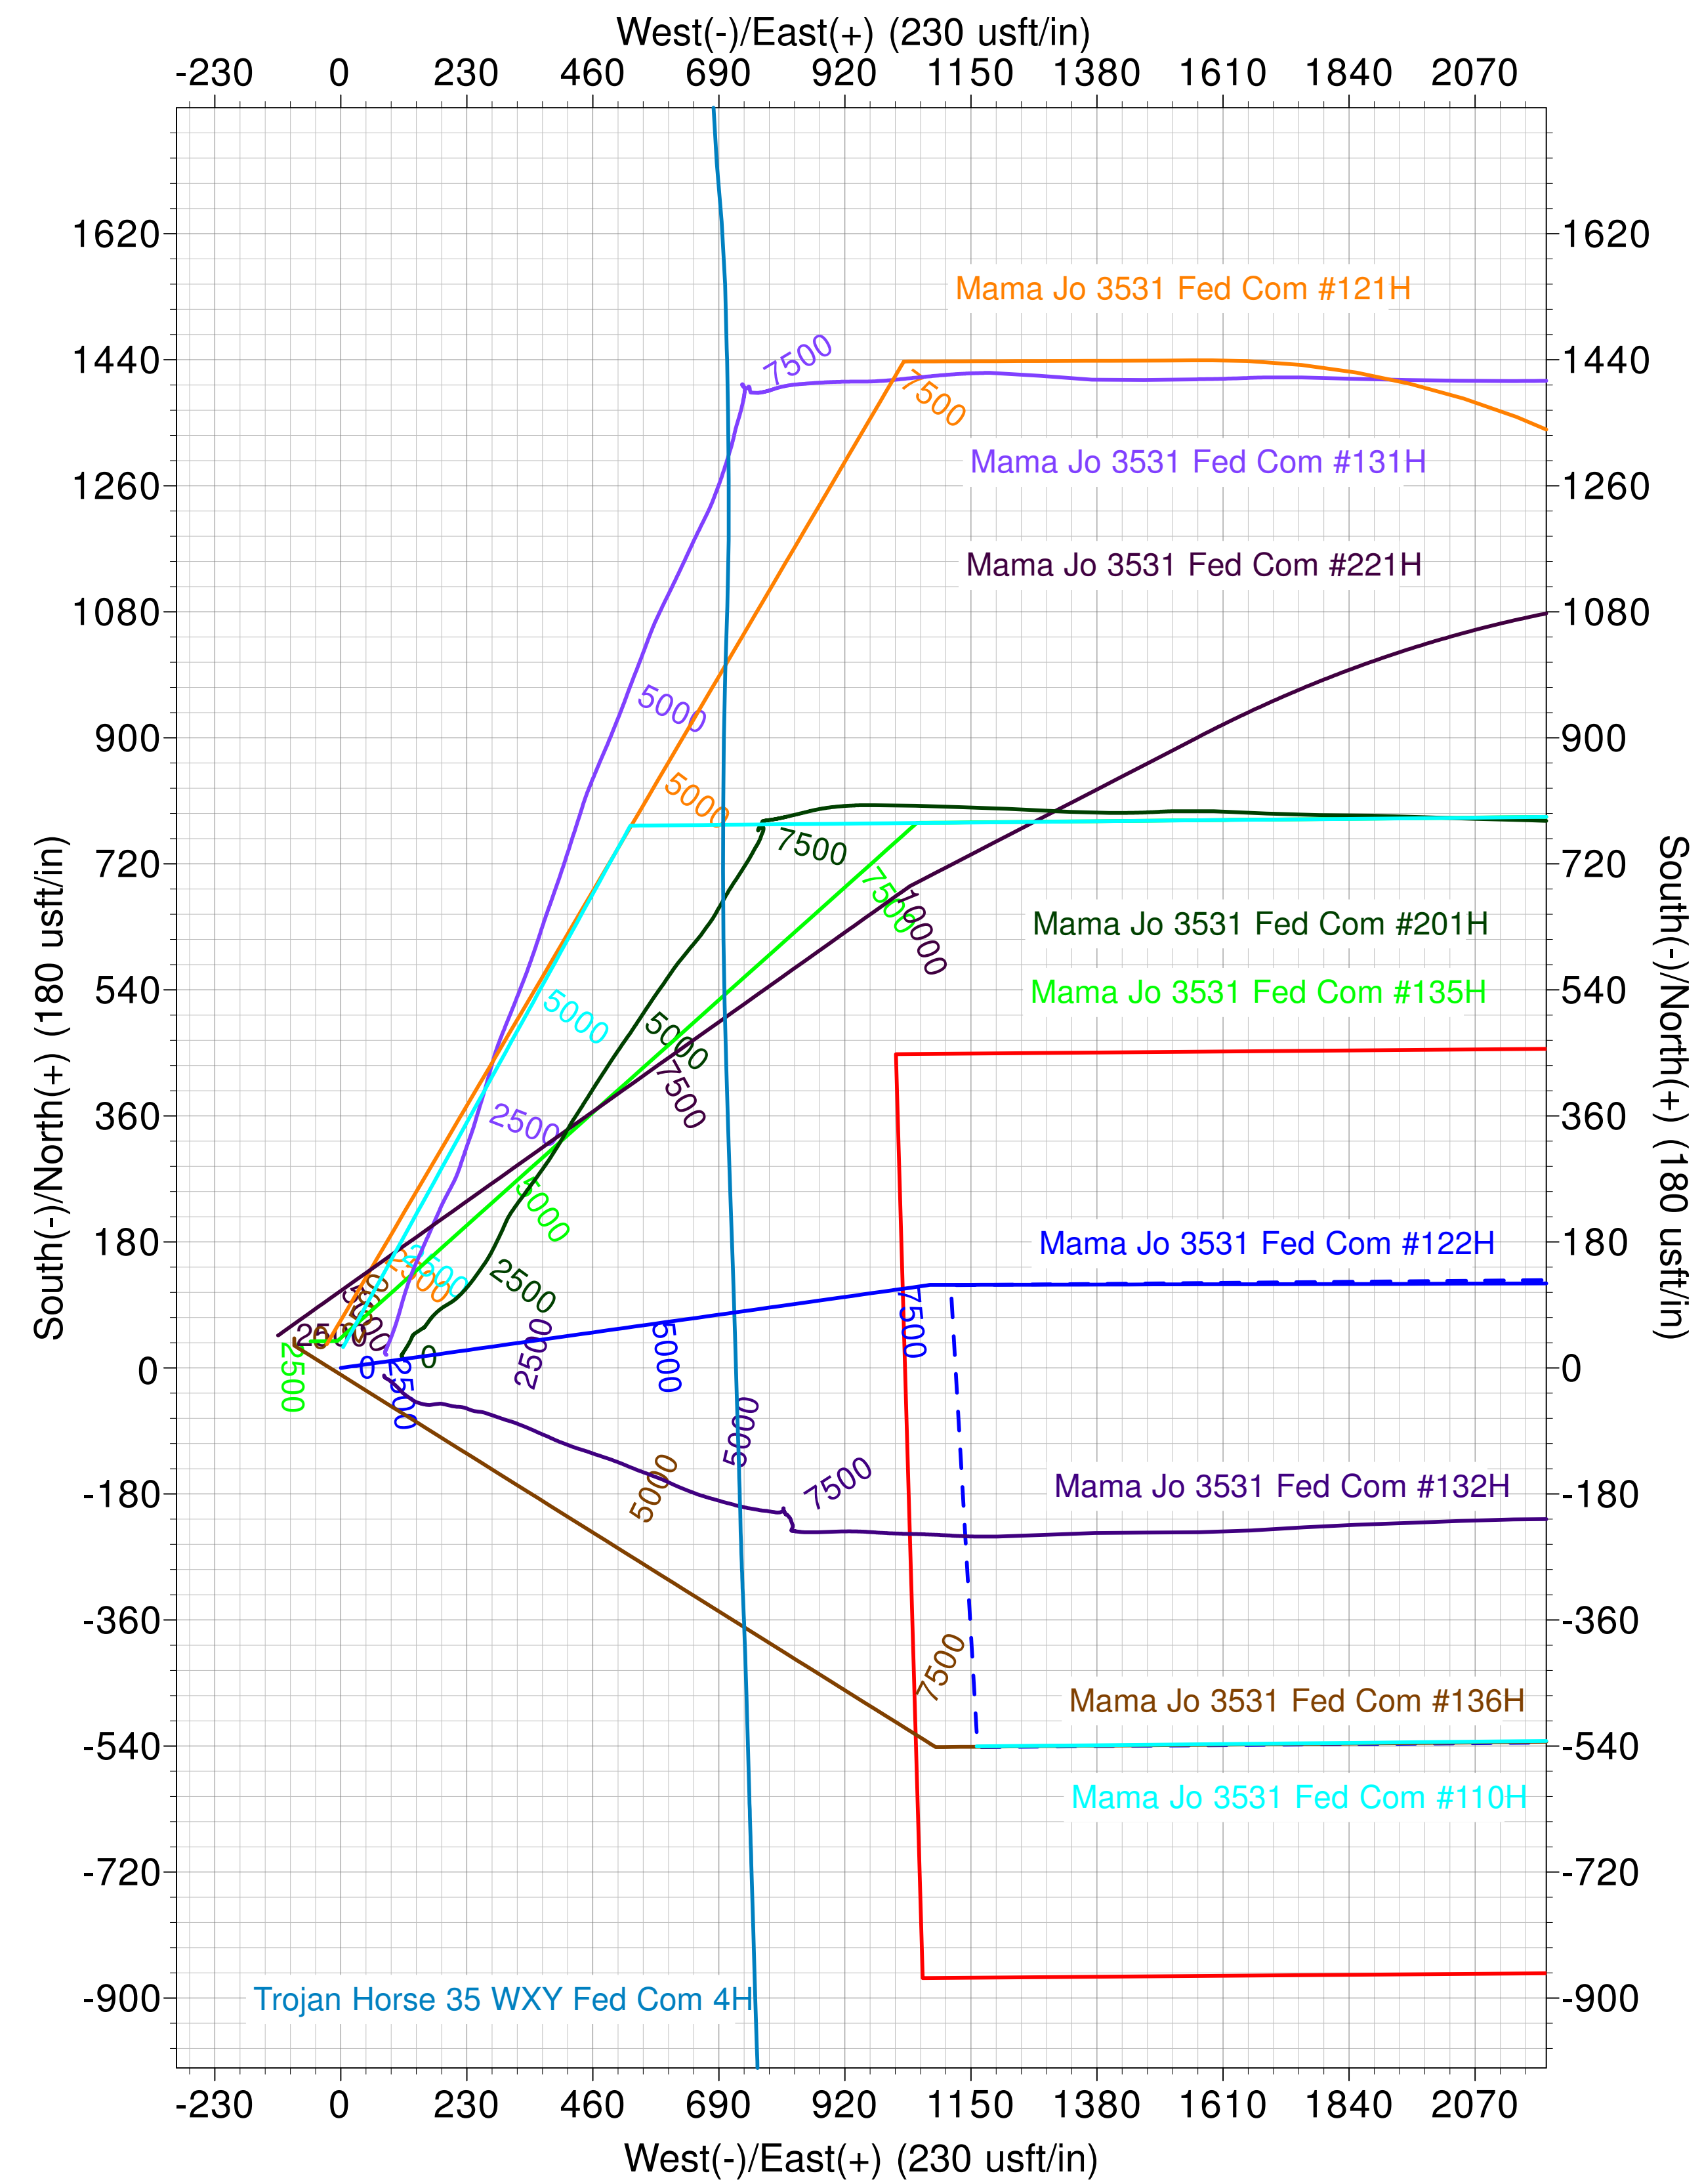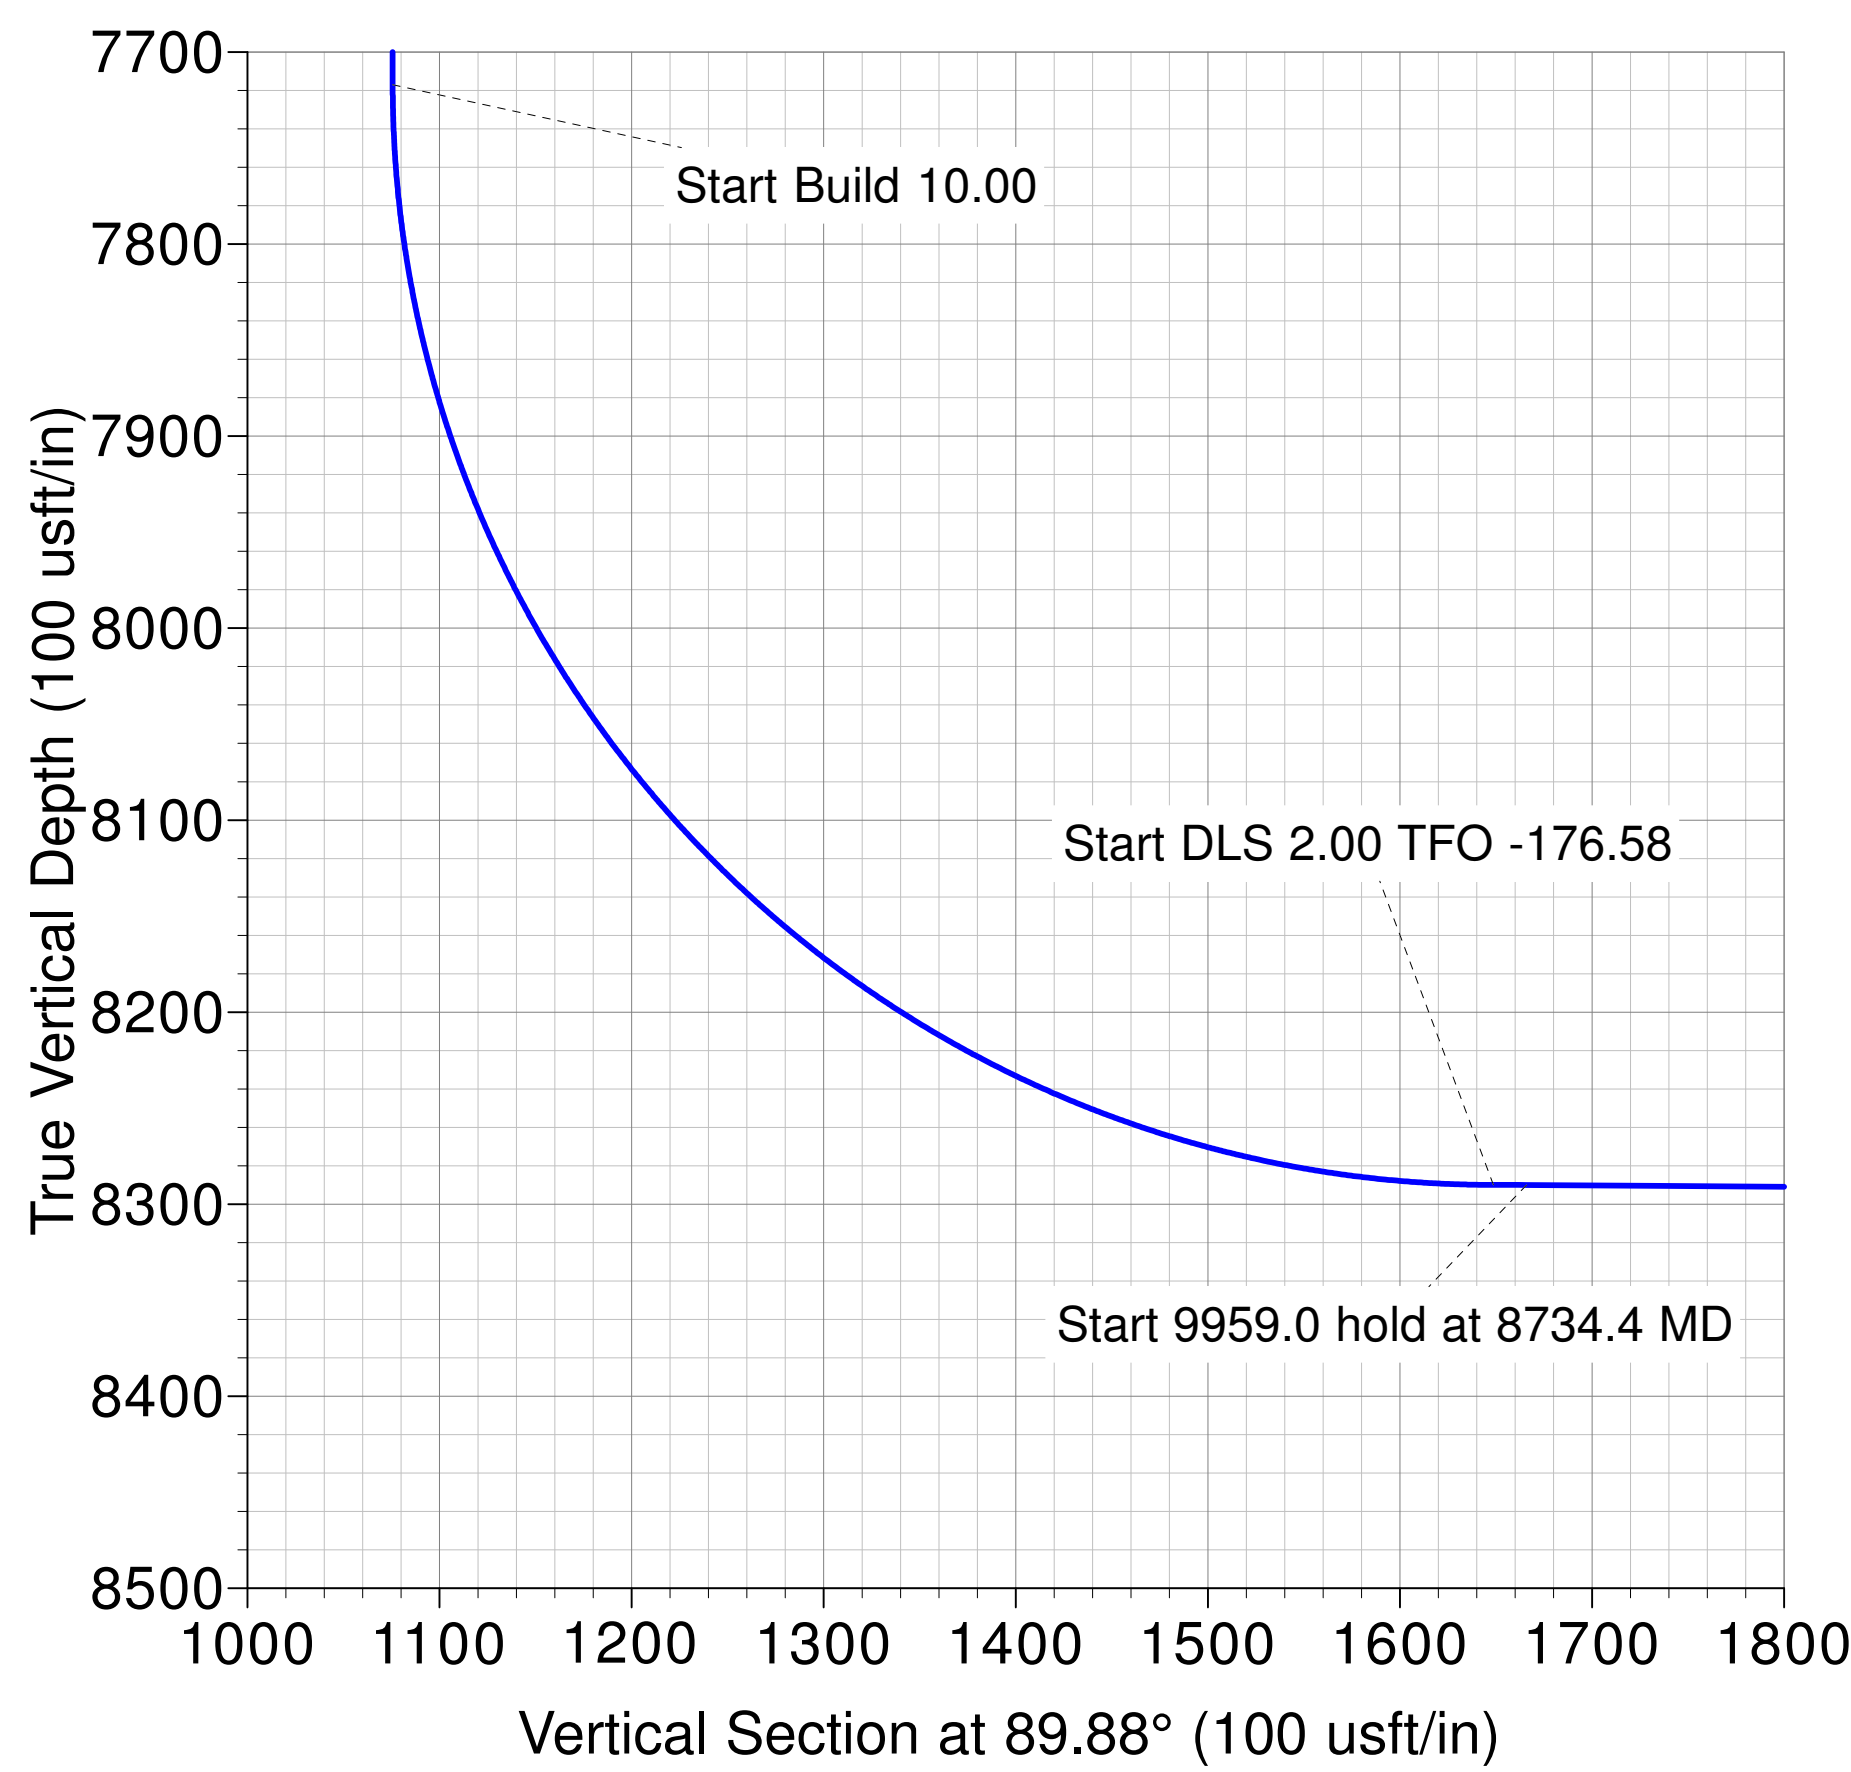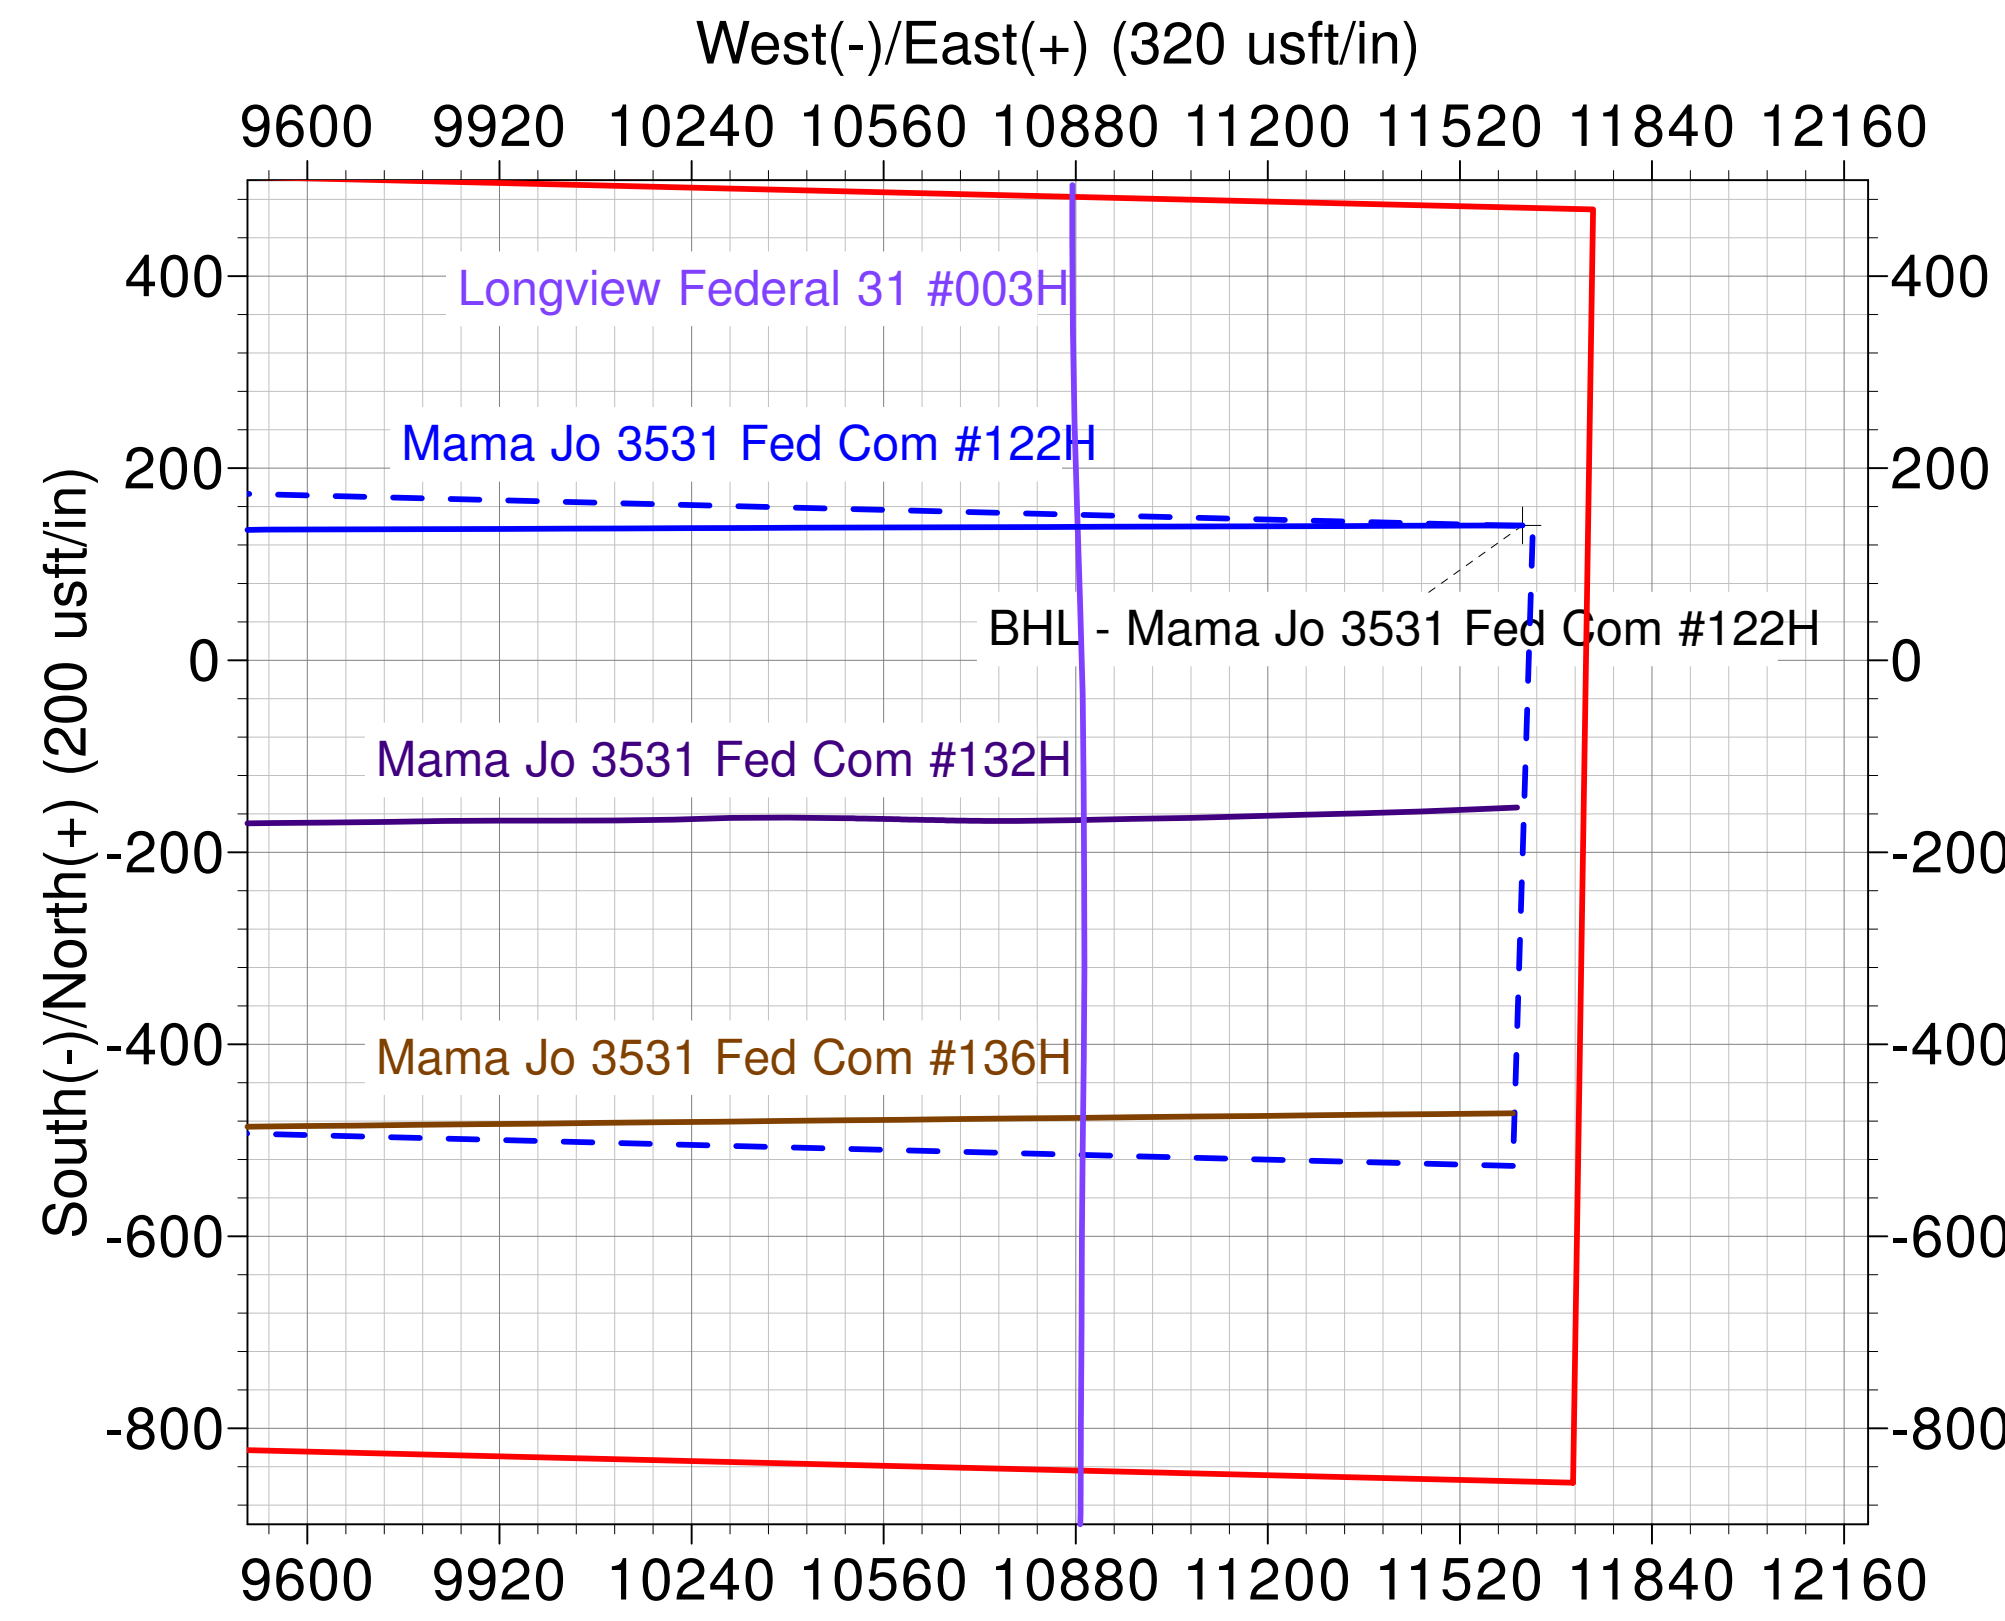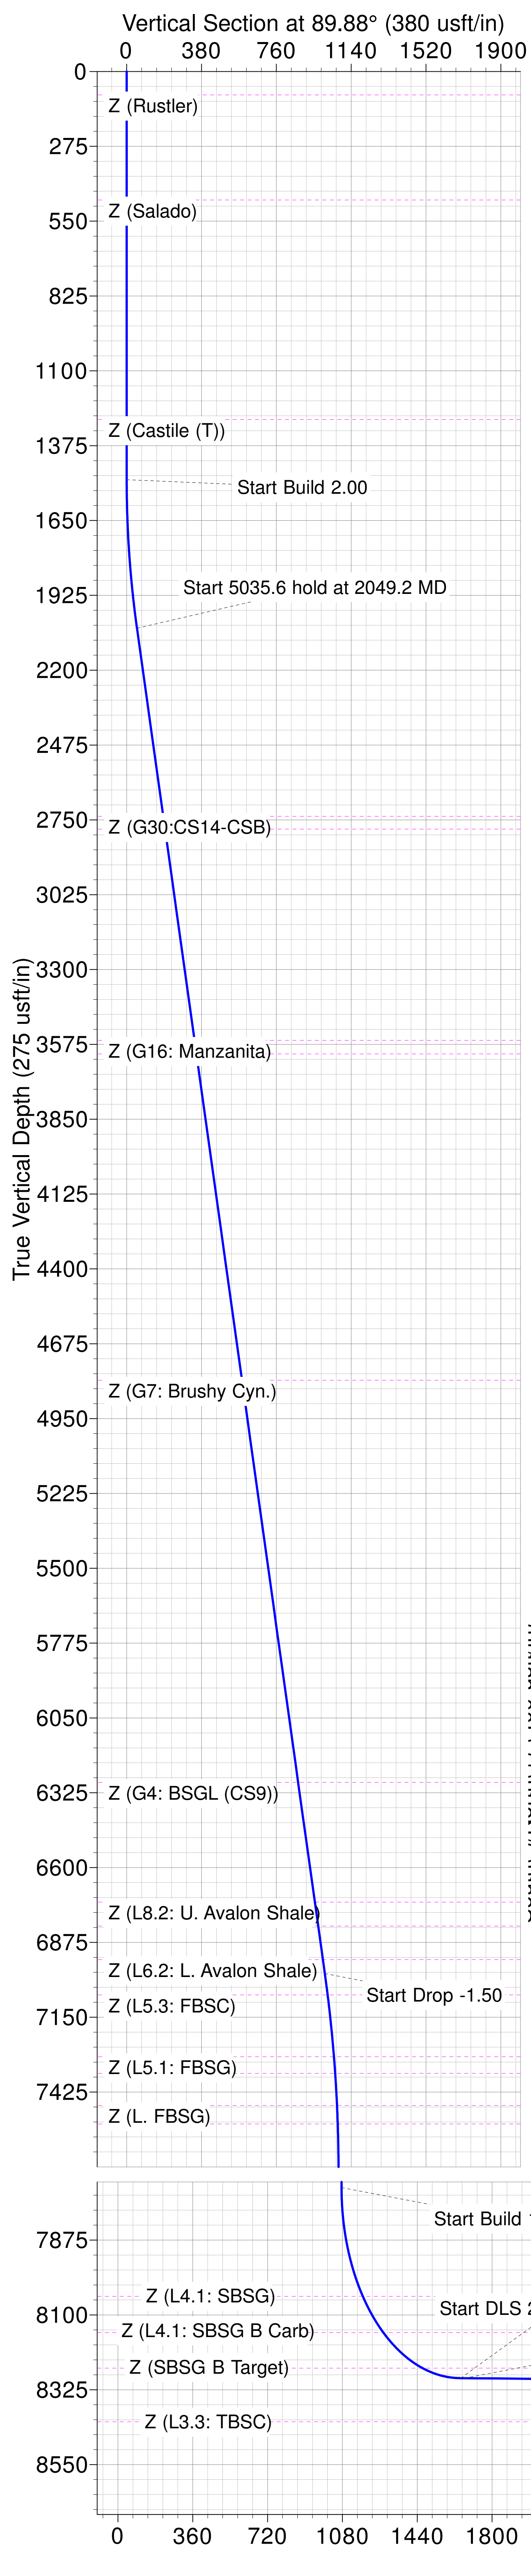

# **Matador Production Company**

**Rustler Breaks**

**Mama Jo 3531**

**Mama Jo 3531 Fed Com #122H**

**Wellbore #1**

**BLM Plan #1**

## **Anticollision Summary Report**

**13 January, 2026**

Anticollision Summary Report

<b>Company:</b>	Matador Production Company	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Project:</b>	Rustler Breaks	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Reference Site:</b>	Mama Jo 3531	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site Error:</b>	0.0 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	EDM 5000.14 Single User Db
<b>Reference Design:</b>	BLM Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Reference</b>	BLM Plan #1		
<b>Filter type:</b>	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
<b>Interpolation Method:</b>	Stations	<b>Error Model:</b>	ISCWSA
<b>Depth Range:</b>	Unlimited	<b>Scan Method:</b>	Closest Approach 3D
<b>Results Limited by:</b>	Maximum center-center distance of 10,000.0 usft	<b>Error Surface:</b>	Pedal Curve
<b>Warning Levels Evaluated at:</b>	2.00 Sigma	<b>Casing Method:</b>	Not applied

<b>Survey Tool Program</b>	<b>Date</b>	1/13/2026		
<b>From (usft)</b>	<b>To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>
0.0	18,692.3	BLM Plan #1 (Wellbore #1)	MWD	OWSG MWD - Standard

Summary						
Site Name	Reference	Offset	Distance		Separation	Warning
			Measured	Measured		
Offset Well - Wellbore - Design	Depth	Depth	Centres	Ellipses	Factor	
	(usft)	(usft)	(usft)	(usft)		
Mama Jo 3531						
Mama Jo 3531 Fed Com #110H - Wellbore #1 - BLM Pla	1,200.0	1,197.0	30.0	21.8	3.689	CC, ES
Mama Jo 3531 Fed Com #110H - Wellbore #1 - BLM Pla	1,300.0	1,296.1	31.4	22.6	3.557	SF
Mama Jo 3531 Fed Com #119H - Wellbore #1 - BLM Pla	7,537.6	7,689.1	1,979.7	1,916.9	31.524	CC
Mama Jo 3531 Fed Com #119H - Wellbore #1 - BLM Pla	12,800.0	12,312.0	2,132.7	1,892.4	8.874	ES
Mama Jo 3531 Fed Com #119H - Wellbore #1 - BLM Pla	13,100.0	12,400.0	2,152.4	1,905.8	8.727	SF
Mama Jo 3531 Fed Com #121H - Wellbore #1 - BLM Pla	1,500.0	1,499.0	42.4	32.2	4.131	CC, ES
Mama Jo 3531 Fed Com #121H - Wellbore #1 - BLM Pla	18,693.3	19,095.2	1,326.9	783.3	2.441	SF
Mama Jo 3531 Fed Com #123H - Wellbore #1 - BLM Pla	8,681.7	8,703.5	1,320.2	1,239.7	16.403	CC
Mama Jo 3531 Fed Com #123H - Wellbore #1 - BLM Pla	18,693.3	18,678.7	1,327.3	787.2	2.457	ES, SF
Mama Jo 3531 Fed Com #124H - Wellbore #1 - BLM Pla	1,500.0	1,486.0	2,264.7	2,254.5	221.362	CC
Mama Jo 3531 Fed Com #124H - Wellbore #1 - BLM Pla	18,693.3	18,777.0	2,671.9	2,134.8	4.975	ES, SF
Mama Jo 3531 Fed Com #131H - Wellbore #1 - Final	517.4	512.4	83.0	79.9	26.617	CC, ES
Mama Jo 3531 Fed Com #131H - Wellbore #1 - Final	18,693.3	20,375.8	1,899.4	1,508.0	4.854	SF
Mama Jo 3531 Fed Com #132H - Wellbore #1 - Final	0.0	0.0	79.7			
Mama Jo 3531 Fed Com #132H - Wellbore #1 - Final	100.0	95.6	79.9	79.6	309.717	ES
Mama Jo 3531 Fed Com #132H - Wellbore #1 - Final	6,100.0	6,068.2	297.6	248.1	6.017	SF
Mama Jo 3531 Fed Com #133H - Wellbore #1 - Final	6,014.5	6,057.7	1,593.3	1,545.8	33.539	CC, ES
Mama Jo 3531 Fed Com #133H - Wellbore #1 - Final	18,693.3	20,354.0	2,151.5	1,724.0	5.033	SF
Mama Jo 3531 Fed Com #134H - Wellbore #1 - Final	0.0	0.0	2,157.8			
Mama Jo 3531 Fed Com #134H - Wellbore #1 - Final	1,500.0	1,466.6	2,161.5	2,151.6	216.937	ES
Mama Jo 3531 Fed Com #134H - Wellbore #1 - Final	18,693.3	20,326.0	3,513.2	3,009.5	6.975	SF
Mama Jo 3531 Fed Com #135H (Previous 222H) - Wellb	1,500.0	1,504.0	66.9	56.6	6.501	CC, ES
Mama Jo 3531 Fed Com #135H (Previous 222H) - Wellb	18,693.3	19,305.6	847.3	379.1	1.809	SF
Mama Jo 3531 Fed Com #136H (Previous 202H) - Wellb	1,500.0	1,500.0	94.8	84.5	9.227	CC, ES
Mama Jo 3531 Fed Com #136H (Previous 202H) - Wellb	18,693.3	19,221.4	759.9	309.2	1.686	SF
Mama Jo 3531 Fed Com #137H (Previous 223H) - Wellb	8,104.8	8,082.1	1,881.1	1,814.1	28.061	CC
Mama Jo 3531 Fed Com #137H (Previous 223H) - Wellb	18,639.6	19,101.8	1,984.9	1,458.3	3.769	ES
Mama Jo 3531 Fed Com #137H (Previous 223H) - Wellb	18,693.3	19,093.0	1,985.6	1,458.6	3.768	SF
Mama Jo 3531 Fed Com #138H (Previous 203H) - Wellb	1,500.0	1,488.0	2,293.8	2,283.6	224.130	CC
Mama Jo 3531 Fed Com #138H (Previous 203H) - Wellb	1,900.0	1,886.7	2,295.2	2,282.2	175.623	ES
Mama Jo 3531 Fed Com #138H (Previous 203H) - Wellb	18,693.3	19,102.7	3,278.7	2,743.6	6.127	SF
Mama Jo 3531 Fed Com #201H - Wellbore #1 - Final	404.2	405.3	111.9	109.6	48.436	CC, ES
Mama Jo 3531 Fed Com #201H - Wellbore #1 - Final	18,600.0	20,209.0	1,742.4	1,472.3	6.450	SF
Mama Jo 3531 Fed Com #204H - Wellbore #1 - Final	0.0	0.0	2,128.7			
Mama Jo 3531 Fed Com #204H - Wellbore #1 - Final	1,600.0	1,585.3	2,130.4	2,119.7	198.033	ES
Mama Jo 3531 Fed Com #204H - Wellbore #1 - Final	18,600.0	20,054.0	3,129.0	2,657.3	6.634	SF
Mama Jo 3531 Fed Com #221H - Wellbore #1 - BLM Pla	1,500.0	1,505.0	123.5	113.2	11.991	CC, ES

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Summary Report

<b>Company:</b>	Matador Production Company	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Project:</b>	Rustler Breaks	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Reference Site:</b>	Mama Jo 3531	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site Error:</b>	0.0 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	EDM 5000.14 Single User Db
<b>Reference Design:</b>	BLM Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
<b>Offset Well - Wellbore - Design</b>						
Mama Jo 3531						
Mama Jo 3531 Fed Com #221H - Wellbore #1 - BLM Pla	18,693.3	20,832.7	2,356.6	2,081.0	8.552	SF
Mama Jo 3531 Fed Com #224H - Wellbore #1 - BLM Pla	1,500.0	1,481.0	2,352.1	2,341.9	230.110	CC
Mama Jo 3531 Fed Com #224H - Wellbore #1 - BLM Pla	1,900.0	1,879.7	2,353.4	2,340.3	180.245	ES
Mama Jo 3531 Fed Com #224H - Wellbore #1 - BLM Pla	18,600.0	20,448.4	3,622.3	3,182.4	8.233	SF
<b>Non-Op Rustler Breaks Wells</b>						
Trojan Horse 35 WXY Fed Com 2H - Wellbore #1 - Wellb	653.4	647.6	2,034.8	2,030.7	495.310	CC
Trojan Horse 35 WXY Fed Com 2H - Wellbore #1 - Wellb	2,000.0	2,033.3	2,039.1	2,025.1	146.230	ES
Trojan Horse 35 WXY Fed Com 2H - Wellbore #1 - Wellb	8,500.0	11,156.7	2,531.5	2,465.6	38.414	SF
Trojan Horse 35 WXY Fed Com 4H - Wellbore #1 - Wellb	8,469.3	11,456.0	1,650.3	1,601.3	33.677	CC, ES
Trojan Horse 35 WXY Fed Com 4H - Wellbore #1 - Wellb	9,000.0	11,477.9	1,886.9	1,823.7	29.876	SF
<b>Offsets Rustler Break Wells</b>						
Crocubot Fed 26 #234H - Wellbore #1 - Wellbore #1	10,301.8	8,353.6	1,695.5	1,593.4	16.615	CC, ES
Crocubot Fed 26 #234H - Wellbore #1 - Wellbore #1	10,700.0	8,372.0	1,741.5	1,631.8	15.869	SF
Longview Federal 31 #001 - Wellbore #1 - Wellbore #1	16,525.4	11,086.8	736.3	639.1	7.571	CC, ES
Longview Federal 31 #001 - Wellbore #1 - Wellbore #1	16,600.0	11,086.3	740.1	642.1	7.557	SF
Longview Federal 31 #003H - Wellbore #1 - Wellbore #1	17,948.5	11,017.4	705.5	598.6	6.595	CC, ES, SF
Pinnacle State #001 - Wellbore #1 - Wellbore #1	10,951.3	6,450.0	2,602.4	2,442.2	16.241	CC
Pinnacle State #001 - Wellbore #1 - Wellbore #1	11,000.0	6,450.0	2,602.8	2,441.9	16.173	ES
Pinnacle State #001 - Wellbore #1 - Wellbore #1	11,700.0	6,450.0	2,708.0	2,535.2	15.673	SF
Pinnacle State #004 - Wellbore #1 - Wellbore #1	12,494.2	6,390.0	1,969.1	1,900.5	28.734	CC, ES
Pinnacle State #004 - Wellbore #1 - Wellbore #1	14,000.0	6,390.0	2,478.9	2,349.8	19.206	SF
Pinnacle State #005 - Wellbore #1 - Wellbore #1	14,039.4	6,440.0	2,604.1	2,383.5	11.804	CC
Pinnacle State #005 - Wellbore #1 - Wellbore #1	14,100.0	6,440.0	2,604.8	2,383.3	11.757	ES
Pinnacle State #005 - Wellbore #1 - Wellbore #1	14,500.0	6,440.0	2,644.5	2,416.8	11.614	SF
Pinnacle State #006 - Wellbore #1 - Wellbore #1	14,038.3	6,415.0	1,946.3	1,864.5	23.787	CC, ES
Pinnacle State #006 - Wellbore #1 - Wellbore #1	15,400.0	6,415.0	2,375.3	2,241.1	17.693	SF
Pinnacle State #014H - Wellbore #1 - Wellbore #1	15,273.7	6,456.0	1,927.2	1,830.1	19.846	CC, ES
Pinnacle State #014H - Wellbore #1 - Wellbore #1	16,600.0	6,456.0	2,339.5	2,182.7	14.917	SF
Pinnacle State #025 - Wellbore #1 - Wellbore #1	11,671.8	7,687.0	3,338.8	3,210.5	26.012	CC
Pinnacle State #025 - Wellbore #1 - Wellbore #1	11,700.0	7,687.0	3,339.0	3,210.0	25.886	ES
Pinnacle State #025 - Wellbore #1 - Wellbore #1	12,700.0	7,687.0	3,493.6	3,347.0	23.840	SF
Pinnacle State #029 - Wellbore #1 - Wellbore #1	15,595.6	8,359.5	2,893.4	2,523.8	7.828	CC
Pinnacle State #029 - Wellbore #1 - Wellbore #1	15,700.0	8,360.1	2,895.3	2,523.3	7.783	ES
Pinnacle State #029 - Wellbore #1 - Wellbore #1	15,900.0	8,361.3	2,909.4	2,533.6	7.741	SF
Pinnacle State #16 - Wellbore #1 - Wellbore #1	13,425.4	6,943.0	2,873.1	2,619.4	11.322	CC
Pinnacle State #16 - Wellbore #1 - Wellbore #1	13,500.0	6,943.0	2,874.1	2,618.9	11.261	ES
Pinnacle State #16 - Wellbore #1 - Wellbore #1	13,900.0	6,943.0	2,912.1	2,650.0	11.112	SF
Pinnacle State 36-35H - Wellbore #1 - Actual	14,300.0	8,909.9	795.4	729.6	12.094	SF
Pinnacle State 36-35H - Wellbore #1 - Actual	14,416.6	8,918.5	786.8	722.4	12.205	CC, ES
Pinnacle State 36-35H - Wellbore #1 - Sidetrack	14,100.0	8,920.2	823.8	758.1	12.529	SF
Pinnacle State 36-35H - Wellbore #1 - Sidetrack	14,280.1	8,920.3	803.9	740.1	12.595	CC, ES
Santa Fe Federal Deep 35 #1 - Wellbore #1 - Wellbore #	9,415.5	8,358.6	1,253.3	1,170.2	15.090	CC, ES
Santa Fe Federal Deep 35 #1 - Wellbore #1 - Wellbore #	9,700.0	8,359.9	1,285.2	1,197.2	14.614	SF


CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Summary Report

<b>Company:</b>	Matador Production Company	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Project:</b>	Rustler Breaks	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Reference Site:</b>	Mama Jo 3531	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site Error:</b>	0.0 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	EDM 5000.14 Single User Db
<b>Reference Design:</b>	BLM Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

Reference Depths are relative to KB @ 3118.5usft  
 Offset Depths are relative to Offset Datum  
 Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: Mama Jo 3531 Fed Com #122H  
 Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30  
 Grid Convergence at Surface is: 0.15°

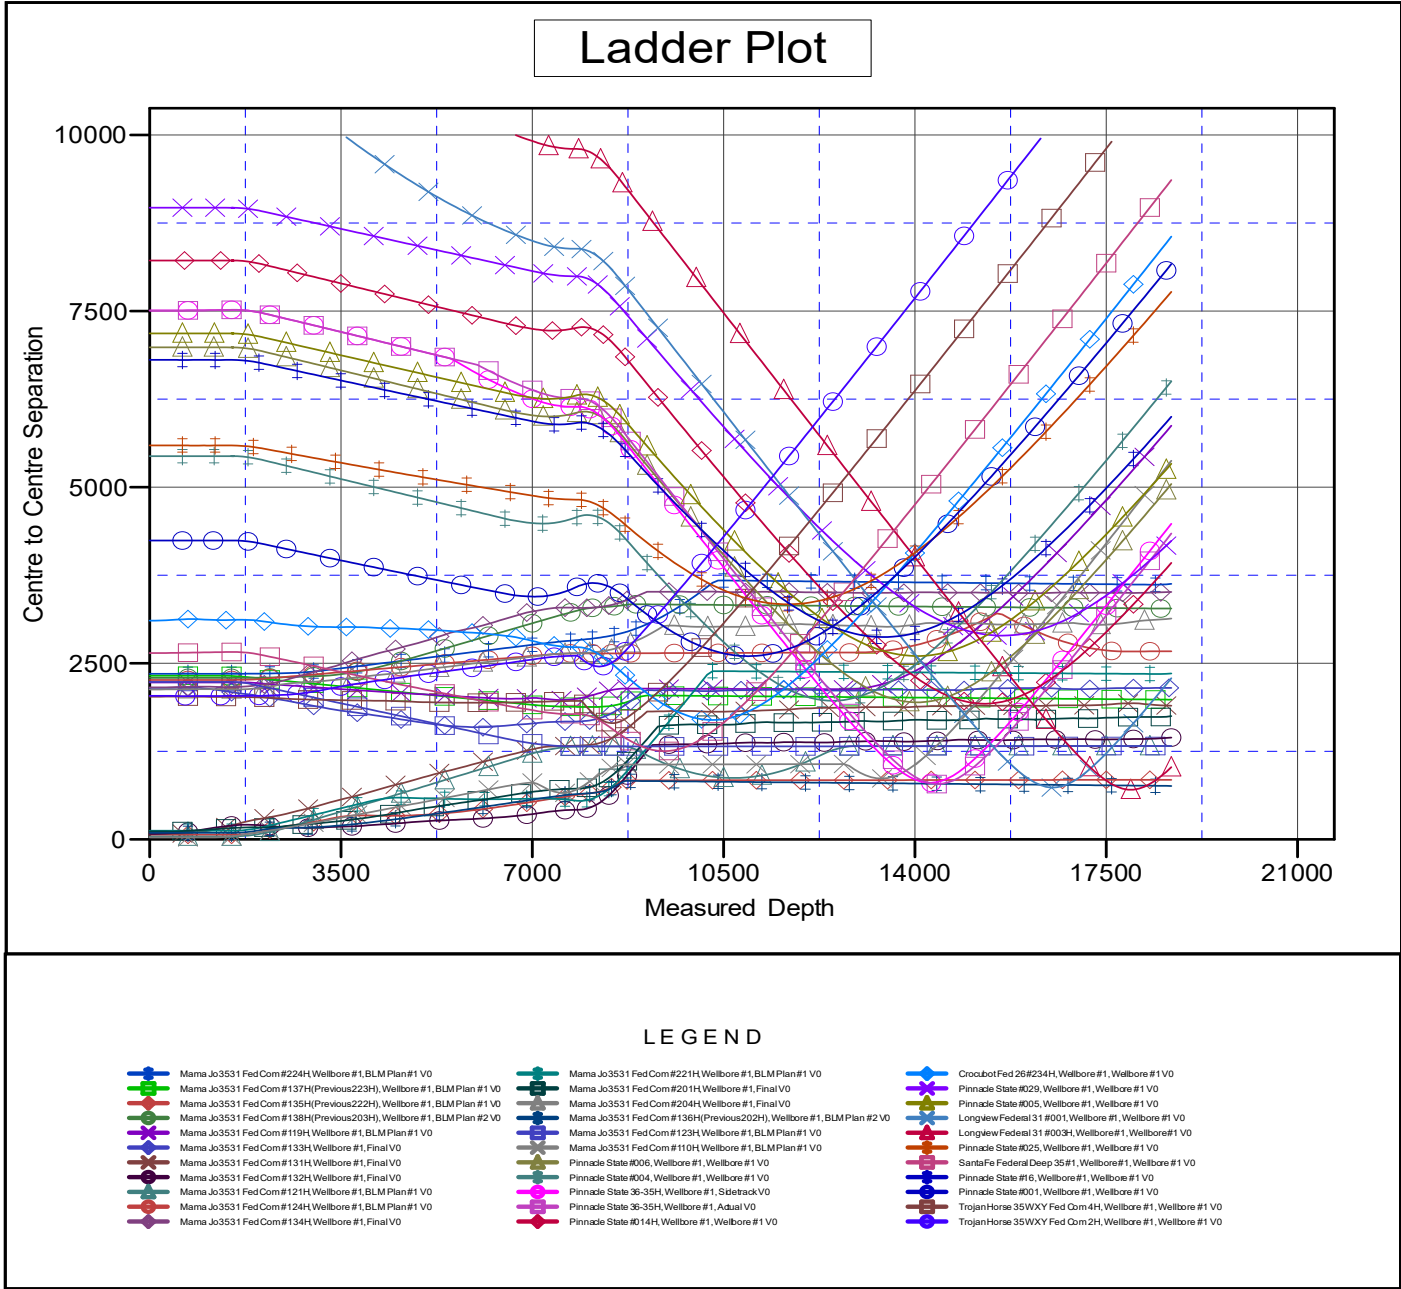


CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Summary Report

<b>Company:</b>	Matador Production Company	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Project:</b>	Rustler Breaks	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Reference Site:</b>	Mama Jo 3531	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site Error:</b>	0.0 usft	<b>North Reference:</b>	Grid
<b>Reference Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0 usft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	Wellbore #1	<b>Database:</b>	EDM 5000.14 Single User Db
<b>Reference Design:</b>	BLM Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

Reference Depths are relative to KB @ 3118.5usft  
 Offset Depths are relative to Offset Datum  
 Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: Mama Jo 3531 Fed Com #122H  
 Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30  
 Grid Convergence at Surface is: 0.15°

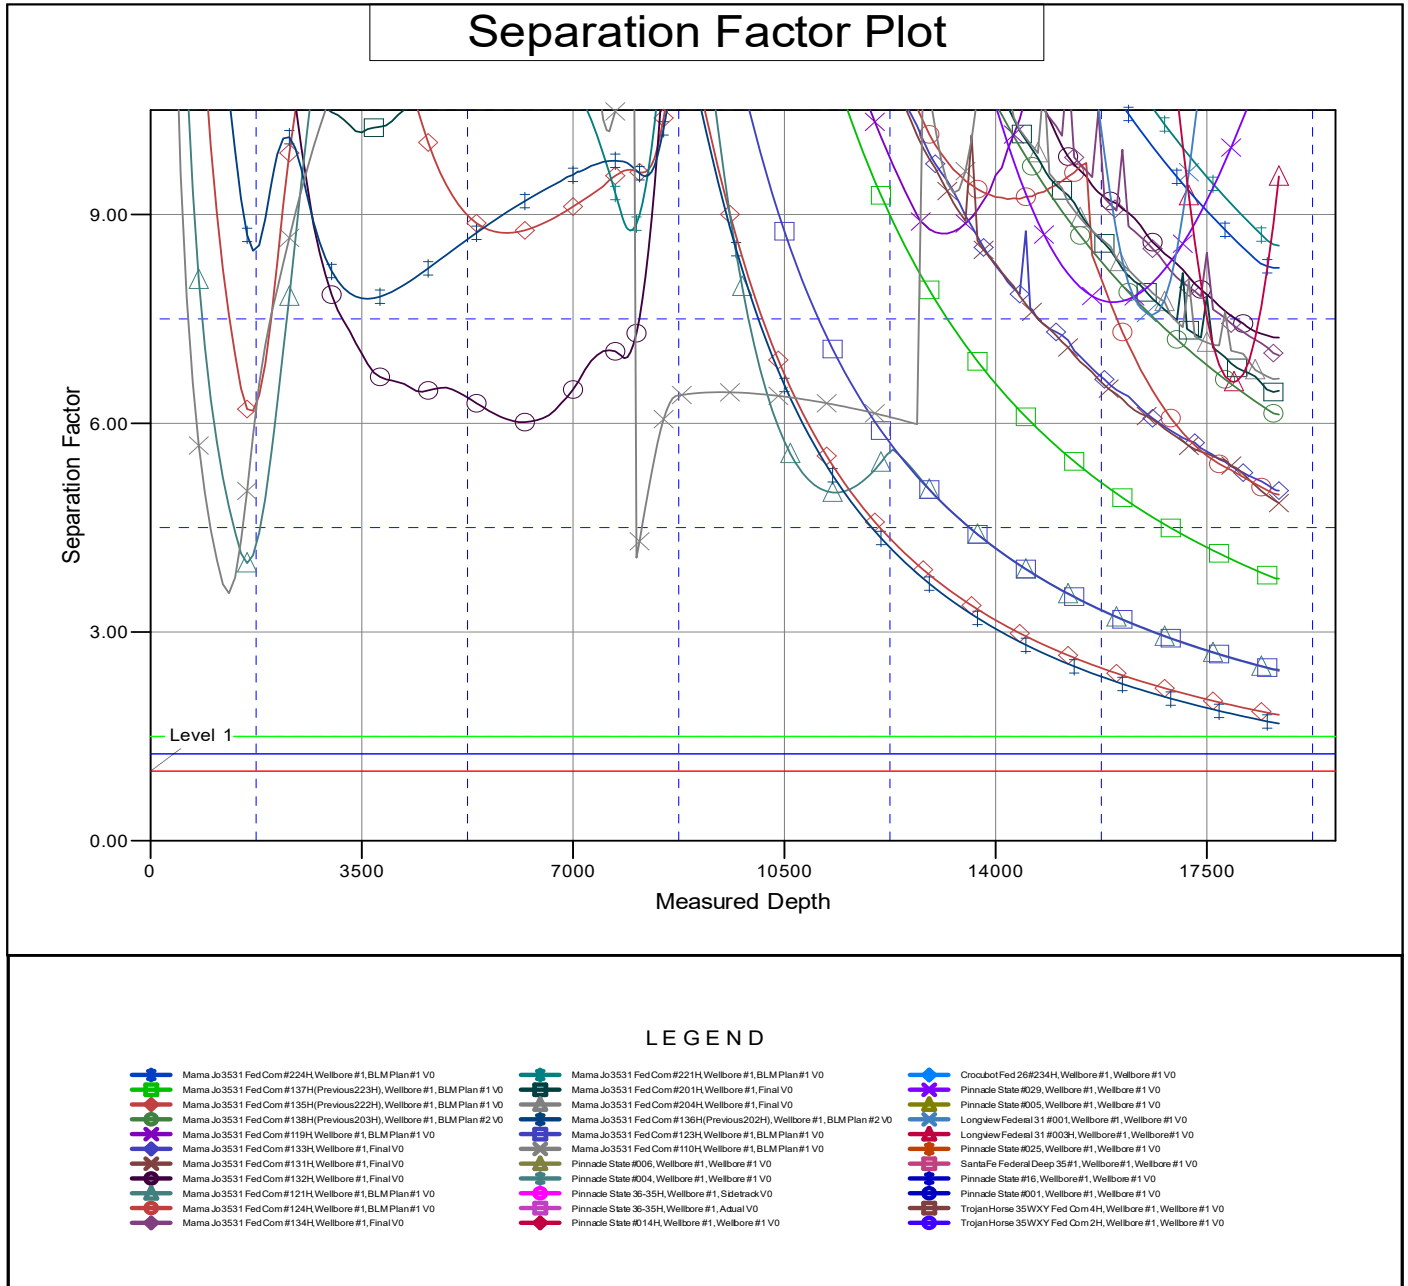

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

**Drill Plan**

**Mama Jo 3531 Fed Com 122H**  
**SHL: 1761' FNL & 1611' FWL Section 35**  
**BHL: 1657' FNL & 2452' FWL Section 31**  
**Township/Range: 22S 28E**  
**Elevation Above Sea Level: 3085**

**Sundry Request**

Matador requests the option to amend the well design of the Mama Jo 3531 Fed Com #122H and make the following changes to the current APD:

- Change well SHL from 1757' FNL & 1582' FWL section 35 to 1761' FNL & 1611' FWL section 35
- Option to drill intermediate hole size of 12-1/4" OH
- Option to run intermediate casing type of 9-5/8" BTC
- Option to drill production vertical hole size of 7-7/8" to KOP
- Option to revise casing set depths and mud weights as described below. Cement volumes will be adjusted accordingly to reflect design change.

**Drilling Operation Plan**

Proposed Drilling Depth: 18693' MD / 8350' TVD

Type of well: Horizontal well, no pilot hole

Permitted Well Type: Oil

Geologic Name of Surface Formation: Quaternary Deposits

KOP Lat/Long (NAD83): 32.3519649 N / -104.0581224 W

TD Lat/Long (NAD83): 32.3519486 N / -104.0239636 W

**1. Estimated Tops**

Formation	MD (ft)	TVD (ft)	Thickness (ft)	Lithology	Resource
Rustler	86	86	386	Anhydrite	Barren
Salado (Top of Salt)	472	472	807	Salt	Barren
Castile	1,279	1,279	1,458	Salt	Barren
Lamar (Base of Salt)	2,753	2,737	47	Salt	Barren
Bell Canyon	2,801	2,784	826	Sandstone	Oil/Natural Gas
Cherry Canyon	3,642	3,610	1,199	Sandstone	Oil/Natural Gas
Brushy Canyon	4,863	4,809	1,478	Sandstone	Oil/Natural Gas
Bone Spring Lime	6,369	6,287	440	Carbonate	Oil/Natural Gas
Avalon Shale	6,817	6,727	341	Shale	Oil/Natural Gas
1st Bone Spring Carb	7,164	7,068	227	Carbonate	Oil/Natural Gas
1st Bone Spring Sand	7,394	7,295	247	Sandstone	Oil/Natural Gas
2nd Bone Spring Carb	7,642	7,542	502	Carbonate	Oil/Natural Gas
<b>KOP</b>	<b>7,817</b>	<b>7,717</b>	-	<b>Carbonate</b>	<b>Oil/Natural Gas</b>
2nd Bone Spring Sand	8,165	8,044		Sandstone	Oil/Natural Gas
<b>TD</b>	<b>18,693</b>	<b>8,350</b>	-	<b>Sandstone</b>	<b>Oil/Natural Gas</b>

## 2. Notable Zones

Second Bone Spring is the goal. All perforations will be within the setback requirements as prescribed or permitted by the New Mexico Oil Conservation Division. OSE estimated ground water depth at this location is 103'.

## 3. Pressure Control

### Equipment

A 12,000' 5000-psi BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram, and one annular preventer will be utilized below surface casing to TD. See attachments for BOP and choke manifold diagrams.

An accumulator complying with Title 43 CFR 3172 requirements for the pressure rating of the BOP stack will be present. A rotating head will also be installed as needed.

### Testing Procedure

BOP will be inspected and operated as required in Title 43 CFR 3172. Kelly cock and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position.

A third party company will test the BOPs.

After setting surface casing, a minimum 5M BOPE system will be installed. Test pressures will be 250 psi low and 5000 psi high with the annular preventer being tested to 250 psi low and 2500 psi high before drilling below surface shoe. In the event that the rig drills multiple wells on the pad and any seal subject to test pressures are broken, a full BOP test will be performed when the rig returns and the 5M BOPE system is re-installed.

### Variance Request

Matador requests a variance to have the option of running a multi-bowl wellhead assembly for setting the Intermediate 1 and Production Strings. The BOPs will not be tested again unless any flanges are separated.

Matador requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. If the specific hose is not available, then one of equal or higher rating will be used.

Matador requests a variance to have the option of batch drilling this well with other wells on the same pad. In the event that this well is batch drilled, the wellbore will be secured with a blind flange of like pressure. When the rig returns to this well and BOPs are installed, the operator will perform a full BOP test.

Matador request the option to offline cement surface casing. The "Offline Cementing - Surface Procedure" is attached for review. No changes in cement program are necessary.

Matador request the option to offline cement intermediate casing. The "Offline Cementing - Intermediate Casing" Procedure is attached for review. No changes in cement program are necessary.

Matador request the option to break test the BOP during batch drilling operations. The "Modified BOP Testing Procedure for Batch Drilling" Procedure is attached for review.

**Drill Plan****4. Casing & Cement**

All casing will be API and new. See attached casing assumption worksheet.

String	Hole Size (in)	Set MD (ft)	Set TVD (ft)	Casing Size (in)	Wt. (lb/ft)	Grade	Joint	Collapse	Burst	Tension
Surface	17.5	0 - 350	0 - 350	13.375	54.5	J-55	BUTT	1.125	1.125	1.8
Intermediate 1	12.25	0 - 2901	0 - 2884	9.625	40	J-55	BUTT	1.125	1.125	1.8
Production	7.875 x 6.75	0 - 7817, 7817 - 18693	0 - 7717, 7717 - 8350	5.5	20	P-110	Hunting TLW-SC	1.125	1.125	1.8

- All casing strings will be tested in accordance with Title 43 CFR 3172.7(b)(8)

- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed

- All non-API joint connections will be of like or greater quality, and as run specification sheets will be on location for review

**Variance Request**

Matador request a variance to wave the centralizer requirement for the 7-5/8" casing and the 5-1/2" SF/Flush casing in the 6-3/4" hole.

If a DV tool is used, depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above the current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review. Option to cancel 2nd stage cement if cement is circulated on 1st stage.

Matador request a variance to utilize a surface setting rig. If this is used, Matador request the option to drill either 17.5" or 20" surface hole, cement volumes will be adjusted accordingly.

**Primary Cement Design - DV/Packer 2-Stage Cement**

String	Type	Sacks	Yield	Cu. Ft.	Weight	Percent Excess	Top of Cement (ft)	Class	Blend
Surface	Lead	30	1.72	49	13.5	50%	0	C	5% NaCl + LCM
	Tail	250	1.38	347	14.8	50%	50	C	5% NaCl + LCM
Intermediate 1 w/ DV @ 2787'	Stg 2 Tail	430	1.78	769	13.5	10%	0	A/C	5% NaCl + LCM
	Stg 1 Lead	1230	1.84	2254	12.5	50%	0	A/C	Bentonite + 1% CaCl <sub>2</sub> + 8% NaCl + LCM
	Stg 1 Tail	260	1.33	343	14.8	50%	6717	A/C	5% NaCl + LCM
Production	Tail	860	1.35	1165	13.2	25%	7517	A/C	Fluid Loss + Dispersant + Retarder + LCM

**5. Mud Program**

An electronic Pason mud monitoring system complying with Title 43 CFR 3172 will be used. All necessary mud products (barite, bentonite, LCM) for weight addition and fluid loss control will be on location at all times. Mud program is subject to change due to hole conditions.

Hole Section	Hole Size (in)	Mud Type	Interval MD (ft)	Density (lb/gal)	Viscosity	Fluid Loss
Surface	17.5	Spud Mud	0 - 350	8.4 - 8.8	28-30	NC
Intermediate 1	12.25	Brine	350 - 2901	8.8 - 9.3	28-30	NC
Production	7.875 x 6.75	Cut Brine/OBM	2901 - 18693	9 - 9.7	30-55	<20

**6. Cores, Test, & Logs**

No core or drill stem test is planned.

No electric logs are planned at this time. GR will be collected through the MWD tools from Intermediate casing to TD. CBL with CCL will be run as far as gravity will let it fall to top of curve. We will be running a Neutron log on one of the wells on each pad.

**7. Down Hole Conditions**

No abnormal pressure or temperature is expected. Bottom hole pressure is 4212 psi. Maximum anticipated surface pressure is 2375 psi. Expected bottom hole temperature is 147 F.

In accordance with Title 43 CFR 3176, Matador does not anticipate that there will be enough H<sub>2</sub>S from the surface to the Bone Spring formations to meet the BLM's minimum requirements for the submission of an "H<sub>2</sub>S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since we have an H<sub>2</sub>S safety package on all wells, attached is an "H<sub>2</sub>S Drilling Operations Plan". Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

# **Matador Production Company**

**Rustler Breaks**

**Mama Jo 3531**

**Mama Jo 3531 Fed Com #122H**

**Wellbore #1**

**Plan: BLM Plan #1**

## **Standard Planning Report**

**13 January, 2026**

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

<b>Project</b>	Rustler Breaks,		
<b>Map System:</b>	US State Plane 1927 (Exact solution)	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	NAD 1927 (NADCON CONUS)		
<b>Map Zone:</b>	New Mexico East 3001		

<b>Site</b>	Mama Jo 3531				
<b>Site Position:</b>		<b>Northing:</b>	489,447.57 usft	<b>Latitude:</b>	32° 20' 43.125 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	584,204.94 usft	<b>Longitude:</b>	104° 3' 38.425 W
<b>Position Uncertainty:</b>	0.0 usft	<b>Slot Radius:</b>	13-3/16 "	<b>Grid Convergence:</b>	0.15 °

<b>Well</b>	Mama Jo 3531 Fed Com #122H					
<b>Well Position</b>	<b>+N/-S</b>	2,259.9 usft	<b>Northing:</b>	491,707.46 usft	<b>Latitude:</b>	32° 21' 5.492 N
	<b>+E/-W</b>	-140.4 usft	<b>Easting:</b>	584,064.58 usft	<b>Longitude:</b>	104° 3' 39.994 W
<b>Position Uncertainty</b>		0.0 usft	<b>Wellhead Elevation:</b>		<b>Ground Level:</b>	3,085.0 usft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2015	10/1/2024	6.40	60.01	47,216.48413713

<b>Design</b>	BLM Plan #1				
<b>Audit Notes:</b>					
<b>Version:</b>	1	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	89.88	

<b>Plan Survey Tool Program</b>	<b>Date</b>	1/13/2026			
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>	
1	0.0	18,692.3 BLM Plan #1 (Wellbore #1)	MWD		
			OWSG MWD - Standard		

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,049.2	10.98	83.71	2,045.9	5.8	52.2	2.00	2.00	0.00	83.71	
7,084.8	10.98	83.71	6,989.2	110.9	1,005.9	0.00	0.00	0.00	0.00	
7,817.1	0.00	0.00	7,717.0	118.5	1,075.4	1.50	-1.50	0.00	180.00	KOP - Mama Jo 3531
8,717.1	90.00	89.90	8,290.0	119.5	1,648.4	10.00	10.00	0.00	89.90	
8,734.4	89.65	89.88	8,290.0	119.6	1,665.7	2.00	-2.00	-0.12	-176.58	
18,693.3	89.65	89.88	8,350.0	140.5	11,624.4	0.00	0.00	0.00	0.00	BHL - Mama Jo 3531

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
86.0	0.00	0.00	86.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>Z (Rustler)</b>									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
472.0	0.00	0.00	472.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>Z (Salado)</b>									
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,279.0	0.00	0.00	1,279.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>Z (Castile (T))</b>									
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>Start Build 2.00</b>									
1,600.0	2.00	83.71	1,600.0	0.2	1.7	1.7	2.00	2.00	0.00
1,700.0	4.00	83.71	1,699.8	0.8	6.9	6.9	2.00	2.00	0.00
1,800.0	6.00	83.71	1,799.5	1.7	15.6	15.6	2.00	2.00	0.00
1,900.0	8.00	83.71	1,898.7	3.1	27.7	27.7	2.00	2.00	0.00
2,000.0	10.00	83.71	1,997.5	4.8	43.3	43.3	2.00	2.00	0.00
2,049.2	10.98	83.71	2,045.9	5.8	52.2	52.2	2.00	2.00	0.00
<b>Start 5035.6 hold at 2049.2 MD</b>									
2,100.0	10.98	83.71	2,095.7	6.8	61.8	61.8	0.00	0.00	0.00
2,200.0	10.98	83.71	2,193.9	8.9	80.7	80.7	0.00	0.00	0.00
2,300.0	10.98	83.71	2,292.0	11.0	99.7	99.7	0.00	0.00	0.00
2,400.0	10.98	83.71	2,390.2	13.1	118.6	118.6	0.00	0.00	0.00
2,500.0	10.98	83.71	2,488.4	15.2	137.5	137.6	0.00	0.00	0.00
2,600.0	10.98	83.71	2,586.6	17.2	156.5	156.5	0.00	0.00	0.00
2,700.0	10.98	83.71	2,684.7	19.3	175.4	175.5	0.00	0.00	0.00
2,753.3	10.98	83.71	2,737.0	20.4	185.5	185.6	0.00	0.00	0.00
<b>Z (G30:CS14-CSB)</b>									
2,800.0	10.98	83.71	2,782.9	21.4	194.4	194.4	0.00	0.00	0.00
2,801.1	10.98	83.71	2,784.0	21.4	194.6	194.6	0.00	0.00	0.00
<b>Z (G26: Bell Cyn.)</b>									
2,900.0	10.98	83.71	2,881.1	23.5	213.3	213.3	0.00	0.00	0.00
3,000.0	10.98	83.71	2,979.2	25.6	232.2	232.3	0.00	0.00	0.00
3,100.0	10.98	83.71	3,077.4	27.7	251.2	251.2	0.00	0.00	0.00
3,200.0	10.98	83.71	3,175.6	29.8	270.1	270.2	0.00	0.00	0.00
3,300.0	10.98	83.71	3,273.7	31.9	289.1	289.1	0.00	0.00	0.00
3,400.0	10.98	83.71	3,371.9	34.0	308.0	308.1	0.00	0.00	0.00
3,500.0	10.98	83.71	3,470.1	36.0	326.9	327.0	0.00	0.00	0.00
3,591.6	10.98	83.71	3,560.0	38.0	344.3	344.4	0.00	0.00	0.00
<b>Z (G16: Manzanita)</b>									
3,600.0	10.98	83.71	3,568.2	38.1	345.9	346.0	0.00	0.00	0.00
3,642.5	10.98	83.71	3,610.0	39.0	353.9	354.0	0.00	0.00	0.00

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
<b>Z (G13: Cherry Cyn.)</b>										
3,700.0	10.98	83.71	3,666.4	40.2	364.8	364.9	0.00	0.00	0.00	
3,800.0	10.98	83.71	3,764.6	42.3	383.8	383.8	0.00	0.00	0.00	
3,900.0	10.98	83.71	3,862.7	44.4	402.7	402.8	0.00	0.00	0.00	
4,000.0	10.98	83.71	3,960.9	46.5	421.6	421.7	0.00	0.00	0.00	
4,100.0	10.98	83.71	4,059.1	48.6	440.6	440.7	0.00	0.00	0.00	
4,200.0	10.98	83.71	4,157.2	50.7	459.5	459.6	0.00	0.00	0.00	
4,300.0	10.98	83.71	4,255.4	52.7	478.4	478.6	0.00	0.00	0.00	
4,400.0	10.98	83.71	4,353.6	54.8	497.4	497.5	0.00	0.00	0.00	
4,500.0	10.98	83.71	4,451.7	56.9	516.3	516.4	0.00	0.00	0.00	
4,600.0	10.98	83.71	4,549.9	59.0	535.3	535.4	0.00	0.00	0.00	
4,700.0	10.98	83.71	4,648.1	61.1	554.2	554.3	0.00	0.00	0.00	
4,800.0	10.98	83.71	4,746.2	63.2	573.1	573.3	0.00	0.00	0.00	
4,863.9	10.98	83.71	4,809.0	64.5	585.3	585.4	0.00	0.00	0.00	
<b>Z (G7: Brushy Cyn.)</b>										
4,900.0	10.98	83.71	4,844.4	65.3	592.1	592.2	0.00	0.00	0.00	
5,000.0	10.98	83.71	4,942.6	67.4	611.0	611.2	0.00	0.00	0.00	
5,100.0	10.98	83.71	5,040.8	69.4	630.0	630.1	0.00	0.00	0.00	
5,200.0	10.98	83.71	5,138.9	71.5	648.9	649.0	0.00	0.00	0.00	
5,300.0	10.98	83.71	5,237.1	73.6	667.8	668.0	0.00	0.00	0.00	
5,400.0	10.98	83.71	5,335.3	75.7	686.8	686.9	0.00	0.00	0.00	
5,500.0	10.98	83.71	5,433.4	77.8	705.7	705.9	0.00	0.00	0.00	
5,600.0	10.98	83.71	5,531.6	79.9	724.7	724.8	0.00	0.00	0.00	
5,700.0	10.98	83.71	5,629.8	82.0	743.6	743.8	0.00	0.00	0.00	
5,800.0	10.98	83.71	5,727.9	84.1	762.5	762.7	0.00	0.00	0.00	
5,900.0	10.98	83.71	5,826.1	86.1	781.5	781.7	0.00	0.00	0.00	
6,000.0	10.98	83.71	5,924.3	88.2	800.4	800.6	0.00	0.00	0.00	
6,100.0	10.98	83.71	6,022.4	90.3	819.4	819.5	0.00	0.00	0.00	
6,200.0	10.98	83.71	6,120.6	92.4	838.3	838.5	0.00	0.00	0.00	
6,300.0	10.98	83.71	6,218.8	94.5	857.2	857.4	0.00	0.00	0.00	
6,369.5	10.98	83.71	6,287.0	95.9	870.4	870.6	0.00	0.00	0.00	
<b>Z (G4: BSG L (CS9))</b>										
6,400.0	10.98	83.71	6,316.9	96.6	876.2	876.4	0.00	0.00	0.00	
6,500.0	10.98	83.71	6,415.1	98.7	895.1	895.3	0.00	0.00	0.00	
6,600.0	10.98	83.71	6,513.3	100.8	914.0	914.3	0.00	0.00	0.00	
6,700.0	10.98	83.71	6,611.4	102.8	933.0	933.2	0.00	0.00	0.00	
6,800.0	10.98	83.71	6,709.6	104.9	951.9	952.1	0.00	0.00	0.00	
6,817.7	10.98	83.71	6,727.0	105.3	955.3	955.5	0.00	0.00	0.00	
<b>Z (L8.2: U. Avalon Shale)</b>										
6,900.0	10.98	83.71	6,807.8	107.0	970.9	971.1	0.00	0.00	0.00	
6,907.4	10.98	83.71	6,815.0	107.2	972.3	972.5	0.00	0.00	0.00	
<b>Z (L6.3: Avalon Carb)</b>										
7,000.0	10.98	83.71	6,905.9	109.1	989.8	990.0	0.00	0.00	0.00	
7,032.7	10.98	83.71	6,938.0	109.8	996.0	996.2	0.00	0.00	0.00	
<b>Z (L6.2: L. Avalon Shale)</b>										
7,084.8	10.98	83.71	6,989.2	110.9	1,005.9	1,006.1	0.00	0.00	0.00	
<b>Start Drop -1.50</b>										
7,100.0	10.76	83.71	7,004.1	111.2	1,008.7	1,008.9	1.50	-1.50	0.00	
7,164.9	9.78	83.71	7,068.0	112.5	1,020.2	1,020.5	1.50	-1.50	0.00	
<b>Z (L5.3: FBSC)</b>										
7,200.0	9.26	83.71	7,102.6	113.1	1,026.0	1,026.2	1.50	-1.50	0.00	
7,300.0	7.76	83.71	7,201.5	114.7	1,040.7	1,040.9	1.50	-1.50	0.00	
7,394.2	6.34	83.71	7,295.0	116.0	1,052.2	1,052.4	1.50	-1.50	0.00	

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
<b>Z (L5.1: FBSG)</b>										
7,400.0	6.26	83.71	7,300.7	116.1	1,052.8	1,053.1	1.50	-1.50	0.00	
7,455.5	5.42	83.71	7,356.0	116.7	1,058.4	1,058.7	1.50	-1.50	0.00	
<b>Z (M. FBSG)</b>										
7,500.0	4.76	83.71	7,400.3	117.1	1,062.4	1,062.6	1.50	-1.50	0.00	
7,573.9	3.65	83.71	7,474.0	117.7	1,067.7	1,068.0	1.50	-1.50	0.00	
<b>Z (L. FBSG)</b>										
7,600.0	3.26	83.71	7,500.0	117.9	1,069.3	1,069.5	1.50	-1.50	0.00	
7,642.0	2.63	83.71	7,542.0	118.1	1,071.4	1,071.7	1.50	-1.50	0.00	
<b>Z (L4.3: SBSC)</b>										
7,700.0	1.76	83.71	7,599.9	118.3	1,073.6	1,073.9	1.50	-1.50	0.00	
7,800.0	0.26	83.71	7,699.9	118.5	1,075.4	1,075.6	1.50	-1.50	0.00	
7,817.1	0.00	0.00	7,717.0	118.5	1,075.4	1,075.7	1.50	-1.50	0.00	
<b>Start Build 10.00 - KOP - Mama Jo 3531 Fed Com #122H</b>										
7,900.0	8.29	89.90	7,799.6	118.6	1,081.4	1,081.7	10.00	10.00	0.00	
8,000.0	18.29	89.90	7,896.8	118.6	1,104.4	1,104.6	10.00	10.00	0.00	
8,057.2	24.01	89.90	7,950.1	118.6	1,125.0	1,125.2	10.00	10.00	0.00	
<b>FPP - Mama Jo 3531 Fed Com #122H</b>										
8,100.0	28.29	89.90	7,988.6	118.7	1,143.9	1,144.1	10.00	10.00	0.00	
8,165.1	34.80	89.90	8,044.0	118.7	1,177.9	1,178.1	10.00	10.00	0.00	
<b>Z (L4.1: SBSG)</b>										
8,200.0	38.29	89.90	8,072.0	118.8	1,198.7	1,198.9	10.00	10.00	0.00	
8,300.0	48.29	89.90	8,144.7	118.9	1,267.2	1,267.4	10.00	10.00	0.00	
8,312.6	49.55	89.90	8,153.0	118.9	1,276.7	1,276.9	10.00	10.00	0.00	
<b>Z (L4.1: SBSG B Carb)</b>										
8,400.0	58.29	89.90	8,204.4	119.0	1,347.2	1,347.5	10.00	10.00	0.00	
8,500.0	68.29	89.90	8,249.3	119.2	1,436.5	1,436.7	10.00	10.00	0.00	
8,531.0	71.39	89.90	8,260.0	119.2	1,465.5	1,465.8	10.00	10.00	0.00	
<b>Z (SBSG B Target)</b>										
8,600.0	78.29	89.90	8,278.0	119.3	1,532.1	1,532.4	10.00	10.00	0.00	
8,700.0	88.29	89.90	8,289.7	119.5	1,631.3	1,631.5	10.00	10.00	0.00	
8,717.1	90.00	89.90	8,290.0	119.5	1,648.4	1,648.6	10.00	10.00	0.00	
<b>Start DLS 2.00 TFO -176.58</b>										
8,734.4	89.65	89.88	8,290.0	119.6	1,665.7	1,665.9	2.00	-2.00	-0.12	
<b>Start 9959.0 hold at 8734.4 MD</b>										
8,800.0	89.65	89.88	8,290.4	119.7	1,731.3	1,731.5	0.00	0.00	0.00	
8,900.0	89.65	89.88	8,291.0	119.9	1,831.3	1,831.5	0.00	0.00	0.00	
9,000.0	89.65	89.88	8,291.6	120.1	1,931.3	1,931.5	0.00	0.00	0.00	
9,100.0	89.65	89.88	8,292.2	120.3	2,031.3	2,031.5	0.00	0.00	0.00	
9,200.0	89.65	89.88	8,292.8	120.6	2,131.3	2,131.5	0.00	0.00	0.00	
9,300.0	89.65	89.88	8,293.4	120.8	2,231.3	2,231.5	0.00	0.00	0.00	
9,400.0	89.65	89.88	8,294.0	121.0	2,331.3	2,331.5	0.00	0.00	0.00	
9,500.0	89.65	89.88	8,294.6	121.2	2,431.3	2,431.5	0.00	0.00	0.00	
9,600.0	89.65	89.88	8,295.2	121.4	2,531.3	2,531.5	0.00	0.00	0.00	
9,700.0	89.65	89.88	8,295.8	121.6	2,631.3	2,631.5	0.00	0.00	0.00	
9,800.0	89.65	89.88	8,296.4	121.8	2,731.3	2,731.5	0.00	0.00	0.00	
9,900.0	89.65	89.88	8,297.0	122.0	2,831.3	2,831.5	0.00	0.00	0.00	
10,000.0	89.65	89.88	8,297.6	122.2	2,931.3	2,931.5	0.00	0.00	0.00	
10,100.0	89.65	89.88	8,298.2	122.5	3,031.3	3,031.5	0.00	0.00	0.00	
10,200.0	89.65	89.88	8,298.8	122.7	3,131.3	3,131.5	0.00	0.00	0.00	
10,300.0	89.65	89.88	8,299.4	122.9	3,231.3	3,231.5	0.00	0.00	0.00	
10,400.0	89.65	89.88	8,300.0	123.1	3,331.3	3,331.5	0.00	0.00	0.00	

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,500.0	89.65	89.88	8,300.6	123.3	3,431.3	3,431.5	0.00	0.00	0.00
10,600.0	89.65	89.88	8,301.2	123.5	3,531.3	3,531.5	0.00	0.00	0.00
10,700.0	89.65	89.88	8,301.9	123.7	3,631.3	3,631.5	0.00	0.00	0.00
10,734.7	89.65	89.88	8,302.1	123.8	3,666.0	3,666.3	0.00	0.00	0.00
<b>BPP1 - Mama Jo 3531 Fed Com #122H</b>									
10,800.0	89.65	89.88	8,302.5	123.9	3,731.3	3,731.5	0.00	0.00	0.00
10,900.0	89.65	89.88	8,303.1	124.1	3,831.2	3,831.5	0.00	0.00	0.00
11,000.0	89.65	89.88	8,303.7	124.3	3,931.2	3,931.5	0.00	0.00	0.00
11,100.0	89.65	89.88	8,304.3	124.6	4,031.2	4,031.5	0.00	0.00	0.00
11,200.0	89.65	89.88	8,304.9	124.8	4,131.2	4,131.5	0.00	0.00	0.00
11,300.0	89.65	89.88	8,305.5	125.0	4,231.2	4,231.5	0.00	0.00	0.00
11,400.0	89.65	89.88	8,306.1	125.2	4,331.2	4,331.5	0.00	0.00	0.00
11,500.0	89.65	89.88	8,306.7	125.4	4,431.2	4,431.5	0.00	0.00	0.00
11,600.0	89.65	89.88	8,307.3	125.6	4,531.2	4,531.5	0.00	0.00	0.00
11,700.0	89.65	89.88	8,307.9	125.8	4,631.2	4,631.5	0.00	0.00	0.00
11,800.0	89.65	89.88	8,308.5	126.0	4,731.2	4,731.5	0.00	0.00	0.00
11,900.0	89.65	89.88	8,309.1	126.2	4,831.2	4,831.5	0.00	0.00	0.00
12,000.0	89.65	89.88	8,309.7	126.5	4,931.2	4,931.5	0.00	0.00	0.00
12,100.0	89.65	89.88	8,310.3	126.7	5,031.2	5,031.5	0.00	0.00	0.00
12,200.0	89.65	89.88	8,310.9	126.9	5,131.2	5,131.5	0.00	0.00	0.00
12,300.0	89.65	89.88	8,311.5	127.1	5,231.2	5,231.5	0.00	0.00	0.00
12,400.0	89.65	89.88	8,312.1	127.3	5,331.2	5,331.5	0.00	0.00	0.00
12,500.0	89.65	89.88	8,312.7	127.5	5,431.2	5,431.5	0.00	0.00	0.00
12,600.0	89.65	89.88	8,313.3	127.7	5,531.2	5,531.5	0.00	0.00	0.00
12,700.0	89.65	89.88	8,313.9	127.9	5,631.2	5,631.5	0.00	0.00	0.00
12,800.0	89.65	89.88	8,314.5	128.1	5,731.2	5,731.5	0.00	0.00	0.00
12,900.0	89.65	89.88	8,315.1	128.3	5,831.2	5,831.5	0.00	0.00	0.00
13,000.0	89.65	89.88	8,315.7	128.6	5,931.2	5,931.5	0.00	0.00	0.00
13,100.0	89.65	89.88	8,316.3	128.8	6,031.2	6,031.5	0.00	0.00	0.00
13,200.0	89.65	89.88	8,316.9	129.0	6,131.2	6,131.5	0.00	0.00	0.00
13,300.0	89.65	89.88	8,317.5	129.2	6,231.2	6,231.5	0.00	0.00	0.00
13,400.0	89.65	89.88	8,318.1	129.4	6,331.2	6,331.5	0.00	0.00	0.00
13,500.0	89.65	89.88	8,318.7	129.6	6,431.2	6,431.5	0.00	0.00	0.00
13,600.0	89.65	89.88	8,319.3	129.8	6,531.2	6,531.5	0.00	0.00	0.00
13,700.0	89.65	89.88	8,319.9	130.0	6,631.2	6,631.4	0.00	0.00	0.00
13,800.0	89.65	89.88	8,320.5	130.2	6,731.2	6,731.4	0.00	0.00	0.00
13,900.0	89.65	89.88	8,321.1	130.5	6,831.2	6,831.4	0.00	0.00	0.00
14,000.0	89.65	89.88	8,321.7	130.7	6,931.2	6,931.4	0.00	0.00	0.00
14,100.0	89.65	89.88	8,322.3	130.9	7,031.2	7,031.4	0.00	0.00	0.00
14,200.0	89.65	89.88	8,322.9	131.1	7,131.2	7,131.4	0.00	0.00	0.00
14,300.0	89.65	89.88	8,323.5	131.3	7,231.2	7,231.4	0.00	0.00	0.00
14,400.0	89.65	89.88	8,324.1	131.5	7,331.2	7,331.4	0.00	0.00	0.00
14,500.0	89.65	89.88	8,324.7	131.7	7,431.2	7,431.4	0.00	0.00	0.00
14,600.0	89.65	89.88	8,325.3	131.9	7,531.2	7,531.4	0.00	0.00	0.00
14,700.0	89.65	89.88	8,325.9	132.1	7,631.2	7,631.4	0.00	0.00	0.00
14,800.0	89.65	89.88	8,326.5	132.3	7,731.2	7,731.4	0.00	0.00	0.00
14,900.0	89.65	89.88	8,327.1	132.6	7,831.2	7,831.4	0.00	0.00	0.00
15,000.0	89.65	89.88	8,327.8	132.8	7,931.2	7,931.4	0.00	0.00	0.00
15,100.0	89.65	89.88	8,328.4	133.0	8,031.2	8,031.4	0.00	0.00	0.00
15,200.0	89.65	89.88	8,329.0	133.2	8,131.2	8,131.4	0.00	0.00	0.00
15,300.0	89.65	89.88	8,329.6	133.4	8,231.2	8,231.4	0.00	0.00	0.00
15,400.0	89.65	89.88	8,330.2	133.6	8,331.2	8,331.4	0.00	0.00	0.00
15,500.0	89.65	89.88	8,330.8	133.8	8,431.2	8,431.4	0.00	0.00	0.00
15,600.0	89.65	89.88	8,331.4	134.0	8,531.2	8,531.4	0.00	0.00	0.00

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,700.0	89.65	89.88	8,332.0	134.2	8,631.2	8,631.4	0.00	0.00	0.00
15,800.0	89.65	89.88	8,332.6	134.5	8,731.1	8,731.4	0.00	0.00	0.00
15,900.0	89.65	89.88	8,333.2	134.7	8,831.1	8,831.4	0.00	0.00	0.00
16,000.0	89.65	89.88	8,333.8	134.9	8,931.1	8,931.4	0.00	0.00	0.00
16,100.0	89.65	89.88	8,334.4	135.1	9,031.1	9,031.4	0.00	0.00	0.00
16,200.0	89.65	89.88	8,335.0	135.3	9,131.1	9,131.4	0.00	0.00	0.00
16,240.9	89.65	89.88	8,335.2	135.4	9,172.0	9,172.3	0.00	0.00	0.00
<b>BPP2 - Mama Jo 3531 Fed Com #122H</b>									
16,300.0	89.65	89.88	8,335.6	135.5	9,231.1	9,231.4	0.00	0.00	0.00
16,400.0	89.65	89.88	8,336.2	135.7	9,331.1	9,331.4	0.00	0.00	0.00
16,500.0	89.65	89.88	8,336.8	135.9	9,431.1	9,431.4	0.00	0.00	0.00
16,600.0	89.65	89.88	8,337.4	136.1	9,531.1	9,531.4	0.00	0.00	0.00
16,700.0	89.65	89.88	8,338.0	136.3	9,631.1	9,631.4	0.00	0.00	0.00
16,800.0	89.65	89.88	8,338.6	136.6	9,731.1	9,731.4	0.00	0.00	0.00
16,900.0	89.65	89.88	8,339.2	136.8	9,831.1	9,831.4	0.00	0.00	0.00
17,000.0	89.65	89.88	8,339.8	137.0	9,931.1	9,931.4	0.00	0.00	0.00
17,100.0	89.65	89.88	8,340.4	137.2	10,031.1	10,031.4	0.00	0.00	0.00
17,200.0	89.65	89.88	8,341.0	137.4	10,131.1	10,131.4	0.00	0.00	0.00
17,300.0	89.65	89.88	8,341.6	137.6	10,231.1	10,231.4	0.00	0.00	0.00
17,400.0	89.65	89.88	8,342.2	137.8	10,331.1	10,331.4	0.00	0.00	0.00
17,500.0	89.65	89.88	8,342.8	138.0	10,431.1	10,431.4	0.00	0.00	0.00
17,600.0	89.65	89.88	8,343.4	138.2	10,531.1	10,531.4	0.00	0.00	0.00
17,700.0	89.65	89.88	8,344.0	138.5	10,631.1	10,631.4	0.00	0.00	0.00
17,800.0	89.65	89.88	8,344.6	138.7	10,731.1	10,731.4	0.00	0.00	0.00
17,900.0	89.65	89.88	8,345.2	138.9	10,831.1	10,831.4	0.00	0.00	0.00
18,000.0	89.65	89.88	8,345.8	139.1	10,931.1	10,931.4	0.00	0.00	0.00
18,100.0	89.65	89.88	8,346.4	139.3	11,031.1	11,031.4	0.00	0.00	0.00
18,200.0	89.65	89.88	8,347.0	139.5	11,131.1	11,131.4	0.00	0.00	0.00
18,300.0	89.65	89.88	8,347.6	139.7	11,231.1	11,231.4	0.00	0.00	0.00
18,400.0	89.65	89.88	8,348.2	139.9	11,331.1	11,331.4	0.00	0.00	0.00
18,500.0	89.65	89.88	8,348.8	140.1	11,431.1	11,431.4	0.00	0.00	0.00
18,600.0	89.65	89.88	8,349.4	140.3	11,531.1	11,531.4	0.00	0.00	0.00
18,693.3	89.65	89.88	8,350.0	140.5	11,624.4	11,624.7	0.00	0.00	0.00
<b>TD at 18693.3 - BHL - Mama Jo 3531 Fed Com #122H</b>									

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
KOP - Mama Jo 3531 Fe - plan hits target center - Point	0.00	0.00	7,717.0	118.5	1,075.4	491,826.00	585,140.00	32° 21' 6.638 N	104° 3' 27.453 W	
FPP - Mama Jo 3531 Fe - plan hits target center - Point	0.00	0.00	7,950.1	118.6	1,125.0	491,826.09	585,189.58	32° 21' 6.638 N	104° 3' 26.875 W	
BPP1 - Mama Jo 3531 F - plan hits target center - Point	0.00	0.00	8,302.1	123.8	3,666.0	491,831.25	587,730.58	32° 21' 6.623 N	104° 2' 57.253 W	
BPP2 - Mama Jo 3531 F - plan hits target center - Point	0.00	0.00	8,335.2	135.4	9,172.0	491,842.84	593,236.58	32° 21' 6.589 N	104° 1' 53.065 W	
BHL - Mama Jo 3531 Fe - plan hits target center - Point	0.00	0.01	8,350.0	140.5	11,624.4	491,848.00	595,689.00	32° 21' 6.570 N	104° 1' 24.476 W	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
86.0	86.0	Z (Rustler)		0.00	89.84	
472.0	472.0	Z (Salado)		0.00	89.84	
1,279.0	1,279.0	Z (Castile (T))		0.00	89.84	
2,753.3	2,737.0	Z (G30:CS14-CSB)		0.00	89.84	
2,801.1	2,784.0	Z (G26: Bell Cyn.)		0.00	89.84	
3,591.6	3,560.0	Z (G16: Manzanita)		0.00	89.84	
3,642.5	3,610.0	Z (G13: Cherry Cyn.)		0.00	89.84	
4,863.9	4,809.0	Z (G7: Brushy Cyn.)		0.00	89.84	
6,369.5	6,287.0	Z (G4: BSG (CS9))		0.00	89.84	
6,817.7	6,727.0	Z (L8.2: U. Avalon Shale)		0.00	89.84	
6,907.4	6,815.0	Z (L6.3: Avalon Carb)		0.00	89.84	
7,032.7	6,938.0	Z (L6.2: L. Avalon Shale)		0.00	89.84	
7,164.9	7,068.0	Z (L5.3: FBSC)		0.00	89.84	
7,394.2	7,295.0	Z (L5.1: FBSG)		0.00	89.84	
7,455.5	7,356.0	Z (M. FBSG)		0.00	89.84	
7,573.9	7,474.0	Z (L. FBSG)		0.00	89.84	
7,642.0	7,542.0	Z (L4.3: SBSC)		0.00	89.84	
8,165.1	8,044.0	Z (L4.1: SBSG)		0.00	89.84	
8,312.6	8,153.0	Z (L4.1: SBSG B Carb)		0.00	89.84	
8,531.0	8,260.0	Z (SBSG B Target)		0.00	89.84	

Planning Report

<b>Database:</b>	EDM 5000.14 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Mama Jo 3531 Fed Com #122H
<b>Company:</b>	Matador Production Company	<b>TVD Reference:</b>	KB @ 3118.5usft
<b>Project:</b>	Rustler Breaks	<b>MD Reference:</b>	KB @ 3118.5usft
<b>Site:</b>	Mama Jo 3531	<b>North Reference:</b>	Grid
<b>Well:</b>	Mama Jo 3531 Fed Com #122H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	BLM Plan #1		

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
1,500.0	1,500.0	0.0	0.0	Start Build 2.00	
2,049.2	2,045.9	5.8	52.2	Start 5035.6 hold at 2049.2 MD	
7,084.8	6,989.2	110.9	1,005.9	Start Drop -1.50	
7,817.1	7,717.0	118.5	1,075.4	Start Build 10.00	
8,717.1	8,290.0	119.5	1,648.4	Start DLS 2.00 TFO -176.58	
8,734.4	8,290.0	119.6	1,665.7	Start 9959.0 hold at 8734.4 MD	
18,693.3	8,350.0	140.5	11,624.4	TD at 18693.3	

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 556923

**CONDITIONS**

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 556923
	Action Type: [C-103A] NOI Change of Plans (C-103A)

**CONDITIONS**

Created By	Condition	Condition Date
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing.	4/15/2026
ward.rikala	Post Bradenhead cement squeeze, a CBL will be required. If zonal isolation is not achieved per OCD requirements, then remedial work is required before operations can continue.	4/15/2026
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	4/15/2026