

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

| | | |
|---|---|--|
| ¹ Operator name and Address SPUR ENERGY PARTNERS LLC 9655 KATY FREEWAY, SUITE 500 HOUSTON, TX 77024 | | ² OGRID Number 328947 |
| | | ³ Reason for Filing Code/ Effective Date RT 12/15/2022 |
| ⁴ API Number 30 - 0 25-49802 | ⁵ Pool Name WC-025 G-03 S173318N; YESO | ⁶ Pool Code 97727 |
| ⁷ Property Code 332463 | ⁸ Property Name OAKMONT 11-10 STATE COM | ⁹ Well Number 11H |

II. ¹⁰ Surface Location

| Ul or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South Line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| B | 11 | 17S | 33E | | 770 | NORTH | 1890 | EAST | LEA |

¹¹ Bottom Hole Location

FTP: 330' FNL 2513' FWL LTP: 343' FNL 120' FWL

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| D | 10 | 17S | 33E | | 347 | NORTH | 52 | WEST | LEA |

| ¹² Lse Code | ¹³ Producing Method Code | ¹⁴ Gas Connection Date | ¹⁵ C-129 Permit Number | ¹⁶ C-129 Effective Date | ¹⁷ C-129 Expiration Date |
|------------------------|-------------------------------------|-----------------------------------|-----------------------------------|------------------------------------|-------------------------------------|
| S | P | | | | |

III. Oil and Gas Transporters

| ¹⁸ Transporter OGRID | ¹⁹ Transporter Name and Address | ²⁰ O/G/W |
|---------------------------------|---|---------------------|
| 221115 | FRONTIER FIELD SERVICES, LLC 4200 EAST SKELLY DRIVE, SUITE 700, TULSA OK 74135 | G |
| 33479 | HOLLYFRONTIER REFINING & MARKETING 2828 N. HARWOOD, SUITE 1300, DALLAS, TX 75201 | O |
| | | |
| | | |
| | | |

IV. Well Completion Data

| ²¹ Spud Date | ²² Ready Date | ²³ TD | ²⁴ PBTD | ²⁵ Perforations | ²⁶ DHC, MC |
|-------------------------|------------------------------------|-------------------------|----------------------------|----------------------------|-----------------------|
| 08/20/2022 | 12/15/2022 | 6237'V/14482'M | 6237'V/14436'M | 6749'-14414' | |
| ²⁷ Hole Size | ²⁸ Casing & Tubing Size | ²⁹ Depth Set | ³⁰ Sacks Cement | | |
| 17-1/2" | 13-3/8" 54.5# J-55 BTC | 1533' | 1530 SXS (CIRC TO SURFACE) | | |
| 12-1/4" | 9-5/8" 36# J-55 BTC | 3200' | 735 SXS (CIRC TO SURFACE) | | |
| 8-3/4" | 7" 32# L-80 BK-HT | 6502' | 2475 SXS (CIRC TO SURFACE) | | |
| 8-3/4" | 5-1/2" 20# L-80 BK-HT | 14482' | 2475 SXS (CIRC TO SURFACE) | | |

V. Well Test Data

| ³¹ Date New Oil | ³² Gas Delivery Date | ³³ Test Date | ³⁴ Test Length | ³⁵ Tbg. Pressure | ³⁶ Csg. Pressure |
|----------------------------|---------------------------------|-------------------------|---------------------------|-----------------------------|-----------------------------|
| | | | | | |
| ³⁷ Choke Size | ³⁸ Oil | ³⁹ Water | ⁴⁰ Gas | ⁴¹ Test Method | |
| | | | | | |

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Sarah Chapman*
Printed name: SARAH CHAPMAN
Title: REGULATORY DIRECTOR
E-mail Address: SCHAPMAN@SPURENERGY.COM
Date: 12/15/2022 Phone: 832-930-8613

OIL CONSERVATION DIVISION
Approved by:
Title:
Approval Date:

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | | | | | | | | |
|---|----------------------|---|---------------------|--|-----------------------------|----------------------------------|------------------------------|-------------------------------|----------------------|
| 1 API Number 30-025-49802 | | 2 Pool Code 97727 | | 3 Pool Name WC-025 G-03 S173318N; YESO | | | | | |
| 4 Property Code 332463 | | 5 Property Name OAKMONT 11-10 STATE COM | | | | | | 6 Well Number 11H | |
| 7 OGRID NO. 328947 | | 8 Operator Name SPUR ENERGY PARTNERS LLC. | | | | | | 9 Elevation 4161' | |
| 10 Surface Location | | | | | | | | | |
| UL or lot no. B | Section 11 | Township 17S | Range 33E | Lot Idn | Feet from the 770 | North/South line NORTH | Feet From the 1890 | East/West line EAST | County LEA |
| 11 Bottom Hole Location If Different From Surface | | | | | | | | | |
| UL or lot no. D | Section 10 | Township 17S | Range 33E | Lot Idn | Feet from the 347 | North/South line NORTH | Feet from the 52 | East/West line WEST | County LEA |
| 12 Dedicated Acres 480 | 13 Joint or Infill | 14 Consolidation Code | 15 Order No. | | | | | | |

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

| | | |
|---|---|---|
| <p>16</p> <p><u>GEODETTIC DATA</u> NAD 83 GRID - NM EAST</p> <p><u>SURFACE LOCATION (SL)</u> N: 675269.9 - E: 756877.3 LAT: 32.8543715° N LONG: 103.6314376° W</p> <p><u>FIRST TAKE POINT (FTP)</u> 330' FNL & 2513' FWL - SEC 11 N: 675703.0 - E: 756012.7 LAT: 32.8555775° N LONG: 103.6342436° W MD = 6749.0 - TVD = 6223.4</p> <p><u>LAST TAKE POINT (LTP)</u> 343' FNL & 120' FWL - SEC 10 N: 675620.9 - E: 748351.2 LAT: 32.8554888° N LONG: 103.6591934° W MD = 14414.0 - TVD = 6235.7</p> | <p><u>BOTTOM HOLE (BH)</u> N: 675617.1 - E: 748283.4 LAT: 32.8554796° N LONG: 103.6594145° W MD = 14482.0 - TVD = 6236.5</p> <p><u>CORNER DATA</u> NAD 83 GRID - NM EAST</p> <p>A: FOUND BRASS CAP "1913" N: 670684.5 - E: 748266.9</p> <p>B: FOUND BRASS CAP "1913" N: 673324.2 - E: 748248.0</p> <p>C: FOUND BRASS CAP "1913" N: 675963.1 - E: 748229.1</p> <p>D: FOUND BRASS CAP "1913" N: 676012.3 - E: 753497.4</p> <p>E: FOUND BRASS CAP "1913" N: 676055.2 - E: 758760.9</p> <p>F: FOUND BRASS CAP "1913" N: 673415.8 - E: 758781.3</p> <p>G: FOUND 1/2" REBAR N: 670779.6 - E: 758802.1</p> <p>H: FOUND BRASS CAP "1913" N: 670754.1 - E: 756170.4</p> <p>I: FOUND BRASS CAP "1913" N: 670732.3 - E: 753537.8</p> <p>J: FOUND BRASS CAP "1913" N: 670708.7 - E: 750901.5</p> <p>K: FOUND BRASS CAP "1913" N: 673372.7 - E: 753518.2</p> | <p>17 OPERATOR CERTIFICATION</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i></p> <p><i>Sarah Chapman</i> 12/09/2022 Signature Date</p> <p>SARAH CHAPMAN Printed Name</p> <p>SCHAPMAN@SPURENERGY.COM E-mail Address</p> |
| | | <p>18 SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>11/18/2022 Date of Survey</p> <p>Signature and Seal of Professional Surveyor</p> <p>19680 Certificate Number</p> <p style="text-align: right;">PROF. ROBERT M. HOWETT NEW MEXICO 19680 PROFESSIONAL SURVEYOR</p> |
| | | <p>Job No: LS21121255AC</p> |

T + 1 713 625-4200
17015 Aldine Westfield Rd
Houston, TX 77073, USA




Spur Energy Partners
Oakmont 11-10 State COM No.11H
Lea County, NM (NAD83)
Lea County, NM
30025498020000

I, Joshua Johnson, MWD Field Service Engineer, certify that I am employed by Baker Hughes; did conduct or supervise on the day(s) of 09/18/2022 through 10/15/2022 conduct or supervise the taking of a MWD survey from a depth of 1591 feet to a depth of 14457 feet; that the data is true, correct, complete and within the limitations of the tool as set forth by Baker Hughes; that I am authorized and qualified to make this report; that this survey was conducted at the request of Spur Energy Partners for the Oakmont 11-10 State COM No.11H Well, API No. 30025498020000 in Lea County, New Mexico; and that I have reviewed this report and find that it conforms to the principles and procedures as set forth by Baker Hughes.

Joshua Johnson
Field Service Engineer

SO#: 111504032

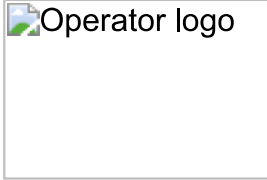

Actual Wellpath Report

Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482


Page 1 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| REPORT SETUP INFORMATION | | | |
|--------------------------|--|------------------|--------------------------|
| Projection System | NAD83 / TM New Mexico SP, Eastern Zone (3001), US feet | Software System | WellArchitect® 6.0 |
| North Reference | Grid | User | Croollom |
| Scale | 0.999962 | Report Generated | 10/15/2022 at 8:04:32 PM |
| Convergence at slot | 0.38° East | Database | WellArchitectDB |

| WELLPATH LOCATION | | | | | | |
|-----------------------|-------------------|----------|------------------|-----------------|------------------------|------------------|
| | Local coordinates | | Grid coordinates | | Geographic coordinates | |
| | North[ft] | East[ft] | Easting[US ft] | Northing[US ft] | Latitude | Longitude |
| Slot Location | 0.00 | 0.00 | 756877.30 | 675269.90 | 32°51'15.7373"N | 103°37'53.1756"W |
| Facility Reference Pt | | | 756877.30 | 675269.90 | 32°51'15.7373"N | 103°37'53.1756"W |
| Field Reference Pt | | | 533303.25 | 1273342.63 | 34°30'0.0000"N | 104°21'36.0000"W |

| WELLPATH DATUM | | | |
|--------------------------|--------------------|--|-------------------|
| Calculation method | Minimum curvature | Rig: Akita 57 (KB) to Facility Vertical Datum | 4181.00ft |
| Horizontal Reference Pt | Slot | Rig: Akita 57 (KB) to Mean Sea Level | 4181.00ft |
| Vertical Reference Pt | Rig: Akita 57 (KB) | Rig: Akita 57 (KB) to Ground Level at Slot (Oakmont 11-10 State COM No. 11H) | 20.00ft |
| MD Reference Pt | Rig: Akita 57 (KB) | Section Origin | N 0.00, E 0.00 ft |
| Field Vertical Reference | Mean Sea Level | Section Azimuth | 269.49° |

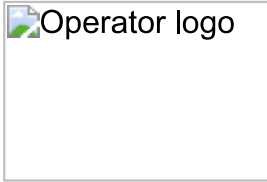

Actual Wellpath Report


Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482

Page 2 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| WELLPATH DATA (223 stations) † = interpolated, ‡ = extrapolated station | | | | | | | | | | | | | |
|---|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 0.00† | 0.00 | 0.000 | 137.690 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.00 | 0.00 | 0.00 | 0.00 |
| 20.00 | 20.00 | 0.000 | 137.690 | 20.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.000 | 0.00 | 0.00 | 0.00 | 0.00 |
| 146.00 | 126.00 | 0.220 | 137.690 | 146.00 | -0.16 | -0.18 | 0.16 | 0.24 | 137.690 | 0.17 | 77.37 | 0.17 | 0.00 |
| 265.00 | 119.00 | 0.480 | 188.490 | 265.00 | -0.24 | -0.84 | 0.24 | 0.88 | 163.879 | 0.32 | -171.93 | 0.22 | 42.69 |
| 342.00 | 77.00 | 0.400 | 26.250 | 342.00 | -0.31 | -0.92 | 0.31 | 0.97 | 161.115 | 1.13 | -44.19 | -0.10 | -210.70 |
| 431.00 | 89.00 | 1.710 | 351.440 | 430.98 | -0.26 | 0.67 | 0.25 | 0.72 | 20.679 | 1.57 | 11.32 | 1.47 | -39.11 |
| 520.00 | 89.00 | 4.000 | 357.950 | 519.86 | 0.01 | 5.09 | -0.05 | 5.09 | 359.384 | 2.59 | 12.85 | 2.57 | 7.31 |
| 610.00 | 90.00 | 4.620 | 359.700 | 609.61 | 0.08 | 11.85 | -0.19 | 11.85 | 359.101 | 0.70 | 63.68 | 0.69 | 1.94 |
| 700.00 | 90.00 | 4.880 | 5.330 | 699.30 | -0.32 | 19.29 | 0.15 | 19.29 | 0.448 | 0.59 | 63.84 | 0.29 | 6.26 |
| 790.00 | 90.00 | 5.100 | 9.990 | 788.96 | -1.44 | 27.04 | 1.20 | 27.06 | 2.542 | 0.51 | 128.39 | 0.24 | 5.18 |
| 881.00 | 91.00 | 5.010 | 11.310 | 879.61 | -2.99 | 34.92 | 2.68 | 35.02 | 4.391 | 0.16 | 21.71 | -0.10 | 1.45 |
| 969.00 | 88.00 | 5.190 | 12.100 | 967.26 | -4.65 | 42.58 | 4.27 | 42.79 | 5.726 | 0.22 | 173.81 | 0.20 | 0.90 |
| 1058.00 | 89.00 | 4.790 | 12.620 | 1055.92 | -6.37 | 50.14 | 5.92 | 50.49 | 6.739 | 0.45 | -104.91 | -0.45 | 0.58 |
| 1147.00 | 89.00 | 4.700 | 7.700 | 1144.62 | -7.74 | 57.38 | 7.23 | 57.83 | 7.177 | 0.47 | 72.52 | -0.10 | -5.53 |
| 1237.00 | 90.00 | 5.010 | 16.750 | 1234.29 | -9.43 | 64.80 | 8.85 | 65.40 | 7.779 | 0.92 | -21.48 | 0.34 | 10.06 |
| 1326.00 | 89.00 | 5.320 | 15.440 | 1322.93 | -11.72 | 72.49 | 11.07 | 73.33 | 8.682 | 0.37 | -11.22 | 0.35 | -1.47 |
| 1416.00 | 90.00 | 5.580 | 14.910 | 1412.53 | -14.03 | 80.74 | 13.31 | 81.83 | 9.358 | 0.29 | 140.47 | 0.29 | -0.59 |
| 1591.00 | 175.00 | 4.980 | 20.880 | 1586.78 | -19.06 | 96.06 | 18.20 | 97.77 | 10.730 | 0.46 | -95.25 | -0.34 | 3.41 |
| 1654.00 | 63.00 | 4.960 | 14.500 | 1649.55 | -20.76 | 101.26 | 19.86 | 103.18 | 11.097 | 0.88 | -90.60 | -0.03 | -10.13 |
| 1717.00 | 63.00 | 4.980 | 8.710 | 1712.31 | -21.90 | 106.59 | 20.96 | 108.64 | 11.122 | 0.80 | -105.16 | 0.03 | -9.19 |
| 1780.00 | 63.00 | 4.930 | 6.390 | 1775.07 | -22.67 | 111.99 | 21.67 | 114.07 | 10.952 | 0.33 | 100.20 | -0.08 | -3.68 |
| 1843.00 | 63.00 | 4.920 | 7.060 | 1837.84 | -23.35 | 117.36 | 22.30 | 119.46 | 10.761 | 0.09 | -151.55 | -0.02 | 1.06 |
| 1906.00 | 63.00 | 4.760 | 6.010 | 1900.62 | -24.00 | 122.64 | 22.91 | 124.76 | 10.581 | 0.29 | 101.76 | -0.25 | -1.67 |
| 1969.00 | 63.00 | 4.670 | 14.030 | 1963.41 | -24.94 | 127.73 | 23.81 | 129.93 | 10.558 | 1.06 | 77.18 | -0.14 | 12.73 |
| 2032.00 | 63.00 | 4.870 | 21.990 | 2026.19 | -26.61 | 132.70 | 25.43 | 135.11 | 10.848 | 1.10 | 155.08 | 0.32 | 12.63 |
| 2095.00 | 63.00 | 4.720 | 22.840 | 2088.97 | -28.66 | 137.56 | 27.44 | 140.27 | 11.279 | 0.26 | 143.00 | -0.24 | 1.35 |
| 2220.00 | 125.00 | 4.510 | 24.880 | 2213.56 | -32.81 | 146.76 | 31.50 | 150.10 | 12.114 | 0.21 | -37.86 | -0.17 | 1.63 |

| WELLPATH DATA (223 stations) † = interpolated, ‡ = extrapolated station | | | | | | | | | | | | | |
|---|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 2282.00 | 62.00 | 4.710 | 23.010 | 2275.36 | -34.87 | 151.32 | 33.52 | 154.98 | 12.491 | 0.40 | -29.84 | 0.32 | -3.02 |
| 2343.00 | 61.00 | 5.130 | 20.350 | 2336.14 | -36.84 | 156.18 | 35.45 | 160.15 | 12.788 | 0.78 | -100.90 | 0.69 | -4.36 |
| 2406.00 | 63.00 | 5.100 | 18.430 | 2398.89 | -38.75 | 161.48 | 37.31 | 165.73 | 13.011 | 0.28 | -163.32 | -0.05 | -3.05 |
| 2469.00 | 63.00 | 4.920 | 17.800 | 2461.64 | -40.51 | 166.70 | 39.02 | 171.21 | 13.175 | 0.30 | 37.48 | -0.29 | -1.00 |
| 2532.00 | 63.00 | 5.150 | 19.740 | 2524.40 | -42.33 | 171.94 | 40.80 | 176.71 | 13.351 | 0.45 | 176.88 | 0.37 | 3.08 |
| 2594.00 | 62.00 | 4.870 | 19.920 | 2586.16 | -44.22 | 177.03 | 42.64 | 182.10 | 13.543 | 0.45 | 111.57 | -0.45 | 0.29 |
| 2657.00 | 63.00 | 4.790 | 22.490 | 2648.94 | -46.18 | 181.98 | 44.56 | 187.35 | 13.759 | 0.37 | -45.36 | -0.13 | 4.08 |
| 2720.00 | 63.00 | 5.130 | 18.760 | 2711.71 | -48.13 | 187.07 | 46.47 | 192.76 | 13.950 | 0.74 | -91.40 | 0.54 | -5.92 |
| 2783.00 | 63.00 | 5.140 | 13.500 | 2774.45 | -49.75 | 192.48 | 48.04 | 198.39 | 14.012 | 0.75 | 153.32 | 0.02 | -8.35 |
| 2907.00 | 124.00 | 4.980 | 14.430 | 2897.97 | -52.48 | 203.10 | 50.67 | 209.32 | 14.009 | 0.14 | 75.45 | -0.13 | 0.75 |
| 3032.00 | 125.00 | 5.010 | 15.700 | 3022.50 | -55.40 | 213.61 | 53.50 | 220.21 | 14.062 | 0.09 | -141.64 | 0.02 | 1.02 |
| 3096.00 | 64.00 | 4.880 | 14.480 | 3086.26 | -56.89 | 218.93 | 54.94 | 225.72 | 14.087 | 0.26 | -152.14 | -0.20 | -1.91 |
| 3141.00 | 45.00 | 4.710 | 13.380 | 3131.10 | -57.82 | 222.58 | 55.85 | 229.48 | 14.085 | 0.43 | -110.99 | -0.38 | -2.44 |
| 3233.00 | 92.00 | 4.460 | 2.000 | 3222.81 | -58.89 | 229.83 | 56.84 | 236.76 | 13.892 | 1.02 | 49.14 | -0.27 | -12.37 |
| 3297.00 | 64.00 | 5.160 | 10.330 | 3286.58 | -59.54 | 235.15 | 57.45 | 242.07 | 13.728 | 1.54 | 173.46 | 1.09 | 13.02 |
| 3358.00 | 61.00 | 5.060 | 10.460 | 3347.34 | -60.57 | 240.50 | 58.43 | 247.49 | 13.655 | 0.17 | 81.71 | -0.16 | 0.21 |
| 3421.00 | 63.00 | 5.120 | 14.230 | 3410.09 | -61.81 | 245.95 | 59.62 | 253.08 | 13.627 | 0.54 | 90.84 | 0.10 | 5.98 |
| 3484.00 | 63.00 | 5.120 | 15.920 | 3472.84 | -63.32 | 251.38 | 61.08 | 258.70 | 13.658 | 0.24 | -96.84 | 0.00 | 2.68 |

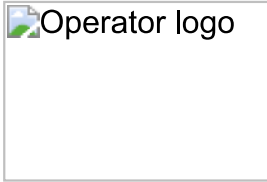

Actual Wellpath Report



Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482

Page 3 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| WELLPATH DATA (223 stations) | | | | | | | | | | | | | |
|------------------------------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 3547.00 | 63.00 | 5.110 | 14.910 | 3535.59 | -64.86 | 256.80 | 62.58 | 264.31 | 13.695 | 0.14 | 145.54 | -0.02 | -1.60 |
| 3610.00 | 63.00 | 5.060 | 15.300 | 3598.34 | -66.36 | 262.19 | 64.03 | 269.89 | 13.724 | 0.10 | -8.35 | -0.08 | 0.62 |
| 3672.00 | 62.00 | 5.260 | 14.980 | 3660.09 | -67.87 | 267.57 | 65.49 | 275.47 | 13.753 | 0.33 | 175.99 | 0.32 | -0.52 |
| 3735.00 | 63.00 | 5.120 | 15.090 | 3722.83 | -69.40 | 273.07 | 66.97 | 281.16 | 13.779 | 0.22 | 73.78 | -0.22 | 0.17 |
| 3860.00 | 125.00 | 5.130 | 15.470 | 3847.33 | -72.43 | 283.84 | 69.91 | 292.33 | 13.836 | 0.03 | 156.17 | 0.01 | 0.30 |
| 3922.00 | 62.00 | 4.870 | 16.830 | 3909.10 | -73.98 | 289.03 | 71.41 | 297.73 | 13.878 | 0.46 | -39.50 | -0.42 | 2.19 |
| 4046.00 | 124.00 | 5.160 | 14.220 | 4032.62 | -76.97 | 299.48 | 74.30 | 308.56 | 13.935 | 0.30 | 117.68 | 0.23 | -2.10 |
| 4109.00 | 63.00 | 5.110 | 15.310 | 4095.37 | -78.45 | 304.93 | 75.74 | 314.20 | 13.949 | 0.17 | -146.18 | -0.08 | 1.73 |
| 4171.00 | 62.00 | 4.910 | 13.730 | 4157.13 | -79.86 | 310.17 | 77.10 | 319.61 | 13.959 | 0.39 | 17.41 | -0.32 | -2.55 |
| 4233.00 | 62.00 | 5.130 | 14.500 | 4218.89 | -81.23 | 315.43 | 78.42 | 325.04 | 13.962 | 0.37 | 158.46 | 0.35 | 1.24 |
| 4296.00 | 63.00 | 5.000 | 15.090 | 4281.65 | -82.70 | 320.81 | 79.84 | 330.60 | 13.976 | 0.22 | -42.10 | -0.21 | 0.94 |
| 4357.00 | 61.00 | 5.090 | 14.180 | 4342.41 | -84.10 | 326.00 | 81.20 | 335.96 | 13.986 | 0.20 | 136.19 | 0.15 | -1.49 |
| 4421.00 | 64.00 | 4.730 | 18.530 | 4406.18 | -85.68 | 331.25 | 82.73 | 341.43 | 14.023 | 0.81 | -77.79 | -0.56 | 6.80 |
| 4484.00 | 63.00 | 4.910 | 11.040 | 4468.95 | -87.07 | 336.36 | 84.07 | 346.71 | 14.034 | 1.04 | 110.34 | 0.29 | -11.89 |
| 4547.00 | 63.00 | 4.850 | 13.050 | 4531.73 | -88.23 | 341.60 | 85.19 | 352.07 | 14.003 | 0.29 | -136.58 | -0.10 | 3.19 |
| 4610.00 | 63.00 | 4.670 | 10.920 | 4594.51 | -89.36 | 346.72 | 86.28 | 357.29 | 13.974 | 0.40 | 61.31 | -0.29 | -3.38 |
| 4673.00 | 63.00 | 4.880 | 15.150 | 4657.29 | -90.59 | 351.82 | 87.47 | 362.53 | 13.961 | 0.65 | 116.72 | 0.33 | 6.71 |
| 4799.00 | 126.00 | 4.470 | 29.070 | 4782.87 | -94.46 | 361.29 | 91.25 | 372.63 | 14.175 | 0.95 | -63.42 | -0.33 | 11.05 |
| 4862.00 | 63.00 | 5.490 | 12.350 | 4845.64 | -96.35 | 366.38 | 93.09 | 378.02 | 14.256 | 2.80 | -66.89 | 1.62 | -26.54 |
| 4925.00 | 63.00 | 5.640 | 9.000 | 4908.34 | -97.53 | 372.38 | 94.22 | 384.11 | 14.199 | 0.57 | 112.15 | 0.24 | -5.32 |
| 4987.00 | 62.00 | 5.500 | 12.920 | 4970.05 | -98.72 | 378.28 | 95.36 | 390.12 | 14.149 | 0.65 | -115.11 | -0.23 | 6.32 |
| 5050.00 | 63.00 | 5.470 | 12.240 | 5032.76 | -100.09 | 384.16 | 96.67 | 396.14 | 14.125 | 0.11 | -19.74 | -0.05 | -1.08 |
| 5113.00 | 63.00 | 5.540 | 11.980 | 5095.47 | -101.41 | 390.07 | 97.94 | 402.18 | 14.095 | 0.12 | 172.66 | 0.11 | -0.41 |
| 5175.00 | 62.00 | 5.380 | 12.200 | 5157.19 | -102.69 | 395.84 | 99.17 | 408.07 | 14.066 | 0.26 | -105.40 | -0.26 | 0.35 |
| 5238.00 | 63.00 | 5.290 | 345.340 | 5219.93 | -102.63 | 401.54 | 99.06 | 413.58 | 13.859 | 3.93 | -76.60 | -0.14 | -42.63 |
| 5300.00 | 62.00 | 7.370 | 312.920 | 5281.56 | -99.05 | 407.01 | 95.43 | 418.05 | 13.195 | 6.54 | -37.93 | 3.35 | -52.29 |
| 5364.00 | 64.00 | 11.500 | 298.100 | 5344.69 | -90.46 | 412.81 | 86.79 | 421.84 | 11.873 | 7.44 | -8.89 | 6.45 | -23.16 |

| WELLPATH DATA (223 stations) | | | | | | | | | | | | | |
|------------------------------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 5427.00 | 63.00 | 15.800 | 295.640 | 5405.90 | -77.24 | 419.49 | 73.51 | 425.88 | 9.939 | 6.89 | -66.93 | 6.83 | -3.90 |
| 5489.00 | 62.00 | 18.390 | 280.620 | 5465.19 | -60.06 | 424.95 | 56.28 | 428.66 | 7.544 | 8.22 | -24.28 | 4.18 | -24.23 |
| 5551.00 | 62.00 | 21.960 | 276.380 | 5523.37 | -38.94 | 428.04 | 35.13 | 429.48 | 4.693 | 6.22 | -53.81 | 5.76 | -6.84 |
| 5613.00 | 62.00 | 24.010 | 269.940 | 5580.46 | -14.81 | 429.31 | 10.99 | 429.45 | 1.467 | 5.23 | 1.61 | 3.31 | -10.39 |
| 5675.00 | 62.00 | 25.870 | 270.060 | 5636.67 | 11.33 | 429.31 | -15.15 | 429.58 | 357.979 | 3.00 | 2.60 | 3.00 | 0.19 |
| 5738.00 | 63.00 | 29.810 | 270.420 | 5692.37 | 40.74 | 429.44 | -44.56 | 431.75 | 354.076 | 6.26 | -11.37 | 6.25 | 0.57 |
| 5801.00 | 63.00 | 34.440 | 268.780 | 5745.71 | 74.23 | 429.18 | -78.05 | 436.22 | 349.693 | 7.48 | -2.24 | 7.35 | -2.60 |
| 5863.00 | 62.00 | 37.900 | 268.560 | 5795.76 | 110.81 | 428.33 | -114.63 | 443.40 | 345.018 | 5.58 | 21.25 | 5.58 | -0.35 |
| 5926.00 | 63.00 | 41.500 | 270.660 | 5844.22 | 151.04 | 428.08 | -154.86 | 455.23 | 340.112 | 6.10 | 7.30 | 5.71 | 3.33 |
| 5988.00 | 62.00 | 45.040 | 271.300 | 5889.36 | 193.52 | 428.81 | -197.34 | 472.04 | 335.288 | 5.75 | -6.67 | 5.71 | 1.03 |
| 6049.00 | 61.00 | 48.570 | 270.750 | 5931.11 | 237.96 | 429.60 | -241.80 | 492.98 | 330.627 | 5.82 | -12.08 | 5.79 | -0.90 |
| 6112.00 | 63.00 | 52.350 | 269.730 | 5971.21 | 286.53 | 429.80 | -290.37 | 518.69 | 325.957 | 6.13 | 12.30 | 6.00 | -1.62 |
| 6176.00 | 64.00 | 55.530 | 270.570 | 6008.87 | 338.26 | 429.94 | -342.10 | 549.44 | 321.491 | 5.08 | -15.76 | 4.97 | 1.31 |
| 6239.00 | 63.00 | 59.670 | 269.220 | 6042.63 | 391.44 | 429.83 | -395.28 | 583.95 | 317.397 | 6.82 | 53.68 | 6.57 | -2.14 |
| 6270.00 | 31.00 | 59.970 | 269.690 | 6058.21 | 418.24 | 429.57 | -422.08 | 602.23 | 315.504 | 1.63 | -30.70 | 0.97 | 1.52 |
| 6300.00 | 30.00 | 60.160 | 269.560 | 6073.18 | 444.23 | 429.40 | -448.07 | 620.61 | 313.781 | 0.74 | -80.17 | 0.63 | -0.43 |
| 6330.00 | 30.00 | 60.230 | 269.100 | 6088.09 | 470.27 | 429.10 | -474.10 | 639.45 | 312.147 | 1.35 | -168.58 | 0.23 | -1.53 |
| 6360.00 | 30.00 | 59.930 | 269.030 | 6103.06 | 496.27 | 428.67 | -500.10 | 658.68 | 310.602 | 1.02 | 69.43 | -1.00 | -0.23 |

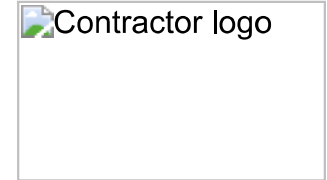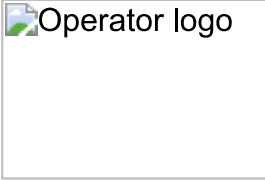

Actual Wellpath Report

Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482


Page 4 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| WELLPATH DATA (223 stations) | | | | | | | | | | | | | |
|------------------------------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 6390.00 | 30.00 | 60.330 | 270.240 | 6118.00 | 522.28 | 428.51 | -526.12 | 678.54 | 309.162 | 3.74 | 103.60 | 1.33 | 4.03 |
| 6420.00 | 30.00 | 60.030 | 271.710 | 6132.92 | 548.30 | 428.95 | -552.14 | 699.18 | 307.843 | 4.37 | 5.37 | -1.00 | 4.90 |
| 6440.00 | 20.00 | 60.400 | 271.750 | 6142.85 | 565.64 | 429.47 | -569.49 | 713.28 | 307.021 | 1.86 | -21.63 | 1.85 | 0.20 |
| 6486.00 | 46.00 | 64.800 | 269.830 | 6164.02 | 606.46 | 430.02 | -610.31 | 746.59 | 305.168 | 10.26 | 5.25 | 9.57 | -4.17 |
| 6550.00 | 64.00 | 70.880 | 270.420 | 6188.15 | 665.70 | 430.16 | -669.56 | 795.83 | 302.719 | 9.54 | 6.73 | 9.50 | 0.92 |
| 6613.00 | 63.00 | 76.490 | 271.100 | 6205.84 | 726.12 | 430.97 | -729.99 | 847.71 | 300.556 | 8.96 | -2.57 | 8.90 | 1.08 |
| 6676.00 | 63.00 | 82.010 | 270.850 | 6217.58 | 787.97 | 432.02 | -791.85 | 902.04 | 298.616 | 8.77 | 0.40 | 8.76 | -0.40 |
| 6739.00 | 63.00 | 87.780 | 270.890 | 6223.19 | 850.68 | 432.97 | -854.57 | 957.99 | 296.869 | 9.16 | -13.89 | 9.16 | 0.06 |
| 6801.00 | 62.00 | 90.370 | 270.250 | 6224.19 | 912.65 | 433.59 | -916.55 | 1013.93 | 295.317 | 4.30 | 127.15 | 4.18 | -1.03 |
| 6864.00 | 63.00 | 90.120 | 270.580 | 6223.92 | 975.65 | 434.04 | -979.55 | 1071.40 | 293.898 | 0.66 | 128.85 | -0.40 | 0.52 |
| 6928.00 | 64.00 | 89.540 | 271.300 | 6224.11 | 1039.62 | 435.09 | -1043.54 | 1130.61 | 292.633 | 1.44 | -52.24 | -0.91 | 1.13 |
| 6991.00 | 63.00 | 90.090 | 270.590 | 6224.31 | 1102.60 | 436.13 | -1106.53 | 1189.38 | 291.512 | 1.43 | -90.00 | 0.87 | -1.13 |
| 7054.00 | 63.00 | 90.090 | 270.380 | 6224.21 | 1165.59 | 436.67 | -1169.53 | 1248.39 | 290.474 | 0.33 | -101.21 | 0.00 | -0.33 |
| 7117.00 | 63.00 | 89.880 | 269.320 | 6224.23 | 1228.59 | 436.50 | -1232.53 | 1307.54 | 289.502 | 1.72 | -68.01 | -0.33 | -1.68 |
| 7179.00 | 62.00 | 90.090 | 268.800 | 6224.24 | 1290.59 | 435.48 | -1294.52 | 1365.80 | 288.593 | 0.90 | -104.50 | 0.34 | -0.84 |
| 7241.00 | 62.00 | 89.940 | 268.220 | 6224.23 | 1352.58 | 433.87 | -1356.50 | 1424.19 | 287.737 | 0.97 | 17.97 | -0.24 | -0.94 |
| 7304.00 | 63.00 | 91.050 | 268.580 | 6223.68 | 1415.57 | 432.11 | -1419.47 | 1483.78 | 286.931 | 1.85 | -175.38 | 1.76 | 0.57 |
| 7367.00 | 63.00 | 89.690 | 268.470 | 6223.28 | 1478.55 | 430.49 | -1482.44 | 1543.68 | 286.193 | 2.17 | 75.97 | -2.16 | -0.17 |
| 7429.00 | 62.00 | 89.940 | 269.470 | 6223.48 | 1540.55 | 429.38 | -1544.43 | 1603.01 | 285.537 | 1.66 | -107.82 | 0.40 | 1.61 |
| 7492.00 | 63.00 | 89.850 | 269.190 | 6223.59 | 1603.55 | 428.64 | -1607.43 | 1663.60 | 284.931 | 0.47 | -96.45 | -0.14 | -0.44 |
| 7554.00 | 62.00 | 89.720 | 268.040 | 6223.83 | 1665.54 | 427.14 | -1669.41 | 1723.19 | 284.352 | 1.87 | -82.99 | -0.21 | -1.85 |
| 7617.00 | 63.00 | 89.880 | 266.740 | 6224.05 | 1728.50 | 424.27 | -1732.34 | 1783.54 | 283.762 | 2.08 | 94.83 | 0.25 | -2.06 |
| 7680.00 | 63.00 | 89.820 | 267.450 | 6224.21 | 1791.44 | 421.08 | -1795.26 | 1843.98 | 283.200 | 1.13 | 87.06 | -0.10 | 1.13 |
| 7742.00 | 62.00 | 89.910 | 269.200 | 6224.36 | 1853.43 | 419.27 | -1857.23 | 1903.97 | 282.721 | 2.83 | 91.34 | 0.15 | 2.82 |
| 7804.00 | 62.00 | 89.880 | 270.480 | 6224.47 | 1915.42 | 419.09 | -1919.23 | 1964.45 | 282.318 | 2.07 | 98.33 | -0.05 | 2.06 |
| 7867.00 | 63.00 | 89.820 | 270.890 | 6224.64 | 1978.41 | 419.85 | -1982.22 | 2026.20 | 281.959 | 0.66 | -62.65 | -0.10 | 0.65 |
| 7929.00 | 62.00 | 89.970 | 270.600 | 6224.75 | 2040.39 | 420.65 | -2044.22 | 2087.05 | 281.628 | 0.53 | -143.13 | 0.24 | -0.47 |

WELLPATH DATA (223 stations)

| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
|---------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| 7992.00 | 63.00 | 89.690 | 270.390 | 6224.94 | 2103.38 | 421.20 | -2107.22 | 2148.90 | 281.304 | 0.56 | -90.00 | -0.44 | -0.33 |
| 8055.00 | 63.00 | 89.690 | 269.180 | 6225.28 | 2166.38 | 420.96 | -2170.21 | 2210.66 | 280.977 | 1.92 | 82.35 | 0.00 | -1.92 |
| 8119.00 | 64.00 | 89.780 | 269.850 | 6225.57 | 2230.38 | 420.42 | -2234.21 | 2273.42 | 280.657 | 1.06 | 77.38 | 0.14 | 1.05 |
| 8180.00 | 61.00 | 90.060 | 271.100 | 6225.66 | 2291.37 | 420.93 | -2295.21 | 2333.49 | 280.392 | 2.10 | -134.56 | 0.46 | 2.05 |
| 8243.00 | 63.00 | 89.420 | 270.450 | 6225.94 | 2354.35 | 421.78 | -2358.20 | 2395.62 | 280.140 | 1.45 | -77.67 | -1.02 | -1.03 |
| 8306.00 | 63.00 | 89.630 | 269.490 | 6226.47 | 2417.35 | 421.74 | -2421.20 | 2457.65 | 279.881 | 1.56 | 154.18 | 0.33 | -1.52 |
| 8369.00 | 63.00 | 89.320 | 269.640 | 6227.04 | 2480.34 | 421.27 | -2484.19 | 2519.66 | 279.625 | 0.55 | 56.63 | -0.49 | 0.24 |
| 8432.00 | 63.00 | 89.880 | 270.490 | 6227.48 | 2543.34 | 421.34 | -2547.19 | 2581.80 | 279.392 | 1.62 | -56.69 | 0.89 | 1.35 |
| 8495.00 | 63.00 | 90.340 | 269.790 | 6227.36 | 2606.33 | 421.49 | -2610.19 | 2644.00 | 279.173 | 1.33 | -131.80 | 0.73 | -1.11 |
| 8558.00 | 63.00 | 89.410 | 268.750 | 6227.50 | 2669.33 | 420.69 | -2673.18 | 2706.08 | 278.944 | 2.21 | -92.15 | -1.48 | -1.65 |
| 8619.00 | 61.00 | 89.380 | 267.950 | 6228.14 | 2730.32 | 418.93 | -2734.15 | 2766.06 | 278.711 | 1.31 | 36.87 | -0.05 | -1.31 |
| 8679.00 | 60.00 | 89.660 | 268.160 | 6228.65 | 2790.29 | 416.90 | -2794.12 | 2825.05 | 278.486 | 0.58 | 104.38 | 0.47 | 0.35 |
| 8740.00 | 61.00 | 89.350 | 269.370 | 6229.17 | 2851.29 | 415.58 | -2855.10 | 2885.19 | 278.282 | 2.05 | 87.19 | -0.51 | 1.98 |
| 8799.00 | 59.00 | 89.380 | 269.980 | 6229.83 | 2910.28 | 415.25 | -2914.09 | 2943.53 | 278.110 | 1.04 | -118.92 | 0.05 | 1.03 |
| 8859.00 | 60.00 | 89.010 | 269.310 | 6230.67 | 2970.28 | 414.88 | -2974.09 | 3002.88 | 277.941 | 1.28 | 3.37 | -0.62 | -1.12 |
| 8919.00 | 60.00 | 89.690 | 269.350 | 6231.35 | 3030.27 | 414.17 | -3034.08 | 3062.22 | 277.773 | 1.14 | 156.98 | 1.13 | 0.07 |
| 8979.00 | 60.00 | 89.290 | 269.520 | 6231.88 | 3090.27 | 413.58 | -3094.07 | 3121.59 | 277.614 | 0.72 | 6.98 | -0.67 | 0.28 |
| 9039.00 | 60.00 | 89.780 | 269.580 | 6232.37 | 3150.27 | 413.11 | -3154.07 | 3181.01 | 277.462 | 0.82 | -27.48 | 0.82 | 0.10 |

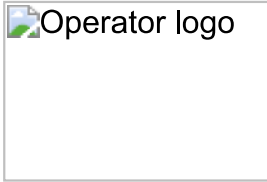

Actual Wellpath Report

Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PT B 14482


Page 5 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| WELLPATH DATA (223 stations) | | | | | | | | | | | | | |
|------------------------------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 9099.00 | 60.00 | 90.030 | 269.450 | 6232.47 | 3210.27 | 412.60 | -3214.07 | 3240.44 | 277.315 | 0.47 | 46.09 | 0.42 | -0.22 |
| 9158.00 | 59.00 | 90.800 | 270.250 | 6232.04 | 3269.26 | 412.45 | -3273.06 | 3298.95 | 277.182 | 1.88 | -160.87 | 1.31 | 1.36 |
| 9217.00 | 59.00 | 90.310 | 270.080 | 6231.47 | 3328.26 | 412.62 | -3332.06 | 3357.51 | 277.059 | 0.88 | -169.32 | -0.83 | -0.29 |
| 9277.00 | 60.00 | 89.780 | 269.980 | 6231.43 | 3388.25 | 412.65 | -3392.06 | 3417.07 | 276.936 | 0.90 | -49.90 | -0.88 | -0.17 |
| 9338.00 | 61.00 | 89.940 | 269.790 | 6231.57 | 3449.25 | 412.53 | -3453.06 | 3477.61 | 276.813 | 0.41 | -72.45 | 0.26 | -0.31 |
| 9398.00 | 60.00 | 90.310 | 268.620 | 6231.44 | 3509.25 | 411.69 | -3513.05 | 3537.09 | 276.684 | 2.05 | -101.04 | 0.62 | -1.95 |
| 9458.00 | 60.00 | 89.820 | 266.110 | 6231.38 | 3569.20 | 408.94 | -3572.98 | 3596.31 | 276.529 | 4.26 | -97.23 | -0.82 | -4.18 |
| 9518.00 | 60.00 | 89.450 | 263.190 | 6231.76 | 3628.98 | 403.34 | -3632.72 | 3655.04 | 276.336 | 4.91 | 84.75 | -0.62 | -4.87 |
| 9577.00 | 59.00 | 89.660 | 265.470 | 6232.22 | 3687.74 | 397.51 | -3691.42 | 3712.76 | 276.146 | 3.88 | 87.16 | 0.36 | 3.86 |
| 9638.00 | 61.00 | 89.910 | 270.480 | 6232.45 | 3748.70 | 395.36 | -3752.36 | 3773.13 | 276.015 | 8.22 | 109.15 | 0.41 | 8.21 |
| 9697.00 | 59.00 | 89.660 | 271.200 | 6232.67 | 3807.68 | 396.22 | -3811.36 | 3831.90 | 275.935 | 1.29 | -164.06 | -0.42 | 1.22 |
| 9756.00 | 59.00 | 89.170 | 271.060 | 6233.27 | 3866.65 | 397.39 | -3870.34 | 3890.69 | 275.862 | 0.86 | 0.00 | -0.83 | -0.24 |
| 9818.00 | 62.00 | 89.780 | 271.060 | 6233.84 | 3928.62 | 398.53 | -3932.33 | 3952.47 | 275.787 | 0.98 | -57.38 | 0.98 | 0.00 |
| 9881.00 | 63.00 | 89.940 | 270.810 | 6233.99 | 3991.60 | 399.56 | -3995.32 | 4015.25 | 275.711 | 0.47 | 131.64 | 0.25 | -0.40 |
| 9944.00 | 63.00 | 89.380 | 271.440 | 6234.36 | 4054.58 | 400.80 | -4058.30 | 4078.05 | 275.640 | 1.34 | 8.13 | -0.89 | 1.00 |
| 10007.00 | 63.00 | 89.940 | 271.520 | 6234.74 | 4117.54 | 402.43 | -4121.28 | 4140.88 | 275.577 | 0.90 | -101.31 | 0.89 | 0.13 |
| 10070.00 | 63.00 | 89.810 | 270.870 | 6234.88 | 4180.51 | 403.74 | -4184.27 | 4203.70 | 275.511 | 1.05 | -92.55 | -0.21 | -1.03 |
| 10133.00 | 63.00 | 89.750 | 269.520 | 6235.12 | 4243.50 | 403.96 | -4247.27 | 4266.43 | 275.433 | 2.14 | -76.27 | -0.10 | -2.14 |
| 10196.00 | 63.00 | 89.970 | 268.620 | 6235.27 | 4306.50 | 402.93 | -4310.26 | 4329.05 | 275.341 | 1.47 | -97.05 | 0.35 | -1.43 |
| 10259.00 | 63.00 | 89.850 | 267.650 | 6235.37 | 4369.48 | 400.88 | -4373.22 | 4391.56 | 275.238 | 1.55 | 72.90 | -0.19 | -1.54 |
| 10322.00 | 63.00 | 90.370 | 269.340 | 6235.25 | 4432.47 | 399.23 | -4436.20 | 4454.13 | 275.142 | 2.81 | 100.80 | 0.83 | 2.68 |
| 10385.00 | 63.00 | 90.120 | 270.650 | 6234.98 | 4495.46 | 399.22 | -4499.20 | 4516.87 | 275.071 | 2.12 | -105.57 | -0.40 | 2.08 |
| 10448.00 | 63.00 | 89.780 | 269.430 | 6235.04 | 4558.46 | 399.27 | -4562.19 | 4579.63 | 275.002 | 2.01 | -68.48 | -0.54 | -1.94 |
| 10511.00 | 63.00 | 90.060 | 268.720 | 6235.12 | 4621.46 | 398.25 | -4625.19 | 4642.30 | 274.921 | 1.21 | 113.20 | 0.44 | -1.13 |
| 10573.00 | 62.00 | 89.910 | 269.070 | 6235.14 | 4683.45 | 397.05 | -4687.17 | 4703.96 | 274.842 | 0.61 | 75.03 | -0.24 | 0.56 |
| 10636.00 | 63.00 | 90.180 | 270.080 | 6235.09 | 4746.45 | 396.59 | -4750.17 | 4766.70 | 274.772 | 1.66 | 112.54 | 0.43 | 1.60 |
| 10699.00 | 63.00 | 89.570 | 271.550 | 6235.23 | 4809.43 | 397.48 | -4813.16 | 4829.55 | 274.721 | 2.53 | 81.26 | -0.97 | 2.33 |

WELLPATH DATA (223 stations)

| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
|----------|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| 10767.00 | 68.00 | 89.970 | 274.150 | 6235.50 | 4877.31 | 400.86 | -4881.07 | 4897.51 | 274.695 | 3.87 | -41.84 | 0.59 | 3.82 |
| 10829.00 | 62.00 | 90.830 | 273.380 | 6235.07 | 4939.14 | 404.93 | -4942.94 | 4959.50 | 274.683 | 1.86 | -92.21 | 1.39 | -1.24 |
| 10893.00 | 64.00 | 90.650 | 268.780 | 6234.24 | 5003.09 | 406.14 | -5006.90 | 5023.35 | 274.637 | 7.19 | -120.97 | -0.28 | -7.19 |
| 10956.00 | 63.00 | 90.620 | 268.730 | 6233.54 | 5066.08 | 404.77 | -5069.88 | 5086.02 | 274.565 | 0.09 | -121.72 | -0.05 | -0.08 |
| 11019.00 | 63.00 | 90.280 | 268.180 | 6233.05 | 5129.07 | 403.07 | -5132.86 | 5148.66 | 274.490 | 1.03 | -102.87 | -0.54 | -0.87 |
| 11082.00 | 63.00 | 90.120 | 267.480 | 6232.83 | 5192.04 | 400.69 | -5195.81 | 5211.24 | 274.410 | 1.14 | 150.95 | -0.25 | -1.11 |
| 11145.00 | 63.00 | 90.030 | 267.530 | 6232.75 | 5255.00 | 397.94 | -5258.75 | 5273.79 | 274.327 | 0.16 | 125.54 | -0.14 | 0.08 |
| 11207.00 | 62.00 | 89.880 | 267.740 | 6232.79 | 5316.97 | 395.39 | -5320.70 | 5335.37 | 274.250 | 0.42 | -93.07 | -0.24 | 0.34 |
| 11270.00 | 63.00 | 89.850 | 267.180 | 6232.94 | 5379.93 | 392.59 | -5383.64 | 5397.93 | 274.171 | 0.89 | -129.23 | -0.05 | -0.89 |
| 11333.00 | 63.00 | 89.450 | 266.690 | 6233.33 | 5442.87 | 389.23 | -5446.55 | 5460.44 | 274.088 | 1.00 | 76.51 | -0.63 | -0.78 |
| 11396.00 | 63.00 | 89.510 | 266.940 | 6233.90 | 5505.79 | 385.73 | -5509.45 | 5522.93 | 274.005 | 0.41 | 174.60 | 0.10 | 0.40 |
| 11458.00 | 62.00 | 88.770 | 267.010 | 6234.83 | 5567.73 | 382.45 | -5571.35 | 5584.46 | 273.927 | 1.20 | 79.30 | -1.19 | 0.11 |
| 11520.00 | 62.00 | 88.980 | 268.120 | 6236.05 | 5629.68 | 379.82 | -5633.28 | 5646.07 | 273.857 | 1.82 | 79.77 | 0.34 | 1.79 |
| 11582.00 | 62.00 | 89.260 | 269.670 | 6237.00 | 5691.67 | 378.63 | -5695.26 | 5707.83 | 273.803 | 2.54 | 51.34 | 0.45 | 2.50 |
| 11645.00 | 63.00 | 90.180 | 270.820 | 6237.31 | 5754.66 | 378.89 | -5758.26 | 5770.71 | 273.765 | 2.34 | 85.06 | 1.46 | 1.83 |
| 11708.00 | 63.00 | 90.250 | 271.630 | 6237.07 | 5817.63 | 380.24 | -5821.24 | 5833.65 | 273.737 | 1.29 | 162.00 | 0.11 | 1.29 |
| 11771.00 | 63.00 | 89.850 | 271.760 | 6237.02 | 5880.58 | 382.11 | -5884.22 | 5896.61 | 273.715 | 0.67 | -8.13 | -0.63 | 0.21 |
| 11834.00 | 63.00 | 90.830 | 271.620 | 6236.64 | 5943.53 | 383.96 | -5947.19 | 5959.57 | 273.694 | 1.57 | -165.17 | 1.56 | -0.22 |

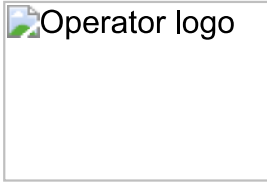

Actual Wellpath Report


Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482

Page 6 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| WELLPATH DATA (223 stations) † = interpolated, ‡ = extrapolated station | | | | | | | | | | | | | |
|---|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 11897.00 | 63.00 | 90.150 | 271.440 | 6236.10 | 6006.49 | 385.65 | -6010.16 | 6022.52 | 273.671 | 1.12 | -93.34 | -1.08 | -0.29 |
| 11960.00 | 63.00 | 90.060 | 269.900 | 6235.99 | 6069.48 | 386.38 | -6073.16 | 6085.43 | 273.640 | 2.45 | -91.75 | -0.14 | -2.44 |
| 12022.00 | 62.00 | 90.030 | 268.920 | 6235.94 | 6131.47 | 385.74 | -6135.15 | 6147.27 | 273.598 | 1.58 | 33.02 | -0.05 | -1.58 |
| 12085.00 | 63.00 | 90.830 | 269.440 | 6235.47 | 6194.47 | 384.84 | -6198.14 | 6210.08 | 273.553 | 1.51 | -174.12 | 1.27 | 0.83 |
| 12148.00 | 63.00 | 90.150 | 269.370 | 6234.93 | 6257.47 | 384.19 | -6261.14 | 6272.91 | 273.511 | 1.09 | -38.66 | -1.08 | -0.11 |
| 12211.00 | 63.00 | 90.400 | 269.170 | 6234.63 | 6320.47 | 383.38 | -6324.13 | 6335.74 | 273.469 | 0.51 | 132.71 | 0.40 | -0.32 |
| 12274.00 | 63.00 | 90.280 | 269.300 | 6234.25 | 6383.47 | 382.54 | -6387.12 | 6398.57 | 273.428 | 0.28 | -101.66 | -0.19 | 0.21 |
| 12336.00 | 62.00 | 90.150 | 268.670 | 6234.02 | 6445.46 | 381.45 | -6449.11 | 6460.38 | 273.385 | 1.04 | 118.18 | -0.21 | -1.02 |
| 12399.00 | 63.00 | 90.000 | 268.950 | 6233.94 | 6508.46 | 380.14 | -6512.10 | 6523.19 | 273.341 | 0.50 | 56.84 | -0.24 | 0.44 |
| 12462.00 | 63.00 | 90.490 | 269.700 | 6233.67 | 6571.46 | 379.39 | -6575.09 | 6586.03 | 273.302 | 1.42 | -98.63 | 0.78 | 1.19 |
| 12525.00 | 63.00 | 90.370 | 268.910 | 6233.19 | 6634.45 | 378.63 | -6638.09 | 6648.88 | 273.265 | 1.27 | -109.72 | -0.19 | -1.25 |
| 12587.00 | 62.00 | 90.180 | 268.380 | 6232.90 | 6696.45 | 377.16 | -6700.07 | 6710.68 | 273.222 | 0.91 | -130.14 | -0.31 | -0.85 |
| 12648.00 | 61.00 | 89.750 | 267.870 | 6232.93 | 6757.43 | 375.17 | -6761.04 | 6771.44 | 273.176 | 1.09 | -130.60 | -0.70 | -0.84 |
| 12711.00 | 63.00 | 89.630 | 267.730 | 6233.27 | 6820.40 | 372.75 | -6823.99 | 6834.16 | 273.127 | 0.29 | 12.44 | -0.19 | -0.22 |
| 12774.00 | 63.00 | 90.310 | 267.880 | 6233.31 | 6883.37 | 370.34 | -6886.94 | 6896.89 | 273.078 | 1.11 | 0.00 | 1.08 | 0.24 |
| 12837.00 | 63.00 | 90.340 | 267.880 | 6232.95 | 6946.35 | 368.01 | -6949.90 | 6959.63 | 273.031 | 0.05 | 47.29 | 0.05 | 0.00 |
| 12898.00 | 61.00 | 90.460 | 268.010 | 6232.52 | 7007.32 | 365.82 | -7010.86 | 7020.39 | 272.987 | 0.29 | 90.00 | 0.20 | 0.21 |
| 12961.00 | 63.00 | 90.460 | 268.720 | 6232.02 | 7070.31 | 364.02 | -7073.83 | 7083.19 | 272.946 | 1.13 | 73.88 | 0.00 | 1.13 |
| 13023.00 | 62.00 | 90.590 | 269.170 | 6231.45 | 7132.30 | 362.88 | -7135.82 | 7145.04 | 272.911 | 0.76 | 180.00 | 0.21 | 0.73 |
| 13087.00 | 64.00 | 90.280 | 269.170 | 6230.96 | 7196.30 | 361.95 | -7199.81 | 7208.90 | 272.878 | 0.48 | 90.00 | -0.48 | 0.00 |
| 13148.00 | 61.00 | 90.280 | 269.940 | 6230.67 | 7257.30 | 361.48 | -7260.80 | 7269.80 | 272.850 | 1.26 | 121.66 | 0.00 | 1.26 |
| 13211.00 | 63.00 | 89.910 | 270.540 | 6230.56 | 7320.29 | 361.74 | -7323.80 | 7332.73 | 272.828 | 1.12 | 60.79 | -0.59 | 0.95 |
| 13275.00 | 64.00 | 90.430 | 271.470 | 6230.37 | 7384.27 | 362.87 | -7387.79 | 7396.70 | 272.812 | 1.66 | -172.95 | 0.81 | 1.45 |
| 13337.00 | 62.00 | 89.540 | 271.360 | 6230.39 | 7446.23 | 364.40 | -7449.77 | 7458.68 | 272.800 | 1.45 | -54.78 | -1.44 | -0.18 |
| 13400.00 | 63.00 | 89.780 | 271.020 | 6230.76 | 7509.20 | 365.71 | -7512.76 | 7521.65 | 272.787 | 0.66 | -77.13 | 0.38 | -0.54 |
| 13463.00 | 63.00 | 89.940 | 270.320 | 6230.92 | 7572.19 | 366.44 | -7575.75 | 7584.61 | 272.769 | 1.14 | -128.89 | 0.25 | -1.11 |
| 13525.00 | 62.00 | 89.690 | 270.010 | 6231.12 | 7634.19 | 366.62 | -7637.75 | 7646.55 | 272.748 | 0.64 | 98.23 | -0.40 | -0.50 |

| WELLPATH DATA (223 stations) † = interpolated, ‡ = extrapolated station | | | | | | | | | | | | | |
|---|--------------------|-----------------|-------------|----------|----------------|------------|-----------|-------------------|-----------------|---------------|--------------|----------------------|---------------------|
| MD [ft] | Course Length [ft] | Inclination [°] | Azimuth [°] | TVD [ft] | Vert Sect [ft] | North [ft] | East [ft] | Closure Dist [ft] | Closure Dir [°] | DLS [°/100ft] | Toolface [°] | Build Rate [°/100ft] | Turn Rate [°/100ft] |
| 13588.00 | 63.00 | 89.570 | 270.840 | 6231.52 | 7697.18 | 367.09 | -7700.75 | 7709.49 | 272.729 | 1.33 | 50.88 | -0.19 | 1.32 |
| 13651.00 | 63.00 | 90.180 | 271.590 | 6231.66 | 7760.15 | 368.42 | -7763.73 | 7772.47 | 272.717 | 1.53 | -156.57 | 0.97 | 1.19 |
| 13714.00 | 63.00 | 89.880 | 271.460 | 6231.63 | 7823.11 | 370.10 | -7826.71 | 7835.46 | 272.707 | 0.52 | -21.40 | -0.48 | -0.21 |
| 13776.00 | 62.00 | 90.620 | 271.170 | 6231.36 | 7885.07 | 371.52 | -7888.69 | 7897.44 | 272.696 | 1.28 | -41.73 | 1.19 | -0.47 |
| 13839.00 | 63.00 | 90.990 | 270.840 | 6230.47 | 7948.05 | 372.63 | -7951.68 | 7960.40 | 272.683 | 0.79 | -116.56 | 0.59 | -0.52 |
| 13902.00 | 63.00 | 90.770 | 270.400 | 6229.50 | 8011.03 | 373.31 | -8014.67 | 8023.36 | 272.667 | 0.78 | -119.02 | -0.35 | -0.70 |
| 13964.00 | 62.00 | 89.910 | 268.850 | 6229.14 | 8073.02 | 372.90 | -8076.66 | 8085.27 | 272.644 | 2.86 | -116.39 | -1.39 | -2.50 |
| 14027.00 | 63.00 | 89.290 | 267.600 | 6229.58 | 8136.00 | 370.95 | -8139.63 | 8148.08 | 272.609 | 2.21 | -131.39 | -0.98 | -1.98 |
| 14090.00 | 63.00 | 88.550 | 266.760 | 6230.76 | 8198.94 | 367.85 | -8202.54 | 8210.78 | 272.568 | 1.78 | 53.87 | -1.17 | -1.33 |
| 14153.00 | 63.00 | 89.010 | 267.390 | 6232.10 | 8261.87 | 364.64 | -8265.44 | 8273.48 | 272.526 | 1.24 | -35.36 | 0.73 | 1.00 |
| 14216.00 | 63.00 | 89.320 | 267.170 | 6233.02 | 8324.82 | 361.65 | -8328.36 | 8336.21 | 272.486 | 0.60 | -146.31 | 0.49 | -0.35 |
| 14279.00 | 63.00 | 89.140 | 267.050 | 6233.87 | 8387.76 | 358.47 | -8391.28 | 8398.93 | 272.446 | 0.34 | -53.13 | -0.29 | -0.19 |
| 14342.00 | 63.00 | 89.320 | 266.810 | 6234.72 | 8450.69 | 355.10 | -8454.18 | 8461.64 | 272.405 | 0.48 | -138.37 | 0.29 | -0.38 |
| 14405.00 | 63.00 | 89.140 | 266.650 | 6235.56 | 8513.61 | 351.51 | -8517.07 | 8524.32 | 272.363 | 0.38 | 45.00 | -0.29 | -0.25 |
| 14457.00 | 52.00 | 89.350 | 266.860 | 6236.25 | 8565.54 | 348.56 | -8568.99 | 8576.07 | 272.329 | 0.57 | 0.00 | 0.40 | 0.40 |
| 14482.00‡ | 25.00 | 89.350 | 266.860 | 6236.53 | 8590.52 | 347.20 | -8593.95 | 8600.96 | 272.313 | 0.00 | | 0.00 | 0.00 |

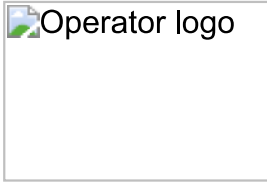

Actual Wellpath Report

Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482

Page 7 of 7

| REFERENCE WELLPATH IDENTIFICATION | | | |
|-----------------------------------|-------------------------------------|----------|---------------------------------|
| Operator | Spur Energy Partners | Well | Oakmont 11-10 State COM No. 11H |
| Field | Lea County, NM (NAD 83) | API | 30-025-49802 |
| Facility | Oakmont 11-10 State COM (North Pad) | Wellbore | Oakmont 11-10 State COM No. 11H |
| Slot | Oakmont 11-10 State COM No. 11H | | |

| TARGETS | | | | | | | | |
|---|----------|------------|-----------|-------------------|--------------------|-----------------|------------------|-------|
| Name | TVD [ft] | North [ft] | East [ft] | Grid East [US ft] | Grid North [US ft] | Latitude | Longitude | Shape |
| Oakmont 11-10 State COM No. 11H FTP Rev2 | 6225.00 | 433.12 | -845.53 | 756031.80 | 675703.00 | 32°51'20.0781"N | 103°38'3.0533"W | point |
| Oakmont 11-10 State COM No. 11H LTP Rev2 | 6225.00 | 364.21 | -8546.14 | 748331.50 | 675634.10 | 32°51'19.8917"N | 103°39'33.3267"W | point |
| Oakmont 11-10 State COM No. 11H PBHL Rev2 | 6225.00 | 363.81 | -8596.14 | 748281.50 | 675633.70 | 32°51'19.8909"N | 103°39'33.9128"W | point |

| WELLPATH COMPOSITION - Ref Wellbore: Oakmont 11-10 State COM No. 11H | | | | | | Ref Wellpath: Oakmont 11-10 State COM No. 11H_AWP_20_146-14457_PTB 14482 | |
|--|-------------|---|------------------------------|---------------------------------|-------------|--|--|
| Start MD [ft] | End MD [ft] | Positional Uncertainty Model | Log Name/Comment | Wellbore | Survey Date | | |
| 20.00 | 1416.00 | OWSG MWD rev2 + IFR1 | Imported MWD Surface Surveys | Oakmont 11-10 State COM No. 11H | 8/31/2022 | | |
| 1416.00 | 3141.00 | OWSG MWD rev2 + IFR1 | 12 1/4" BKR MWD Surveys | Oakmont 11-10 State COM No. 11H | 9/13/2022 | | |
| 3141.00 | 14482.00 | Custom OWSG MWD+IFR1+SAG+FDIR (Approximation) | 8-3/4" BKR ATC Surveys | Oakmont 11-10 State COM No. 11H | 10/7/2022 | | |



Spur Energy Partners




Location: Lea County, NM
 Field: Lea County, NM (NAD 83)
 Facility: Oakmont 11-10 State COM (North Pad)

Slot: Oakmont 11-10 State COM No. 11H
 Well: Oakmont 11-10 State COM No. 11H
 Wellbore: Oakmont 11-10 State COM No. 11H

Well Profile Data

| Design Comment | MD (ft) | Inc (°) | Az (°) | TVD (ft) | Local N (ft) | Local E (ft) | DLS (°/100ft) | VS (ft) |
|----------------|----------|---------|---------|----------|--------------|--------------|---------------|---------|
| Tie On | 1416.00 | 5.580 | 14.910 | 1412.53 | 80.74 | 13.31 | 0.29 | -14.03 |
| PTB | 1485.00 | 5.580 | 16.750 | 1481.20 | 87.20 | 15.14 | 0.26 | -15.91 |
| Drill Out | 1585.00 | 5.580 | 16.750 | 1580.72 | 96.51 | 17.94 | 0.00 | -18.80 |
| Drop/Turn | 1622.74 | 4.861 | 14.219 | 1618.31 | 99.82 | 18.86 | 2.00 | -19.75 |
| KOP | 5217.58 | 4.861 | 14.219 | 5200.22 | 395.10 | 93.68 | 0.00 | -97.20 |
| Build | 6239.99 | 60.000 | 269.487 | 6047.74 | 437.24 | -385.00 | 6.00 | 381.09 |
| Hold | 6440.99 | 60.000 | 269.487 | 6148.24 | 435.68 | -559.07 | 0.00 | 555.17 |
| LP/FTP | 6740.99 | 90.000 | 269.487 | 6225.00 | 433.12 | -845.53 | 10.00 | 841.64 |
| LTP | 14441.91 | 90.000 | 269.487 | 6225.00 | 364.21 | -8546.14 | 0.00 | 8542.56 |
| TD/PBHL | 14491.91 | 90.000 | 269.596 | 6225.00 | 363.81 | -8596.14 | 0.22 | 8592.56 |

| Location Information | | | | | | | | |
|---|-------------------|--------------------|---|------------------------------|---------------------------------|---|-----------------|------------------|
| Facility Name | Grid East (US ft) | Grid North (US ft) | Latitude | Longitude | | | | |
| Oakmont 11-10 State COM (North Pad) | 756877.300 | 675269.900 | 32°51'15.7373"N | 103°37'53.1756"W | | | | |
| Slot | Local N (ft) | Local E (ft) | Grid East (US ft) | Grid North (US ft) | Latitude | | | |
| Oakmont 11-10 State COM No. 11H | 0.00 | 0.00 | 756877.300 | 675269.900 | 32°51'15.7373"N | | | |
| Rig: Akita 57 (KB) to Ground level (At Slot: Oakmont 11-10 State COM No. 11H) | | | | | 20ft | | | |
| Mean Sea Level to Ground level (At Slot: Oakmont 11-10 State COM No. 11H) | | | | | -4161ft | | | |
| Rig: Akita 57 (KB) to Mean Sea Level | | | | | 4181ft | | | |
| Survey Program | | | | | | | | |
| Start MD (ft) | End MD (ft) | Tool | Model | Log Name/Comment | Wellbore | | | |
| 20.00 | 1416.00 | OWSG MWD rev2 | OWSG MWD rev2 + IFR1 | Imported MWD Surface Surveys | Oakmont 11-10 State COM No. 11H | | | |
| 1416.00 | 3185.00 | OWSG MWD rev2 | OWSG MWD rev2 + IFR1 | | Oakmont 11-10 State COM No. 11H | | | |
| 3185.00 | 14516.36 | OWSG MWD rev2 | Custom OWSG MWD+IFR1+SAG+FDRI (Approximation) | | Oakmont 11-10 State COM No. 11H | | | |
| Targets | | | | | | | | |
| Name | MD (ft) | TVD (ft) | Local N (ft) | Local E (ft) | Grid East (US ft) | Grid North (US ft) | Latitude | Longitude |
| Oakmont 11-10 State COM No. 11H FTP Rev2 | 6740.99 | 6225.00 | 433.12 | -845.53 | 756031.80 | 675703.00 | 32°51'20.0781"N | 103°38'3.0533"W |
| Oakmont 11-10 State COM No. 11H LTP Rev2 | 14441.91 | 6225.00 | 364.21 | -8546.14 | 748331.50 | 675634.10 | 32°51'19.8917"N | 103°39'33.3267"W |
| Oakmont 11-10 State COM No. 11H PBHL Rev2 | 14491.91 | 6225.00 | 363.81 | -8596.14 | 748281.50 | 675633.70 | 32°51'19.8909"N | 103°39'33.9128"W |
| Plot reference wellpath is Oakmont 11-10 State COM No. 11H Rev-B.0 | | | | | | Grid System: NAD83 / TM New Mexico SP, Eastern Zone (3001), US feet | | |
| True vertical depths are referenced to Rig: Akita 57 (KB) | | | | | | North Reference: Grid north | | |
| Reference wellpath measured depths are referenced to Rig: Akita 57 (KB) | | | | | | Scale: True distance | | |
| Rig: Akita 57 (KB) to Mean Sea Level: 4181 feet | | | | | | Coordinates are in feet referenced to Facility Center | | |
| Mean Sea Level to Ground level (At Slot: Oakmont 11-10 State COM No. 11H): -4161 feet | | | | | | Depths are in feet | | |
| Offset wellpath MDs are referenced to each path's default MD datum | | | | | | Created by: fform01 on 2022-10-04; Database: WellArchitectDB | | |

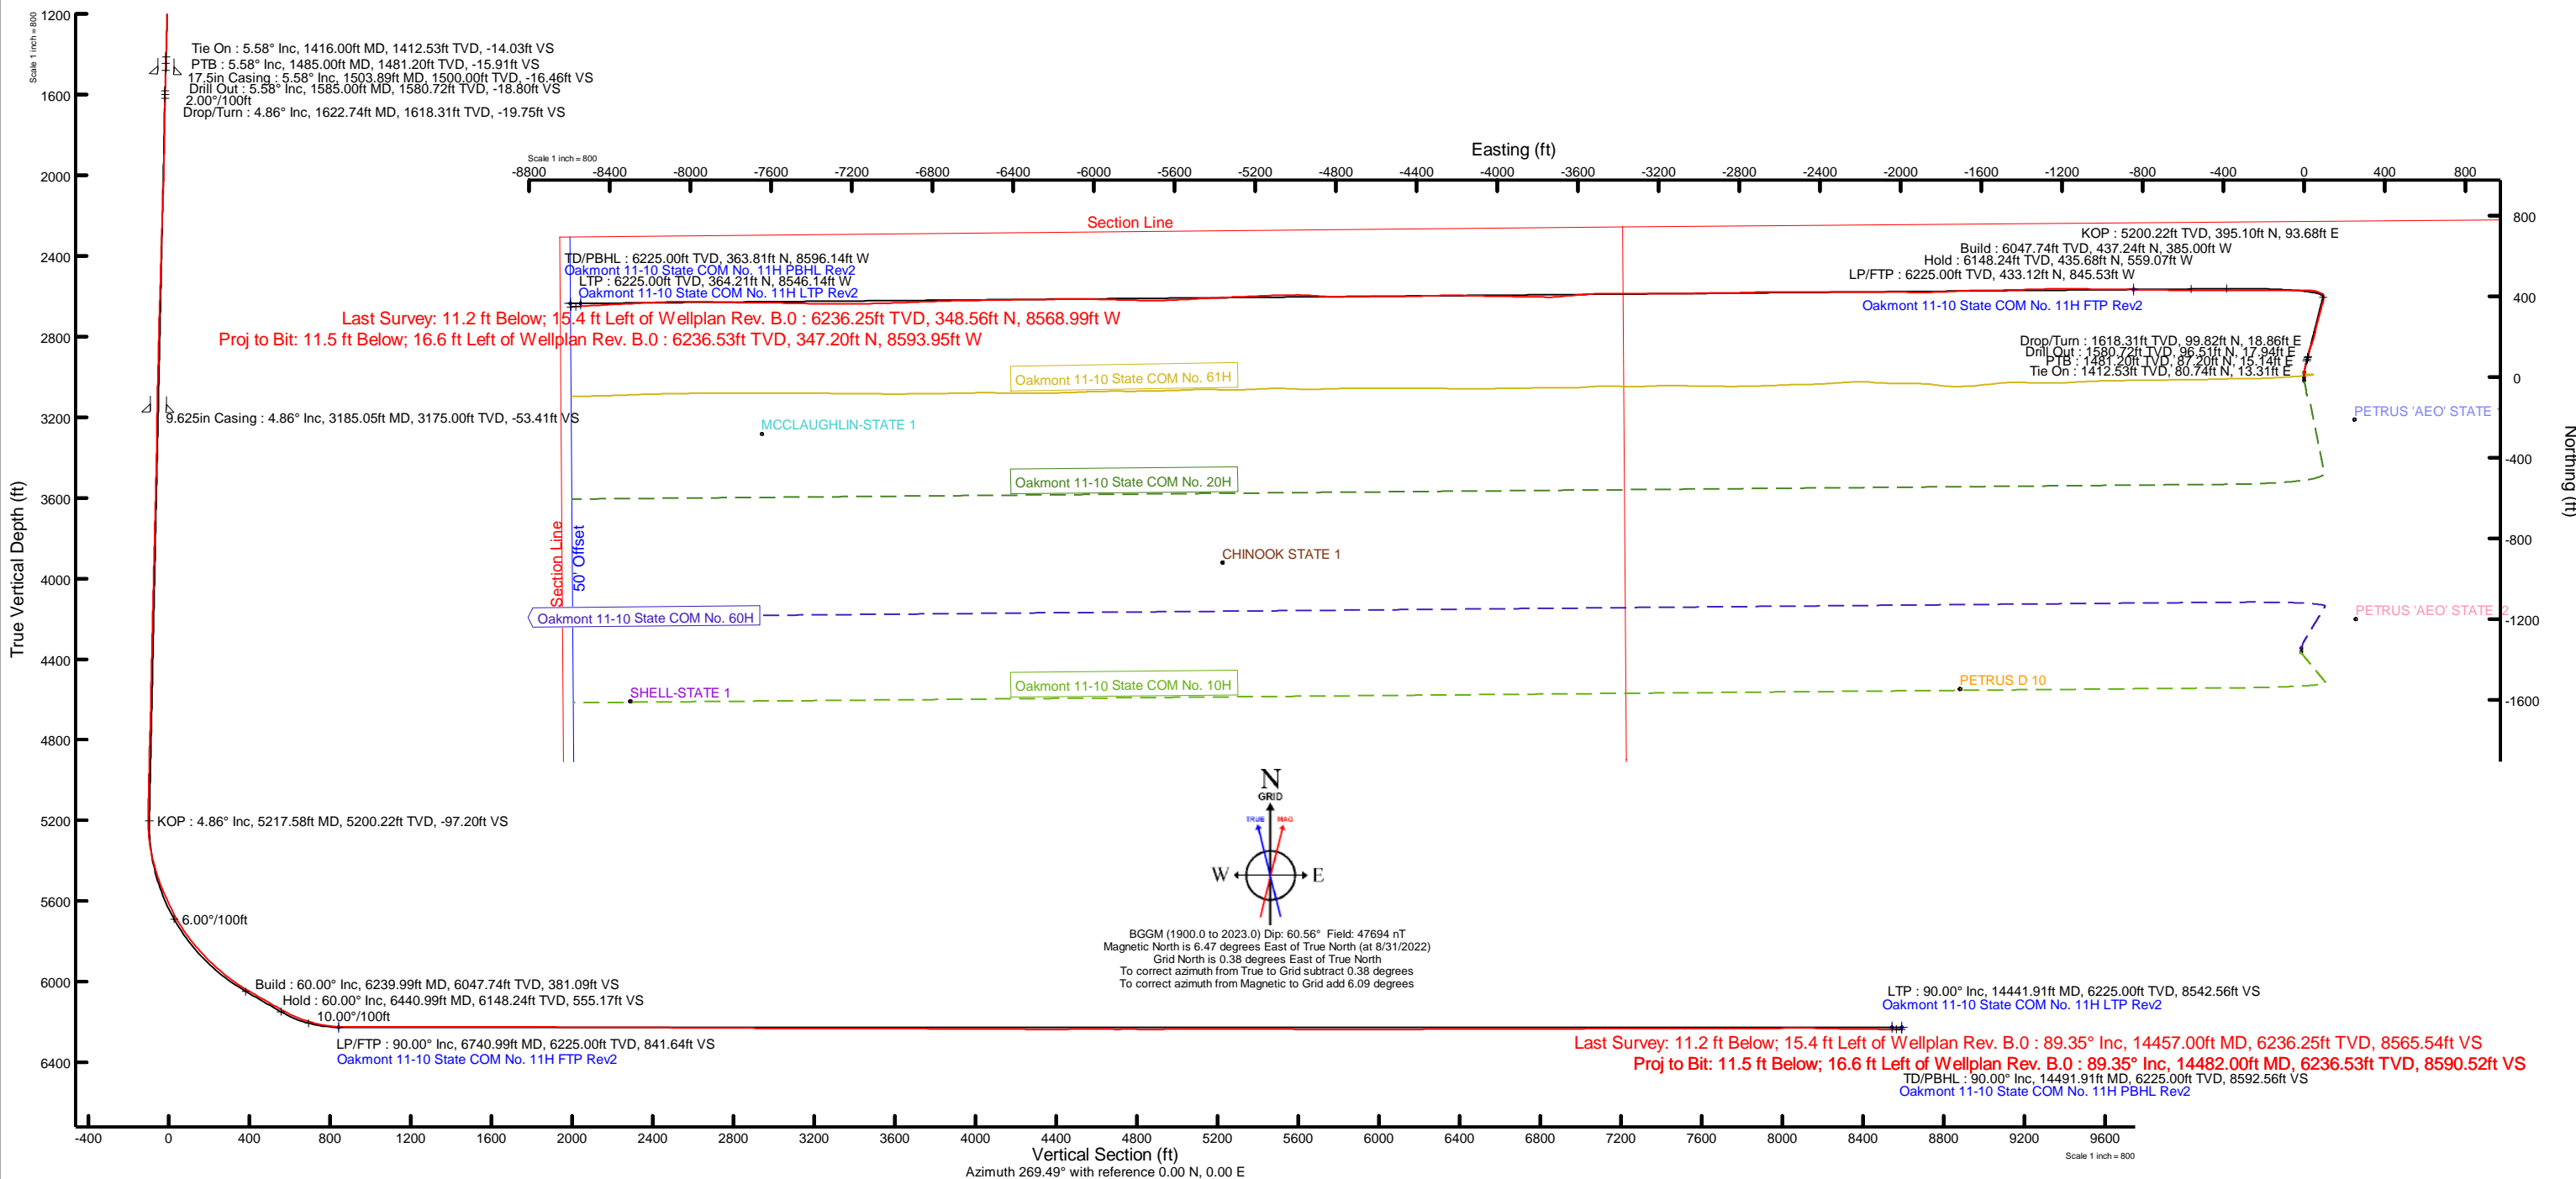

Intent As Drilled

| | | | | | | | | | |
|----------------|--|--|--|--|----------------|--|--|--|-------------|
| API # | | | | | | | | | |
| Operator Name: | | | | | Property Name: | | | | Well Number |

Kick Off Point (KOP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

First Take Point (FTP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

Last Take Point (LTP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

Is this well the defining well for the Horizontal Spacing Unit?

Is this well an infill well?

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

| | | | | | | | | | |
|----------------|--|--|--|--|----------------|--|--|--|-------------|
| API # | | | | | | | | | |
| Operator Name: | | | | | Property Name: | | | | Well Number |

KZ 06/29/2018

| Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 | | State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 | | | | Form C-105 Revised April 3, 2017 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|----------------|---|-------------------------------|--|--|--|-------|-------------------------------------|---------|---|---|--------|-----|-------|---------|---------------------------|---|----|-----|-------|--------|----------------------------|---|--------|-----|--------|--------|----------------------------|---|--|--|------|-----|--------|--------------|--------|------|-----------|------------|--|--|--|--|--|-------------|-------|--|--|--|
| | | 1. WELL API NO. | | 30-025-49802 | | 2. Type of Lease | | <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/> FED/INDIAN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 3. State Oil & Gas Lease No. | | | | 4. Reason for filing: | | 5. Lease Name or Unit Agreement Name OAKMONT 11-10 STATE COM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <input checked="" type="checkbox"/> COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) | | | | <input type="checkbox"/> C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC) | | 6. Well Number: 11H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7. Type of Completion: | | <input checked="" type="checkbox"/> NEW WELL <input type="checkbox"/> WORKOVER <input type="checkbox"/> DEEPENING <input type="checkbox"/> PLUGBACK <input type="checkbox"/> DIFFERENT RESERVOIR <input type="checkbox"/> OTHER | | 8. Name of Operator SPUR ENERGY PARTNERS LLC | | 9. OGRID 328947 | | 10. Address of Operator 9655 KATY FREEWAY, SUITE 500, HOUSTON, TX 77024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11. Pool name or Wildcat WC-025 G-03-S173318N; YESO | | 12. Location | | 13. Date Spudded 08/20/2022 | | 14. Date T.D. Reached 10/16/2022 | | 15. Date Rig Released 10/17/2022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16. Date Completed (Ready to Produce) 12/15/2022 | | 17. Elevations (DF and RKB, RT, GR, etc.) 4161' GR | | 18. Total Measured Depth of Well 6237'V/14482'M | | 19. Plug Back Measured Depth 6237'V/14436'M | | 20. Was Directional Survey Made? YES | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 21. Type Electric and Other Logs Run GAMMA RAY | | 22. Producing Interval(s), of this completion - Top, Bottom, Name 6749'-14414' PADDOCK | | 23. CASING RECORD (Report all strings set in well) | | 24. LINER RECORD | | 25. TUBING RECORD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>CASING SIZE</th> <th>WEIGHT LB./FT.</th> <th>DEPTH SET</th> <th>HOLE SIZE</th> <th>CEMENTING RECORD</th> <th>AMOUNT PULLED</th> </tr> </thead> <tbody> <tr> <td>13-3/8"</td> <td>54.5#</td> <td>1533'</td> <td>17-1/2"</td> <td>1530 SXS (CIRC TO SURFACE)</td> <td>0</td> </tr> <tr> <td>9-5/8"</td> <td>36#</td> <td>3200'</td> <td>12-1/4"</td> <td>735 SXS (CIRC TO SURFACE)</td> <td>0</td> </tr> <tr> <td>7"</td> <td>32#</td> <td>6502'</td> <td>8-3/4"</td> <td>2475 SXS (CIRC TO SURFACE)</td> <td>0</td> </tr> <tr> <td>5-1/2"</td> <td>20#</td> <td>14482'</td> <td>8-3/4"</td> <td>2475 SXS (CIRC TO SURFACE)</td> <td>0</td> </tr> </tbody> </table> | | CASING SIZE | WEIGHT LB./FT. | DEPTH SET | HOLE SIZE | CEMENTING RECORD | AMOUNT PULLED | 13-3/8" | 54.5# | 1533' | 17-1/2" | 1530 SXS (CIRC TO SURFACE) | 0 | 9-5/8" | 36# | 3200' | 12-1/4" | 735 SXS (CIRC TO SURFACE) | 0 | 7" | 32# | 6502' | 8-3/4" | 2475 SXS (CIRC TO SURFACE) | 0 | 5-1/2" | 20# | 14482' | 8-3/4" | 2475 SXS (CIRC TO SURFACE) | 0 | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>SIZE</th> <th>TOP</th> <th>BOTTOM</th> <th>SACKS CEMENT</th> <th>SCREEN</th> <th>SIZE</th> <th>DEPTH SET</th> <th>PACKER SET</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>3-1/2" J-55</td> <td>6445'</td> <td></td> </tr> </tbody> </table> | | SIZE | TOP | BOTTOM | SACKS CEMENT | SCREEN | SIZE | DEPTH SET | PACKER SET | | | | | | 3-1/2" J-55 | 6445' | | 26. Perforation record (interval, size, and number) 11/18/2022 RIH & cleanout to PBTD @ 14436'. RIH & perf from 6749'-14414', total shots 900/ft @ 0.42 shot size. Frac in 38 stages w/ 18756570 gal slickwater and 7696699# sand. 12/04/2022 rig down wireline and cleanout. RIH w/ 3-1/2" J-55 tbg @ 6445'. | |
| CASING SIZE | WEIGHT LB./FT. | DEPTH SET | HOLE SIZE | CEMENTING RECORD | AMOUNT PULLED | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13-3/8" | 54.5# | 1533' | 17-1/2" | 1530 SXS (CIRC TO SURFACE) | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9-5/8" | 36# | 3200' | 12-1/4" | 735 SXS (CIRC TO SURFACE) | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7" | 32# | 6502' | 8-3/4" | 2475 SXS (CIRC TO SURFACE) | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5-1/2" | 20# | 14482' | 8-3/4" | 2475 SXS (CIRC TO SURFACE) | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SIZE | TOP | BOTTOM | SACKS CEMENT | SCREEN | SIZE | DEPTH SET | PACKER SET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | 3-1/2" J-55 | 6445' | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. | | <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>DEPTH INTERVAL</th> <th>AMOUNT AND KIND MATERIAL USED</th> </tr> </thead> <tbody> <tr> <td>6749'-14414'</td> <td>8756570 gal slickwater and 7696699# sand</td> </tr> </tbody> </table> | | DEPTH INTERVAL | AMOUNT AND KIND MATERIAL USED | 6749'-14414' | 8756570 gal slickwater and 7696699# sand | 28. PRODUCTION | | Date First Production 12/27/2022 | | Production Method (Flowing, gas lift, pumping - Size and type pump) PUMPING ON ESP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DEPTH INTERVAL | AMOUNT AND KIND MATERIAL USED | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6749'-14414' | 8756570 gal slickwater and 7696699# sand | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Well Status (Prod. or Shut-in) PRODUCING | | Date of Test 03/04/2023 | | Hours Tested 24-HOURS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Choke Size N/A | | Prod'n For Test Period 158 | | Oil - Bbl 158 | | Gas - MCF 67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Water - Bbl. 2502 | | Gas - Oil Ratio | | Date of Test 03/04/2023 | | Hours Tested 24-HOURS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Flow Tubing Press. 131 | | Casing Pressure 38 | | Calculated 24-Hour Rate 158 | | Oil - Bbl. 158 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Gas - MCF 67 | | Water - Bbl. 2502 | | Oil Gravity - API - (Corr.) | | 29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30. Test Witnessed By JERRY MATHEWS | | 31. List Attachments AS DRILLED PLAT, FINAL C-104, DIRECTIONAL AND WBD | | 32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit. | | 33. Rig Release Date: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 34. If an on-site burial was used at the well, report the exact location of the on-site burial: | | Latitude _____ Longitude _____ NAD83 | | I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Printed Name SARAH CHAPMAN Title REGULATORY DIRECTOR Date 03/23/23 | | Signature Sarah Chapman E-mail Address SCHAPMAN@SPURENERGY.COM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

| Southeastern New Mexico | | Northwestern New Mexico | |
|-------------------------|------------------|-------------------------|------------------|
| T. Anhy | T. Canyon | T. Ojo Alamo | T. Penn A" |
| T. Salt | T. Strawn | T. Kirtland | T. Penn. "B" |
| B. Salt | T. Atoka | T. Fruitland | T. Penn. "C" |
| T. Yates 2775' | T. Miss | T. Pictured Cliffs | T. Penn. "D" |
| T. 7 Rivers 3115' | T. Devonian | T. Cliff House | T. Leadville |
| T. Queen 3745' | T. Silurian | T. Menefee | T. Madison |
| T. Grayburg 4220' | T. Montoya | T. Point Lookout | T. Elbert |
| T. San Andres 4560' | T. Simpson | T. Mancos | T. McCracken |
| T. Glorieta 6015' | T. McKee | T. Gallup | T. Ignacio Otzte |
| T. Paddock | T. Ellenburger | Base Greenhorn | T. Granite |
| T. Blinebry | T. Gr. Wash | T. Dakota | |
| T. Tubb | T. Delaware Sand | T. Morrison | |
| T. Drinkard | T. Bone Springs | T. Todilto | |
| T. Abo | T. YESO 6100' | T. Entrada | |
| T. Wolfcamp | T. | T. Wingate | |
| T. Penn | T. | T. Chinle | |
| T. Cisco (Bough C) | T. | T. Permian | |

OIL OR GAS SANDS OR ZONES

No. 1, from.....to..... No. 3, from.....to.....
 No. 2, from.....to..... No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

| From | To | Thickness In Feet | Lithology | From | To | Thickness In Feet | Lithology |
|-------|-------|-------------------|----------------------------|------|----|-------------------|-----------|
| 2775' | 3115' | 340' | DOLOMITE, LIMESTONE, SHALE | | | | |
| 3115' | 3745' | 630' | DOLOMITE, LIMESTONE | | | | |
| 3745' | 4220' | 475' | SANDSTONE, DOLOMITE | | | | |
| 4220' | 4560' | 340' | DOLOMITE, LIMESTONE | | | | |
| 4560' | 6015' | 1455' | DOLOMITE, SILTSTONE | | | | |
| 6015' | 6100' | 85' | DOLOMITE, LIMESTONE | | | | |

Oakmont 11-10 State Com 11H

Lea County, NM
API# 30-025-49802

SPUD DATE: 8/20/2022
ELEV: 4,161' GR, 20' KB

CURRENT WBD

13-3/8" 54.5# J-55 BTC Csg @ 1,533'
CMT W/ 1155 SX LEAD (12.4 PPG, 1.77 CUFT/SK) & 415 SX TAIL (14.8 PPG, 1.33 CUFT/SK) CLASS C CEMENT
CIRC 150 BBLs TO SURF, TOC @ SURF

TUBING DETAIL
2-7/8" 6.5# J-55 EUE 8RD TUBING
ESP ASSEMBLY
INTAKE @ 6,387'
PIP SENSOR @ 6,438'
EOT @ 6,445'

9-5/8" 36# J-55 BTC Csg @ 3,200'
CMT W/ 540 SX LEAD (12 PPG, 2.38 CUFT/SK) & 195 SX TAIL (13.5 PPG, 1.73 CUFT/SK) CLASS C CEMENT
CIRC 95 BBLs TO SURF, TOC @ SURF

7" 32# P-110 BTC Csg @ 6,502'
5-1/2" 20# P-110 BTC Csg @ 14,482'
CMT W/ 215 SX LEAD (11.4 PPG, 2.39 CUFT/SK) & 2260 SX TAIL (13.2 PPG, 1.4 CUFT/SK) CLASS C CEMENT
CIRC 100 BBLs TO SURF, TOC @ SURF


LOWER PADDOCK COMPLETION
PERF & FRAC IN 38 STAGES F/ 6,749'-14,414'
3-1/8" GUNS, 0.41 EHD, 60 DEG, 6 CLUSTERS/STG,
4 SHOTS/CLUSTER, 912 TOTAL HOLES,
48,079 GALS 15% HCL, 445,440 BBLs FR WATER,
3,438,533# 100 MESH, 797,210# 20/40 PERMIAN,
3,460,956# 40/70 PERMIAN

CROSS OVER FROM 7" TO 5-1/2" CSG @ 6,502'

KOP @ 5,200'

TOP PERF @ 6,749'

BOTTOM PERF @ 14,414'

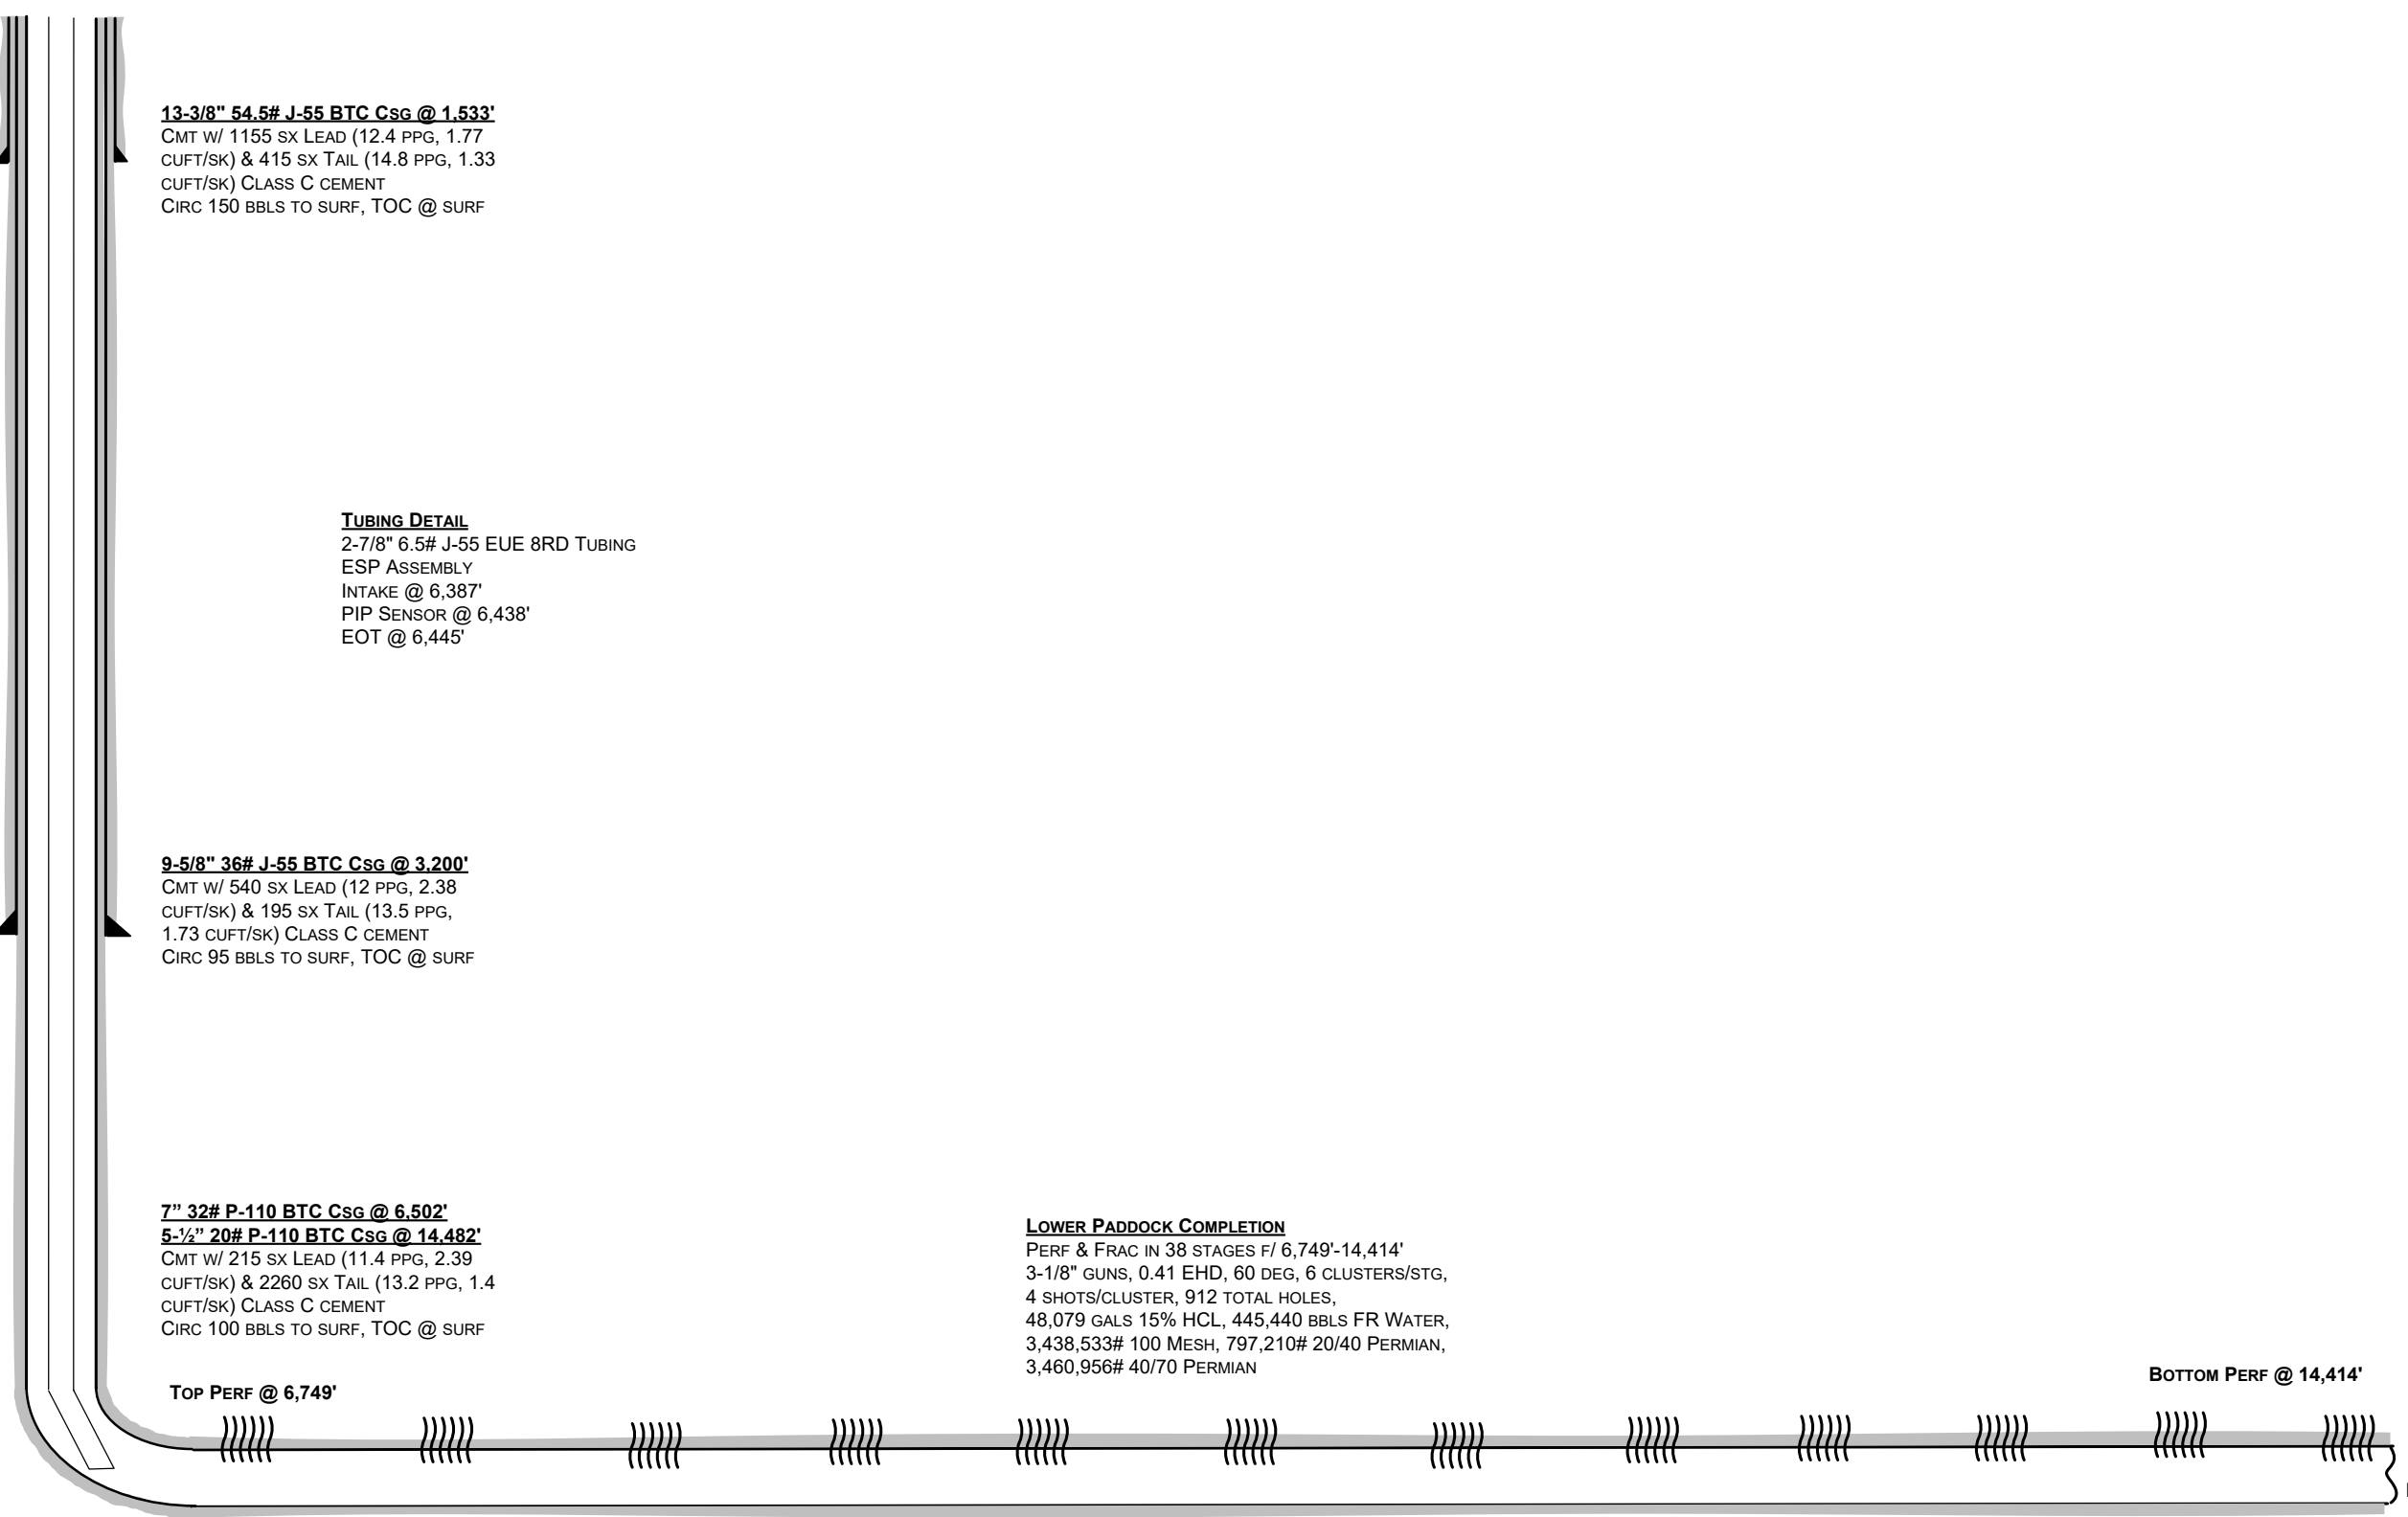

TD (MD) @ 14,482'
TD (TVD) @ 6,237'
PBTD @ 14,434' MD

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 200315

ACKNOWLEDGMENTS

| | |
|---|--|
| Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024 | OGRID: 328947 |
| | Action Number: 200315 |
| | Action Type: [C-104] Completion Packet (C-104C) |

ACKNOWLEDGMENTS

| | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion. |
| <input checked="" type="checkbox"/> | I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion. |

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 200315

CONDITIONS

| | |
|---|--|
| Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024 | OGRID: 328947 |
| | Action Number: 200315 |
| | Action Type: [C-104] Completion Packet (C-104C) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|-----------|----------------|
| plmartinez | None | 4/30/2026 |