

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

☒ Initial Report ☐ Final Report

Name of Company: Elm Ridge Exploration	Contact: Amy Mackey
Address: PO Box 156, Bloomfield, NM 87413	Telephone No.: (505) 632-3476 Ext 201
Facility Name: Bisti Coal 20-2	Facility Type: Gas Well

Surface Owner: Federal	Mineral Owner:	Lease No.: NM 25448
------------------------	----------------	---------------------

LOCATION OF RELEASE

Unit Letter M	Section 20	Township 25N	Range 12W	Feet from the 790	North/South Line FSL	Feet from the 790	East/West Line FEL	County San Juan
------------------	---------------	-----------------	--------------	----------------------	-------------------------	----------------------	-----------------------	--------------------

Latitude 36.381600 Longitude -108.128498

NATURE OF RELEASE


Type of Release: Produced Water	Volume of Release: Unknown	Volume Recovered: Unknown
Source of Release: Earth Pit	Date and Hour of Occurrence: Historical	Date and Hour of Discovery: NA
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Not Required	If YES, To Whom?	
By Whom?	Date and Hour	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*
Produced Water from gas well at the mentioned location formerly discharged into an earthen pit on location. The well has been altered to no longer drain into an earthen pit, but instead into an Above Ground Storage Tank (AST).

Describe Area Affected and Cleanup Action Taken.*
From August 10, 2009 through August 14, 2009, 'Production Sludge' was removed from the earthen pit to extents of approximately 15' x 15' x 15' below the bottom of the earthen pit. Sludge was removed to visual extents of contamination, where confirmation samples were collected; see attached **Analytical Results**. Sandstone was encountered at 15' below the bottom of the earthen pit. A sample of the sandstone was collected, and analyzed in the field for TPH via USEPA Method 418.1, and in Envirotech's laboratory for benzene and BTEX via USEPA Method 8021 and for total chlorides via USEPA Method 4500B. The sandstone returned chloride results of 365 mg/kg above background, confirming that a release has occurred at the above mentioned site; see **Analytical Results**. Please reference the attached Bisti Coal 20-2 Closure Plan for Elm Ridge Exploration's proposed course of action concerning this release

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

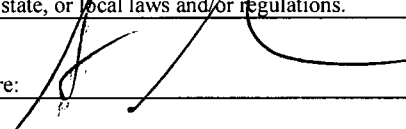OIL CONSERVATION DIVISION	
Signature: 	Approved by District Supervisor:
Printed Name: Ms. Amy Mackey	
Title: Administrative Manager	Approval Date: Expiration Date:
E-mail Address: amackey1@elmridge.net	Conditions of Approval: Attached <input type="checkbox"/>
Date: <u>6-15-10</u> Phone: 505-632-3476 Ext 201	

* Attach Additional Sheets If Necessary



March 8, 2010

Project No. 03056-0168

Mr. Brad Jones
New Mexico Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Phone (505) 476-3487

RE: C-141 RELEASE NOTIFICATION FORM FOR THE BISTI COAL 20 -2 WELL SITE


Dear Mr. Jones,

Please find enclosed a C-141 Release Notification Form and additional supporting closure documentation for the Bisti Coal 20-2 well site owned and operated by Elm Ridge Exploration.

The previous additional 'Closure Plan' submitted by Envirotech, Inc. for Elm Ridge Exploration was a remediation plan, and was not intended to be an alternative closure plan. All closure activities from this point forward will comply with Rule 29 with the local division of the OCD.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully Submitted,
ENVIROTECH, INC.

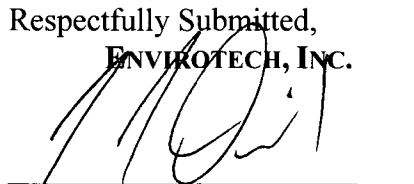
James McDaniel
Project Scientist
jmcdaniel@envirotech-inc.com

Enclosure: C-141 Release Notification Form
Bills of Lading
Proof of Notification

Cc: Client File No. 03056

RECEIVED OCD
2010 JUN 18 A 11:15



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 6"	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	436	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

James McDaniel
Printed


Review

Greg Crabtree
Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	2	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 1'	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	300	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

James McDaniel

Printed



Review

Greg Crabtree

Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	3	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 2'	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	14,200	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

James McDaniel

Printed



Review

Greg Crabtree

Printed



CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 10-Aug-09

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	191
	200	
	500	
	1000	

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.


Analyst

James McDaniel

Print Name


Review

Greg Crabtree

Print Name

8/24/09
Date

8/24/09
Date



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	North Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	8	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

Robyn Jones
Printed


Review

James McDaniel
Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	2	Date Reported:	8/24/2009
Sample ID:	South Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	ND	5.0

ND = Parameter not detected at the stated detection limit.


References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

Robyn Jones
Printed


Review

James McDaniel
Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client: Elm Ridge Exploration
Sample No.: 3
Sample ID: East Wall
Sample Matrix: Soil
Preservative: Cool
Condition: Cool and Intact

Project #: 03056-0168
Date Reported: 8/24/2009
Date Sampled: 8/14/2009
Date Analyzed: 8/14/2009
Analysis Needed: TPH-418.1

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	12	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

Robyn Jones
Printed


Review

James McDaniel
Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	4	Date Reported:	8/24/2009
Sample ID:	West Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	ND	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

Robyn Jones
Printed



Review

James McDaniel
Printed



envirotech

**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	Bottom Comp (15' Below Pit)	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		


Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	72	5.0

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

Robyn Jones
Printed


Review

James McDaniel
Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	6	Date Reported:	8/24/2009
Sample ID:	Wall Composite	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	ND	5.0

ND = Parameter not detected at the stated detection limit.


References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

Robyn Jones
Printed


Review

James McDaniel
Printed



CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 14-Aug-09

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	
	200	193
	500	
	1000	

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Meg Carter for
Analyst

8/24/09
Date

Robyn Jones
Print Name

[Signature]
Review

8/24/09
Date

James McDaniel
Print Name



envirotech

Analytical Laboratory

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Elmridge	Project #:	03056-0168
Sample ID:	Bottom Comp. (15'BPit)	Date Reported:	08-20-09
Laboratory Number:	51315	Date Sampled:	08-14-09
Chain of Custody:	7755	Date Received:	08-17-09
Sample Matrix:	Soil	Date Analyzed:	08-19-09
Preservative:	Cool	Date Extracted:	08-18-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	4.3	1.0
Ethylbenzene	1.8	1.0
p,m-Xylene	3.9	1.2
o-Xylene	3.4	0.9
Total BTEX	13.4	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Bisti Coal 20-2

Analyst

Review



envirotech

Analytical Laboratory

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Elmridge	Project #:	03056-0168
Sample ID:	Wall Comp	Date Reported:	08-20-09
Laboratory Number:	51314	Date Sampled:	08-14-09
Chain of Custody:	7755	Date Received:	08-17-09
Sample Matrix:	Soil	Date Analyzed:	08-19-09
Preservative:	Cool	Date Extracted:	08-18-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	3.2	1.0
Ethylbenzene	1.2	1.0
p,m-Xylene	3.4	1.2
o-Xylene	4.0	0.9
Total BTEX	11.8	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Bisti Coal 20-2

Analyst

Review



envirotech

Analytical Laboratory

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	08-19-BT QA/QC	Date Reported:	08-20-09
Laboratory Number:	51287	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	08-19-09
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	C-Cal RE:	C-Cal RE:	%Diff	Blank Conc	Detect Limit
		Accept Range 0 - 15%			
Benzene	4.0036E+008	4.0116E+008	0.2%	ND	0.1
Toluene	3.7371E+008	3.7446E+008	0.2%	ND	0.1
Ethylbenzene	3.3158E+008	3.3224E+008	0.2%	ND	0.1
p,m-Xylene	8.5339E+008	8.5510E+008	0.2%	ND	0.1
o-Xylene	3.1835E+008	3.1698E+008	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff	Accept Range	Detect Limit
Benzene	4.9	4.7	4.1%	0 - 30%	0.9
Toluene	11.4	11.9	4.4%	0 - 30%	1.0
Ethylbenzene	9.4	8.3	11.7%	0 - 30%	1.0
p,m-Xylene	24.0	22.8	5.0%	0 - 30%	1.2
o-Xylene	14.2	14.0	1.4%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Benzene	4.9	50.0	53.8	98.0%	39 - 150
Toluene	11.4	50.0	59.2	96.4%	46 - 148
Ethylbenzene	9.4	50.0	56.2	94.6%	32 - 160
p,m-Xylene	24.0	100	113	91.0%	46 - 148
o-Xylene	14.2	50.0	61.7	96.1%	46 - 148

ND - Parameter not detected at the stated detection limit.

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.
Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments: QA/QC for Samples 51287 - 51290, 51308, 51310 - 51312, and 51314 - 51315.

Analyst

Review



envirotech

Analytical Laboratory

Chloride

Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Background	Date Reported:	08-20-09
Lab ID#:	51316	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754

Parameter	Concentration (mg/Kg)
-----------	-----------------------

Total Chloride

35

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bisti Coal 20-2.**

Analyst

Review



envirotech
Analytical Laboratory

Chloride

Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Bottom Comp. (15' B Pit)	Date Reported:	08-20-09
Lab ID#:	51315	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754

Parameter	Concentration (mg/Kg)
Total Chloride	400

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bistl Coal 20-2.**

Analyst

Review



envirotech

Analytical Laboratory

Chloride

Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Wall Comp	Date Reported:	08-20-09
Lab ID#:	51314	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754

Parameter	Concentration (mg/Kg)
-----------	-----------------------

Total Chloride

190

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bisti Coal 20-2.**

Analyst

Review

CHAIN OF CUSTODY RECORD

7755

Client: Elm Ridge			Project Name / Location: Bisti Coal 20-2			ANALYSIS / PARAMETERS																	
Client Address:			Sampler Name: R. Jones																				
Client Phone No.:			Client No.: 030546-0168																				
Sample No./ Identification	Sample Date	Sample Time	Lab No.	Sample Matrix	No./Volume of Containers	Preservative			TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	Cation / Anion	RCI	TCLP with H/P	PAH	TPH (418.1)	CHLORIDE			Sample Cool	Sample Intact	
Background	8/14/09	11:30	51316	Soil Sludge	1-4oz			X											X			X	X
Bottom Comp. (US EPA)	8/14/09	11:15	51315	Soil Sludge	1-4oz			X		X									X			X	X
Wall Comp	8/14/09	14:24	51314	Soil Sludge	1-4oz			X		X									X			X	X
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
				Soil Sludge																			
Relinquished by: (Signature) <i>[Signature]</i>					Date	Time	Received by: (Signature) <i>[Signature]</i>					Date	Time										
Relinquished by: (Signature)					8/17/09	9:13	Received by: (Signature)					8/17/09	9:13										
Relinquished by: (Signature)							Received by: (Signature)																



5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

☒ Initial Report ☐ Final Report

Name of Company: Elm Ridge Exploration	Contact: Amy Mackey	
Address: PO Box 156, Bloomfield, NM 87413	Telephone No.: (505) 632-3476 Ext 201	
Facility Name: Bisti Coal 20-2	Facility Type: Gas Well	
Surface Owner: Federal	Mineral Owner:	Lease No.: NM 25448

LOCATION OF RELEASE

Unit Letter M	Section 20	Township 25N	Range 12W	Feet from the 790	North/South Line FSL	Feet from the 790	East/West Line FEL	County San Juan
------------------	---------------	-----------------	--------------	----------------------	-------------------------	----------------------	-----------------------	--------------------

Latitude 36.381600 Longitude -108.128498

NATURE OF RELEASE

Type of Release: Produced Water	Volume of Release: Unknown	Volume Recovered: Unknown
Source of Release: Earth Pit	Date and Hour of Occurrence: Historical	Date and Hour of Discovery: NA
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Not Required	If YES, To Whom?	
By Whom?	Date and Hour	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*

Produced Water from gas well at the mentioned location formerly discharged into an earthen pit on location. The well has been altered to no longer drain into an earthen pit, but instead into an Above Ground Storage Tank (AST).

Describe Area Affected and Cleanup Action Taken.*

From August 10, 2009 through August 14, 2009, 'Production Sludge' was removed from the earthen pit to extents of approximately 15' x 15' x 15' below the bottom of the earthen pit. All sludge was taken to Envirotech's NMOCD permitted soil remediation facility, Landfarm #2. Sludge was removed to visual extents of contamination, where confirmation samples were collected; see attached **Analytical Results**. Sandstone was encountered at 15' below the bottom of the earthen pit. A sample of the sandstone was collected, and analyzed in the field for TPH via USEPA Method 418.1, and in Envirotech's laboratory for benzene and BTEX via USEPA Method 8021 and for total chlorides via USEPA Method 4500B. The sandstone returned chloride results of 365 mg/kg above background, confirming that a release has occurred at the above mentioned site; see **Analytical Results**. Elm Ridge Exploration will comply with rule 29 from this point forward with the district office of the OCD.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

		OIL CONSERVATION DIVISION	
Signature:		Approved by District Supervisor:	
Printed Name: Ms. Amy Mackey			
Title: Administrative Manager		Approval Date:	Expiration Date:
E-mail Address: amackey1@elmridge.net		Conditions of Approval:	
Date:		Attached <input type="checkbox"/>	
Phone: 505-632-3476 Ext 201			

* Attach Additional Sheets If Necessary



Bill of Lading

34030

MANIFEST #


PHONE: (505) 632-0615 • 5796 U.S. HIGHWAY 64 • FARMINGTON, NEW MEXICO 87401

DATE 8-14-09 JOB# 03056-01/26

LOAD NO.	COMPLETE DESCRIPTION OF SHIPMENT						TRANSPORTING COMPANY			
	POINT OF ORIGIN	DESTINATION	MATERIAL	GRID	YDS	BBLs	COMPANY	TRK#	TIME	DRIVER SIGNATURE
1	ELMERIDGE 20-2 Bishi cole 28-19	LF II	cont soil	H-16	20	-	484	74	8:48	Dennis Leonard
2	"	"	"	F-14	12	-	484	75	9:10	Cedric M.
3	"	"	"	F-14	12	-	484	178	9:10	John Lutz
4	"	"	"	F-17	20	-	484	74	11:00	Dennis Leonard
5	"	"	"	F-17	12	-	484	75	11:10	Cedric M.
6	"	"	"	F-17	12	-	484	178	11:15	John Lutz
7	"	"	"	F-17	20	-	484	74	12:45	Dennis Leonard
8	"	"	"	F-17	12	-	484	75	12:55	Cedric M.
9	"	"	"	F-17	12	-	484	178	12:55	John Lutz
10	"	"	"	G-17	20	-	484	74	14:30	Dennis Leonard
11	"	"	"	G-17	12	-	484	75	14:30	Cedric M.
12	"	"	"	G-17	12	-	484	178	14:35	John Lutz

RESULTS:

211-211(2)	CHLORIDE TEST	12
-298(9)	PAINT FILTER TEST	12

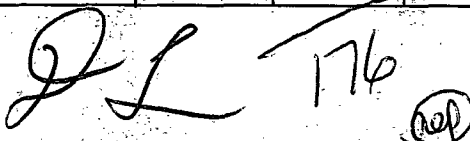LANDFARM
EMPLOYEE:

NOTES:

ENTERED AUG 18 2009

"I certify the material hauled from the above location has not been added to or mixed with, and is the same material received from the above mentioned Generator, and that no additional materials have been added."

NAME Dennis Leonard COMPANY Four Four Inc. SIGNATURE Dennis Leonard
COMPANY CONTACT Scott PHONE 505-327-2711 DATE 8-14-09



Bill of Lading

34039

PHONE: (505) 632-0615 • 5796 U.S. HIGHWAY 64 • FARMINGTON, NEW MEXICO 87401

MANIFEST #.

DATE 8-14-09 JOB# 03056-0166

[illegible]

"I certify the material hauled from the above location has not been added to or mixed with, and is the same material received from the above mentioned Generator, and that no additional materials have been added."

NAME _____ COMPANY _____ SIGNATURE _____

COMPANY CONTACT _____ PHONE _____ DATE _____



Bill of Lading

34031

MANIFEST #

PHONE: (505) 632-0615 • 5796 U.S. HIGHWAY 64 • FARMINGTON, NEW MEXICO 87401

DATE 8-14-09 JOB# 03056-0166

LOAD NO.	COMPLETE DESCRIPTION OF SHIPMENT						TRANSPORTING COMPANY			
	POINT OF ORIGIN	DESTINATION	MATERIAL	GRID	YDS	BBLs	COMPANY	TRK#	TIME	DRIVER SIGNATURE
1	Envirotech Fill	Elmridge Biotic	CLEAN Fill	-	20	-	484	74	8:48	Don Ford
2	"	"	"	-	20	-	484	75	9:10	Carl M.
3	"	"	"	-	12	-	484	178	9:10	John L.
4	"	"	"	-	20	-	484	74	11:00	Don Ford
5	"	"	"	-	12	-	484	75	11:10	Carl M.
6	"	"	"	-	12	-	484	178	11:10	John L.
7	"	"	"	-	20	-	484	74	12:45	Don Ford
8	"	"	"	-	12	-	484	75	12:45	Carl M.
9	"	"	"	-	12	-	484	178	12:45	John L.
10	"	"	"	-	20	-	484	74	14:30	Don Ford
11	"	"	"	-	12	-	484	75	14:30	Carl M.
12	"	"	"	-	12	-	484	178	14:35	John L.
RESULTS:		LANDFARM EMPLOYEE:		NOTES:						
CHLORIDE TEST				ENTERED AUG 18 2009						
PAINT FILTER TEST										

"I certify the material hauled from the above location has not been added to or mixed with, and is the same material received from the above mentioned Generator, and that no additional materials have been added."

NAME Dennison Leonard COMPANY Four Four Inc. SIGNATURE Don Ford
COMPANY CONTACT Scott PHONE 505-327-2711 DATE 8-14-09



August 3, 2009

Project No. 03056-0168

Mr. Mark Kelly
Bureau of Land Management
1235 La Plata Highway, Suite A
Farmington, New Mexico 87401

Phone: (505) 599-8900

RE: BISTI COAL 20-2 EARTH PIT CLOSURE NOTIFICATION

Dear Mr. Kelly,

Please accept this letter and attached Sundry Notice as the necessary surface owner notification for closure activities at the Bisti Coal 20-2 well site, owned and operated by Elm Ridge Exploration. The Bisti Coal 20-2 well site is located in Unit M, Section 20, Township 25N, Range 12W, San Juan County, New Mexico. Closure activities are scheduled to begin on August 10, 2009 and continue through August 14, 2009.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully Submitted,

ENVIROTECH, INC.



James McDaniel
Project Scientist

jmcdaniel@envirotech-inc.com

Enclosure: Sundry Notice

Cc: Client File No. 03056

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
**Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.
NM-25448

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

8. Well Name and No.
Bisti Coal 20-2

2. Name of Operator
Elm Ridge Exploration

9. API Well No.
30-045-28383

3a. Address
PO Box 166
Bloomfield, NM 87413

3b. Phone No. (include area code)
(505) 632-3476

10. Field and Pool or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
790 FSL 790 FEL, M-20-25N-12W, Lat. 36.3816 long. -108.128488

11. Country or Parish, State
San Juan County, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Closure of an Earth Pit
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Elm Ridge Exploration plans to begin closure activities for an earthen pit located at the above mentioned site. All formal notifications have been made. Closure activities are scheduled to being on Monday, August 10, 2009 and last through August 14, 2009.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)
Ms. Amy Mackey

Title Administrative Manager

Signature

Date 08/03/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13 - Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment.

NOTICES

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8-hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

**Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application**

Type of action: ☐ Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
☒ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
☐ Modification to an existing permit
☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

Operator: Elm Ridge Exploration OGRID #: 149052
Address: P.O. Box 156; Bloomfield, NM 87413
Facility or well name: Bisti Coal 20-2
API Number: 3004528383 OCD Permit Number:
U/L or Qtr/Qtr M Section 20 Township 25N Range 12W County: San Juan
Center of Proposed Design: Latitude 36.381426 Longitude -108.140836 NAD: ☐ 1927 ☒ 1983
Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2. **Ceased Operating Prior to June 16, 2008**

☒ **Pit:** Subsection F or G of 19.15.17.11 NMAC
Temporary: ☐ Drilling ☐ Workover
☒ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☐ Lined ☒ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____ Volume: _____ bbl Dimensions: L 24' x W 12' x D 3'

3. ☐ **Closed-loop System:** Subsection H of 19.15.17.11 NMAC

Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other _____
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____

4. ☐ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC

Volume: _____ bbl Type of fluid:
Tank Construction material:
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other _____
Liner type: Thickness _____ mil ☐ HDPE ☐ PVC ☐ Other _____

5. ☐ **Alternative Method:**

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.

Fencing: Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)

- ☐ Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 4' tall hogwire fencing with pipe railing

7.

Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☐ Screen ☒ Netting ☐ Other _____
- ☐ Monthly inspections (If netting or screening is not physically feasible)

8.

Signs: Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.3.103 NMAC

9.

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- ☐ Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).0.

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- (*Applies to temporary, emergency, or cavitation pits and below-grade tanks*) (

☐ Yes ☐ No
☐ NA

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (*Applies to permanent pits*)

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No
☐ NA

Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

Within 500 feet of a wetland.

☐ Yes ☐ No

Within the area overlying a subsurface mine.

☐ Yes ☐ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☐ No

Within a 100-year floodplain.

- FEMA map

☐ Yes ☐ No

☐ Yes ☐ No

☐ Yes ☐ No

11.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12.

Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
- ☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____

☐ Previously Approved Operating and Maintenance Plan API Number: _____ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Climatological Factors Assessment
- ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Quality Control/Quality Assurance Construction and Installation Plan
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan
- ☐ Emergency Response Plan
- ☐ Oil Field Waste Stream Characterization
- ☐ Monitoring and Inspection Plan
- ☐ Erosion Control Plan
- ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

Proposed Closure: 19.15.17.13 NMAC**Instructions:** Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☒ Permanent Pit ☐ Below-grade Tank ☐ Closed-loop System

☐ Alternative

Proposed Closure Method: ☒ Waste Excavation and Removal

☐ Waste Removal (Closed-loop systems only)

☐ On-site Closure Method (Only for temporary pits and closed-loop systems)

☐ In-place Burial ☐ On-site Trench Burial

☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- ☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- ☒ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
- ☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16.

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)

Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please provide the information below) ☐ No

Required for impacted areas which will not be used for future service and operations:

☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17.

Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC

Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 50 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Ground water is between 50 and 100 feet below the bottom of the buried waste

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Ground water is more than 100 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No

Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- Written confirmation or verification from the municipality; Written approval obtained from the municipality

☐ Yes ☐ No

Within 500 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within the area overlying a subsurface mine.

- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

☐ Yes ☐ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☐ No

Within a 100-year floodplain.

- FEMA map

☐ Yes ☐ No

18.

On-Site Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC

☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC

☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC

☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC

☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)

☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19.

Operator Application Certification

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Ms. Amy Mackey

Title: Administrative Manager

Signature: 

Date: 1-27-09

E-mail address: amackey1@elmridge.net

Telephone: (505) 632-3476 Ext. 201

20.

OCD Approval: ☐ Permit Application (including closure plan) ☒ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature:  Approval Date: 2/24/2009

Title: Environmental Engineer OCD Permit Number: _____

21.

Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

22.

Closure Method:

☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

23.

Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:

Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

24.

Closure Report Attachment Checklist: *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)
☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable)
☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

25.


Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.


Name (Print): _____ Title: _____

Signature: _____ Date: _____

E-mail address: _____ Telephone: _____

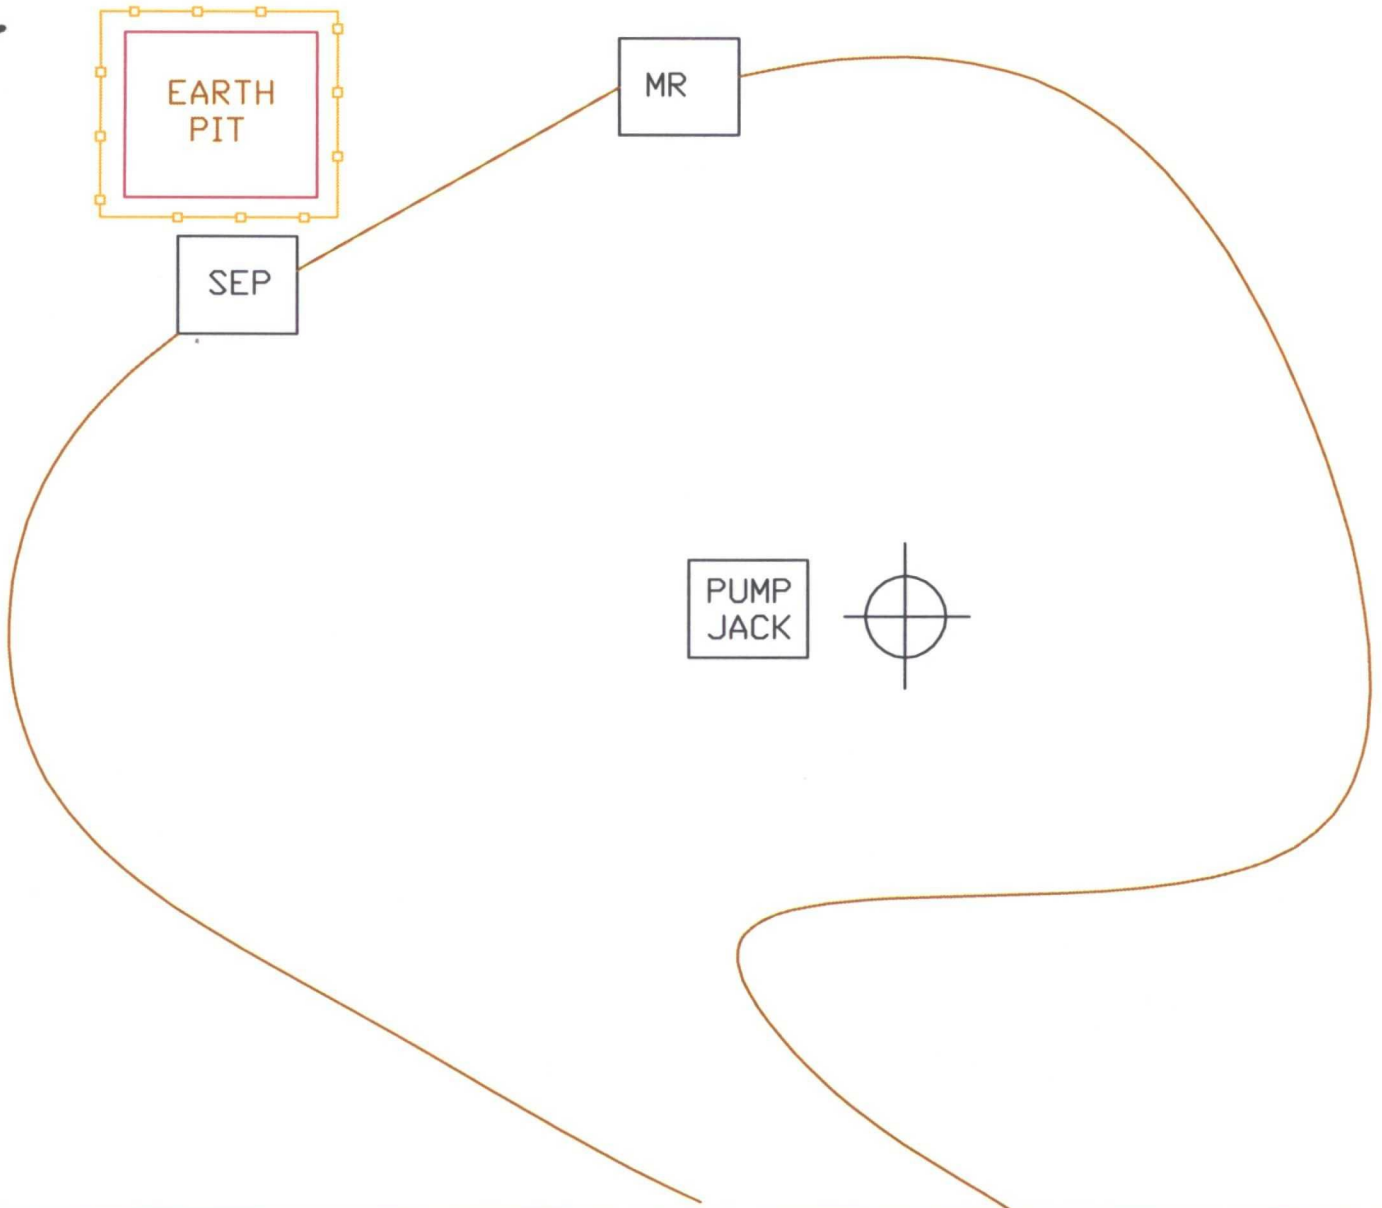

LEGEND



4' Tall Hogwire
Fencing



Berm



Well Head

SITE MAP ELM RIDGE EXPLORATION BISTI COAL 20-2 SEC 20 TWN 25N RGE 12W SAN JUAN COUNTY, NEW MEXICO

SCALE: NTS

PROJECT N003056-0136

FIGURE NO. A

REV

REVISIONS

NO.	DATE	BY	DESCRIPTION
MAP DRWN	TLM	12/24/08	BASE DRWN

ENVIRONMENTAL SCIENTISTS & ENGINEERS
ENVIROTECH

5796 U.S. HIGHWAY 64, FARMINGTON, NM 87410 505-632-0615

EARTHEN PIT CLOSURE PLAN

SITE NAME:

**BISTI COAL 20-2
UNIT LETTER M, SECTION 20, TOWNSHIP 25N, RANGE 12W
SAN JUAN COUNTY, NEW MEXICO
LATITUDE 36.381426 LONGITUDE -108.140836**

SUBMITTED TO:

**MR. WAYNE PRICE
NEW MEXICO OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DRIVE
SANTA FE, NEW MEXICO 87505
(505) 476-3490**

SUBMITTED BY:

**MS. AMY MACKEY
ELM RIDGE EXPLORATION
P.O. BOX 156
BLOOMFIELD, NEW MEXICO 87413
(505) 632-3476 EXT. 201**

JANUARY 2009

**EARTHEN PIT CLOSURE PLAN
ELM RIDGE EXPLORATION
BISTI COAL 20-2
SAN JUAN COUNTY, NEW MEXICO**

TABLE OF CONTENTS

<u>INTRODUCTION</u>	1
<u>SCOPE OF CLOSURE ACTIVITIES</u>	1
<u>REPORTING</u>	3

INTRODUCTION

Elm Ridge Exploration would like to submit a closure plan for the earthen pit at the Bisti Coal 20-2 well site located in the SW ¼ SW ¼ of Section 20, Township 25N, Range 12W, San Juan County, New Mexico. This closure plan has been prepared in conformance with the closure requirements of 19.15.17.13 NMAC.

SCOPE OF CLOSURE ACTIVITIES

The purpose of this closure plan is to provide the details of activities involved in the closure of the permanent unlined pit at the Bisti Coal 20-2 well site. The following scope of closure activities has been designed to meet this objective:

- 1) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close all former earthen pits prior to the closure date agreed upon by the New Mexico Oil Conservation Division of December 31, 2009.
- 2) In accordance with of Subsection A of 19.15.17.13 NMAC, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close any earthen pits at a date the division requires because of imminent danger to fresh water, public health, or the environment.
- 3) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close earthen pits first which seem to pose a greater risk to fresh water, public health, or the environment. This will be determined by the locations proximity to surface water sources and distance to groundwater.
- 4) No less than 60 days prior to any earthen pit closure activities, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the Santa Fe NMOCD office as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (3) NMAC.
- 5) No less than 24 hours and no greater than one (1) week prior to earthen pit removal Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate surface owner as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the surface owner by certified mail, return receipt requested, that the operator plans to close a earthen pit. The return receipt will be used to ensure that the surface owner has received written notification no less than 24 hours and no greater than one (1) week prior to the beginning of BGT closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. Closure activities that will take place on tribal land will have notifications sent by certified mail, return receipt requested, to the appropriate tribal office. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the Bureau of Land Management (BLM) of closure activities for wells located on federal land per a Sundry Notice, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. All notices will be sent in such a way that the surface owner received notice at least 24 hours prior to the beginning of

closure activities.

- 6) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all liquids, and/or sludge, to visual extents, prior to closure sampling. Material will be disposed of at Envirotech's Landfarm #2, Permit # NM-01-0011, TNT Environmental Inc. Landfarm, Permit # NM-01-0008, Industrial Ecosystems Inc. (IEI) Landfarm, Permit # NM-01-0010B or Basin Disposal, Permit # NM-01-0005, depending on the consistence of the material removed, as in accordance with 19.15.17.13 Subsection C Paragraph (1) NMAC .
- 7) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all on-site equipment associated with this earthen pit unless it is required for some other purpose, as in accordance with 19.15.17.13 Subsection C Paragraph (2) NMAC. The equipment that meets the requirements of 19.15.9.712 Subsection A NMAC and 19.15.9.712 Subsection D Paragraph (1) will be disposed of at San Juan County Regional Landfill. Waste that is classified by 19.15.9.712 Subsection D Paragraph (2) will be sampled accordingly to determine acceptance of this material at the San Juan County Regional Landfill. Waste that is unable to be accepted at the San Juan County Regional Landfill will be submitted to the OCD on a case-by-case basis in accordance with Paragraph (3) of Subsection D of 19.15.9.712.
- 8) Once the earthen pit is removed to visual extents of contamination, a five (5)-point composite sample will be collected from directly below the liner(s) or at native soil. Additional discrete samples will be collected from any area that is wet, discolored or show other evidence of a release. All samples being collected will be analyzed for benzene, and total BTEX via USEPA Method 8021B, TPH via USEPA Method 418.1, and chlorides via USEPA 300.1, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.
- 9) Depending on soil sample results the area will be either backfilled or the area will be excavated.
 - a. If soil samples do not exceed the regulatory standards of 0.2 mg/kg benzene, 50 mg/kg BTEX, 100 mg/kg TPH, and 250 mg/kg or background concentration of chlorides, as in accordance with 19.15.17.13 Subsection C Paragraph (3) NMAC.
 - i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.
 - ii. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will backfill the excavation or impacted area with non-waste containing, earthen material, in accordance with 19.15.17.13 Subsection E Paragraph (6) NMAC. A soil cover shall be installed for all backfilled excavations consisting of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater in accordance with Subsections H of 19.15.17.13 NMAC. The operator shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.
 - iii. All areas of the well site that are no longer utilized on a day to day basis for the production of oil and/or gas, Elm Ridge Exploration, or a

contractor acting on behalf of Elm Ridge Exploration, will substantially restore, re-contour, and re-vegetate the areas, in accordance with 19.15.17.13 Subsections G and I NMAC. The operator shall notify the division when it has been re-seeded and when it has achieved successful re-vegetation. For re-vegetation methods, please see attached re-vegetation plan.


- b. If soil samples exceed the regulatory standards stated above.
 - i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (4) of Subsection C of 19.15.17.13 NMAC.
 - ii. Activities beyond this point will be in accordance with 19.15.3.116 NMAC and 19.15.11.19 NMAC.

REPORTING

Elm Ridge Exploration will submit a closure report within 60 days following the earthen pit closure. The closure report will consist of a form C-144 with all supporting data and a form C-141 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques and site reclamation photo documentation if applicable, along with all other information related to the onsite activities.

We appreciate the opportunity to be of service. If you have any questions or require further information, please do not hesitate to contact our office at (505) 632-3476 Ext. 201.

Respectfully Submitted:
Elm Ridge Exploration

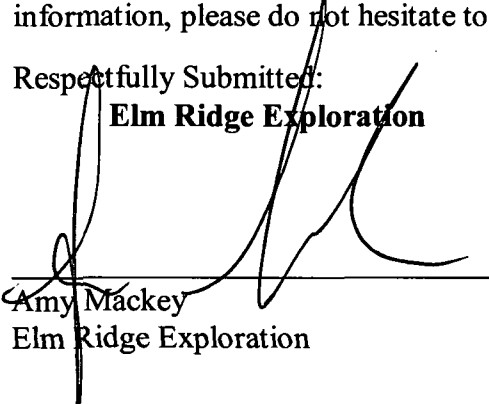
Amy Mackey
Elm Ridge Exploration

Elm Ridge Exploration

Re-Seeding Techniques and Seed Mixture Ratios

These applied practices by Elm Ridge Exploration will at a minimum comply with the New Mexico Oil Conservation Divisions rule 19.15.17.13, Subsection I NMAC Elm Ridge Exploration has adopted these re-seeding application techniques, ratios and mixtures as their standard operating procedures.

1. The first growing season after closure of a below grade tank or pit, all areas of the well site not utilized for the production of oil and/or gas on a daily basis will be re-seeded with the specified seed mixture.
2. The seed mixture used will be certified with no primary or secondary noxious weeds in seed mixtures. The seed labels from each bag shall be available for inspection while seed is being sown.
3. The operator shall accomplish seeding by drilling on the contour whenever practical or by other division-approved methods. The operator shall obtain vegetative cover that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.
4. Hand seeding with hydro-mulch, excelsior netting or mulch with netting is required on the cut/fill slopes. Mulch will be spread at a rate of 2,000-3,000 pounds per acre.
5. Compacted areas determined by visual inspection will be ripped to a depth of twelve (12) inches below ground surface and disked to a depth of six (6) inches before seeding. Seeding shall be done with a disk type drill with two (2) boxes for various seed sizes. The drill rows shall be eight (8) to ten (10) inches apart. Seed shall be planted at no less than one-half (1/2) inch deep or more than one (1) inch deep. The seeder shall be followed with a drag, packer, or roller to ensure uniform coverage of the seed and adequate compaction. Drilling shall be done on the contour where possible, but not up and down the slope.
6. Where slopes are too steep for contour drilling a hand seeder shall be used. Seed shall be covered to the depth stated above by whatever means is practical. If the seed is unable to be covered by the means listed above, the prescribed seed mixture amount will be doubled.

7. Elm Ridge Exploration shall repeat seeding or planting until it successfully achieves the required vegetative cover of 70% of the native perennial vegetation cover.
8. Upon abandonment of a well site, if the retention of the access road is not considered necessary for the management and multiple uses of the natural resources, or by the surface owner, it will be ripped a minimum of twelve (12) inches in depth. After ripping, water bars will be installed. All ripped surfaces are to be protected from vehicular travel by construction of a dead end ditch and earthen barricade at the entrance to these ripped areas. Re-seeding of areas affected by the ditch and barriers will be re-seeded if necessary.
9. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will inform the division once successful re-vegetation has occurred.

RELEASE CLOSURE PLAN

SITE NAME:

**BISTI COAL 20-2
UNIT LETTER M, SECTION 20, TOWNSHIP 25N, RANGE 12W
SAN JUAN COUNTY, NEW MEXICO
LATITUDE 36.381426 LONGITUDE -108.140836**

SUBMITTED TO:

**MR. BRAD JONES
NEW MEXICO OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DRIVE
SANTA FE, NEW MEXICO 87505
(505) 476-3490**

SUBMITTED BY:

**MS. AMY MACKEY
ELM RIDGE EXPLORATION
P.O. BOX 156
BLOOMFIELD, NEW MEXICO 87413
(505) 632-3476 EXT. 201**

OCTOBER 2009

INTRODUCTION

The purpose of this release closure plan is to provide the details of activities involved in the closure of the confirmed release from the former earthen pit located at the Bisti Coal 20-2 well site located in Unit M, Section 20, Township 25N, Range 12W, San Juan County, New Mexico. From August 10, 2009 through August 14, 2009, 'production sludge' was removed from the former earthen pit located at the Bisti Coal 20-2 well site. The 'production sludge' was removed to visual extents of approximately 15' x 15' x 15' below the bottom of the earthen pit, where sandstone was encountered. Five (5) samples were collected from the excavation. One (1) sample was collected from the sandstone bottom of the excavation at fifteen (15) feet below the bottom of the earthen pit, and one (1) sample was collected of each of the four (4) walls. Each sample was analyzed in the field for total petroleum hydrocarbons (TPH) via USEPA Method 418.1 with each sample returning results below the 100 mg/kg standard required by the 'Pit Rule'. The sample collected from the sandstone bottom, along with a composite sample of the four (4) walls of the excavation, were collected into four (4)-ounce glass jars, capped headspace free, and transported with ice under chain of custody to Envirotech's laboratory to be analyzed for benzene and BTEX via USEPA Method 8021 and for total chlorides via USEPA Method 4500B. Samples collected from the walls were below the 100 mg/kg TPH standard, the 0.2 mg/kg benzene standard, the 50 mg/kg BTEX standard, and the 250 mg/kg chloride standard. The sample collected from the sandstone bottom returned results below the 100 mg/kg TPH standard, the 0.2 mg/kg benzene standard, and the 50 mg/kg BTEX standard, but returned results above the 250 mg/kg total chloride standard at 400 mg/kg total chlorides. A background sample was collected at this location at approximately one (1) foot below ground surface and analyzed in Envirotech's laboratory for total chlorides via USEPA Method 4500B. The background sample returned results of 35 mg/kg total chlorides. The sample taken from the bottom of the excavation at sandstone is 365 mg/kg above the background for this site, confirming that a release has occurred at the Bisti Coal 20-2 well site.

Closure Plan

Elm Ridge Exploration is proposing to close the remainder of the earthen pit in place; citing presidents set forth in the NMOCD 'Pit Rule'.

The sample collected from the bottom of the excavation was collected from sandstone at fifteen (15) feet below the bottom of the earthen pit. The sandstone was dry, and did not contain groundwater.

- A permit submit by Permit's West for a drill pit at the Bisti Gallup 20-9 well site, approved by the OCD in October of 2008, shows a groundwater elevation at this site of 6,071 feet. The Bisti Coal 20-2 well site is located approximately 1,200 feet to the south-west of the Bisti Gallup 20-9 well site at an elevation of approximately 6,338 feet. These findings indicate that the depth to groundwater is over 100 feet at the Bisti Coal 20-2 well site; see *Topographic Map*.
- The nearest surface water is approximately 560 feet to the south-west of the Bisti Coal 20-2 well site; see *Topographic Map*.
- According to an iWATERS database search, no registered water wells exist within 1,000 feet of the Bisti Coal 20-2 well site; see *iWATERS Database Search*.
- The Bisti Coal 20-2 well site is not located within an area overlying a subsurface mine; see attached *Mine Map*.

- The Bisti Coal 20-2 well site is not within 300 feet of a permanent residence, school, hospital, institution or church; see attached *Aerial Photograph*.
- The Bisti Coal 20-2 well site is not within incorporated municipal boundaries; see attached *Topographic Map*.
- The Bisti Coal 20-2 well site is not located within 500 feet of a wetland; see attached *Wetlands Map*.
- The Bisti Coal 20-2 well site is not located within an unstable area. This data was obtained from frequent site visits during closure activities by Envirotech, Inc. personnel.
- The Bisti Coal 20-2 well site is not within a 100 year flood plain; see attached *FEMA Map*.


Currently, the NMOCD allows on-site burial of drill pits that meet these criteria, outlined in 19.15.17.10 Subpart A NMAC. The chloride levels found in the sandstone at the Bisti Coal 20-2 well site are well below the 1000 mg/kg chloride standard allowed for on-site burial at well sites with groundwater depths greater than 100 feet from the bottom of the drill pit based on rule 19.15.17.10 Subpart C. Elm Ridge Exploration is proposing to bury the remainder of the chlorides found in the sandstone based on the analytical results found and the citing criteria determined for this site, which indicate that the chloride levels found at this site "do not pose a threat to present or foreseeable beneficial use of fresh waters, public health and the environment". As the chloride contamination was found in sandstone at approximately 15 feet below ground surface, maximum reasonable extents of excavation have been reached at this depth.

REPORTING

Elm Ridge Exploration will submit a closure report within 60 days following the earthen pit final closure. The closure report will consist of a form C-144 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques and site reclamation photo documentation if applicable, along with all other information related to the onsite activities.

We appreciate the opportunity to be of service. If you have any questions or require further information, please do not hesitate to contact our office at (505) 632-3476 Ext. 201.

Respectfully Submitted,
Elm Ridge Exploration

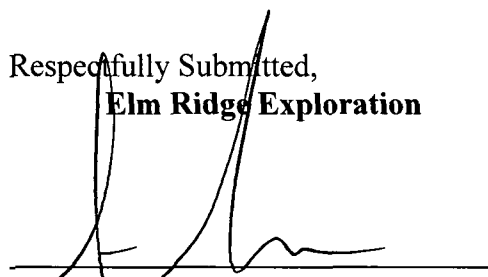

Amy Mackey
Elm Ridge Exploration

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised October 10, 2003

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

☒ Initial Report ☐ Final Report


Name of Company: Elm Ridge Exploration	Contact: Amy Mackey	
Address: PO Box 156, Bloomfield, NM 87413	Telephone No.: (505) 632-3476 Ext 201	
Facility Name: Bisti Coal 20-2	Facility Type: Gas Well	
Surface Owner: Federal	Mineral Owner:	Lease No.: NM 25448

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County
M	20	25N	12W	790	FSL	790	FEL	San Juan

Latitude 36.381600 Longitude -108.128498

NATURE OF RELEASE

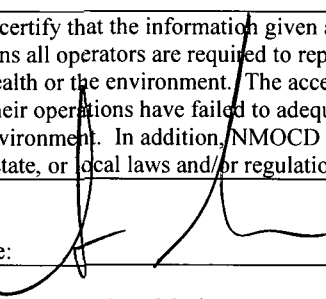Type of Release: Produced Water	Volume of Release: Unknown	Volume Recovered: Unknown
Source of Release: Earth Pit	Date and Hour of Occurrence: Historical	Date and Hour of Discovery: NA
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Not Required	If YES, To Whom?	
By Whom?	Date and Hour	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	
If a Watercourse was Impacted, Describe Fully.*		
Describe Cause of Problem and Remedial Action Taken.* Produced Water from gas well at the mentioned location formerly discharged into an earthen pit on location. The well has been altered to no longer drain into an earthen pit, but instead into an Above Ground Storage Tank (AST).		
Describe Area Affected and Cleanup Action Taken.* From August 10, 2009 through August 14, 2009, 'Production Sludge' was removed from the earthen pit to extents of approximately 15' x 15' x 15' below the bottom of the earthen pit. Sludge was removed to visual extents of contamination, where confirmation samples were collected; see attached Analytical Results . Sandstone was encountered at 15' below the bottom of the earthen pit. A sample of the sandstone was collected, and analyzed in the field for TPH via USEPA Method 418.1, and in Envirotech's laboratory for benzene and BTEX via USEPA Method 8021 and for total chlorides via USEPA Method 4500B. The sandstone returned chloride results of 365 mg/kg above background, confirming that a release has occurred at the above mentioned site; see Analytical Results . Please reference the attached Bisti Coal 20-2 Closure Plan for Elm Ridge Exploration's proposed course of action concerning this release		
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Signature: 		OIL CONSERVATION DIVISION
Printed Name: Ms. Amy Mackey		Approved by District Supervisor:
Title: Administrative Manager	Approval Date:	Expiration Date:
E-mail Address: amackey1@elmridge.net	Conditions of Approval:	Attached <input type="checkbox"/>
Date: <u>10-8-09</u> Phone: 505-632-3476 Ext 201		

* Attach Additional Sheets If Necessary

19.

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): BRIAN WOOD Title: CONSULTANT

Signature: _____

Date: 9-14-08

e-mail address: brian@permitswest.com Telephone: (505) 466-8120

20.

OCD Approval: ☒ Permit Application (including closure plan) ☐ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature: _____ Approval Date: 10-10-08

Title: Enviro Spec OCD Permit Number: _____

21.

Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

22.

Closure Method:

☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

23.

Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:

Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

24.

Closure Report Attachment Checklist: *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)
☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable)
☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

25.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____

Elm Ridge Exploration Company, LLC
Bisti Gallup 20 #9 temporary pit
1980' FSL & 660' FEL Sec. 20, T. 25 N., R. 12 W.
San Juan County, New Mexico
API #30-045-34002

PAGE 1

Siting Criteria

1. Ground water is >100' below the bottom of the pit. Closest reported water depth is the U. S. Department of Interior (USDI) well which is >4 miles northeast in 1-25n-12w. Water depth is 210' in the 403' deep USDI well. The USDI well probably produces from the Ojo Alamo sandstone. Pit will be in the Nacimiento Formation. Office of the State Engineer records for the 4 closest townships are attached as Exhibit A.

6,342' graded ground

- 10' deep pit

6,332' bottom of pit

6,281' USDI water well ground elevation

-210' depth to water

6,071' water level elevation

6,332' bottom of pit

- 6,071' water level

≈261' depth to water

2. Pit is not within 300' of a continuously flowing watercourse. Pit is not within 200' of any other significant watercourse as defined by OCD. Closest first order tributary of Hunter Wash is over 1/4 mile south (Exhibit B).

3. Pit is not within 300' of any building. Closest buildings are >1 mile southwest in Section 29 (Exhibits B & C).

4. Pit is not within 1,000' any fresh water well or spring (Exhibits A & B).

5. Pit is not within municipal boundaries or within a municipal fresh water well field (Exhibits A & B).

6. Pit is not within 500' of a wetland (Exhibit D).

7. Pit does not overly a mine (Exhibit E).

Elm Ridge Exploration Company, LLC
Bisti Gallup 20 #9 temporary pit
1980' FSL & 660' FEL Sec. 20, T. 25 N., R. 12 W.
San Juan County, New Mexico
API #30-045-34002

PAGE 2

8. Pit is not in an unstable area. No evidence of earth movement was found during an on site inspection. Maximum grade is $\approx 2\%$. Over 90% of the pit will be in cut (Exhibit F).

9. Pit is not within a 100 year flood plain (Exhibit G).

10. C-102 is attached as Exhibit H.

11. Closure notice (items 7 & 10 on PAGES 7 & 8 of APD) to surface owner (Navajo Nation) is attached as Exhibit I.

Hydrogeology

Surface formation is the badland Nacimiento. According to Stone et al in Hydrogeology and water resources of San Juan Basin, New Mexico, the Nacimiento is mainly a mudstone. There are also medium to coarse grained sandstone layers in the Nacimiento. Transmissivities of 100 feet² per day can be found in the coarser continuous sandstones. Water in the more extensive sandstones has a specific conductance of 1,500 μmhos . Specific conductance is $>2,000 \mu\text{mhos}$ in the finer grained sandstones. The Nacimiento is above the Ojo Alamo sandstone. The Ojo Alamo outcrops to the northeast and southwest of Section 20.

Alternative for 19.15.17.11 D. (3)

Elm Ridge is proposing an alternate fence. Sheep graze in the project area and hog wire has been found to be more effective than just barbed wire. The operator will fence the pit with a minimum 48" high fence. Fence will consist of minimum 36" woven wire (hog wire) topped with at least 1 strand of barbed wire.



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 6"	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------

Total Petroleum Hydrocarbons	436	5.0
------------------------------	-----	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

James McDaniel

Printed



Review

Greg Crabtree

Printed



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	2	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 1'	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		


Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	300	5.0

ND = Parameter not detected at the stated detection limit.


References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample


Analyst

James McDaniel
Printed


Review

Greg Crabtree
Printed



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	3	Date Reported:	8/24/2009
Sample ID:	5 Point Composite @ 2'	Date Sampled:	8/10/2009
Sample Matrix:	Soil	Date Analyzed:	8/10/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	14,200	5.0
------------------------------	--------	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**


Instrument calibrated to 200 ppm standard. Zeroed before each sample

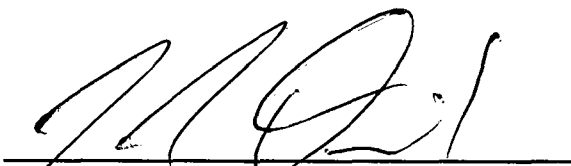

Analyst

James McDaniel

Printed

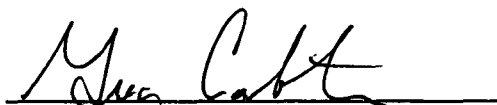

Review

Greg Crabtree

Printed




CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 10-Aug-09

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	191
	200	
	500	
	1000	


The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.



Analyst

James McDaniel


Print Name

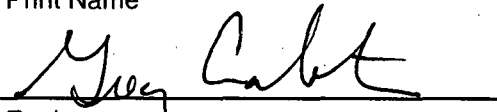

Review

Greg Crabtree

Print Name



Date



Date



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	North Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	8	5.0
------------------------------	---	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones

Printed



Review

James McDaniel

Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	2	Date Reported:	8/24/2009
Sample ID:	South Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	ND	5.0
-------------------------------------	-----------	------------

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**


Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones

Printed

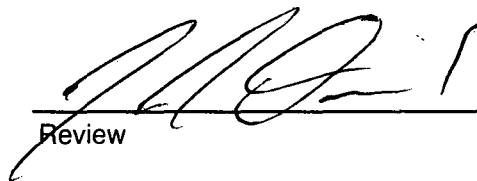

Review

James McDaniel

Printed



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	3	Date Reported:	8/24/2009
Sample ID:	East Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	12	5.0
------------------------------	----	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones
Printed



Review

James McDaniel
Printed



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	4	Date Reported:	8/24/2009
Sample ID:	West Wall	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	ND	5.0
------------------------------	----	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones

Printed



Review

James McDaniel

Printed



EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	1	Date Reported:	8/24/2009
Sample ID:	Bottom Comp (15' Below Pit)	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	72	5.0
------------------------------	----	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**

Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones

Printed



Review

James McDaniel

Printed



**EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS**

Client:	Elm Ridge Exploration	Project #:	03056-0168
Sample No.:	6	Date Reported:	8/24/2009
Sample ID:	Wall Composite	Date Sampled:	8/14/2009
Sample Matrix:	Soil	Date Analyzed:	8/14/2009
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
-----------	--------------------------	--------------------------


Total Petroleum Hydrocarbons	ND	5.0
-------------------------------------	-----------	------------

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Bisti Coal 20-2**


Instrument calibrated to 200 ppm standard. Zeroed before each sample



Analyst

Robyn Jones


Printed

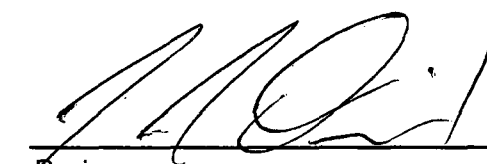

Review

James McDaniel

Printed



envirotech

CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 14-Aug-09

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	
	200	193
	500	
	1000	

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Meg Cabler for
Analyst

8/24/09
Date

Robyn Jones
Print Name

[Signature]
Review

8/24/09
Date

James McDaniel
Print Name

Client:	Elmridge	Project #:	03056-0168
Sample ID:	Bottom Comp. (15'BPit)	Date Reported:	08-20-09
Laboratory Number:	51315	Date Sampled:	08-14-09
Chain of Custody:	7755	Date Received:	08-17-09
Sample Matrix:	Soil	Date Analyzed:	08-19-09
Preservative:	Cool	Date Extracted:	08-18-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	4.3	1.0
Ethylbenzene	1.8	1.0
p,m-Xylene	3.9	1.2
o-Xylene	3.4	0.9
Total BTEX	13.4	

ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Bisti Coal 20-2

Analyst 

Review 

Client:	Elmridge	Project #:	03056-0168
Sample ID:	Wall Comp	Date Reported:	08-20-09
Laboratory Number:	51314	Date Sampled:	08-14-09
Chain of Custody:	7755	Date Received:	08-17-09
Sample Matrix:	Soil	Date Analyzed:	08-19-09
Preservative:	Cool	Date Extracted:	08-18-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	3.2	1.0
Ethylbenzene	1.2	1.0
p,m-Xylene	3.4	1.2
o-Xylene	4.0	0.9
Total BTEX	11.8	

ND - Parameter not detected at the stated detection limit.


Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **Bisti Coal 20-2**

Analyst 

Review 

Client:	N/A	Project #:	N/A
Sample ID:	08-19-BT QA/QC	Date Reported:	08-20-09
Laboratory Number:	51287	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	08-19-09
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF	C-Cal RF	%Diff	Blank Conc	Detect. Limit
		Accept. Range 0 - 15%			
Benzene	4.0036E+006	4.0116E+006	0.2%	ND	0.1
Toluene	3.7371E+006	3.7446E+006	0.2%	ND	0.1
Ethylbenzene	3.3158E+006	3.3224E+006	0.2%	ND	0.1
p,m-Xylene	8.5339E+006	8.5510E+006	0.2%	ND	0.1
o-Xylene	3.1635E+006	3.1698E+006	0.2%	ND	0.1


Duplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff	Accept Range	Detect. Limit
Benzene	4.9	4.7	4.1%	0 - 30%	0.9
Toluene	11.4	11.9	4.4%	0 - 30%	1.0
Ethylbenzene	9.4	8.3	11.7%	0 - 30%	1.0
p,m-Xylene	24.0	22.8	5.0%	0 - 30%	1.2
o-Xylene	14.2	14.0	1.4%	0 - 30%	0.9


Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Benzene	4.9	50.0	53.8	98.0%	39 - 150
Toluene	11.4	50.0	59.2	96.4%	46 - 148
Ethylbenzene	9.4	50.0	56.2	94.6%	32 - 160
p,m-Xylene	24.0	100	113	91.0%	46 - 148
o-Xylene	14.2	50.0	61.7	96.1%	46 - 148

ND - Parameter not detected at the stated detection limit.

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.
 Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments: QA/QC for Samples 51287 - 51290, 51308, 51310 - 51312, and 51314 - 51315.

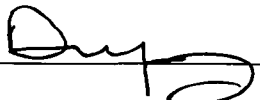
 Analyst


 Review



Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Background	Date Reported:	08-20-09
Lab ID#:	51316	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754


Parameter	Concentration (mg/Kg)
-----------	-----------------------


Total Chloride

35

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bisti Coal 20-2.**


Analyst


Review



Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Bottom Comp. (15' B Pit)	Date Reported:	08-20-09
Lab ID#:	51315	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754

Parameter

Concentration (mg/Kg)

Total Chloride

400

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bisti Coal 20-2.**

Analyst

Review



Client:	Elm Ridge	Project #:	03056-0168
Sample ID:	Wall Comp	Date Reported:	08-20-09
Lab ID#:	51314	Date Sampled:	08-14-09
Sample Matrix:	Soil	Date Received:	08-17-09
Preservative:	Cool	Date Analyzed:	08-19-09
Condition:	Intact	Chain of Custody:	7754

Parameter	Concentration (mg/Kg)
-----------	-----------------------

Total Chloride

190

Reference: U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.
Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Bisti Coal 20-2.**

Analyst

Review

CHAIN OF CUSTODY RECORD

7755

Client: Elm Ridge			Project Name / Location: Bisti Coal 20-2			ANALYSIS / PARAMETERS														
Client Address:			Sampler Name: R. Jones			TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	Cation / Anion	RCI	TCLP with H/P	PAH	TPH (418.1)	CHLORIDE				Sample Cool	Sample Intact
Client Phone No.:			Client No.: 03054-0168																	
Sample No./ Identification	Sample Date	Sample Time	Lab No.	Sample Matrix	No./Volume of Containers	Preservative HgCl ₂ HCl														
Background	8/14/09	16:30	51316	Soil Solid	Sludge Aqueous	1-4oz			X										X	X
Bottom Comp. (15' BPH)	8/14/09	16:15	51315	Soil Solid	Sludge Aqueous	1-4oz			X	X									X	X
Wall Comp	8/14/09	14:24	51314	Soil Solid	Sludge Aqueous	1-4oz			X	X									X	X
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
				Soil Solid	Sludge Aqueous															
Relinquished by: (Signature) <i>[Signature]</i>			Date	Time	Received by: (Signature) <i>[Signature]</i>			Date			Time									
Relinquished by: (Signature)			8/17/09	9:13	Received by: (Signature)			8/17/09			9:13									
Relinquished by: (Signature)					Received by: (Signature)															



envirotech
Analytical Laboratory

5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com



Aerial Photograph



36.3816 -108.1284898

MMQonline Public Version


Mines, Mills & Quarries Commodity Groups


-  Aggregate & Stone Mines
-  Coal Mines
-  Industrial Minerals Mines
-  Industrial Minerals Mills
-  Metal Mines and Mill Concentrate
-  Potash Mines & Refineries
-  Smelters & Refinery Ops.
-  Uranium Mines
-  Uranium Mills

Mines, Mills & Quarries Status


-  Active Mines

SCALE 1 : 918,081



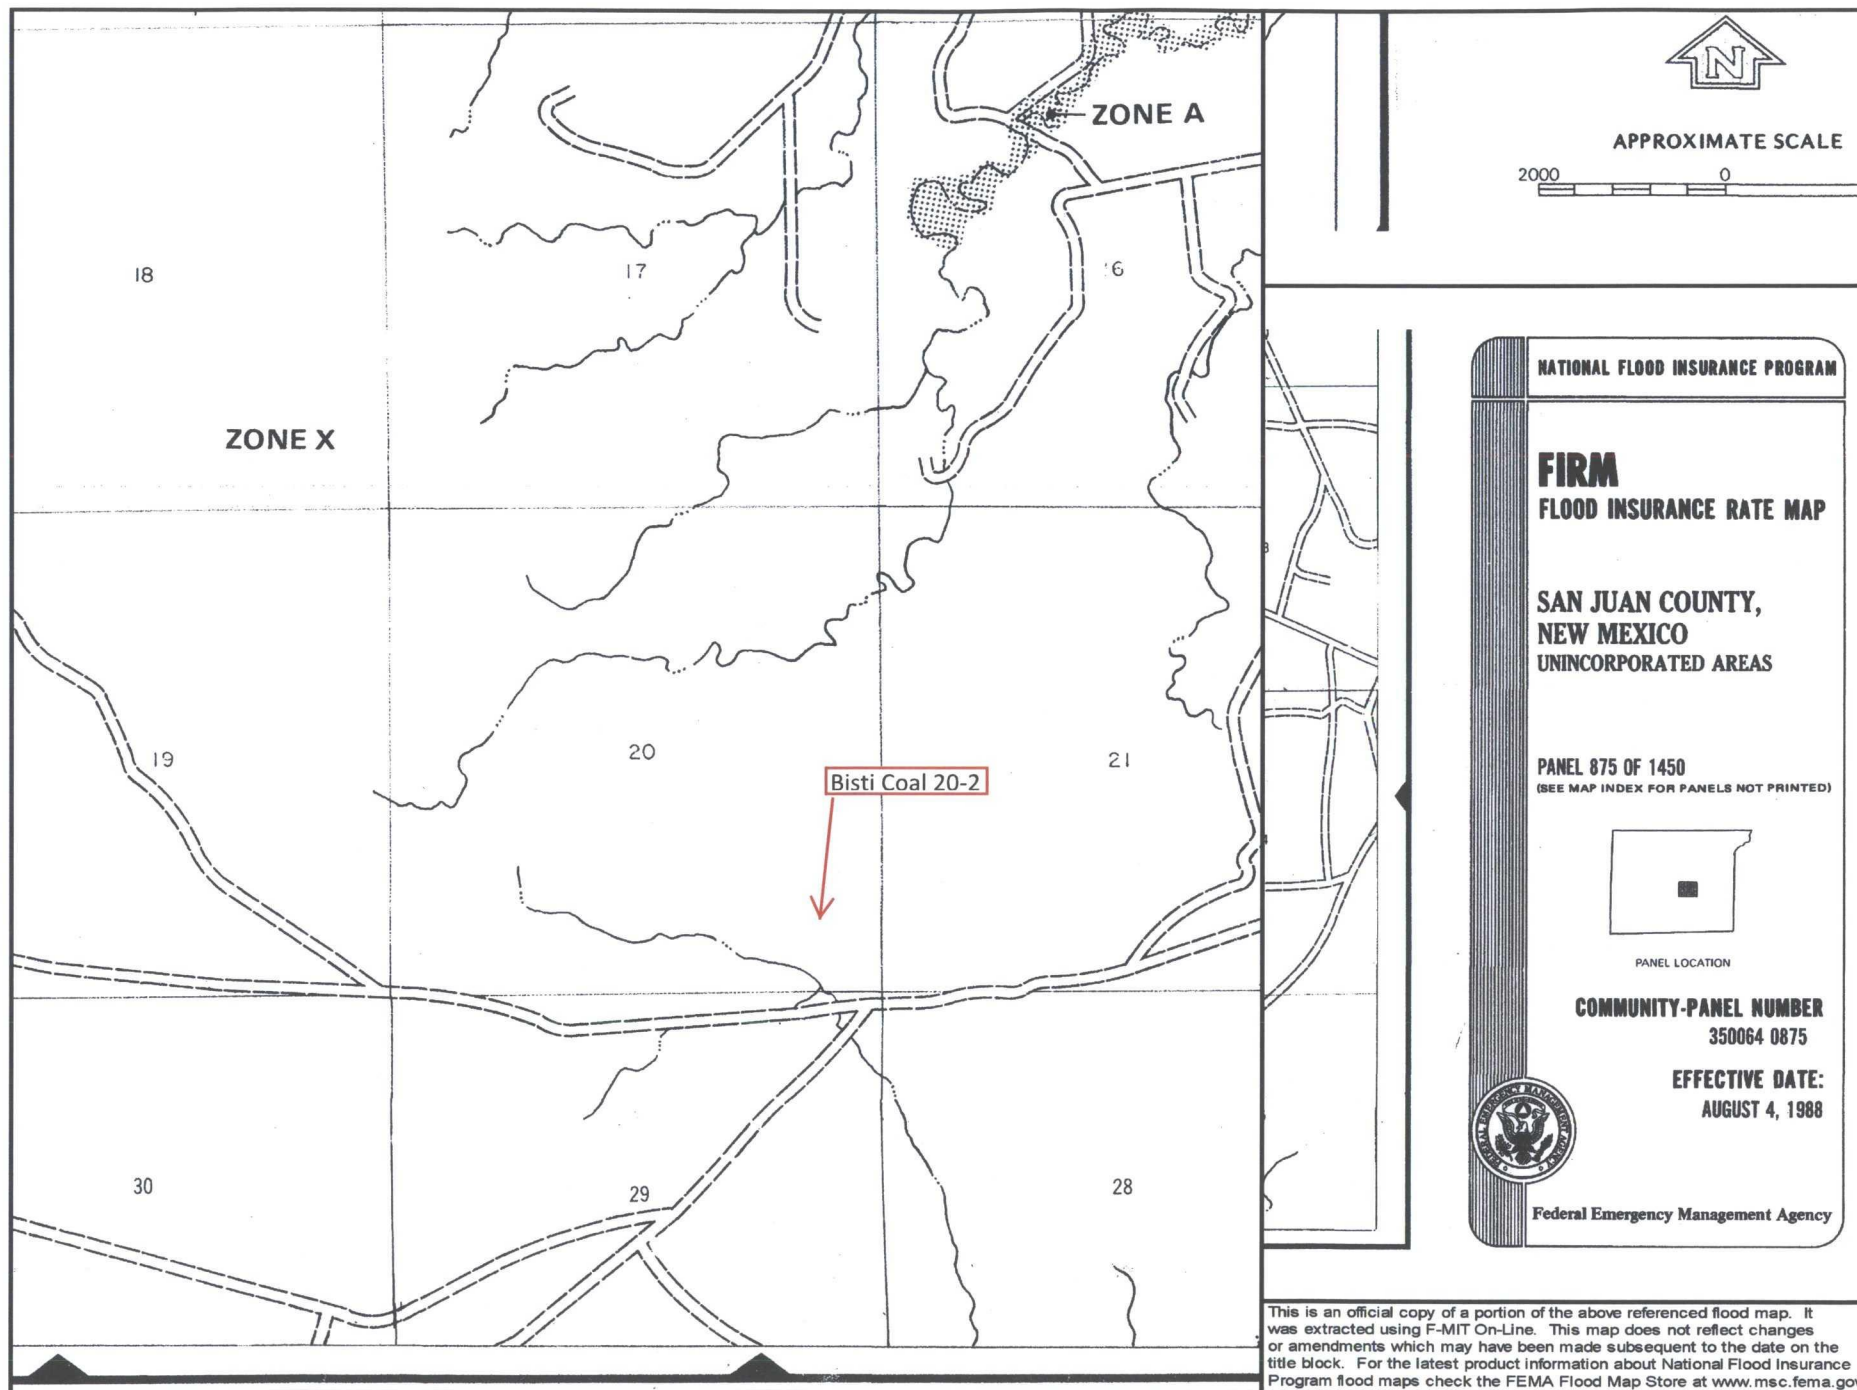

Wetlands Map

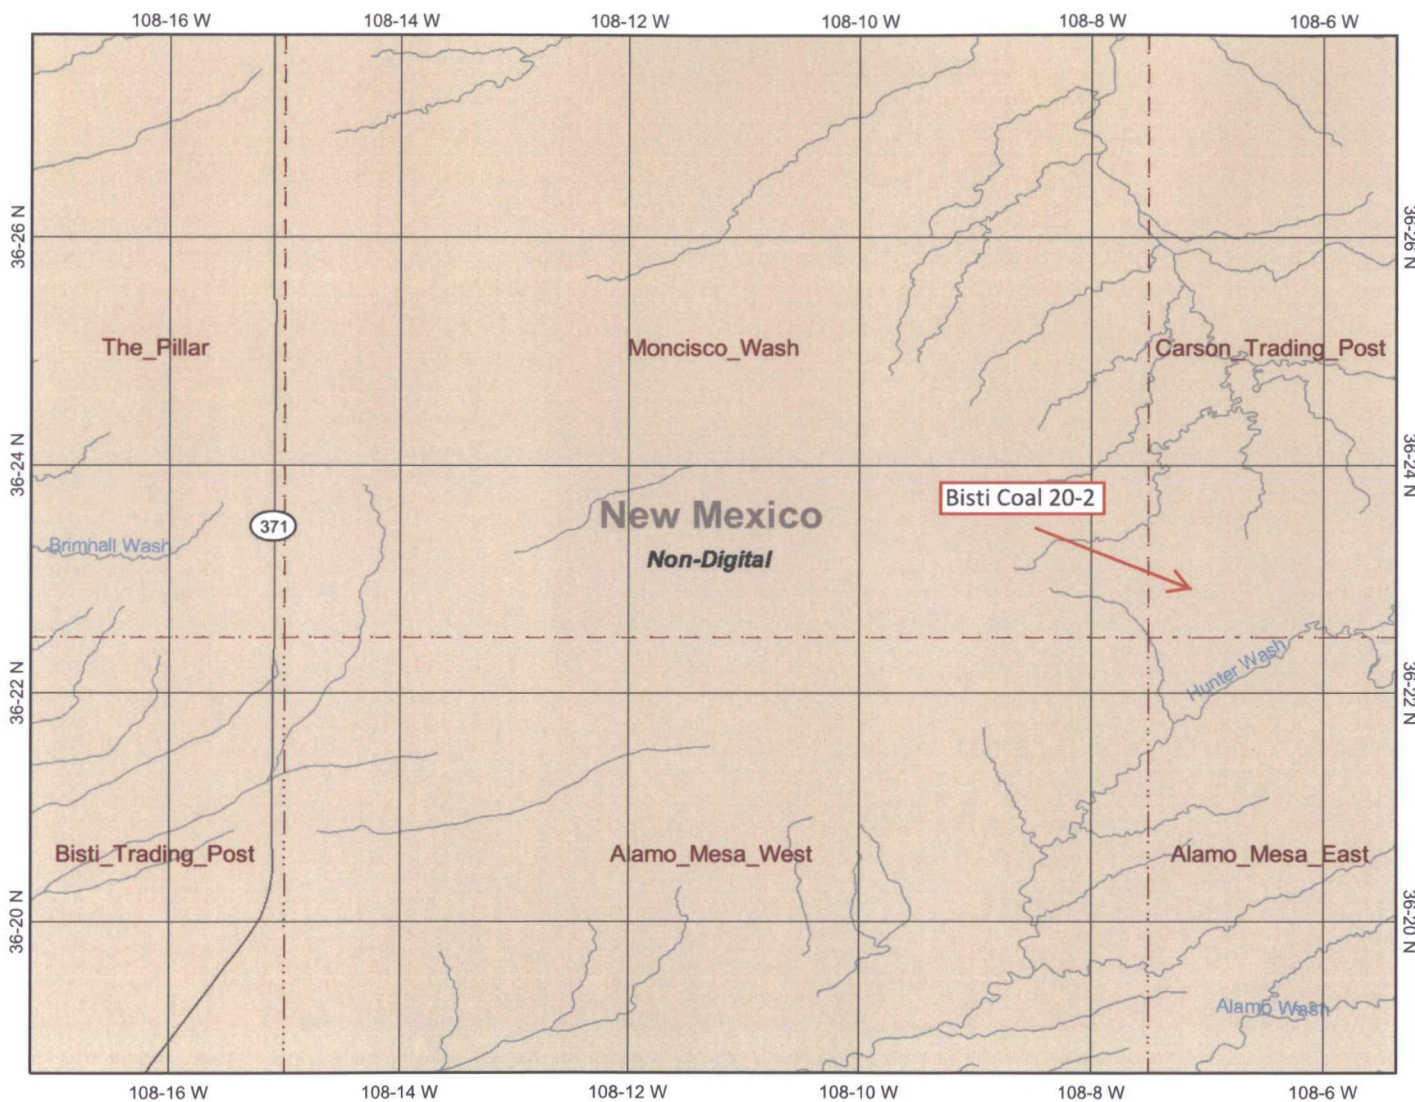

- Interstate
- Major Roads
- Other Road
- Interstate
- State highway
- US highway
- Cities
- USGS Quad Index 24K
- Lower 48 Available Wetland Data**
- Non-Digital
- Digital
- No Data
- Scan
- NHD Waterbodies**
- LAKE/POND
- RESERVOIR
- STREAM/RIVER
- NHD Streams
- Counties 100K
- Urban Areas 300K
- States 100K
- South America
- North America