District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Divsiion
1220 S. St. Francis Dr.
Santa Fe, NM 87505

Form C-101
May 27, 2004

Submit to appropriate District Office

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

[1] Operator Name and Address	[2] OGRID Number
OXY USA Inc. P.O. Box 50250 Midland, TX 79710-0250	16696
	[3] API Number 30- 059- 20471

[4] Property Code	[5] Property Name	[6] Well No.
27111	Bravo Dome Carbon Dioxide Gas Unit 2333	131

[9] Proposed Pool 1	[10] Proposed Pool 2
Bravo Dome Carbon Dioxide Gas 640 96010	

[7] Surface Location

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County
K	13	23 N	33 E		1650	South	1650	West	Union

[8] Proposed Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot. Idn	Feet from the	North/South Line	Feet from the	East/West line	County

Additional Well Location

[11] Work Type Code	[12] Well Type Code	[13] Cable/Rotary	[14] Lease Type Code	[15] Ground Level Elevation
N	C	R	P	4903.1'
[16] Multiple	**[17] Proposed Depth**	**[18] Formation**	**[19] Contractor**	**[20] Spud Date**
No	2600'	Tubb	N/A	5/1/06

Depth to ground water	Distance from nearest fresh water well	Distance from nearest surface water
>100'	>1000'	>1000'

Pit: Liner: Synthetic [X] 12 mils thick Clay ☐ Pit Volume 4000 bbls Drilling Method:

Closed-Loop System ☐ Fresh Water [X] Brine ☐ Diesel/Oil-based ☐ Gas/Air ☐

[21] Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
12-1/4"	8-5/8"	24#	700'	300sx	Surface
7-7/8"	5-1/2"	5.9#FG/15.5#	2600'	300sx	Surface

[22] Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

See Attachment

[23] I hereby certify that the information given above is true and complete to the best of my knowledge and belief. **I further certify that the drilling pit will be constructed according to NMOCD guidelines [X] a general permit ☐, or an (attached) alternative OCD-approved plan ☐.**

Signature:

Printed name: David Stewart

Title: Sr. Regulatory Analyst

E-mail Address: david_stewart@oxy.com

Date: 3/3/06 Phone: 432-685-5717

OIL CONSERVATION DIVISION

Approved by:

Title: DISTRICT SUPERVISOR

Approval Date: 3/13/06 Expiration Date: 3/13/07

Conditions of Approval:

Attached ☐

ATTACHMENT C-101
BDCDGU

PROPOSED TD: 2600' TVD

BOP PROGRAM: 0-700' None

700-2600' 8" 2M annular hydril preventer.

CASING: Surface: 8-5/8" OD 24# J55 8rd ST&C new casing set at 700'
12-1/4" hole
Centralizers from TD-Surf, every fourth joint

Production: 5-1/2" OD new casing from 0-2600'
300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG
7-7/8" hole - 5 centralizers

*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT: Surface - Circulate cement with 300sx Premium Plus with 2% $CaCl_2$ + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% $CaCl_2$ + .25#/sx Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% $CaCl_2$ + .25#/sx Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD: 0-700' Fresh water/native mud.
Wt 8.6-9.2ppg, Vis 32-36sec

700-2600' Fresh water/Starch/Gel
pH control as needed.
Wt 9.0-9.2ppg, Vis 28-29sec

District I
1625 N. French Dr., Hobbs, NM 88240

District II
811 South First, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Form C-102
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease – 4 Copies
Fee Lease – 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
30-059-	96010	BRAVO DOME CARBON DIOXIDE GAS

Property Code	Property Name	Well Number
27111	BRAVO DOME CARBON DIOXIDE GAS UNIT 2333	131

OGRID No.	Operator Name	Elevation
16696	OXY USA INC.	4903.1

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
K	13	23 N	33 E		1650'	SOUTH	1650'	WEST	UNION

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
640	N		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

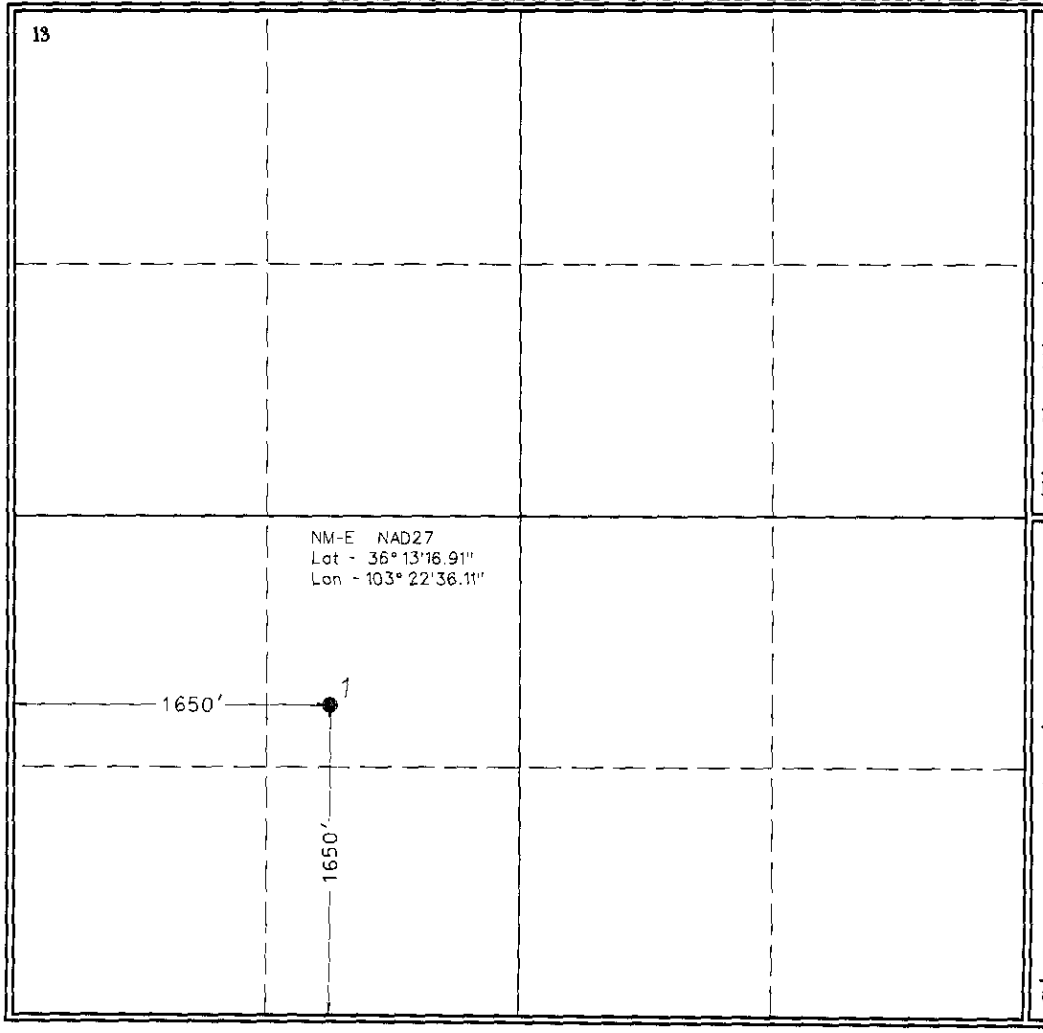

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Signature

David Stewart
Printed Name

Sr. Regulatory Analyst
Title

3/3/06
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

February 24, 2006
Date of Survey

Signature and Seal of Professional Surveyor

TERRY J. ASEL
NEW MEXICO
15079
REGISTERED PROFESSIONAL LAND SURVEYOR

Terry Asel

Certificate Number 15079

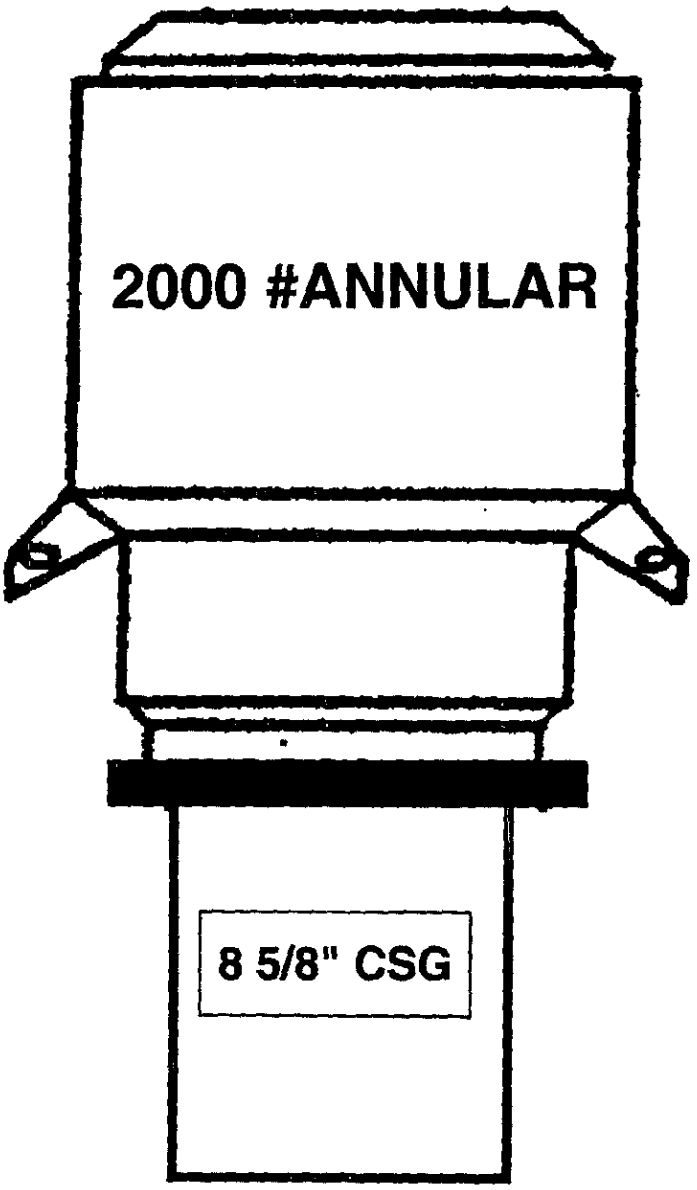

BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM

Bravo Dome Unit
Location and Pit Design
Cheyenne Rig 8