## State of New Mexico Energy, Minerals & Natural Resources

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Oil Conservation Divsiion 1220 S. St. Francis Dr. Santa Fe. NM. 87505 Submit to appropriate District Office

1220 S. St. Franci					·~ em	Santa Fe, N			DI TICIDACI		ENDED REPORT		
APPLICATION FOR THE RIPHTE TO BIRILL, SEE-ENTER, DEEPEN  Operator Name and Address										<sup>2</sup> OGRID Number			
OXY USA Inc.										16696			
P.O. Box 50		il and,	<b>TX</b> _7	79710-025	<u>.</u>	30- 021-							
	erty Code		, <u></u>	R.	-31/0 Dc	<sup>5</sup> Property Name Carbon Di		la Gae Unit	932	<sup>6</sup> Wel	ell No.		
	<u> </u>	9 Propos		ool l	dvo bu.		UATE.	E das onte ,	10 Proposed Po		<u> </u>		
Bravo Dom	ne Carbon					96010	L						
	·			<del></del>		<sup>7</sup> Surface L		<del>, , , , , , , , , , , , , , , , , , , </del>		<del></del>			
UL or lot no.	Section	Townsh	-	Range	Lot. Ide	1		North/South Line	Feet from the	East/West line	County		
G	19	19		32 E	2-#om	Hole Locati		f Different From	m Surface	east	Harding		
UL or lot no.	Section	Townsh		Range	Lot, Ide	1		North/South Line	Feet from the	East/West line	County		
ULOTROLING.	Sam.	1071	11p	Kango	La.,	1		NOTES Some	l'ott non-	Cast wes	County		
					A	Additional W	ell L	ocation					
li Work Ty	12.	$\overline{}$	12	Well Type Cod	de	13 Cable/R	•		se Type Code	1	Level Elevation		
<sup>16</sup> Muli	N Ultiple		17	C Proposed Depti		R 18 Format		<u>5</u>	-LG4680		oci. S		
<u>N</u>	No			2600'		Tub	bb		N/A	1 7	· 1		
Depth to ground	d water	>100'			Distance f	from nearest fresh	water v	well	Distance from near	rest surface water			
Pit: Liner: Sy	ynthetic X		mils thi	hick Cla	L ay □	Pit Volume _40		bbls Drilling Meth	hod:				
	Loop System		11	il.	/			Water X Brine		Oil-based	Gas/Air 🔲		
V	00р Буш		—	21,	7706			ement Program		/II-Uasou	Ua> / 11		
Hole	21		Caeir										
<del></del>		+		ng Size	Cass	ng weight/foot	<del> </del>	Setting Depth	Sacks of Ceme	mt L	Estimated TOC		
12-1		+		5/8" \ /2"	<del></del>	24# #56/15 5#	<del> </del>	700'	300sx		Surface		
7-7/	8"	+	<u> </u>	1/2"	2.37	#FG/15.5#	-	2600'	300sx	<del></del>	Surface		
		+			+		<del> </del>		P-01				
<del></del>		+			+		<del> </del>						
22 Describe the	sed pr		e this ;	lication is	DEEDI	Thi ar PI IIG BAC		ve the data on the pre	dustive 7		- tothe zone		
Describe the blov							Ж, в.	e the data on the pro	sent productive 20	ine and proposed	new productive zone		
1						C Attac	·						
						See Attach	amen	ı <b>t</b>					
<sup>23</sup> I hereby certi	ify that the infi	ormation /	oiven	ahave is true	and comp!	lete to the best of	Γ	OII C					
my knowledge ar	and belief. I fur	ırther certi	rtify th	hat <u>the</u> drillin	ng pit will l	be		UILC	ONSERVAT	ION DIVISI	ON		
constructed according to (attached) al	•	-			general pe	ermit [], or	Appr	roved by:	1 M	1.			
Signature:	fre	Ligar .	_				<u> </u>	MOTON	· / /a	y low			
Printed name: D			al				Title:			RVISOR	<u> </u>		
	Sr. Regula						Appr	roval Date: 4-2	·3-07   E	xpiration Date:	4-23-08		
E-mail Address: Date:	Qaviu se	Jewar La		Phone:			Conc	ditions of Approval:					
4(20(07				432-685-5717			Attached						
			1	492-000-0/1/				Attached					

## ATTACHMENT C-101' BDCDGU 1932-19(

PROPOSED TD:

2600' TVD

BOP PROGRAM:

0-700'

None

700-26001

8" 2M annular hydril preventer.

CASING:

Surface:

8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production:

5-1/2" OD new casing from 0-2600'

300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8\* hole - 5 centralizers

\*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT:

Surface - Circulate cement with 300sx Premium Plus with 2% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% CaCl<sub>2</sub> + .25#/sx Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD:

0-700'

Fresh water/native mud. Wt 8.6-9.2ppg, Vis 32-36sec

700-26001

Fresh water/Starch/Gel pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210 District III

1000 Rio Brazos Rd., Aztec, NM 87410


State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

Form C-102 Revised October 18, 1994 Instructions on back Submit to Appropriate District Office State Lease – 4 Copies Fee Lease – 3 Copies

Certificate Number 15079

2040 South Pach	eco, Santa F	e, NM 87505								AMEN	DED REPORT		
		WEI	L LO	CATION	AND	ACR	REAGE DEDIC	CATION PI	LAT				
	Pool Cod		Pool Name										
30-201-	API Number 30-021-20405				0		BRAVO DOME CARBON DIOXIDE G						
Property				 operty	perty Name				Well Number				
27111 BRAVO			O DO	DME C		DIOXIDE GAS UNIT 1932				191			
OGRID No.					Op	erator	Name		Elevation				
16696					OXY	US	USA INC.			4591.8			
	<del></del>			Surf			Location			-			
UL or lot no.	r lot no. Section Township		Range	Lot Idn.	Feet from the	the	North/South line	Feet from the	eet from the East/West		County		
G	G 19 19 N 3		32 E	170		) (	NORTH	1700'	1700' EA		HARDING		
Bottom Hole Location If Different From Surface											<del> </del>		
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from	the North/South line	North/South line	Feet from the	East/West line		County		
	]	] ]			]		]				]		
Dedicated Acre	es Joint	or Infill C	onsolidatio	n Code	Order No.		<u> </u>		L- <u></u> -		<u> </u>		
७५०	N												
NO ALLO	WABLE V	WILL BE A	SSIGNE	D TO TI	HIS COMP	LETI	ON UNTIL ALL	INTERESTS I	IAVE BE	EN CO	NSOLIDATED		
r=====================================		OR A	NON-ST	ANDARD	UNIT H	AS BI	EEN APPROVED	BY THE DIV	ISION				
19					<u> </u>			OPER	ATOR	CERT	IFICATION		
]]				1		1		I hereby certify that the information contained herein is					
	-							true and com	plete to the l	best of my k	nowledge and belief.		
	1			ļ	,002	İ							
\\	j				- 17	İ		i)	_				
	į								7 /		/		
									In Stat				
					1 NM-E NAD27		1700′	Signature	Davi	d Stewart			
1				NM-F				Printed Nam	Printed Name				
				Lat -	35° 51'55.81'' 103° 34'35.15		Sr.	Sr. Regulatory Analyst					
ll .	l			X - 7	24267.72 771138.49			Title	Title				
				' '	771100.49			Dota .	9/20/07 Date				
				<u> </u>				Date					
<b>}</b>						1		SURV	EYOR	CERT	IFICATION		
				ĺ		ļ					shown on this plat		
											nd surveys made by the same is true		
	{			<b>\</b>				and correct to	the best of	belief.	45		
	ł							No.	overtibe	1Q.	2000		
<b> </b>	]							Date of Surve	y / ≥ / ≥		18/2		
\\	}					1		Signature and		44664	urveyor 🤗		
ll .						į					/ [§] —		
	į					j			100		/May		
						0	nu XX	FESION	19/2007				
	i					j		II del	Ter	CV As	91/201		

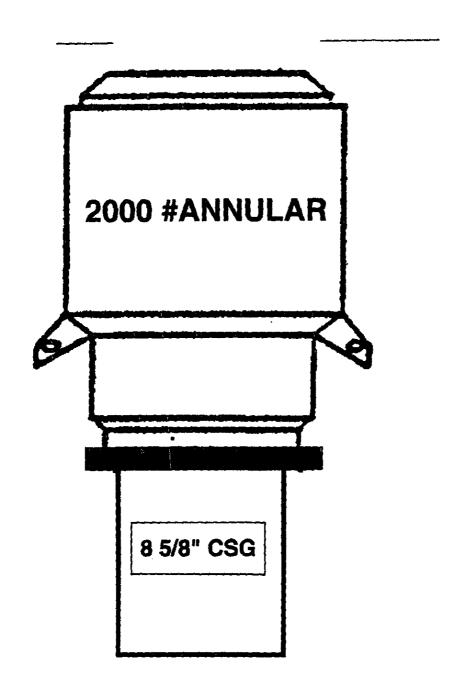

**BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM** 

80

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

## Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

