District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Divsiion 1220 S. St. Francis Dr.

Santa Fe, NM 87505

MAY 0 3 SOMMY to appropriate District Office

Oil Conservation DivisionMENDED REPORT 1220 S. St. Francis Drive

State of New Mexico Form C-101 Energy, Minerals & Natural Resource CETY May 27, 2004

APPLIC	ATION	FOR	PEI	RMIT T	O DRI	LL, RE-EN	NTE	R, DEEPEN,	PLUGBAG	K, OR ADI) A ZONE	
¹ Operator Name and Address								² OGRID Number 16696				
OXY USA Inc.								³ API Number,				
P.O. Box 502		land,	<u>TX</u> 7	79710-025	<u>50</u>	S Decompositor	NT		30- 021-	30-021· 20416		
⁴ Proper 27]	rty Code 111			Br	ravo <u>Do</u>	⁵ Property me Carbon Di		e Gas Unit 18		3\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		
			osed Po de Ga	ool l		96010	¹⁰ Proposed Pool 2					
Bravo Dome Carbon Dioxide Gas 160 96010 7Surface Location												
UL or lot no.	UL or lot no. Section Township Range			Range	Lot. Idr			North/South Line	Feet from the	East/West line	County	
Ŧ	12	18		31 E		1980	2	north	רצרו	west	Harding	
⁸ Proposed Bottom Hole Locat							ion If	f Different Fro	m Surface			
UL or lot no.	Section	Towns	ship	Range	Lot. Idr	n Feet from t	the	North/South Line	Feet from the	East/West line	County	
Additional Well Location												
11 Work Typ	=	1	12 ,	Well Type Cod	de	13 Cable/R	•		se Type Code		Level Elevation	
<u> </u>	<u>\</u>	\rightarrow	C			R 18 Forma		5 - L05864		44466.7		
¹⁶ Multi N	-		., h	Proposed Depti 2600	.h	'° Forma Tub				¬ Sp	oud Pate	
Depth to ground	water				Distance f	from nearest fresh	rom nearest fresh water well		Distance from near	rest surface water		
>100' >1(000' >1000'					
Pit: Liner: Syn	ıthetic [X]	<u>12</u> ,	mils thi	ick Clay	у	Pit Volume 40						
Closed-Lo	oop System							Vater X Brine		Oil-based	Gas/Air 🔲	
				21 _F	Propose	d Casing ar	ıd Ce	ment Program	 l			
Hole S	ize		Casing			l l		Setting Depth	Sacks of Ceme	ent E	stimated TOC	
12-1/	4"		8-5/	/8"		24#		700'	300sx		Surface	
7-7/8	в"		5-1/	/2"	5.9#FG/15.5#			2600'	300sx		Surface	
					<u></u>		<u> </u>					
22 Describe the p	proposed pro	gram. If	f this ar	oplication is	to DEEPE	N or PLUG BAC	K, giv	e the data on the pre	sent productive zo	ne and proposed	new productive zone.	
Describe the blow	out prevention	n progra	am, if a	ny. Use addi	itional shee	ets if necessary.						
See Attachment												
)							mio.					
23 I hereby certify that the information given above is true and complete to the best of						ete to the best of	OIL CONSERVATION DIVISION					
my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines \(\begin{array}{c} \begin{array}{c} \text{a general permit } \begin{array}{c} \end{array}, or							Approved by:					
an (attached) alternative OCD-approved plan Signature:							Appi	oved by:	& Mas	too		
Printed name: David Stewart							Title:		ISTRICT	STIPERVI	SOR	
Title: Sr. Regulatory Analyst							Appr	oval Date: 5	4/n > E	Expiration Date:	5/4/08	
E-mail Address: david stewart@oxy.com							 			<u> при-т</u>		
Date:				Phone:			Conditions of Approval:					
511(07			- }	432-685-5717				Attached				

ATTACHMENT C-101 BDCDGU 1831-122-

PROPOSED TD:

2600' TVD

BOP PROGRAM:

0-700'

None

700-26001

8" 2M annular hydril preventer.

CASING:

Surface:

8-5/8" OD 24# J55 8rd ST&C new casing set at 700'

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production:

5-1/2" OD new casing from 0-2600'

300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8* hole - 5 centralizers

*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT:

Surface - Circulate cement with 300sx Premium Plus with 2% CaCl₂ + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx) followed by 150sx Premium Plus with 3% $CaCl_2 + .25\#/sx$ Poly E Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD:

0-7001

Fresh water/native mud. Wt 8.6-9.2ppg, Vis 32-36sec

700-2600'

Fresh water/Starch/Gel pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV 2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico Energy, Minerals & Natural Resources Department


OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505 Form C-102
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

AMENDED REPORT

		WI	ELL LO	CATION	AND ACI	REAGE DEDIC	CATION PI		74,472,111			
F	API Numb			Pool Cod		Pool Name						
30-021-20416				9601	0	ME CARBO	CARBON DIOXIDE GAS 160					
	Property Code				Property	Name		Well Number JNIT 1831 122				
2711	1	BRA	VO DO	DME C.	ME CARBON DIOXIDE GAS							
OGRID						tor Name			Elevation			
1669	6				OXY USA INC.			4466.7				
						Location						
UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West	line	County		
F	12	18 N		}	1980'	NORTH	1737'	WES	ST	HARDING		
	<u> </u>	10 11	Bott	om Ho	I	If Different Fro		1 112		771110		
UL or lot no.	Section	I Township		Lot Idn.	Feet from the	North/South line	Feet from the	E	tin .	Court		
UL or lot no.	Section	Township	Range	Lot Idn.	reet from the	North South line	reet from the	East/West	iine	County		
	<u> </u>			<u> </u>				<u> </u>				
Dedicated Acre	es Joint	or Infill	Consolidation	n Code (Order No.							
160	<u> </u>											
NO ALLO	WABLE V					ON UNTIL ALL			EN CO	NSOLIDATED		
	· · · · · · · · · · · · · · · · · · ·	OR A	1 NON-S1	ANDARD	UNII HAS B	EEN_APPROVED	BY THE DIV	ISION				
12							OPER	ATOR (CERTI	FICATION		
				i				I hereby certify that the information contained herein is				
							true and com	true and complete to the best of my knowledge and belief.				
	ł	Ţ		ı	1		} }			ļ		
	ļ	980,										
		1							>	- /		
			·	-}				Signature David Stewart Printed Name Sr. Regulatory Analyst				
			NM-E NA Lat - 35°	AD27 ' 48'23.53''			Signature					
		2		° 36'01.52"	ļ		Printed Norm					
]	1737′		Ŷ - 1749		ŀ		11					
1			200				Title	MCBULA.	5/1/07			
		, A	-PiA	· ·				5				
			→ \				Date	•				
							SURV	EYOR (==== CERTI	FICATION		
							LE .			shown on this plat		
					i		was plotted fi	rom field not	es of actual	surveys made by		
								my supervision the best of a		the same is true		
	1							1	Ú I	2007		
								Date of Survey Signature and Seal of Professional Surveyor 15079				
							Signature and					
							ll l			<i> </i>		
							100	18/		131/1		
					1		نفل آ	my tedge	SSIONAL	1/9/2007		
	J							ノ Terr	y Ase	1'		

Certificate Number

15079

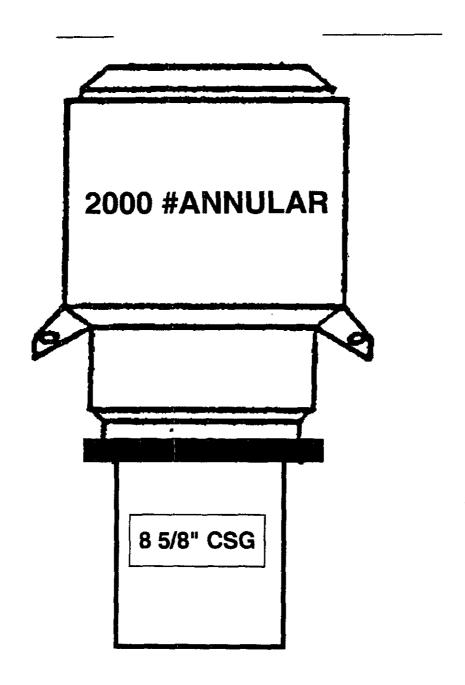

BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM

80, 50

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

