

Initial Application Part I

Received: 07/30/2019

This application is placed in file for record. It MAY or MAY NOT have been reviewed to be determined Administratively Complete

RECEIVED: 07/30/2019	REVIEWER:	TYPE: SWD	APP NO: pMAM1921145567
-----------------------------	-----------	------------------	-------------------------------

ABOVE THIS TABLE FOR OCD DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION
 - Geological & Engineering Bureau -
 1220 South St. Francis Drive, Santa Fe, NM 87505



ADMINISTRATIVE APPLICATION CHECKLIST

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Applicant: _____ OGRID Number: _____
 Well Name: _____ API: _____
 Pool: _____ Pool Code: _____

SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED BELOW

1) **TYPE OF APPLICATION:** Check those which apply for [A]

SWD-2213

A. Location – Spacing Unit – Simultaneous Dedication

☐ NSL ☐ NSP (PROJECT AREA) ☐ NSP (PRORATION UNIT) ☐ SD

B. Check one only for [I] or [II]

[I] Commingling – Storage – Measurement

☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM

[II] Injection – Disposal – Pressure Increase – Enhanced Oil Recovery

☐ WFX ☐ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR

2) **NOTIFICATION REQUIRED TO:** Check those which apply.

- A. ☐ Offset operators or lease holders
- B. ☐ Royalty, overriding royalty owners, revenue owners
- C. ☐ Application requires published notice
- D. ☐ Notification and/or concurrent approval by SLO
- E. ☐ Notification and/or concurrent approval by BLM
- F. ☐ Surface owner
- G. ☐ For all of the above, proof of notification or publication is attached, and/or,
- H. ☐ No notice required

FOR OCD ONLY

- ☐ Notice Complete
- ☐ Application Content Complete

3) **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Print or Type Name

Larry E. Fisher

Signature

Date

Phone Number

e-mail Address



Mr. Michael McMillan
New Mexico Oil Conservation Division
1220 S. St. Francis Drive
Santa Fe, NM 87505

Re: C-108 Application for SWD Well
Permian Oilfield Partners, LLC
Torrent Federal SWD #1
916' FSL & 249' FWL
Sec 4, T26S, R34E
Lea County, NM

Mr. McMillan,
Attached is a C-108 Application for administrative approval of Permian Oilfield Partners LLC's proposed Torrent Federal SWD #1 located in Sec 4, Twp 26S, Rge 34E, Lea County, New Mexico. This well will be completed open hole in the Devonian-Silurian formation and will be operated as a commercial salt water disposal well.

Similar application exhibits were sent to all Affected Persons. The distribution list and proof of mailing, as well as affidavit of publication are enclosed. A copy of this application has also been sent to NM OCD District 1 in Hobbs.

If you have any questions, please contact us at (817)606-7630.


Sincerely,



Sean Puryear
Permian Oilfield Partners, LLC
spuryear@popmidstream.com

Date: 7-29-2019

APPLICATION FOR AUTHORIZATION TO INJECT

- I. PURPOSE: **Disposal**
Application qualifies for administrative approval? **Yes**
- II. OPERATOR: **Permian Oilfield Partners, LLC.**
ADDRESS: **P.O. Box 3329, Hobbs, NM 88241**
CONTACT PARTY: **Sean Puryear** PHONE: **(817) 600-8772**
- III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.
Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? **No**
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- *X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).
- *XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
- NAME: **Sean Puryear** TITLE: **Manager**
SIGNATURE:  DATE: **7-22-2019**
E-MAIL ADDRESS: **spuryear@popmidstream.com**
- * If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: _____

III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

Additional Data

1. **Is this a new well drilled for injection?**
Yes
2. **Name of the Injection Formation:**
Devonian: Open Hole Completion
3. **Name of Field or Pool (if applicable):**
SWD; Devonian-Silurian
4. **Has the well ever been perforated in any other zone(s)?**
No: New Drill for Injection of Produced Water
5. **Give the name and depths of any oil or gas zones underlying or overlying the proposed Injection zone in this area:**

Overlying Potentially Productive Zones:
Delaware, Bone Spring, Wolfcamp, Strawn, Atoka & Morrow Tops all above 15,948'

Underlying Potentially Productive Zones:
None

WELL CONSTRUCTION DATA

Permian Oilfield Partners, LLC.
Torrent Federal SWD #1
916' FSL, 249' FWL
Sec. 4, T26S, R34E, Lea Co. NM
Lat 32.0677443° N, Lon 103.4825834° W
GL 3334', RKB 3364'

Surface - (Conventional)

Hole Size: 26" Casing: 20" - 94# H-40 & 106.5# J-55 STC Casing
Depth Top: Surface
Depth Btm: 1110'
Cement: 736 sks - Class C + Additives
Cement Top: Surface - (Circulate)

Intermediate #1 - (Conventional)

Hole Size: 17.5" Casing: 13.375" - 61# J-55 & 68# J-55 STC Casing
Depth Top: Surface
Depth Btm: 5384'
Cement: 1766 sks - Lite Class C (50:50:10) + Additives
Cement Top: Surface - (Circulate)

Intermediate #2 - (Conventional)

Hole Size: 12.25" Casing: 9.625" - 40# L-80 & 40# HCL-80 BTC Casing
Depth Top: Surface
Depth Btm: 12737' ECP/DV Tool: 5484'
Cement: 2166 sks - Lite Class C (60:40:0) + Additives
Cement Top: Surface - (Circulate)

Intermediate #3 - (Liner)

Hole Size: 8.5" Casing: 7.625" - 39# HCL-80 FJ Casing
Depth Top: 12537'
Depth Btm: 18119'
Cement: 263 sks - Lite Class C (60:40:0) + Additives
Cement Top: 12537' - (Volumetric)

Intermediate #4 - (Open Hole)

Hole Size: 6.5" Depth: 19918'
Inj. Interval: 18119' - 19918' (Open-Hole Completion)

Tubing - (Tapered)

Tubing Depth: 18074' Tubing: 7" - 26# HCP-110 FJ Casing & 5.5" 17# HCL-80 FJ
X/O Depth: 12537' Casing (Fiberglass Lined)
X/O: 7" 26# HCP-110 FJ Casing - X - 5.5" 17# HCL-80 FJ Casing (Fiberglass Lined)
Packer Depth: 18084' Packer: 5.5" - Perma-Pak or Equivalent (Inconel)

WELLBORE SCHEMATIC

Permian Oilfield Partners, LLC.
Torrent Federal SWD #1
916' FSL, 249' FWL
Sec. 4, T26S, R34E, Lea Co. NM
Lat 32.0677443° N, Lon 103.4825834° W
GL 3334', RKB 3364'

Surface - (Conventional)

Hole Size: 26"
Casing: 20" - 94# H-40 & 106.5# J-55 STC Casing
Depth Top: Surface
Depth Btm: 1110'
Cement: 736 sks - Class C + Additives
Cement Top: Surface - (Circulate)

Intermediate #1 - (Conventional)

Hole Size: 17.5"
Casing: 13.375" - 61# J-55 & 68# J-55 STC Casing
Depth Top: Surface
Depth Btm: 5384'
Cement: 1766 sks - Lite Class C (50:50:10) + Additives
Cement Top: Surface - (Circulate)

Intermediate #2 - (Conventional)

Hole Size: 12.25"
Casing: 9.625" - 40# L-80 & 40# HCL-80 BTC Casing
Depth Top: Surface
Depth Btm: 12737'
Cement: 2166 sks - Lite Class C (60:40:0) + Additives
Cement Top: Surface - (Circulate)
ECP/DV Tool: 5484'

Intermediate #3 - (Liner)


Hole Size: 8.5"
Casing: 7.625" - 39# HCL-80 FJ Casing
Depth Top: 12537'
Depth Btm: 18119'
Cement: 263 sks - Lite Class C (60:40:0) + Additives
Cement Top: 12537' - (Volumetric)

Intermediate #4 - (Open Hole)

Hole Size: 6.5"
Depth: 19918'
Inj. Interval: 18119' - 19918' (Open-Hole Completion)

Tubing - (Tapered)

Tubing Depth: 18074'
Tubing: 7" - 26# HCP-110 FJ Casing & 5.5" 17# HCL-80 FJ Casing (Fiberglass Lined)
X/O Depth: 12537'
X/O: 7" 26# HCP-110 FJ Casing - X - 5.5" 17# HCL-80 FJ Casing (Fiberglass Lined)
Packer Depth: 18084'
Packer: 5.5" - Perma-Pak or Equivalent (Inconel)

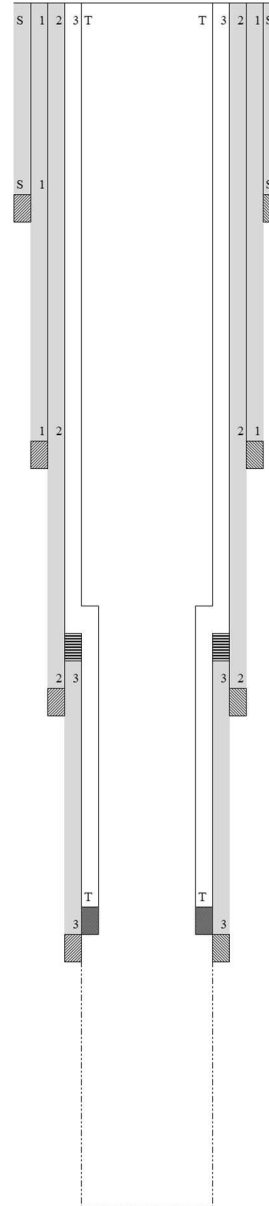

VI: There are no wells within the proposed wells area of review that penetrate the Devonian Formation.

VII:

1. The average injected volume anticipated is 40,000 BWPD
The maximum injected volume anticipated is 50,000 BWPD
2. Injection will be through a closed system
3. The average injection pressure anticipated is 2,000 psi
The proposed maximum injection pressure is 3,624 psi
4. Disposal Sources will be produced waters from surrounding wells in the Delaware, Avalon, Bone Spring and Wolfcamp formations. These formation waters are known to be compatible with Devonian formation water. Representative area produced water analyses were sourced from Go-Tech's website and are listed below.

WELL NAME	FIGHTING OKRA 18 FEDERAL COM #001H	SALADO DRAW 6 FEDERAL #001H	RATTLESNAKE 13 12 FEDERAL COM #001H	SNAPPING 2 STATE #014H
api	3002540382	3002541293	3002540912	3001542688
latitude	32.0435333	32.0657196	32.0369568	32.06555986
longitude	-103.5164566	-103.5146942	-103.416214	-103.7413815
section	18	6	13	2
township	26S	26S	26S	26S
range	34E	34E	34E	31E
unit	E	M	P	P
ftgns	2590N	200S	330S	250S
ftgew	330W	875W	330E	330E
county	Lea	Lea	Lea	EDDY
state	NM	NM	NM	NM
formation	AVALON UPPER	BONE SPRING 3RD SAND	DELAWARE-BRUSHY CANYON	WOLFCAMP
sampledate	42046	41850	41850	42284
ph	8	6.6	6.2	7.3
tds_mgL	201455.9	99401.9	243517.1	81366.4
resistivity_ohm_cm	0.032	0.064	0.026	0.1004
sodium_mgL	66908.6	34493.3	73409.8	26319.4
calcium_mgL	9313	3295	15800	2687.4
iron_mgL	10	0.4	18.8	26.1
magnesium_mgL	1603	396.8	2869	326.7
manganese_mgL	1.6	0.37	3.12	
chloride_mgL	121072.7	59986.5	149966.2	50281.2
bicarbonate_mgL	1024.8	109.8	48.8	
sulfate_mgL	940	710	560	399.7
co2_mgL	1950	70	200	100

5. Devonian water analysis from the area of review is unavailable. Representative area water analyses were sourced from Go-Tech's website and are listed below.

WELL NAME	ANTELOPE RIDGE UNIT #003	BELL LAKE UNIT #006
api	3002521082	3002508483
latitude	32.2593155	32.3282585
longitude	-103.4610748	-103.507103
sec	34	6
township	23S	23S
range	34E	34E
unit	K	O
ftgns	1980S	660S
ftgew	1650W	1980E
county	LEA	LEA
state	NM	NM
field	ANTELOPE RIDGE	BELL LAKE NORTH
formation	DEVONIAN	DEVONIAN
samplesource	UNKNOWN	HEATER TREATER
ph	6.9	7
tds_mgL	80187	71078
chloride_mgL	42200	47900
bicarbonate_mgL	500	476
sulfate_mgL	1000	900

VIII: Injection Zone Geology

Fluid injection will take place in the Devonian-Silurian formations. This sequence is bounded above by the Upper Devonian Woodford shale. Underlying the Woodford is the first injection formation, the Devonian, consisting of dolomitic carbonates & chert, followed by the Upper Silurian dolomites, and the Lower Silurian Fusselman dolomite. The lower bound of the injection interval is the limestone of the Upper Ordovician Montoya. This proposed well will TD above the top of the Montoya, and will not inject fluids into the Montoya itself, in order to provide a sufficient barrier to preclude fluid injection into the Middle Ordovician Simpson, the Lower Ordovician Ellenburger, the Cambrian, and the PreCambrian below.

Injection zone porosities are expected to range from 0% to a high of 8%, with the higher ranges being secondary porosity in the form of vugs & fractures due to weathering effects, with occasional interbedded shaly intervals. Permeabilities in the 2-3% porosity grainstone intervals are estimated to be in the 10-15 mD range, with the higher porosity intervals conservatively estimated to be in the 40-50 mD range. It is these intervals of high secondary porosity and associated high permeability that are expected to take the majority of the injected water.

The Devonian-Silurian sequence is well suited for SWD purposes, with a low permeability shale barrier overlying the injection interval to prevent upward fluid migrations to USDW's, sufficient permeabilities and porosities in zone, and multiple formations available over a large depth range. This large injection depth range means there is a large injection surface area available, allowing for low injection pressures at high injection rates.

Permian Oilfield Partners, LLC.
 Torrent Federal SWD #1
 916' FSL, 249' FWL
 Sec. 4, T26S, R34E, Lea Co. NM
 Lat 32.0677443° N, Lon 103.4825834° W
 GL 3334', RKB 3364'

GEOLOGY PROGNOSIS			
FORMATION	<u>TOP</u> KB TVD (ft)	<u>BOTTOM</u> KB TVD (ft)	<u>THICKNESS</u> (ft)
Salt	1,480	5,204	3,724
Delaware	5,359	9,392	4,033
Bone Spring	9,392	12,687	3,295
Wolfcamp	12,687	13,871	1,184
Lwr. Mississippian	17,510	17,853	343
Woodford	17,853	18,084	231
Devonian	18,084	19,273	1,189
Fusselman (Silurian)	19,273	19,943	670
Montoya (U. Ordovician)	19,943	20,699	756
Simpson (M. Ordovician)	20,699	21,381	682

2. According to the New Mexico Office of the State Engineer, there are NO fresh water wells within the proposed well's one-mile area of review. Regionally, shallow fresh water is known to exist at depths less than 251'. There are no underground sources of fresh water present below the injection interval.
- IX:** Formation chemical stimulation with 40,000 gals of 15% Hydrochloric Acid is planned after well completion.
- X:** A compensated neutron/gamma ray log will be run from surface to TD upon well completion. All logs will be submitted to the NMOCD upon completion.
- XI:** According to the New Mexico Office of the State Engineer, there are NO fresh water wells within the proposed well's one-mile area of review.
- XII:** Hydrologic affirmative statement attached.
- XIII:** Proof of notice and proof of publication attached.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-	² Pool Code 97869	³ Pool Name SWD; DEVONIAN-SILURIAN
⁴ Property Code	⁵ Property Name TORRENT FEDERAL SWD	⁶ Well Number 1
⁷ OGRID NO. 328259	⁸ Operator Name PERMIAN OILFIELD PARTNERS, LLC	⁹ Elevation 3334'

¹⁰ Surface Location

UL or lot no. M	Section 4	Township 26S	Range 34E	Lot Idn	Feet from the 916	North/South line SOUTH	Feet From the 249	East/West line WEST	County LEA
---------------------------	---------------------	------------------------	---------------------	---------	-----------------------------	----------------------------------	-----------------------------	-------------------------------	----------------------

¹¹ Bottom Hole Location If Different From Surface


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

<p>(B) <i>N 89°31'16" E 2643.88'</i></p> <p>(C) <i>N 89°28'18" E 2643.92'</i></p> <p>(D)</p> <p>(E) <i>S 00°30'46" E 2641.65'</i></p> <p>(F) <i>S 00°30'29" E 2638.14'</i></p> <p>(A) <i>S 89°33'34" W 2642.93'</i></p> <p>(G) <i>S 89°28'54" W 2644.58'</i></p> <p><i>S 00°30'49" E 5277.56'</i></p> <p><i>249'</i></p> <p><i>S.L.</i></p> <p><i>916'</i></p>	<p>¹⁶</p> <p>4</p> <p>GEODETIC DATA NAD 83 GRID - NM EAST</p> <p>SURFACE LOCATION N 389421.7 - E 804870.0</p> <p>LAT: 32.0677443° N LONG: 103.4825834° W</p> <p>CORNER DATA NAD 83 GRID - NM EAST</p> <p>A: FOUND 1" SPIKE & STONES N 388503.6 - E 804629.2</p> <p>B: FOUND BRASS CAP "1913" N 393780.1 - E 804581.9</p> <p>C: FOUND BRASS CAP "1913" N 393802.2 - E 807225.2</p> <p>D: FOUND BRASS CAP "1913" N 393826.5 - E 809868.6</p> <p>E: FOUND BRASS CAP "1913" N 391185.4 - E 809892.2</p> <p>F: FOUND BRASS CAP "1913" N 388547.8 - E 809915.6</p> <p>G: FOUND BRASS CAP "1913" N 388523.9 - E 807271.6</p>	<p>¹⁷ OPERATOR CERTIFICATION</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division</i></p> <p><i>Gary E Fisher</i> 7/12/2019 Signature Date</p> <p>Gary E Fisher Printed Name</p> <p>gfisher@popmidstream.com E-mail Address</p> <p>¹⁸ SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>05-18-2019 Date of Survey</p> <p>Signature and Seal of Professional Surveyor</p> <p>10034 Certificate Number</p> <p>JEFFREY L. FANSLER NEW MEXICO PROFESSIONAL SURVEYOR 10034</p>
--	--	---


Job No.: LS19050555

1 & 2 Mile AOR, Torrent Federal SWD #1

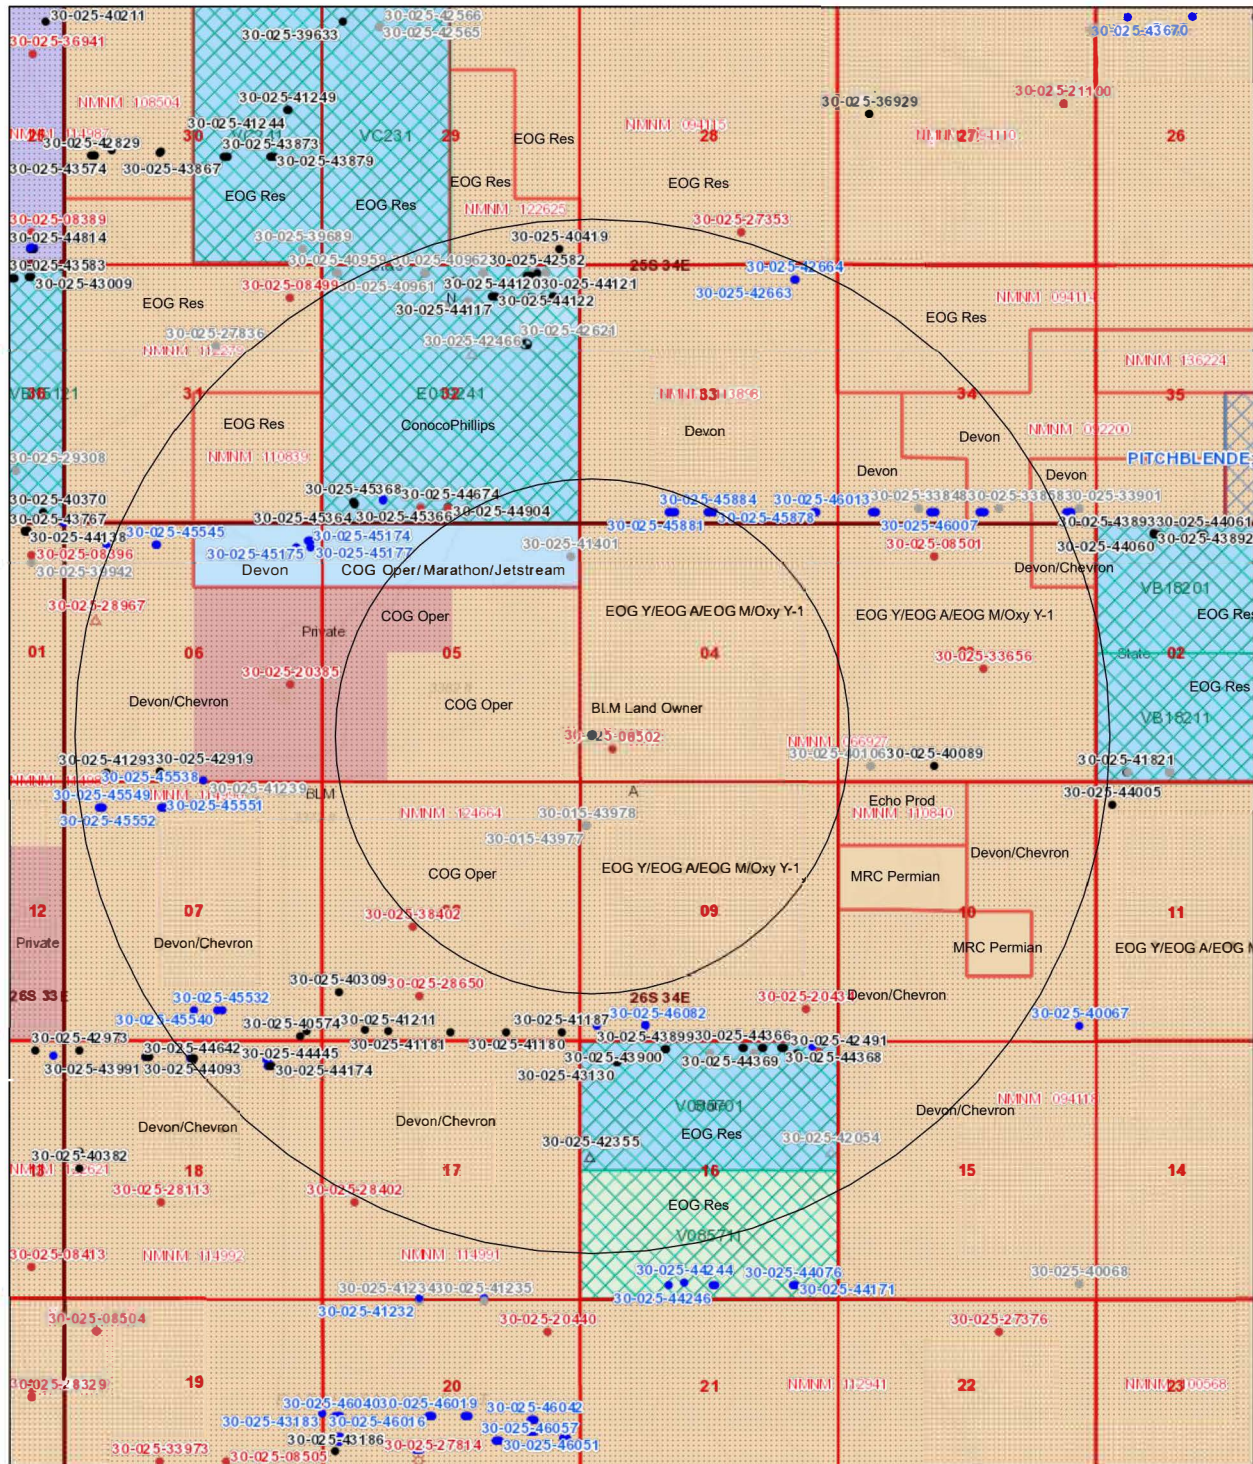

7/22/2019, 7:10:37 PM

- Override 1
- Well Locations - Small Scale
 - Active
 - New
 - Plugged
 - Cancelled
 - Temporarily Abandoned
- Well Locations - Large Scale
 - Miscellaneous
 - CO2 Active
 - CO2 Cancelled
 - CO2 New
 - CO2 Plugged
 - CO2 Temporarily Abandoned
- Gas Active
- Gas, Cancelled, Never Drilled
- Gas, New
- Gas, Plugged
- Gas, Temporarily Abandoned
- Injection, Active
- Injection, Cancelled
- Injection, New
- Injection, Plugged
- Injection, Temporarily Abandoned
- Oil, Active
- Oil, Cancelled
- Oil, New
- Oil, Plugged
- Oil, Temporarily Abandoned
- ▲ Salt Water Injection, Active
- ▲ Salt Water Injection, Cancelled
- ▲ Salt Water Injection, New
- ▲ Salt Water Injection, Plugged
- ▲ Salt Water Injection Temporarily Abandoned
- Water, Active
- Water, Cancelled
- Water, New
- Water, Plugged
- Water, Temporarily Abandoned
- PLSS First Division



U.S. BLM
Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c)

New Mexico Oil Conservation Division

Torrent Federal SWD #1 - Wells within 1 Mile Area of Review															
API Number	Current Operator	Well Name	Well Number	Well Type	Well Direction	Well Status	Section	Township	Range	OCD Unit Letter	Surface Location	Bottomhole Location	Formation	MD	TYD
30-025-08502	PRE-ONGARD WELL OPERATOR	PRE-ONGARD WELL	#001	Oil	Vertical	Plugged, Site Released	04	T26S	R34E	M	M-04-26S-34E 660 FSL 660 FWL	M-04-26S-34E 660 FSL 660 FWL	DELAWARE	5480	5480
30-025-41401	COG OPERATING LLC	GUNNER 5 FEE	#001C	Oil	Horizontal	Cancelled Apd	05	T26S	R34E	A	A-05-26S-34E 660 FNL 190 FEL	D-05-26S-34E 660 FNL 330 FWL	BONE SPRING	14938	10300
30-025-45876	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#001H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 1825 FWL	D-33-25S-34E 20 FNL 990 FWL	BONE SPRING	17390	12550
30-025-45877	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#002H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 1945 FWL	C-33-25S-34E 20 FNL 2310 FWL	BONE SPRING	17357	12540
30-025-45878	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#003H	Oil	Horizontal	New	33	T25S	R34E	O	O-33-25S-34E 205 FSL 2550 FEL	B-33-25S-34E 20 FNL 1650 FEL	BONE SPRING	17550	12540
30-025-45880	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#005H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 1885 FWL	C-33-25S-34E 20 FNL 1650 FWL	WOLF CAMP	17398	12690
30-025-45881	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#006H	Oil	Horizontal	New	33	T25S	R34E	O	O-33-25S-34E 205 FSL 2640 FEL	B-33-25S-33E 20 FNL 2310 FEL	WOLF CAMP	17407	12690
30-025-45883	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#008H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 1855 FWL	D-33-25S-34E 20 FNL 990 FWL	WOLF CAMP	17806	12790
30-025-45884	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#009H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 2617 FWL	C-33-25S-34E 20 FNL 2310 FWL	WOLF CAMP	17745	12780
30-025-45885	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#010H	Oil	Horizontal	New	33	T25S	R34E	O	O-33-25S-34E 205 FSL 2580 FEL	B-33-25S-34E 20 FNL 1650 FEL	WOLF CAMP	17642	12780
30-025-46001	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#012H	Oil	Horizontal	New	33	T25S	R34E	N	N-33-25S-34E 205 FSL 1915 FWL	C-33-25S-34E 20 FNL 1650 FWL	WOLF CAMP	17865	12900
30-025-46002	DEVON ENERGY PRODUCTION COMPANY, LP	STRANGER 33 FEDERAL	#013H	Oil	Horizontal	New	33	T25S	R34E	O	O-33-25S-34E 205 FSL 2610 FEL	B-33-25S-34E 20 FNL 2310 FEL	WOLF CAMP	17870	12900
30-015-43977	BOPCO, L.P.	PLU PHANTOM BANKS 29 25 31 USA	#001H	Oil	Horizontal	Cancelled Apd	29	T25S	R31E	D	D-29-25S-31E 330 FNL 85 FWL	D-28-25S-31E 330 FNL 675 FWL	BONE SPRING	16477	10871
30-015-43978	BOPCO, L.P.	PLU PHANTOM BANKS 30 25 31 USA	#001H	Oil	Horizontal	Cancelled Apd	29	T25S	R31E	A	A-29-25S-31E 330 FNL 45 FWL	B-25-25S-30E 330 FNL 2405 FEL	BONE SPRING	18276	10578



Statement of Notifications

Re: C-108 Application for SWD Well
 Permian Oilfield Partners, LLC
 Torrent Federal SWD #1
 916' FSL & 249' FWL
 Sec 4, T26S, R34E
 Lea County, NM

Permian Oilfield Partners, LLC has mailed notifications to Affected Persons as per the following list:

Torrent Federal SWD #1 - Affected Persons within 1 Mile Area of Review					
Notified Name	Notified Address	Notified City, State, ZIP Code	Shipper	Tracking No.	Mailing Date
Bureau Of Land Management	620 E Greene St.	Carlsbad, NM 88220	USPS	9414811899561416402432	7/29/2019
New Mexico State Land Office	310 Old Santa Fe Trail	Santa Fe, NM 87501	USPS	9414811899561416400995	7/29/2019
COG Operating LLC	600 W. Illinois Ave	Midland, TX 79701	USPS	9414811899561416400216	7/29/2019
BOPCO, LP	6401 Holiday Hill Rd Bldg 5	Midland, TX 79707	USPS	9414811899561416402425	7/29/2019
Marathon Oil Permian LLC	5555 San Felipe St.	Houston, TX 77056	USPS	9414811899561416400780	7/29/2019
Jetstream New Mexico LLC	P.O. Box 471396	Fort Worth, TX 76147	USPS	9414811899561416400704	7/29/2019
EOG Y Resources Inc.	104 South 4th St.	Artesia, NM 88210	USPS	9414811899561416400728	7/29/2019
EOG A Resources Inc.	104 South 4th St.	Artesia, NM 88210	USPS	9414811899561416400872	7/29/2019
EOG M Resources Inc.	104 South 4th St.	Artesia, NM 88210	USPS	9414811899561416400766	7/29/2019
Oxy Y-1 Company	5 Greenway Plaza	Houston, TX 77046	USPS	9414811899561416400650	7/29/2019
ConocoPhillips Co.	P.O.Box 2197 Office EC3-10-W285	Houston, TX 77252	USPS	9414811899561416400292	7/29/2019
Chevron USA, Inc.	6301 Deauville Blvd.	Midland, TX 79706	USPS	9414811899561416402524	7/29/2019
Devon Energy Prod. Co.	333 West Sheridan Ave.	Oklahoma City, OK 73102	USPS	9414811899561416400803	7/29/2019
Devon Energy Oper. Co.	333 West Sheridan Ave.	Oklahoma City, OK 73102	USPS	9414811899561416400278	7/29/2019
Echo Production Inc.	616 5th Street	Graham, TX 76450	USPS	9414811899561416400841	7/29/2019

Sean Puryear
 Permian Oilfield Partners, LLC
spuryear@popmidstream.com

Date: 7-29-2019

U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4024 32

ARTICLE ADDRESSED TO:

Bureau of Land Management
620 E Greene St
Carlsbad NM 88220-6292

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4009 95

ARTICLE ADDRESSED TO:

New Mexico State Land Office
310 Old Santa Fe Trail
Santa Fe NM 87501-2708

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4002 16

ARTICLE ADDRESSED TO:

COG Operating LLC
600 W Illinois Ave
Midland TX 79701-4882

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4024 25

ARTICLE ADDRESSED TO:

BOPCO, LP
6401 Holiday Hill Rd, Bldg. 5
Midland TX 79707-2157

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4007 80


ARTICLE ADDRESSED TO:

Marathon Oil Permian LLC
5555 San Felipe Street
Houston TX 77056-2701

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service Certified Mail Receipt

ARTICLE NUMBER: 9414 8118 9956 1416 4007 04

ARTICLE ADDRESSED TO:

Jetstream New Mexico LLC
PO Box 471396
Fort Worth TX 76147-1376

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4007 28


ARTICLE ADDRESSED TO:

EOG Y Resources, Inc.
104 South 4th Street
Artesia NM 88210-2123

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4008 72

ARTICLE ADDRESSED TO:

EOG A Resources Inc.
104 South 4th Street
Artesia NM 88210-2123

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4007 66

ARTICLE ADDRESSED TO:

EOG M Resources Inc.
104 South 4th Street
Artesia NM 88210-2123

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4006 50

ARTICLE ADDRESSED TO:

Oxy Y-1 Company
5 Greenway Plaza
Houston TX 77046-0526

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4002 92


ARTICLE ADDRESSED TO:

ConocoPhillips Company
PO Box 2197
Houston TX 77252-2197

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4025 24


ARTICLE ADDRESSED TO:

Chevron USA
6301 Deauville
Midland TX 79706-2964

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4008 03


ARTICLE ADDRESSED TO:

Devon Energy Production Co., LP
333 West Sheridan Ave
Oklahoma City OK 73102-5010

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4002 78


ARTICLE ADDRESSED TO:

Devon Energy Operating Co., LP
333 West Sheridan Ave
Oklahoma City OK 73102-5010

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



U.S. Postal Service **Certified Mail Receipt**

ARTICLE NUMBER: 9414 8118 9956 1416 4008 41

ARTICLE ADDRESSED TO:

Echo Production Inc.
616 5th Street
Graham TX 76450-2602

FEES

Postage Per Piece	\$3.05
Certified Fee	3.50
Total Postage & Fees:	6.55

Postmark
Here



Affidavit of Publication

STATE OF NEW MEXICO
COUNTY OF LEA

I, Daniel Russell, Publisher of the Hobbs News-Sun, a newspaper published at Hobbs, New Mexico, solemnly swear that the clipping attached hereto was published in the regular and entire issue of said newspaper, and not a supplement thereof for a period of 1 issue(s).


Beginning with the issue dated
July 17, 2019
and ending with the issue dated
July 17, 2019.


Publisher

Sworn and subscribed to before me this
17th day of July 2019.


Business Manager

My commission expires
January 29, 2023

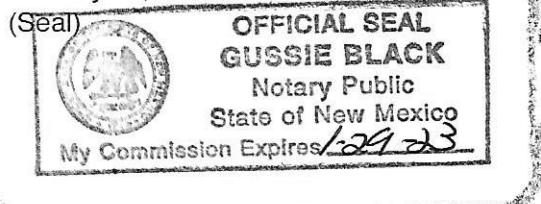

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937 and payment of fees for said

LEGALS

LEGAL NOTICE JULY 17, 2019

Permian Oilfield Partners, LLC, PO Box 3329, Hobbs, NM 88241, phone (817)606-7630, attn. Gary Fisher, has filed form C-108 (Application for Authorization for Injection) with the New Mexico Oil Conservation Division seeking approval to drill a commercial salt water disposal well in Lea County, New Mexico. The well is the Torrent Federal SWD #1, and is located 916' FSL & 249' FWL, Unit M, Section 4, Township 26 South, Range 34 East, N M P M, approximately 17.3 mi SW of Jal, NM. The well will dispose of water produced from nearby oil and gas wells into the Devonian formation from a depth of 18,119 feet to 19,918 feet. The maximum expected injection rate is 50,000 BWPd at a maximum surface injection pressure of 3,624 psi.


Interested parties must file objections or requests for hearing with the New Mexico Oil Conservation Division, 1220 South St. Francis Drive, Santa Fe, New Mexico, 87505 within 15 days.
#34436

67115647

00230897


GARY FISHER
PERMIAN OILFIELD PARTNERS, LLC
PO BOX 1220
STEPHENVILLE, TX 76401

Torrent Federal SWD #1 Water Wells in 1mi Radius

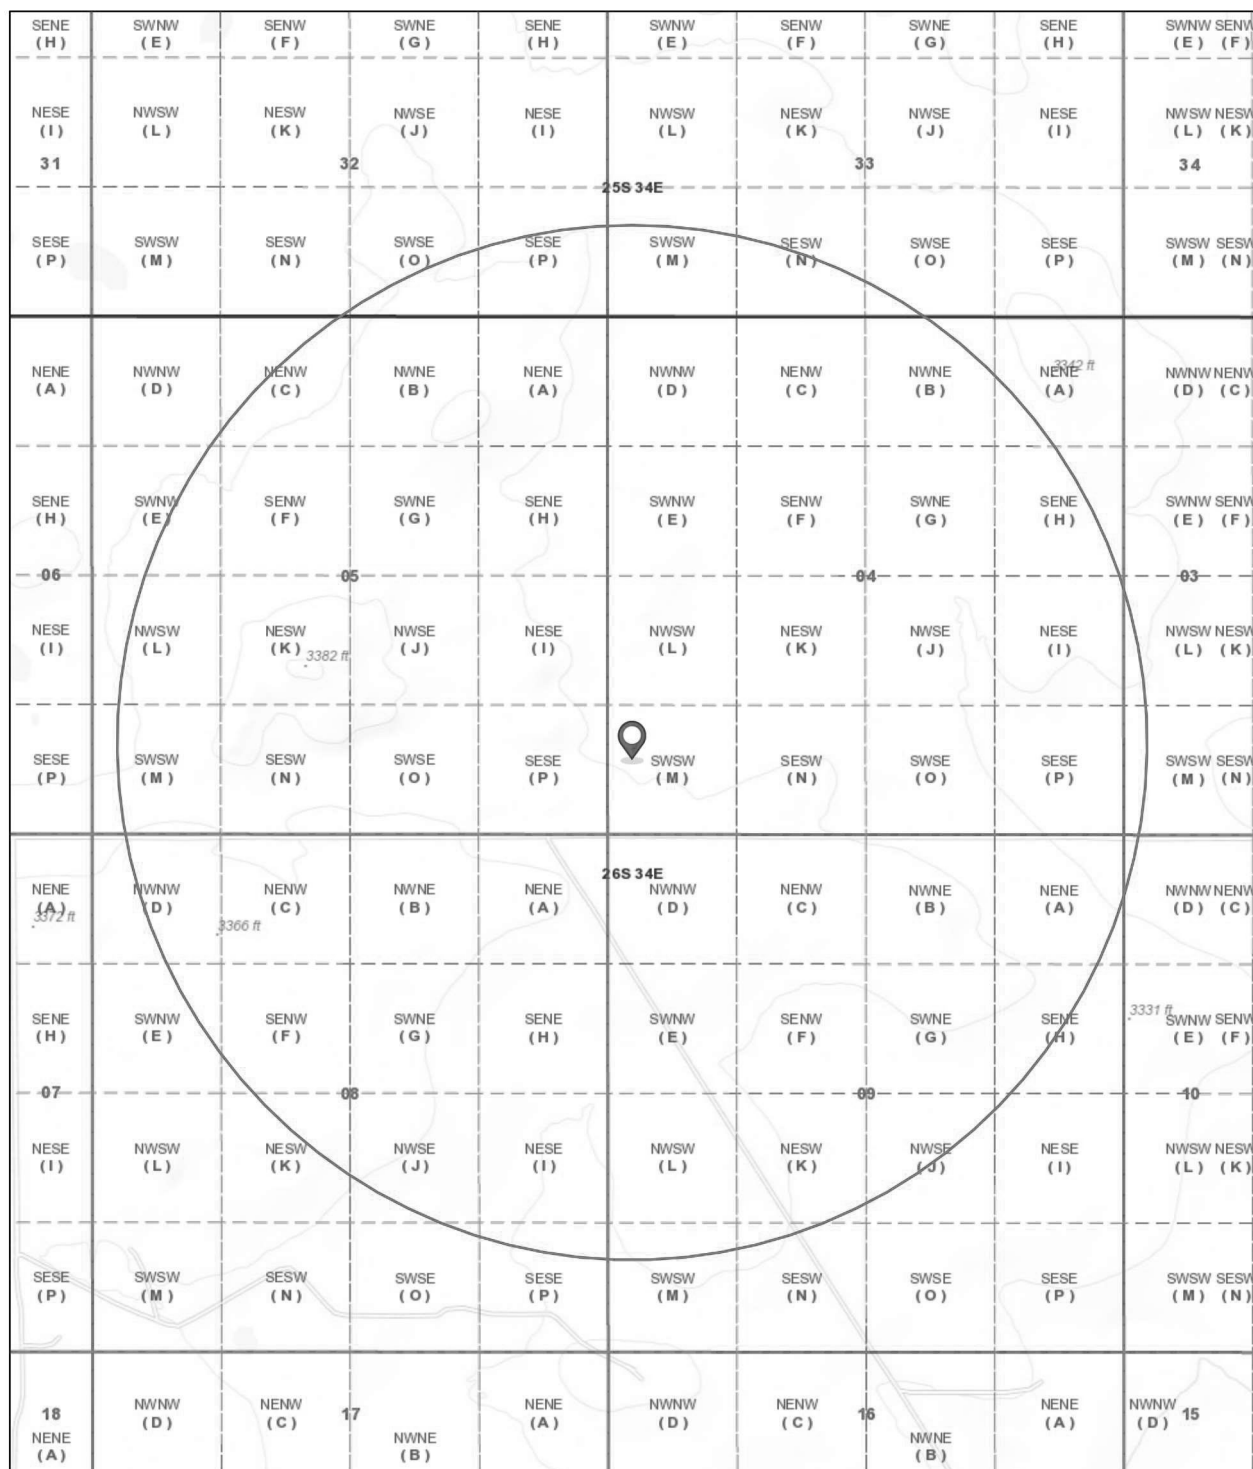

7/18/2019, 10:40:45 AM

- ☐ OCD Districts
- ★ OCD District Offices
- ☐ PLSS First Division
- ☐ PLSS Second Division
- ☐ PLSS Townships



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community



New Mexico Office of the State Engineer

Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced,
O=orphaned,
C=the file is closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	Code	POD Sub-basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	DepthWell	DepthWater	Water Column
C 02291		CUB	LE	1	1	2	06	26S	34E	640825	3550140*	220	160	60
C 02292 POD1		CUB	LE	4	1	2	06	26S	34E	640992	3549987	200	140	60
C 03441 POD1		C	LE	4	1	2	06	26S	34E	640971	3550039	250		
C 03442 POD1		C	LE	4	1	2	06	26S	34E	641056	3550028	251		

Average Depth to Water: **150 feet**

Minimum Depth: **140 feet**

Maximum Depth: **160 feet**

Record Count: 4

PLSS Search:

Township: 26S Range: 34E

*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

7/18/19 10:54 AM

WATER COLUMN/ AVERAGE DEPTH TO WATER



Item XII. Affirmative Statement

Re: C-108 Application for SWD Well
Permian Oilfield Partners, LLC
Torrent Federal SWD #1
916' FSL & 249' FWL
Sec 4, T26S, R34E
Lea County, NM

Permian Oilfield Partners, LLC. has examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.

Gary Fisher
Manager
Permian Oilfield Partners, LLC.

Date: 7/12/2019

Plugging Risk Assessment
Permian Oilfield Partners, LLC.
Torrent Federal SWD #1
SL: 916' FSL & 249' FWL
Sec 4, T26S, R34E
Lea County, New Mexico

WELLBORE SCHEMATIC

Permian Oilfield Partners, LLC.
Torrent Federal SWD #1
916' FSL, 249' FWL
Sec. 4, T26S, R34E, Lea Co. NM
Lat 32.0677443° N, Lon 103.4825834° W
GL 3334', RKB 3364'

Surface - (Conventional)

Hole Size: 26"
Casing: 20" - 94# H-40 & 106.5# J-55 STC Casing
Depth Top: Surface
Depth Btm: 1110'
Cement: 736 sks - Class C + Additives
Cement Top: Surface - (Circulate)

Intermediate #1 - (Conventional)

Hole Size: 17.5"
Casing: 13.375" - 61# J-55 & 68# J-55 STC Casing
Depth Top: Surface
Depth Btm: 5384'
Cement: 1766 sks - Lite Class C (50:50:10) + Additives
Cement Top: Surface - (Circulate)

Intermediate #2 - (Conventional)

Hole Size: 12.25"
Casing: 9.625" - 40# L-80 & 40# HCL-80 BTC Casing
Depth Top: Surface
Depth Btm: 12737'
Cement: 2166 sks - Lite Class C (60:40:0) + Additives
Cement Top: Surface - (Circulate)
ECP/DV Tool: 5484'

Intermediate #3 - (Liner)


Hole Size: 8.5"
Casing: 7.625" - 39# HCL-80 FJ Casing
Depth Top: 12537'
Depth Btm: 18119'
Cement: 263 sks - Lite Class C (60:40:0) + Additives
Cement Top: 12537' - (Volumetric)

Intermediate #4 - (Open Hole)

Hole Size: 6.5"
Depth: 19918'
Inj. Interval: 18119' - 19918' (Open-Hole Completion)

Tubing - (Tapered)

Tubing Depth: 18074'
Tubing: 7" - 26# HCP-110 FJ Casing & 5.5" 17# HCL-80 FJ Casing (Fiberglass Lined)
X/O Depth: 12537'
X/O: 7" 26# HCP-110 FJ Casing - X - 5.5" 17# HCL-80 FJ Casing (Fiberglass Lined)
Packer Depth: 18084'
Packer: 5.5" - Perma-Pak or Equivalent (Inconel)

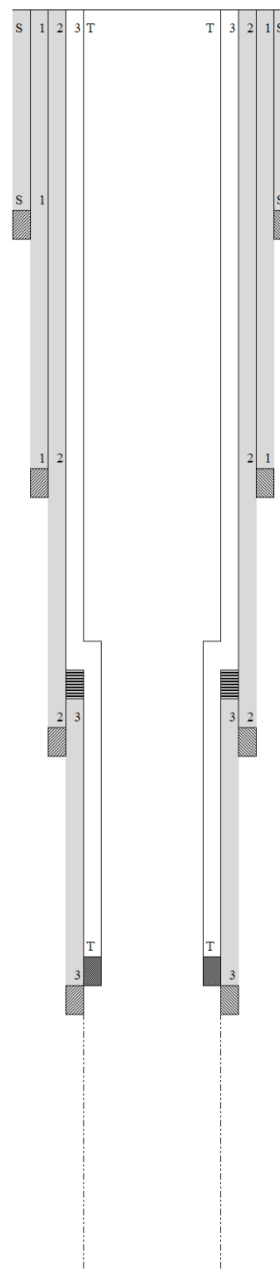

7" UFJ Tubing Inside of 9 5/8" 40# Casing

Bowen Series 150 Releasing and Circulation Overshots

Maximum Catch Size 6 5/8" to 7 1/8" Inclusive

Maximum Catch Size (Spiral)		6 5/8"	6 3/4"	7"	7 1/8"
Maximum Catch Size (Basket)		5 3/4"	6 1/8"	6 5/8"	6 5/8"
Overshot O.D.		8 1/4"	7 7/8"	8 1/4"	8 5/8"
Type		F.S.	S.H.	S.H.	S.H.
Complete Assembly	Part No.	C-3032	C-5222	9217	C-5354
(Dressed Spiral Parts)	Weight	280	243	251	260

Replacement Parts

Top Sub	Part No.	A-3033	A-5223	9218	A-5355
Bowl	Part No.	B-3034	B-5224	9219	B-5356
Packer	Part No.	A-1814	B-5225	9224	B-5357
Spiral Grapple	Part No.	N-84	B-5227	9222	B-5359
Spiral Grapple Control	Part No.	M-89	A-5228	9223	B-5360
Standard Guide	Part No.	A-1818	A-5229	9226	A-5361

Basket Parts

Basket Grapple	Part No.	N-84	B-5227	9222	B-5359
Basket Grapple Control	Part No.	M-89	A-5228	9223	B-5360
Mill Control Packer	Part No.	A-1814-R	B-5225-R	9224-R	B-5357-R

A 8.125" O.D. Bowen Series 150 Overshot will be used to perform this overshot operation. Details on the overshot are listed above. Casing to tubing clearance dimensions are listed below.

7" 26# FJ Casing Inside 9.625" 40# BTC Casing													
Clearance (in)	Pipe Size (in)	Weight lb/ft	Grade	Conn.	Type	Body O.D. (in)	Coupling O.D. (in)	I.D. (in)	Drift (in)	Lined Wt. lb/ft	Lined I.D. (in)	Flare I.D. (in)	Lined Drift (in)
0.840	9 5/8	40.0	L-80	BTC	Casing	9.625	10.625	8.835	8.679	-	-	-	-
	7	26.0	HCP-110	FJ	Casing	7.000	7.000	6.276	6.151	28.500	6.080	5.940	5.815

*Red Indicates Tubing

Fishing Procedure

Overshot Fishing Procedure

In the Event of a Connection Break

- If fishing neck is clean

1. Trip in hole with overshot and engage fish.
2. Pick up 2 points over neutral weight.
3. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
4. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

- If dressing fishing neck is required

1. Trip in hole with mill and dress fishing neck to allow for overshot to engage tubing.
2. Trip out of hole with mill.
3. Trip in hole with overshot and engage fish.
4. Pick up 2 points over neutral weight.
5. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
6. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

In the Event of a Body Break

- If fishing neck is clean

1. Trip in hole with overshot and engage fish.
2. Pick up 2 points over neutral weight.
3. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
4. Once released from packer, trip out of hole with fish.

- If dressing fishing neck is required

1. Trip in hole with mill and dress fishing neck to allow for overshot to engage tubing.
2. Trip out of hole with mill.
3. Trip in hole with overshot and engage fish.
4. Pick up 2 points over neutral weight.

5. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
6. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

Spear Fishing Procedure

If an overshot cannot be used to retrieve the fish, a spear may be used.

- Due to the use of insert lined tubing, the composite liner must be removed from the tubing before engaging the fish with a spear.
1. Trip in hole with spear sized to engage the I.D. of the insert liner.
 2. Engage the insert liner inside the tubing with spear.
 3. Pull the insert liner out of the tubing.
 4. Trip out of hole with insert liner.
 5. Trip in hole with spear sized to engage the I.D. of the tubing.
 6. Engage the tubing with spear.
 7. Pick up 2 points over neutral weight.
 8. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
 9. Once released from packer, trip out of hole with fish.

Inside Diameter Cutting Tool Fishing Procedure

If an overshot is required but a mill cannot be used to dress off a fishing neck, an inside diameter cutting tool may be used.

- Due to the use of insert lined tubing, the composite liner must be removed from the tubing before engaging the fish with a spear.
1. Trip in hole with spear sized to engage the I.D. of the insert liner.
 2. Engage the insert liner inside the tubing with spear.
 3. Pull the insert liner out of the tubing.
 4. Trip out of hole with insert liner.
 5. Trip in hole with inside diameter cutting tool and cut the tubing below the damaged fishing neck.
 6. Trip out hole with cutting tool.
 7. Trip in hole with spear sized to engage the I.D. of the tubing.
 8. Engage the previously cut tubing segment with spear.
 9. Trip out hole with cut tubing segment and spear.
 10. Trip in hole with overshot and engage fish.
 11. Pick up 2 points over neutral weight.
 12. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
 13. Once released from packer, trip out of hole with fish.

5 1/2" UFJ Tubing Inside of 7 5/8" 39# Casing

Series 150 Overshots

Tools are listed in order of maximum catch size.

The following table shows only a partial listing of available NOV Dowhole Bowen® overshots.

NOTE: Nitralloy Grapples are available upon request.

Bowen Series 150 Releasing and Circulation Overshots

Maximum Catch Size 4 1/4" to 5 1/2" inclusive

Maximum Catch Size (Spiral)		4 1/4"	4 1/2"	4 3/4"	4 7/8"	5"	5 1/4"	5 1/2"
Maximum Catch Size (Basket)		3 1/4"	4"	4 1/4"	4 1/2"	4 3/4"	4 7/8"	5 1/4"
Overshot O.D.		5 3/4"	5 1/2"	5 1/4"	5 1/2"	5 3/4"	6 1/4"	6 3/4"
Type		F.S.	S.H.	S.H.	S.F.S.	S.H.	F.S.	S.H.
Complete Assembly	Part No.	5896	5898	C-5168	8975	C-5171	C-4825	8825
(Dressed Spiral Parts)	Weight	130	130	133	138	140	192	185
Replacement Parts								
Top Sub	Part No.	5897	5899	A-5169	8976	A-5172	B-4826	8826
Bowl	Part No.	5898	5700	B-5170	8977	B-5173	B-4827	8817
Packer	Part No.	169	1140	B-2199	6114	L-5950	L-4505	8818
Spiral Grapple	Part No.	165	1135	B-2201	6112	B-4369	M-1071	8819
Spiral Grapple Control	Part No.	188	1137	B-2202	6113	B-4370	M-1072	8820
Standard Guide	Part No.	187	1143	B-2203	6121	B-4371	L-1074	8821
Basket Parts								
Basket Grapple	Part No.	165	1135	B-2201	6112	B-4369	M-1071	8819
Basket Grapple Control	Part No.	188	1137	B-2202	6113	B-4370	M-1072	8820
Mill Control Packer	Part No.	169-R	1140-R	B-2199-R	6114-R	L-5950-R	M-4505	L-8818-R

A (6.625" turned down to **6.500"** O.D.) Bowen Series 150 Overshot will be used to perform this overshot operation. Details on the overshot are listed above. Casing to tubing clearance dimensions are listed below.

5.5" 17# FJ Casing Inside 7.625" 39# FJ Casing													
Clearance (in)	Pipe Size (in)	Weight lb/ft	Grade	Conn.	Type	Body O.D. (in)	Coupling O.D. (in)	I.D. (in)	Drift (in)	Lined Wt. lb/ft	Lined I.D. (in)	Flare I.D. (in)	Lined Drift (in)
0.500	7 5/8	39.0	HCL-80	FJ	Casing	7.625	7.625	6.625	6.500	-	-	-	-
	5 1/2	17.0	HCL-80	FJ	Casing	5.500	5.500	4.892	4.767	18.500	4.520	4.400	4.275

*Red Indicates Tubing

Fishing Procedure

Overshot Fishing Procedure

In the Event of a Connection Break

- If fishing neck is clean

1. Trip in hole with overshot and engage fish.
2. Pick up 2 points over neutral weight.
3. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
4. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

- If dressing fishing neck is required

1. Trip in hole with mill and dress fishing neck to allow for overshot to engage tubing.
2. Trip out of hole with mill.
3. Trip in hole with overshot and engage fish.
4. Pick up 2 points over neutral weight.
5. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
6. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

In the Event of a Body Break

- If fishing neck is clean

1. Trip in hole with overshot and engage fish.
2. Pick up 2 points over neutral weight.
3. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
4. Once released from packer, trip out of hole with fish.

- If dressing fishing neck is required

1. Trip in hole with mill and dress fishing neck to allow for overshot to engage tubing.
2. Trip out of hole with mill.
3. Trip in hole with overshot and engage fish.
4. Pick up 2 points over neutral weight.

5. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
6. Once released from packer, trip out of hole with fish.

A skirted mill may be substituted for a standard mill to ensure pipe stabilization and the casing is not damaged while milling

Spear Fishing Procedure

If an overshot cannot be used to retrieve the fish, a spear may be used.

- Due to the use of insert lined tubing, the composite liner must be removed from the tubing before engaging the fish with a spear.
1. Trip in hole with spear sized to engage the I.D. of the insert liner.
 2. Engage the insert liner inside the tubing with spear.
 3. Pull the insert liner out of the tubing.
 4. Trip out of hole with insert liner.
 5. Trip in hole with spear sized to engage the I.D. of the tubing.
 6. Engage the tubing with spear.
 7. Pick up 2 points over neutral weight.
 8. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
 9. Once released from packer, trip out of hole with fish.

Inside Diameter Cutting Tool Fishing Procedure

If an overshot is required but a mill cannot be used to dress off a fishing neck, an inside diameter cutting tool may be used.

- Due to the use of insert lined tubing, the composite liner must be removed from the tubing before engaging the fish with a spear.
1. Trip in hole with spear sized to engage the I.D. of the insert liner.
 2. Engage the insert liner inside the tubing with spear.
 3. Pull the insert liner out of the tubing.
 4. Trip out of hole with insert liner.
 5. Trip in hole with inside diameter cutting tool and cut the tubing below the damaged fishing neck.
 6. Trip out hole with cutting tool.
 7. Trip in hole with spear sized to engage the I.D. of the tubing.
 8. Engage the previously cut tubing segment with spear.
 9. Trip out hole with cut tubing segment and spear.
 10. Trip in hole with overshot and engage fish.
 11. Pick up 2 points over neutral weight.
 12. Turn pipe 10-15 turns to the right to release the seal assembly from the packer.
 13. Once released from packer, trip out of hole with fish.

Abandonment Procedure

If the tubing cannot be recovered and the well is to be abandoned.

- The operator will ensure that all geologic formations are properly isolated.
- 1. Confirm the I.D. of the injection tubing is free from obstructions.
- 2. Run in hole with wireline set profile plug.
- 3. Set plug inside of packer assembly.
(Plug will allow cement to fill the I.D. of the injection tubing and the tubing to casing annulus)
- 4. Run in hole with wireline conveyed perforating guns and perforate the tubing immediately above the packer.
- 5. Trip in hole with an overshot, spear, cement retainer or isolation tool that will provide a work string-to- injection tubing seal.
- 6. Engage the fish with sealing tool.
- 7. Confirm circulation down the tubing and up the tubing-to-casing annulus.
- 8. Cement the work string, injection tubing, injection tubing-to-casing annulus and work string-to-casing annulus to surface.
- 9. Confirm the entirety of the wellbore is cemented to surface and all zones are isolated.
- 10. ND wellhead and install permanent capping flange.