

DATE IN 3/13/13	SUBMITTER 3/13/13	ENGINEER WJS	LOGGED IN	TYPE WFX 907	APP NO. 01WVJ308454786
--------------------	----------------------	-----------------	-----------	--------------------	---------------------------

ABOVE THIS LINE FOR DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION

- Engineering Bureau -

1220 South St. Francis Drive, Santa Fe, NM 87505



ADMINISTRATIVE APPLICATION CHECKLIST

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Application Acronyms:

[NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
[DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
[PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]
[WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
[SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
[EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

- [1] **TYPE OF APPLICATION** - Check Those Which Apply for [A]
 [A] Location - Spacing Unit - Simultaneous Dedication
☐ NSL ☐ NSP ☐ SD

Check One Only for [B] or [C]

- [B] Commingling - Storage - Measurement
☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM

- [C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery
 X WFX ☐ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR

- [D] Other: Specify _____

RECEIVED OGD
 2013 MAR 13 P 1:02

Northeast Drinkard
 Unit 172
 30-025-40847

- [2] **NOTIFICATION REQUIRED TO:** - Check Those Which Apply, or Does Not Apply
- [A] ☐ Working, Royalty or Overriding Royalty Interest Owners
- [B] X Offset Operators, Leaseholders or Surface Owner

- [C] X Application is One Which Requires Published Legal Notice
- [D] ☐ Notification and/or Concurrent Approval by BLM or SLO
U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office
- [E] X For all of the above, Proof of Notification or Publication is Attached, and/or,
- [F] ☐ Waivers are Attached

- [3] **SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.**

- [4] **CERTIFICATION:** I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Brian Wood

Print or Type Name

Signature

Consultant

Title

brian@permitswest.com

e-mail Address

3-13-13

Date

APPLICATION FOR AUTHORIZATION TO INJECT

I. PURPOSE: XXX Secondary Recovery _____ Pressure Maintenance _____ Disposal _____ Storage _____
Application qualifies for administrative approval? _____ Yes _____ No

II. OPERATOR: APACHE CORPORATION

ADDRESS: 303 VETERANS AIRPARK LANE, SUITE 3000, MIDLAND, TX 79705

CONTACT PARTY: BRIAN WOOD (PERMITS WEST, INC.) PHONE: 505 466-8120

III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.
Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? _____ Yes XXX No _____
If yes, give the Division order number authorizing the project: R-8541

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

NORTHEAST DRINKARD UNIT #172

VII. Attach data on the proposed operation, including:

30-025-40847

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

*VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

*X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).

*XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

NAME: BRIAN WOOD

TITLE: CONSULTANT

SIGNATURE: 

DATE: MARCH 13, 2013

E-MAIL ADDRESS: brian@permitswest.com

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: _____

III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:


- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,

(4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

INJECTION WELL DATA SHEET

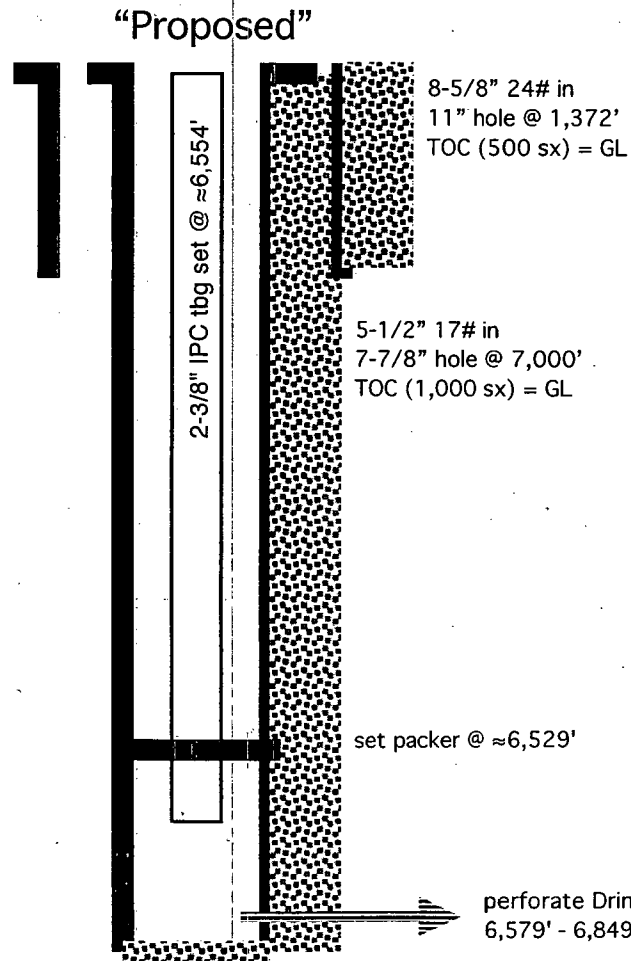OPERATOR: APACHE CORPORATIONWELL NAME & NUMBER: NORTHEAST DRINKARD UNIT #172WELL LOCATION: SHL: 3515' FNL & 1425' FEL J (LOT 10) 3 21 S 37 EFOOTAGE LOCATION UNIT LETTER SECTION TOWNSHIP RANGEBHL: 3300' FNL & 1330' FELWELLBORE SCHEMATICWELL CONSTRUCTION DATASurface Casing

TD 7,050'

(not to scale)

Hole Size: 11" Casing Size: 8-5/8"Cemented with: 500 sx. or ft³Top of Cement: SURFACE Method Determined: VISUALIntermediate CasingHole Size: Casing Size: Cemented with: sx. or ft³Top of Cement: Method Determined: Production CasingHole Size: 7-7/8" Casing Size: 5-1/2"Cemented with: 1,000 sx. or ft³Top of Cement: SURFACE Method Determined: VISUALTotal Depth: 7,050'Injection Interval6,579' feet to 6,849'

(Perforated or Open Hole; indicate which)

■■■■■■■■■■

INJECTION WELL DATA SHEETTubing Size: 2-3/8" J-55 4.7# Lining Material: INTERNAL PLASTIC COATType of Packer: LOCK SET INJECTIONPacker Setting Depth: ≈6,529'

Other Type of Tubing/Casing Seal (if applicable): _____

Additional Data

1. Is this a new well drilled for injection? XXX Yes No

If no, for what purpose was the well originally drilled? _____

2. Name of the Injection Formation: DRINKARD

3. Name of Field or Pool (if applicable): EUNICE; BLI-TU-DR, NORTH (POOL CODE 22900)

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e. sacks of cement or plug(s) used. _____

NO

5. Give the name and depths of any oil or gas zones underlying or overlying the proposed injection zone in this area: _____

OVER: TUBB (6,222'), BLINEBRY (5,698'), GRAYBURG (3,767')UNDER: ABO (6,850'), HARE SIMPSON (8,000')

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 1

30-025-40847

I. Purpose is to drill a water injection well to increase oil recovery. The well will inject (6,579' - 6,849') into the Drinkard, which is part of the Eunice; Blinbry-Tubb-Drinkard, North Pool (aka, Eunice; BLI-TU-DR, North and pool code = 22900). The discovery well was the Gulf Vivian #1 in 1944. The well and zone are part of the Northeast Drinkard Unit (Unit Number 300160, Case Number 9231, Order Number R-8540) that was established in 1987 by Shell. The unit was subsequently operated by Altura, and now, by Apache. This is an active water flood. The well will be directionally drilled because the BHL falls under a railroad corridor.

II. Operator: Apache Corporation (OGRID #873)
Operator phone number: (432) 818-1167
Operator address: 303 Veterans Airpark Lane, Suite 3000
Midland, TX 79705
Contact for Application: Brian Wood (Permits West, Inc.)
Phone: (505) 466-8120

III. A. (1) Lease: fee (Unit Tract 4, aka, Taylor-Glenn)
Lease Size: 240 acres (see Exhibit A for C-102 and map)
Closest Lease Line: 445'
Lease Area: Lots 5, 6, 9, 10, & 11 of Section 3
Lot 8 of Section 4
T. 21 S., R. 37 E.
Unit Size: 4,938 acres
Closest Unit Line: 3,300'
Unit Area:

T. 21 S., R. 37 E.

Section 2: all

Section 3: all ✓

Section 4: Lots 1, 8, 9, & 16

Section 10: all

Section 11: SW4

Section 14: NW4

Section 15, 22, & 23: all

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 2

30-025-40847

- A. (2) Surface casing (8-5/8" and 24#) will be set at 1,372' in an 11" hole. Cement will be circulated to the surface with 500 sacks.

Production casing (5-1/2" and 17#) will be set at 7,050' (TD) in a 7-7/8" hole. Cement will be circulated to the surface with 1,000 sacks.

Mechanical integrity of the casing will be assured by hydraulically pressure testing to 500 psi for 30 minutes.

- A. (3) Tubing specifications are 2-3/8", J-55, 4.7#, and internally plastic coated. Setting depth will be \approx 6,554'. (Disposal interval will be 6,579' to 6,849'.)
- A. (4) A lock set injection packer will be set at \approx 6,529' (\approx 50' above the highest proposed perforation of 6,579').
- B. (1) Injection zone will be the grainstone and packstone member of the Drinkard limestone. The zone is part of the Eunice; Blinebry-Tubb-Drinkard, North Pool. Estimated fracture gradient is \approx 0.56 psi per foot.
- B. (2) Injection interval will be 6,579' to 6,849'. The well will be a cased hole. See attached well profile for more perforation information.
- B. (3) The well has not yet been drilled. It will be completed as a water injection well after approval.
- B. (4) The well will be perforated from 6,579' to 6,849' with 2 shots per foot. Shot diameter = 0.40".
- B. (5) The next higher oil or gas zone is the Tubb. Its estimated bottom is at 6,554'. Injection will occur in the Drinkard. Drinkard top is at 6,555'. Injection interval in the Drinkard will be 6,579' to 6,849'. The Tubb is unitized with the Blinebry and Drinkard. The Blinebry above the Tubb is productive in Section 3. The Blinebry is part of the

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 3

30-025-40847

Eunice; Blinebry-Tubb-Drinkard, North Pool (NMOCD pool code number = 22900). Grayburg, above the Blinebry, is productive in Section 3. The Grayburg is part of the Penrose Skelly; Grayburg (NMOCD pool code number = 50350).

The next lower oil or gas zone is the Wantz; Abo (Pool Code = 62700). Its top is at 6,850'. There are six Abo producers in Section 3. Apache operates all six Abo producing wells. The Abo is not part of the Northeast Drinkard Unit. The Hare; Simpson is deeper than the Abo and is productive in Section 3.

IV. This is not a horizontal or vertical expansion of an existing injection project. The case file for the unit approval (R-8540) includes a discussion of the Drinkard water flood. The water flood (R-8541) was approved at the same time in 1987.

There have been ten water flood expansions (WFX-583, WFX-674, WFX-722, WFX-740, WFX-752, WFX-759, WFX-774, WFX-784, WFX-881, WFX-882, WFX-889) since then. Closest unit boundary is 3,330' north. Thirteen injection wells are within a half-mile radius, all of which are in the unit. The injection wells are in all four cardinal directions (see Exhibit B).

V. Exhibit B shows all 63 existing wells (5 P & A + 17 water injection wells + 41 producing oil wells) within a half-mile radius, regardless of depth. Exhibit C shows all 516 existing wells (377 oil or gas producing wells + 93 injection or disposal wells + 41 P & A wells + 5 water wells) within a two-mile radius.

Exhibit D shows all leases (only BLM and fee) within a half-mile radius. All leases within a half-mile are in the unit. Details on the leases within a half-mile are:

<u>2-21s-37e</u>	<u>Lessor</u>	<u>Lease Number</u>	<u>Operator</u>
Lots 4 & 5	NMSLO	B1-1613-0002	Penroc
Lot 12 & NWSW	NMSLO	B0-9745-0004	Occidental
Lot 13	NMSLO	B1-1613-0002	Penroc

APACHE CORPORATION
 NORTHEAST DRINKARD UNIT 172
 SHL: 3515 FNL & 1425 FEL
 BHL: 3300 FNL & 1330 FEL
 SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 4

30-025-40847

<u>3-21s-37e</u>	<u>Lessor</u>	<u>Lease Number</u>	<u>Operator</u>
Lots 1-4, 7, 8, 12, 15, & 16, & N2SE	BLM	NMNM-002512	Apache
Lots 5, 6, 9, 10; & 11	fee	Taylor-Glenn	Apache
Lots 13 & 14, & NESW	fee	Livingston	Apache

Exhibit E shows all lessors (BLM, fee, and state) within a two-mile radius. Note that the ranges are offset from the normal pattern (T. 20 S., R. 38 E. is north of T. 21 S., R. 37 E.).

VI. There are 63 existing wells within a half-mile radius. Fifty-three of the wells penetrated the Drinkard. The penetrators include 34 oil wells, 15 water injection wells, and 4 P & A wells. A table abstracting the well construction details and histories of the Drinkard penetrators is in Exhibit F. Diagrams illustrating the P & A penetrators are also in Appendix F. The 63 wells and their distances from the 172 are:

OPERATOR	WELL	API # 30- 025-	LOCATION	ZONE	STATUS	TD	DISTANCE
Apache	Taylor Glenn 5	06384	J-3-21s-37e	Wantz; Abo	oil	8361	227
Apache	NEDU 228	34427	J-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6920	285
Apache	Taylor Glenn 4	06383	A-3--21s-37e	Hare; Simpson	oil	8119	574
Apache	NEDU 125	34425	J-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6910	582
Apache	NEDU 208	06385	J-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6707	611
Apache	NEDU 173	40554	B-3-21s-37e	Bliebry-Tubb-Drinkard	oil	7050	625
Apache	NEDU 211	06381	I-3-21s-37e	Bliebry-Tubb-Drinkard	WIW	6780	671
Apache	NEDU 171	40553	I-3-21s-37e	Bliebry-Tubb-Drinkard	oil	7065	862
Apache	Hawk B 3 25	35227	L-3-21s-37e	Grayburg	oil	4450	864
Apache	Hawk B 3 30	39281	H-3-21s-37e	Grayburg	APD expired	4550	908

**APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172**

PAGE 5

SHL: 3515 FNL & 1425 FEL

BHL: 3300 FNL & 1330 FEL

SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

30-025-40847

Apache	NEDU 163	39914	B-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7025	948
Apache	NEDU 158	39440	A-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7020	1027
Apache	Taylor Glenn 3	06382	A-3--21s-37e	Wantz; Abo	oil	8224	1038
Apache	Hawk B 3 26	35734	G-3-21s-37e	Grayburg	oil	4476	1190
Apache	NEDU 229	34429	J-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6910	1192
Apache	NEDU 209	06508	O-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8114	1225
Apache	NEDU 212	06492	P-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6782	1311
Apache	NEDU 124	34424	K-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6910	1371
Apache	NEDU 210	06502	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8302	1403
Apache	NEDU 111	26670	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6875	1442
Apache	NEDU 157	40696	B-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7036	1445
Apache	NEDU 110	06495	G-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	5976	1457
Apache	NEDU 113	06496	H-3--21s-37e	Blinebry-Tubb-Drinkard	WIW	6830	1458
Apache	Taylor Glenn 20	38687	C-3-21s-37e	Grayburg	oil	4530	1547
Conoco	Hawk B 3 8	06500	P-3-21s-37e	Ellenburger	P & A	8191	1589
Apache	NEDU 126	34415	E-2-21s-37e	Blinebry-Tubb-Drinkard	oil	6940	1654
Apache	State Section 2 11	06377	D-2-21s-37e	Wantz; Abo	P & A	8015	1668
Conoco	Hawk B 3 3	06505	P-3-21s-37e	Hare; Simpson	P & A	8010	1668
Apache	NEDU 230	34412	M-2-21s-37e	Blinebry-Tubb-Drinkard	oil	6930	1713
Apache	NEDU 242	37875	G-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6950	1751
Apache	NEDU 206	06522	K-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8590	1863
Apache	NEDU 175	40516	C-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7050	1866

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 6

30-025-40847

Apache	NEDU 226	34380	Q-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6850	1914
Apache	NEDU 250	39236	E-2-21s-37e	Bliebry-Tubb-Drinkard	APD expired	7000	1975
Apache	NEDU 213	06368	D-2-21s-37e	Bliebry-Tubb-Drinkard	oil	6760	1996
Apache	Livingston 24	38382	F-3-21s-37e	Grayburg	oil	4153	1998
Apache	NEDU 159	40497	C-3-21s-37e	Bliebry-Tubb-Drinkard	oil	7024	2011
Apache	State Section 2 8	06374	L-2-21s-37e	Hare; Simpson	oil	8156	2015
Apache	NEDU 131	34609	A-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6990	2026
Apache	NEDU 154	39439	B-3-21s-37e	Bliebry-Tubb-Drinkard	oil	7025	2033
Apache	NEDU 207	06519	N-3-21s-37e	Bliebry-Tubb-Drinkard	WIW	6885	2051
Apache	NEDU 165	39915	D-2-21s-37e	Bliebry-Tubb-Drinkard	WIW	7054	2072
Apache	Taylor Glenn 14	35353	F-3-21s-37e	Grayburg	oil	4200	2072
Apache	NEDU 167	39917	D-2-21s-37e	Bliebry-Tubb-Drinkard	oil	7075	2123
Apache	NEDU 164	40526	A-3-21s-37e	Bliebry-Tubb-Drinkard	oil	7030	2137
Apache	Taylor Glenn 15	35354	K-3-21s-37e	Grayburg	oil	4450	2250
Apache	Livingston 16	35225	14-3-21s-37e	Grayburg	oil	4500	2276
Apache	NEDU 116	06346	E-2-21s-37e	Bliebry-Tubb-Drinkard	P & A	6010	2339
Apache	NEDU 108	24831	C-3-21s-37e	Bliebry-Tubb-Drinkard	P & A	6805	2346
Apache	NEDU 214	06491	M-2-21s-37e	Bliebry-Tubb-Drinkard	WIW	6810	2353
Apache	Hawk B 3 4	06504	Q-3-21s-37e	Grayburg	oil	7845	2358
Apache	NEDU 227	34428	J-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6890	2388
Apache	NEDU 306	06507	R-3-21s-37e	Bliebry-Tubb-Drinkard	WIW	8025	2409
Apache	NEDU 130	34617	F-3-21s-37e	Bliebry-Tubb-Drinkard	oil	6950	2410

APACHE CORPORATION
 NORTHEAST DRINKARD UNIT 172
 SHL: 3515 FNL & 1425 FEL
 BHL: 3300 FNL & 1330 FEL
 SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 7

30-025-40847

Apache	NEDU 215	06341	M-2-21s-37e	Blinebry-Tubb-Drinkard	WIW	8083	2412
Apache	NEDU 115	06340	E-2-21s-37e	Blinebry-Tubb-Drinkard	WIW	8620	2420
Apache	NEDU 132	34601	E-2-21s-37e	Blinebry-Tubb-Drinkard	oil	6970	2424
Apache	NEDU 225	34249	L-2-21s-37e	Blinebry-Tubb-Drinkard	oil	6850	2431
Apache	NEDU 305	06493	J-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6747	2438
Apache	NEDU 232	34430	14-3-21s-37e	Blinebry-Tubb-Drinkard	oil	6890	2486
Apache	NEDU 308	06494	Q-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6753	2500
Apache	NEDU 107	20315	F-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	6000	2586
Apache	NEDU 268	40779	K-3-21s-37e	Blinebry-Tubb-Drinkard	oil	7000	2617
Apache	NEDU 127	34426	L-2-21s-37e	Blinebry-Tubb-Drinkard	oil	6850	2625
Apache	NEDU 309	06499	Q-3-21s-37e	Blinebry-Tubb-Drinkard	WIW	8021	2643

- VII. 1. Average injection rate will be ≈ 750 bwpd.
 Maximum injection rate will be $\approx 1,000$ bwpd.
2. System will be closed. The well will be tied into the existing unit pipeline system. The system consists of a branched injection system with centrifugal injection pumps.
3. Average injection pressure will be $\approx 1,000$ psi. Maximum injection pressure will be 1,315 psi ($= 0.2$ psi/foot \times 6,579' (highest perforation)).
4. Water source will be water pumped from existing $\approx 4,000'$ deep San Andres water supply wells plus produced water from Blinebry, Tubb, and Drinkard zones. The source water and produced water are collected in

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 8

30-025-40847

separate skim tanks. The two water streams (source and produced) are commingled in a storage tank before being piped to the injection wells. Commingling began in the 1970s. A comparison of analyses from the discharge pump and San Andres follows. The complete analyses are in Exhibit G.

	<u>Injection Pump Discharge</u>	<u>San Andres 919-S</u>
Anion/Cation Ratio	1.0	N/A
Barium	0.1 mg/l	0.38 mg/l
Bicarbonate	671.0 mg/l	562.0 mg/l
Calcium	1,099.0 mg/l	608.0 mg/l
Carbon Dioxide	80.0 ppm	80.0 ppm
Chloride	10,086.0 mg/l	6,200.0 mg/l
Hydrogen Sulfide	90.0 ppm	408.0 ppm
Iron	0.3 mg/l	0.0 mg/l
Magnesium	439.0 mg/l	244.0 mg/l
Manganese	N/A	0.01 mg/l
pH	7.5	6.49
Potassium	115.0 mg/l	N/A
Sodium	5,799.5 mg/l	3,909.0 mg/l
Strontium	28.0 mg/l	19.0 mg/l
Sulfate	2,465.0 mg/l	1,750.0 mg/l
Total Dissolved Solids	20,702.9 mg/l	13,273.0 mg/l

5. The Drinkard currently produces in the unit. It is the goal of the project to increase production from the Drinkard. According to NMOCDD records, at least 2,150 wells have been approved to target the Drinkard in New Mexico.

VIII. The Unit is on the north end of a north-northwest to south-southeast trending anticline. It is part of the Penrose Skelly trend and parallels the west edge of the Central Basin Platform. Dips are $\approx 1^\circ$ to $\approx 2^\circ$. The Drinkard is 270' thick and consists of tan to dark gray limestone and dolomite. Core filling and replacement anhydrite are common in the limestone. Nodular anhydrite is common in the dolomite. The reservoir portion of the Drinkard consists of skeletal lime grindstone

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 9

30-025-40847

and lime packstone with some dolomitic packstone. Porosity is $\approx 11\%$. Permeability is ≈ 2.45 millidarcies.

There are currently 158 Drinkard injection wells in the state. Adjacent to the Northeast Drinkard Unit are three other Drinkard water floods (the Apache operated West Blinebry Drinkard and East Blinebry Drinkard Units and the Chevron operated Central Drinkard Unit). The Central Drinkard Unit has been under water flood since the 1960s.

Formation tops are:

Quaternary = 0'
Rustler = 1,327'
Yates = 2,643'
San Andres = 3,842'
Glorieta = 5,209'
Paddock = 5,269'
Blinebry = 5,698'
Tubb = 6,222'
Drinkard = 6,555'
Abo = 6,850'
Total Depth = 7,050'

One fresh water well is within a mile radius. This conclusion is based on a November 15, 2012 field inspection and a review of the State Engineer's records. The closest water well is 5,084' west in Section 4 (Exhibit H). That water well, equipped with an electric pump, is 90' deep and probably produces from the Ogallala aquifer. Depth to water is 75'. No existing underground drinking water sources are below the Drinkard within a mile radius.

There will be $>6,000'$ of vertical separation and the Rustler salt between the bottom of the only likely underground water source (Ogallala) and the top of the Drinkard.

Produced water has been injected or disposed into five zones above the Drinkard within T. 21 S., R. 37 E. and T. 20 S., R. 38 E. The five zones, from top to bottom, are the Grayburg, San Andres, Glorieta, Blinebry, and Tubb.

APACHE CORPORATION
NORTHEAST DRINKARD UNIT 172
SHL: 3515 FNL & 1425 FEL
BHL: 3300 FNL & 1330 FEL
SEC. 3, T. 21 S., R. 37 E., LEA COUNTY, NM

PAGE 10

30-025-40847

IX. The well will be stimulated with acid to clean out scale or fill.

X. Spectral gamma ray, spectral density/compensated neutron, dual laterolog/MSFL, and sonic logs are planned.

XI. One fresh water well is within a mile. An analysis from that stock watering well is attached (Exhibit H).

XII. Apache is not aware of any geologic or engineering data that may indicate the Drinkard is in hydrologic connection with any underground sources of water. This was attested to during sworn testimony (page 65, line 14, Order R-8540) presented in 1987. Closest Quaternary fault is over 75 miles west (Exhibit I). At least 256 injection or saltwater disposal wells have been drilled into the Drinkard in the New Mexico portion of the Permian Basin. Previously approved Drinkard water flood expansions in the unit include:

WFX-740 (October 13, 1998)
WFX-752 (July 6, 1999)
WFX-759 (May 8, 2000)
WFX-774 (June 7, 2001)
WFX-784 (October 29, 2002)
WFX-881 (March 14, 2011)
WFX-882 (March 16, 2011)
WFX-896 (March 6, 2012)

XIII. Notice (this application) has been sent (Exhibit J) to the surface owners (Texas-New Mexico Railroad and Elizabeth Gervis Taylor, et al). Apache is the only Drinkard leasehold operator within a half-mile.

A legal ad (see Exhibit K) was published on February 26, 2013.

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

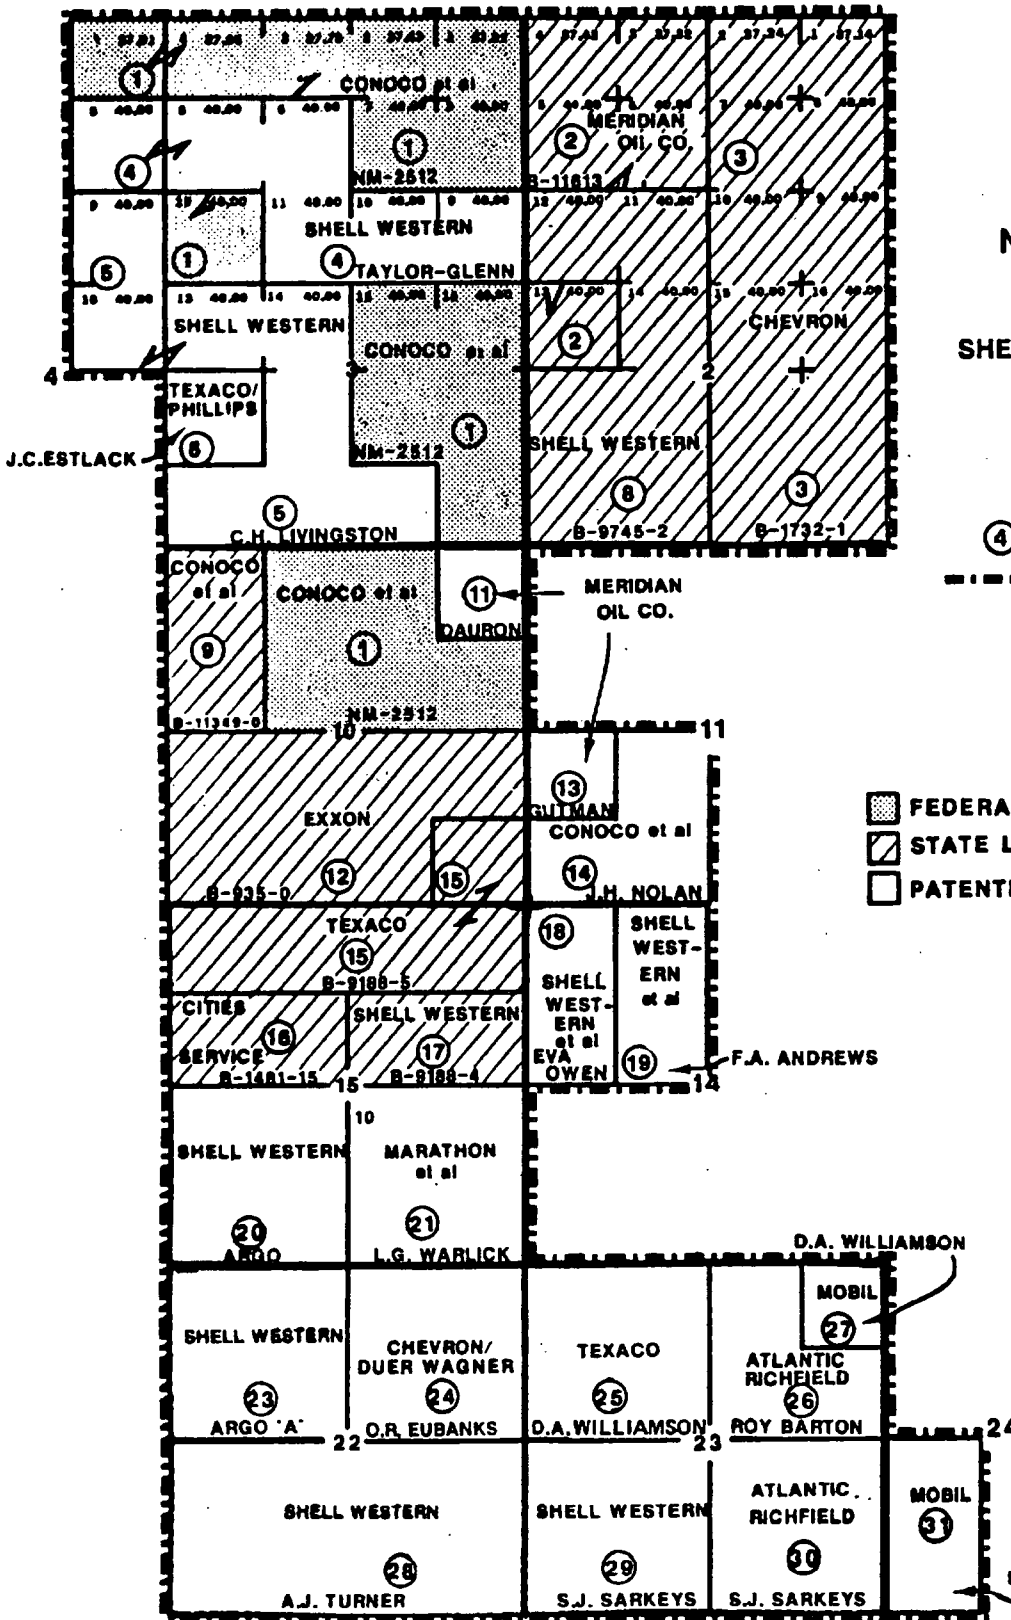


EXHIBIT "A"
NORTHEAST DRINKARD UNIT
LEA COUNTY, NEW MEXICO
SHELL WESTERN E & P INC., OPERATOR

LEGEND

- ④ UNIT TRACT NUMBER
 --- UNIT BOUNDARY

- FEDERAL LANDS
 ▨ STATE LANDS
 □ PATENTED (FEE) LANDS


ACREAGE	PERCENTAGE
708.67	14.12
1,669.12	33.26
2,640.00	52.62
TOTALS	5,017.79 100%



NOTE: UNLESS OTHERWISE INDICATED,
 THE VARIOUS SECTIONS ON
 THIS MAP CONTAIN 840.00 ACRES.

Northeast Drinkard Unit
 Exhibit Two
 Cases 9230
 9231
 9232

TOWNSHIP 21S, RANGE 37E, N.M.P.M.

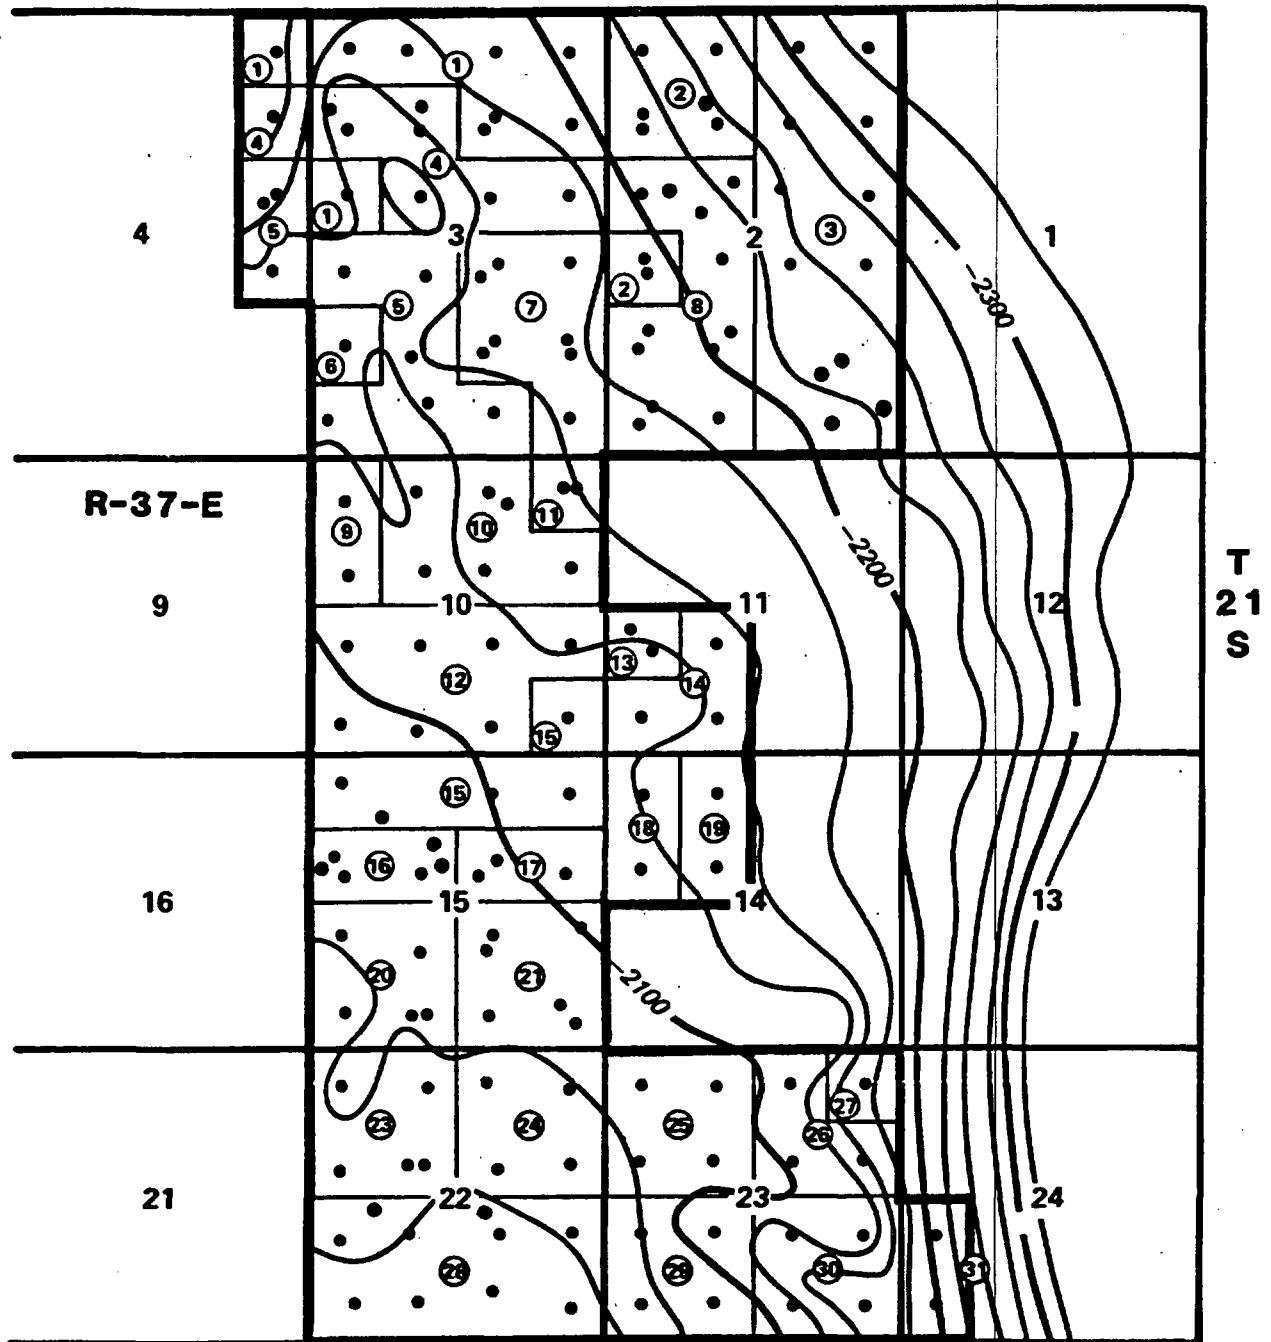


LEGEND

- PROPOSED UNITIZED WELLBORE
- ⑤ TRACT NUMBER

**PROPOSED NORTHEAST DRINKARD UNIT
LEA COUNTY, NEW MEXICO
STRUCTURE ON TOP OF BLINEBRY
CI=25'
EXHIBIT 13**

Northeast Drinkard Unit
Exhibit Thirteen
Cases 9230
9231
9232

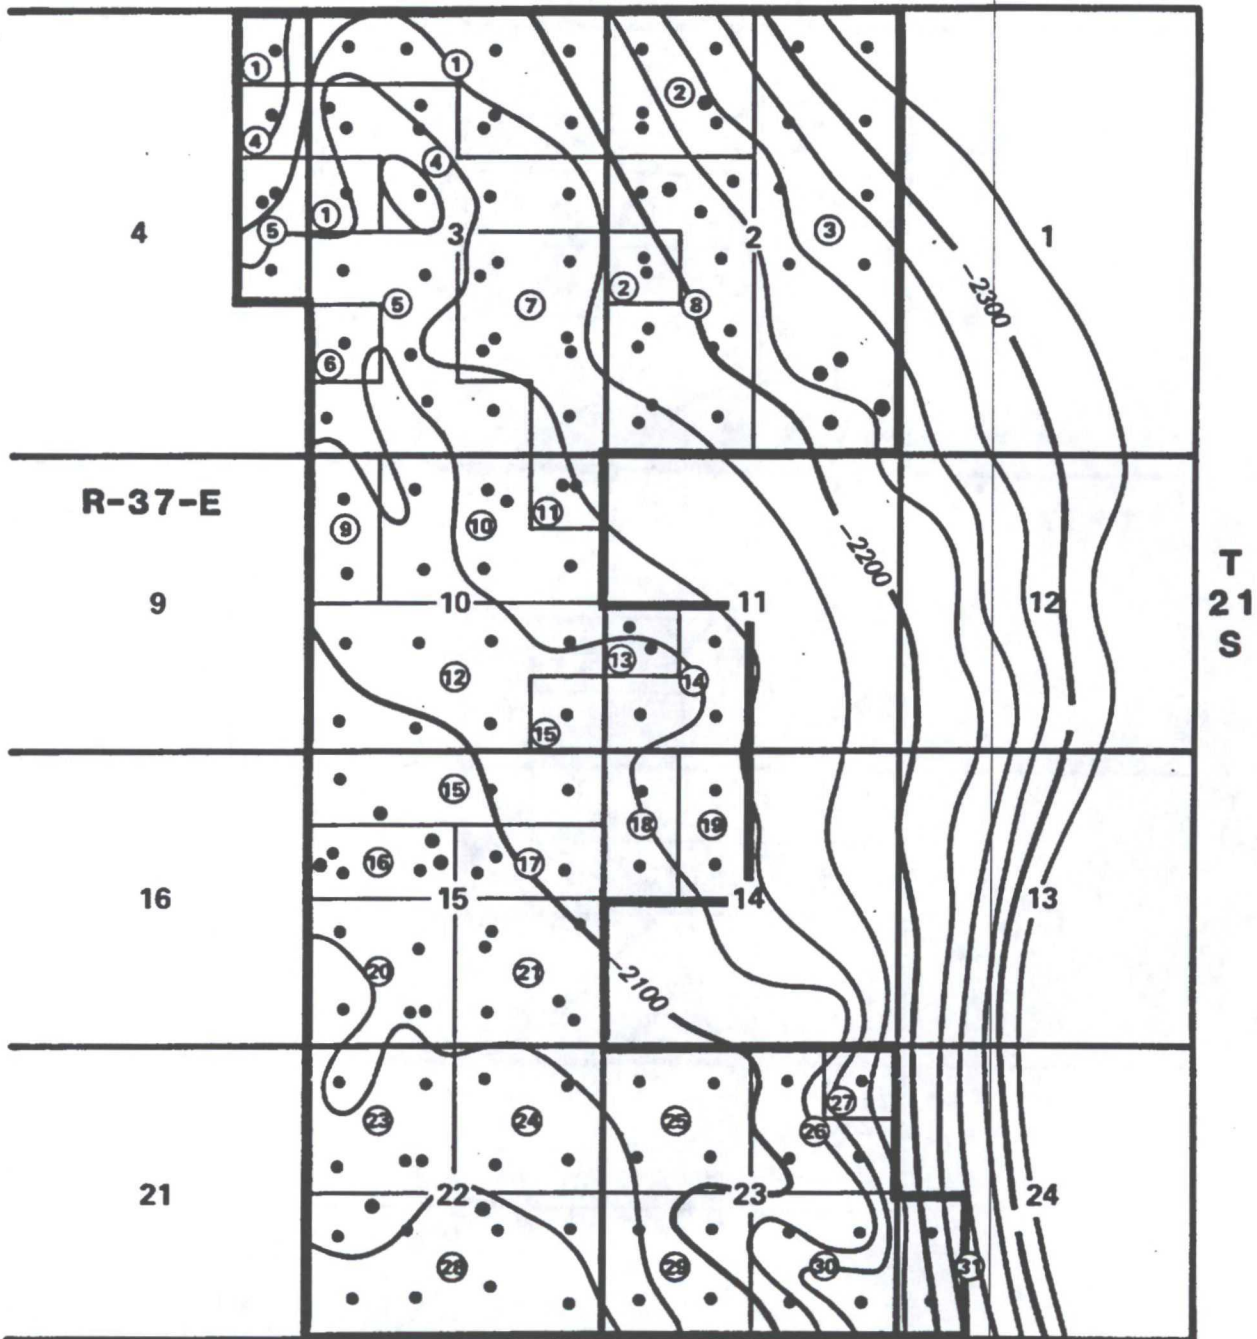


LEGEND

- PROPOSED UNITIZED WELLBORE
- ⑤ TRACT NUMBER


PROPOSED NORTHEAST DRINKARD UNIT
LEA COUNTY, NEW MEXICO
STRUCTURE ON TOP OF BLINEBRY
CI=25'
EXHIBIT 13

Northeast Drinkard Unit
Exhibit Thirteen
Cases 9230
9231
9232

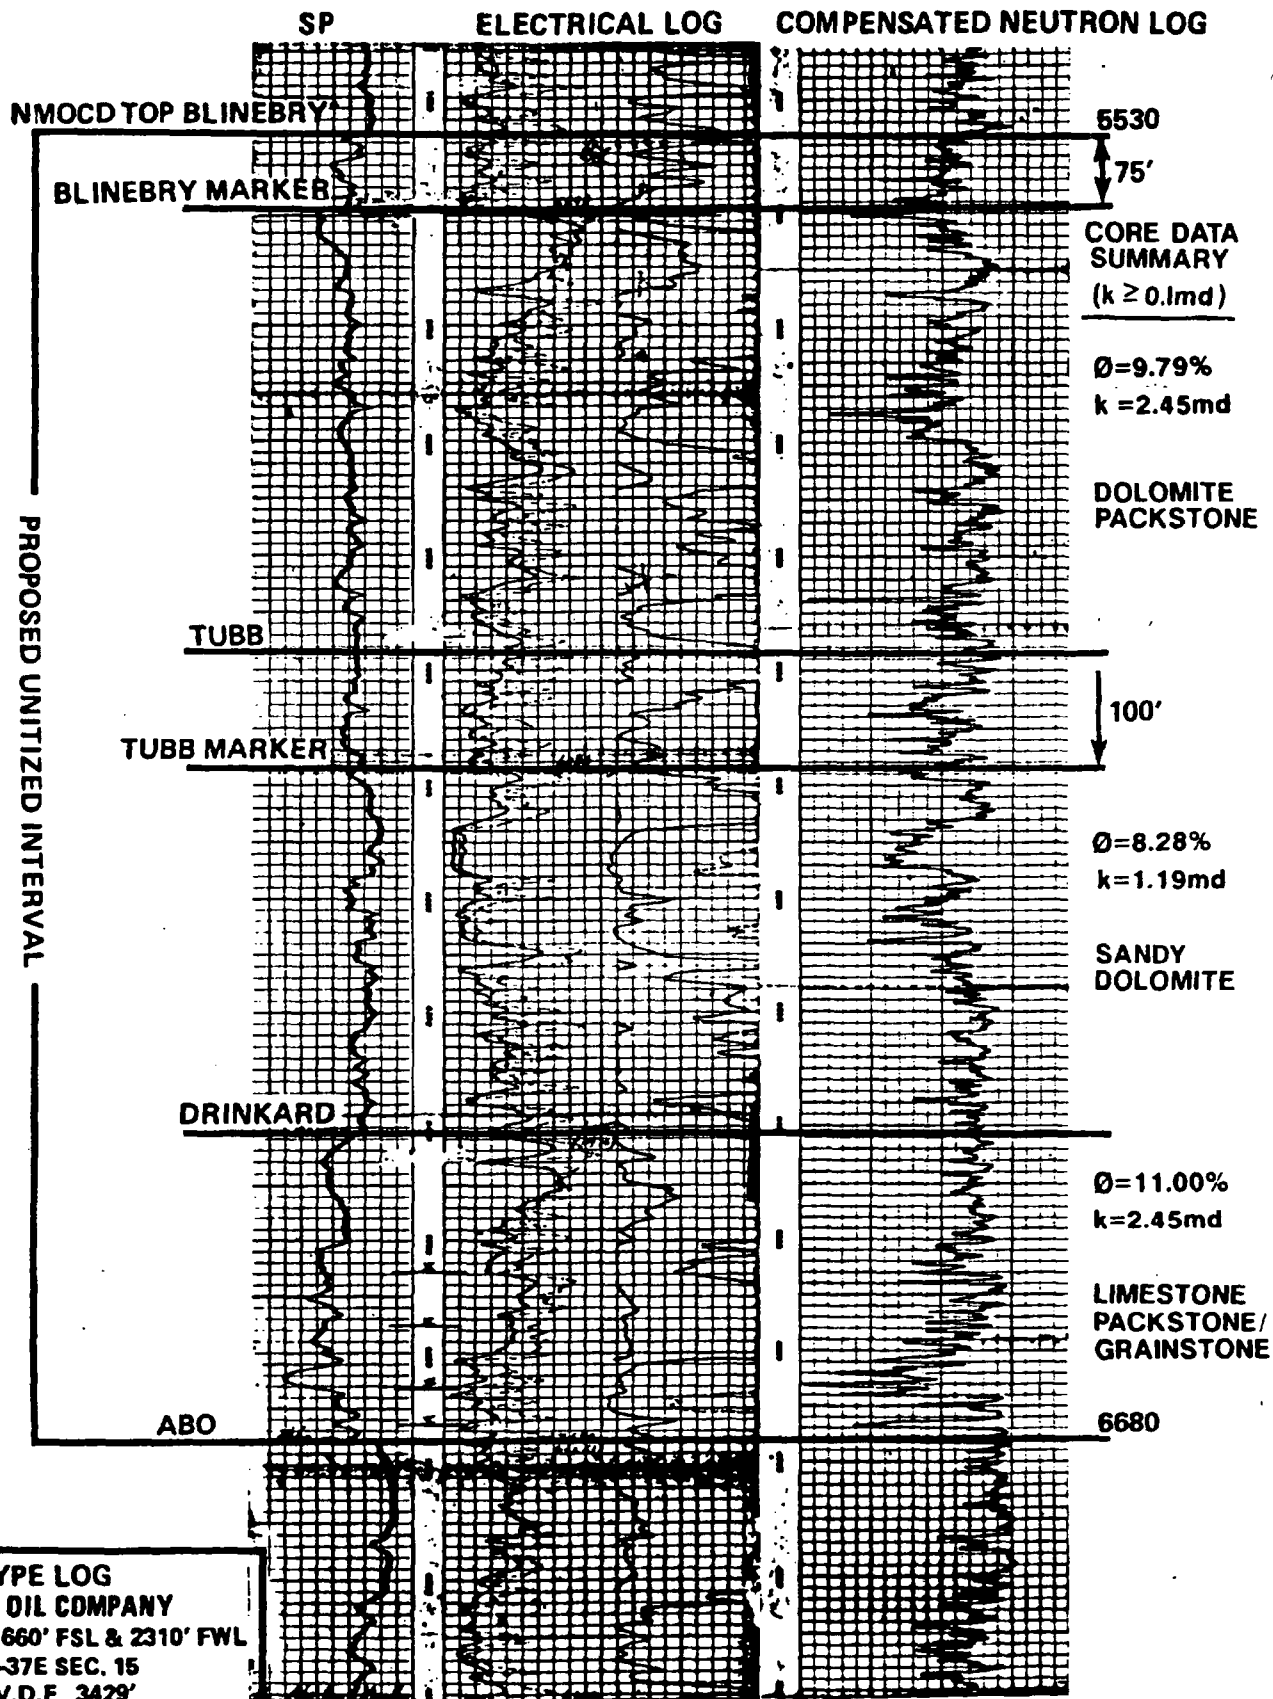


TYPE LOG
SHELL OIL COMPANY
ARGO NO. 8 660' FSL & 2310' FWL
21S-37E SEC. 15
ELEV.D.F. 3429'
LEA COUNTY, NEW MEXICO

Northeast Drinkard Unit
Exhibit Fourteen
Cases 9230
9231
9232

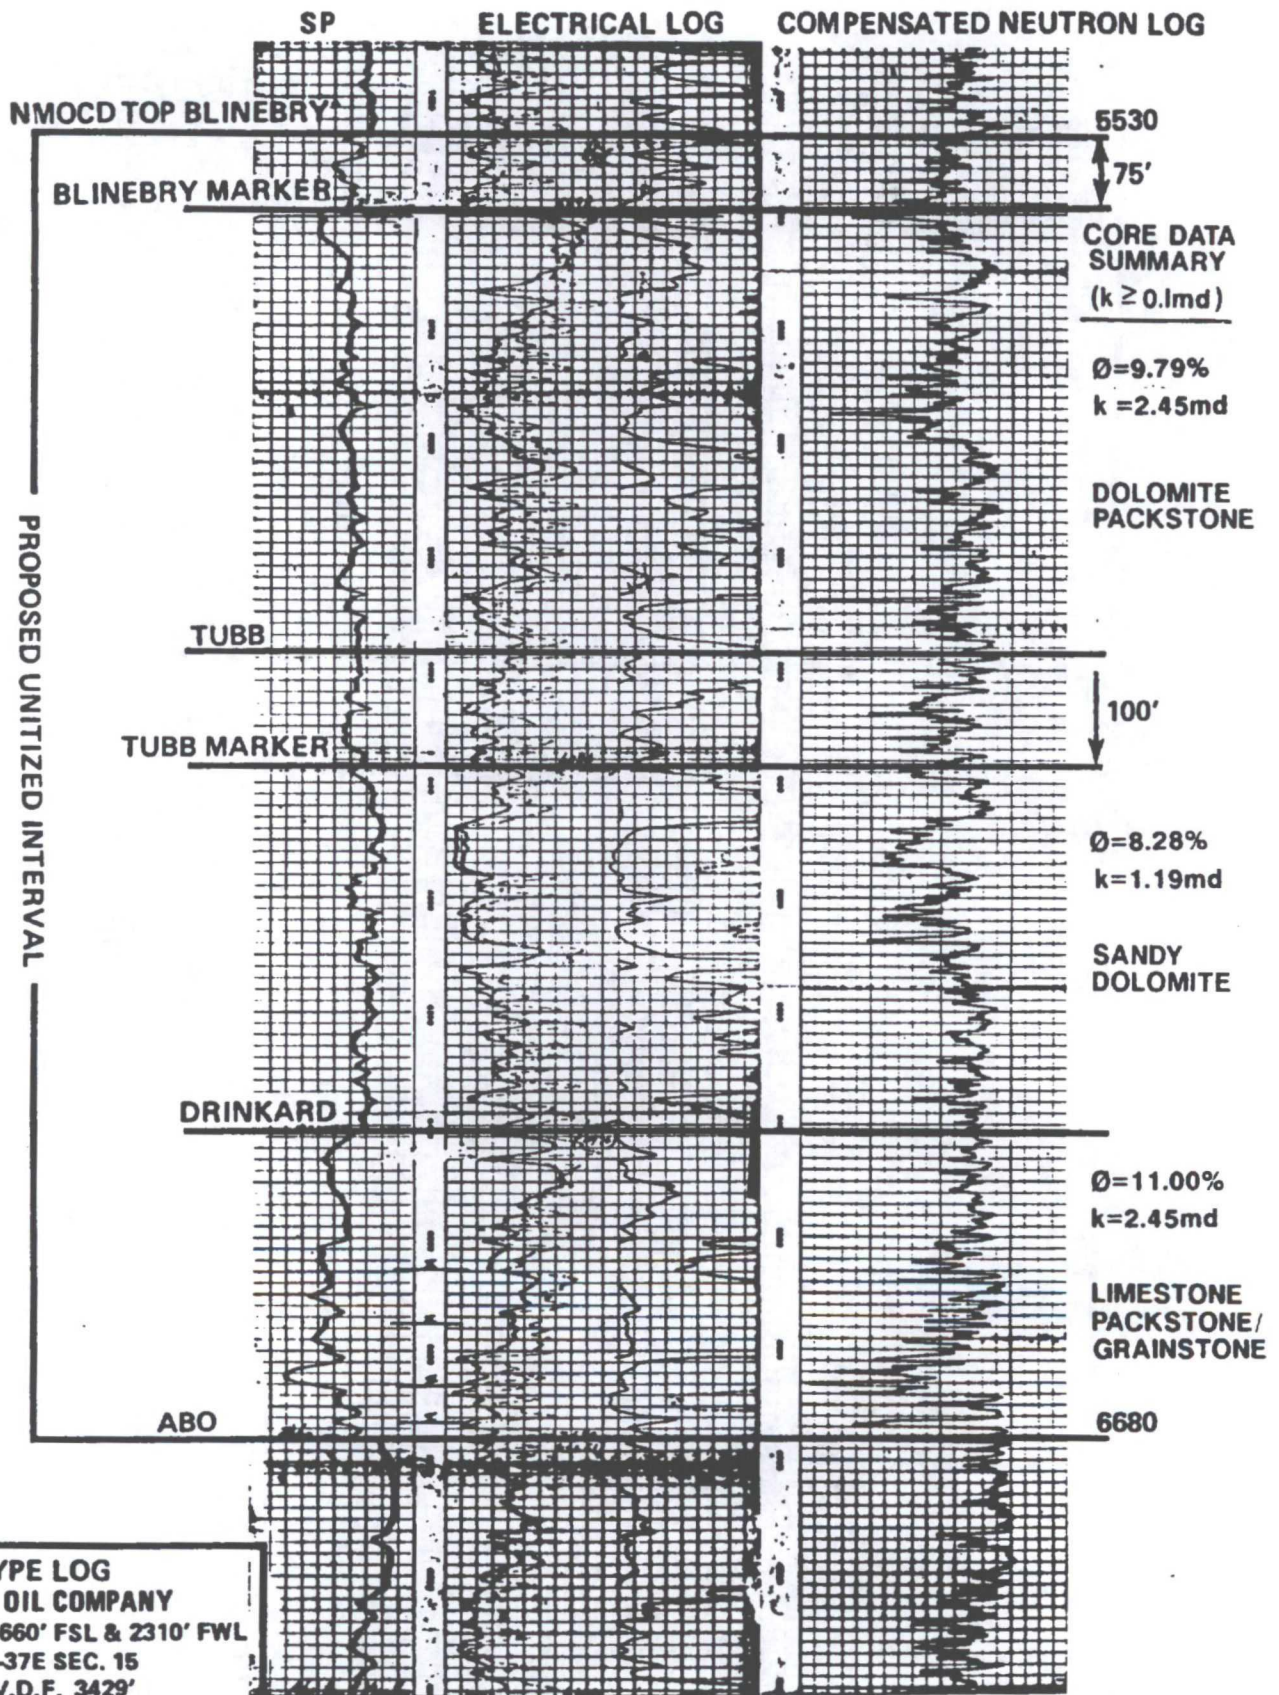

TYPE LOG
SHELL OIL COMPANY
 ARGO NO. 8 660' FSL & 2310' FWL
 21S-37E SEC. 15
 ELEV.D.F. 3429'
 LEA COUNTY, NEW MEXICO

Northeast Drinkard Unit
 Exhibit Fourteen
 Cases 9230
 9231
 9232

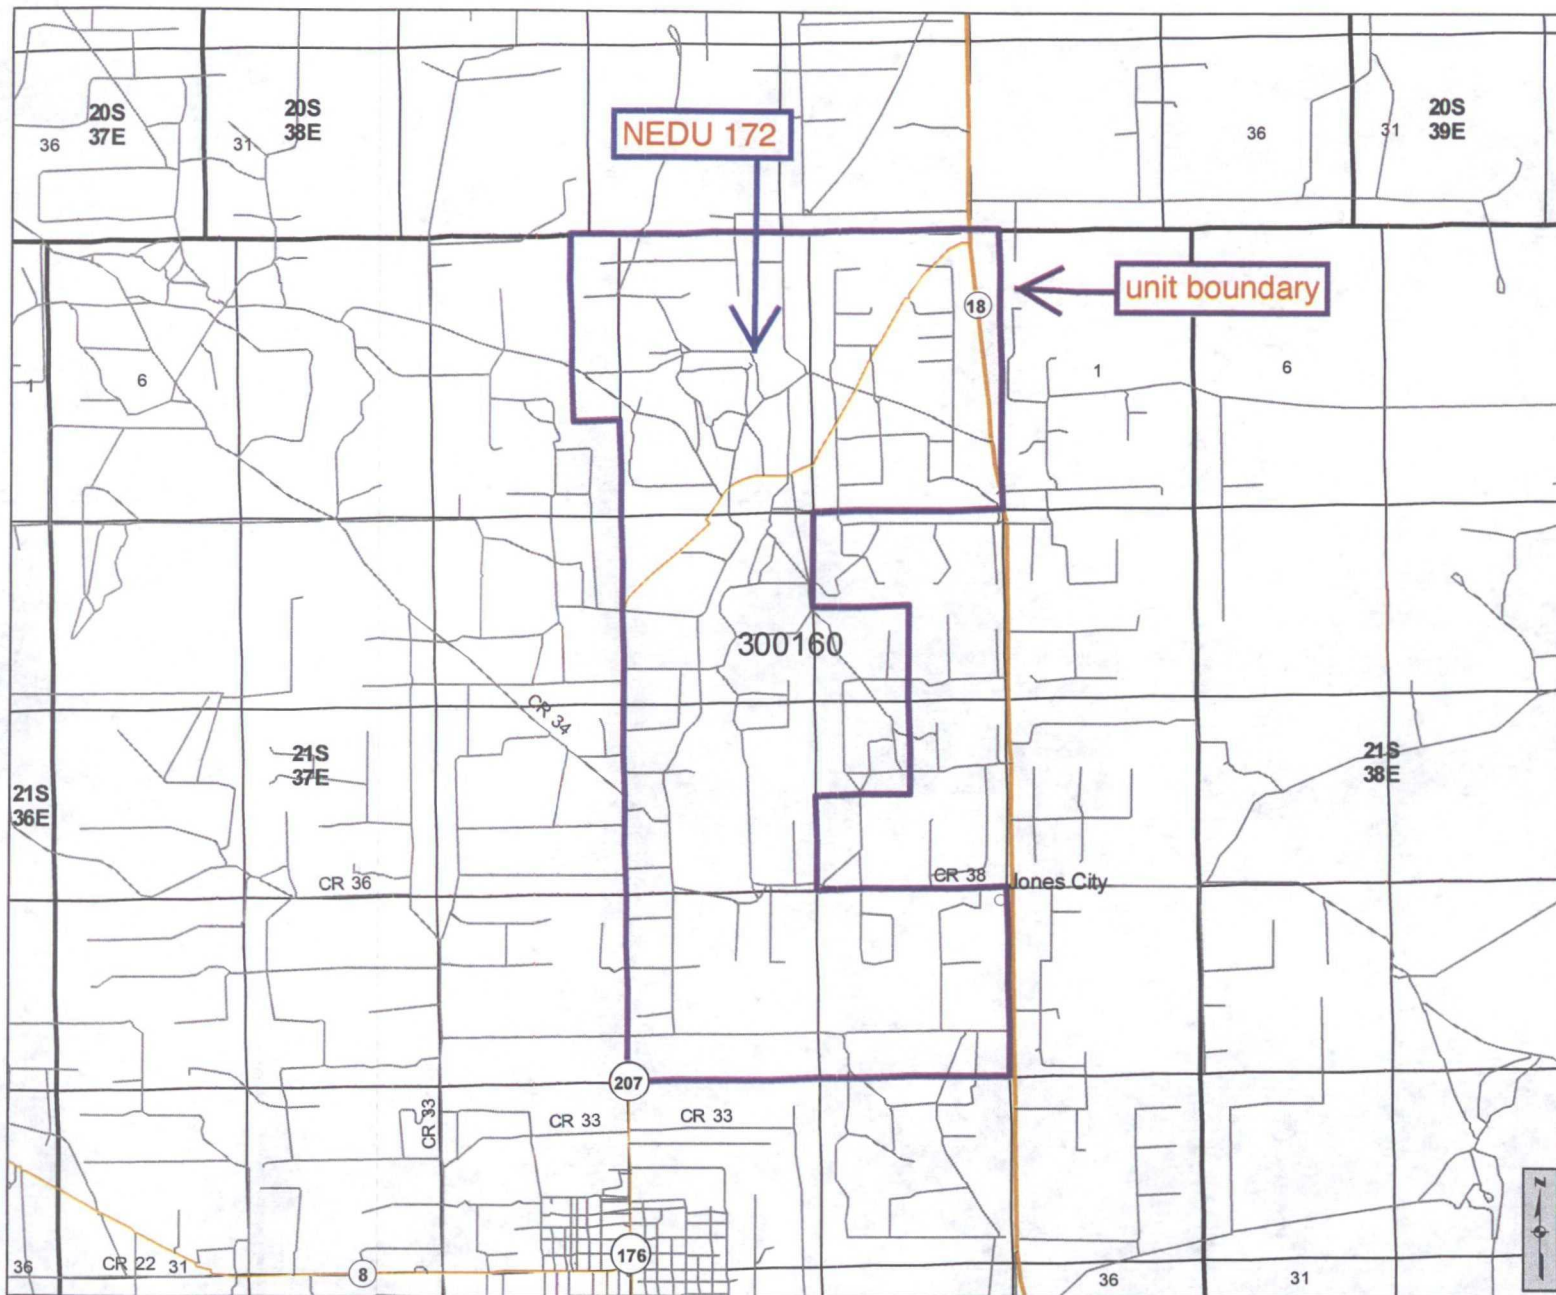

Point Locations

- County Seat
- ▲ SLO District Offices
- City, Town or Village
- ★ Volcanic Vents
- Highway Mileposts

NMOCD Oil and Gas Wells

- Oil
- Injection
- ★ Carbon Dioxide
- Miscellaneous
- ☼ Gas
- ◆ Water
- ◇ DA or PA
- △ Salt Water Disposal

Federal Minerals

- All Minerals
- Coal Only
- Oil and Gas Only
- Oil, Gas and Coal Only
- Other Minerals

State Trust Lands

- Surface Estate
- Subsurface Estate
- Both Estates


NMSLO Leasing

- Option Agreement
- Commercial Lease
- Minerals Lease
- Oil and Gas Lease
- Agricultural Lease
- Not Available for Oil and Gas Leasing
- Restriction Influences Oil and Gas Leasing

Other Boundaries

- Continental Divide
- State Boundary
- County Boundaries
- Oil and Gas Unit Boundary
- Participating Areas in Units
- Geologic Regions
- Potash Enclave (NMOCD R-111-P)

For detailed legend of the Geologic Map of New Mexico, please see <http://geoinfo.nmt.edu/>



www.nmstatelands.org

New Mexico State Land Office Oil, Gas, and Minerals

0 0.2 0.4 0.8 1.2 1.6
Miles

Universal Transverse Mercator Projection, Zone 13
1983 North American Datum

EXHIBIT A

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

Land Office Geographic Information Center
logic@slo.state.nm.us

Created On: 3/2/2013 2:07:59 PM



DISTRICT I1625 N. French Dr., Hobbs, NM 88240
Phone (505) 393-6161 Fax: (505) 393-0720**DISTRICT II**811 S. First St., Artesia, NM 88210
Phone (505) 740-1593 Fax: (505) 740-9720**DISTRICT III**1000 Rio Brazos Rd., Aztec, NM 87410
Phone (505) 334-9178 Fax: (505) 334-8770**DISTRICT IV**1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3400 Fax: (505) 476-3402State of New Mexico
Energy, Minerals and Natural Resources DepartmentForm C-102
Revised August 1, 2011Submit one copy to appropriate
District Office**OIL CONSERVATION DIVISION**1220 South St. Francis Dr.
Santa Fe, New Mexico 87505**WELL LOCATION AND ACREAGE DEDICATION PLAT**☐ AMENDED REPORT

API Number	Pool Code	Pool Name
Property Code	Property Name NORTHEAST DRINKARD UNIT	Well Number 172W
OGRID No.	Operator Name APACHE CORPORATION	Elevation 3481'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
LOT 10	3	21 S	37 E		3515	NORTH	1425	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
LOT 10	3	21 S	37 E		3300	NORTH	1330	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

SURFACE LOCATION


Lat - N 32°30'45.39"
Long - W 103°08'49.23"
NMSPC - N 552252.564
E 907034.124
(NAD-83)

Lat - N 32°30'44.96"
Long - W 103°08'47.54"
NMSPC - N 552192.720
E 865850.394
(NAD-27)

**PROPOSED BOTTOM
HOLE LOCATION**

Lat - N 32°30'47.51"
Long - W 103°08'48.13"
NMSPC - N 552468.179
E 907126.364
(NAD-83)

Lat - N 32°30'47.08"
Long - W 103°08'46.43"
NMSPC - N 552408.343
E 865942.646
(NAD-27)

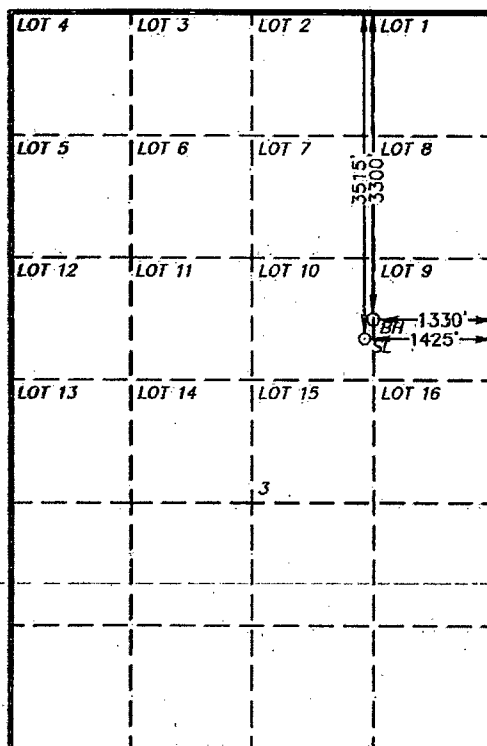

1" = 2000'

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature _____ Date _____

Printed Name _____

Email Address _____

SURVEYOR CERTIFICATION


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Surveyed _____
Signature & Seal of Professional Surveyor _____

Certificate No. Gary L. Jones 7977

BASIN SURVEYS 27321

EXHIBIT A

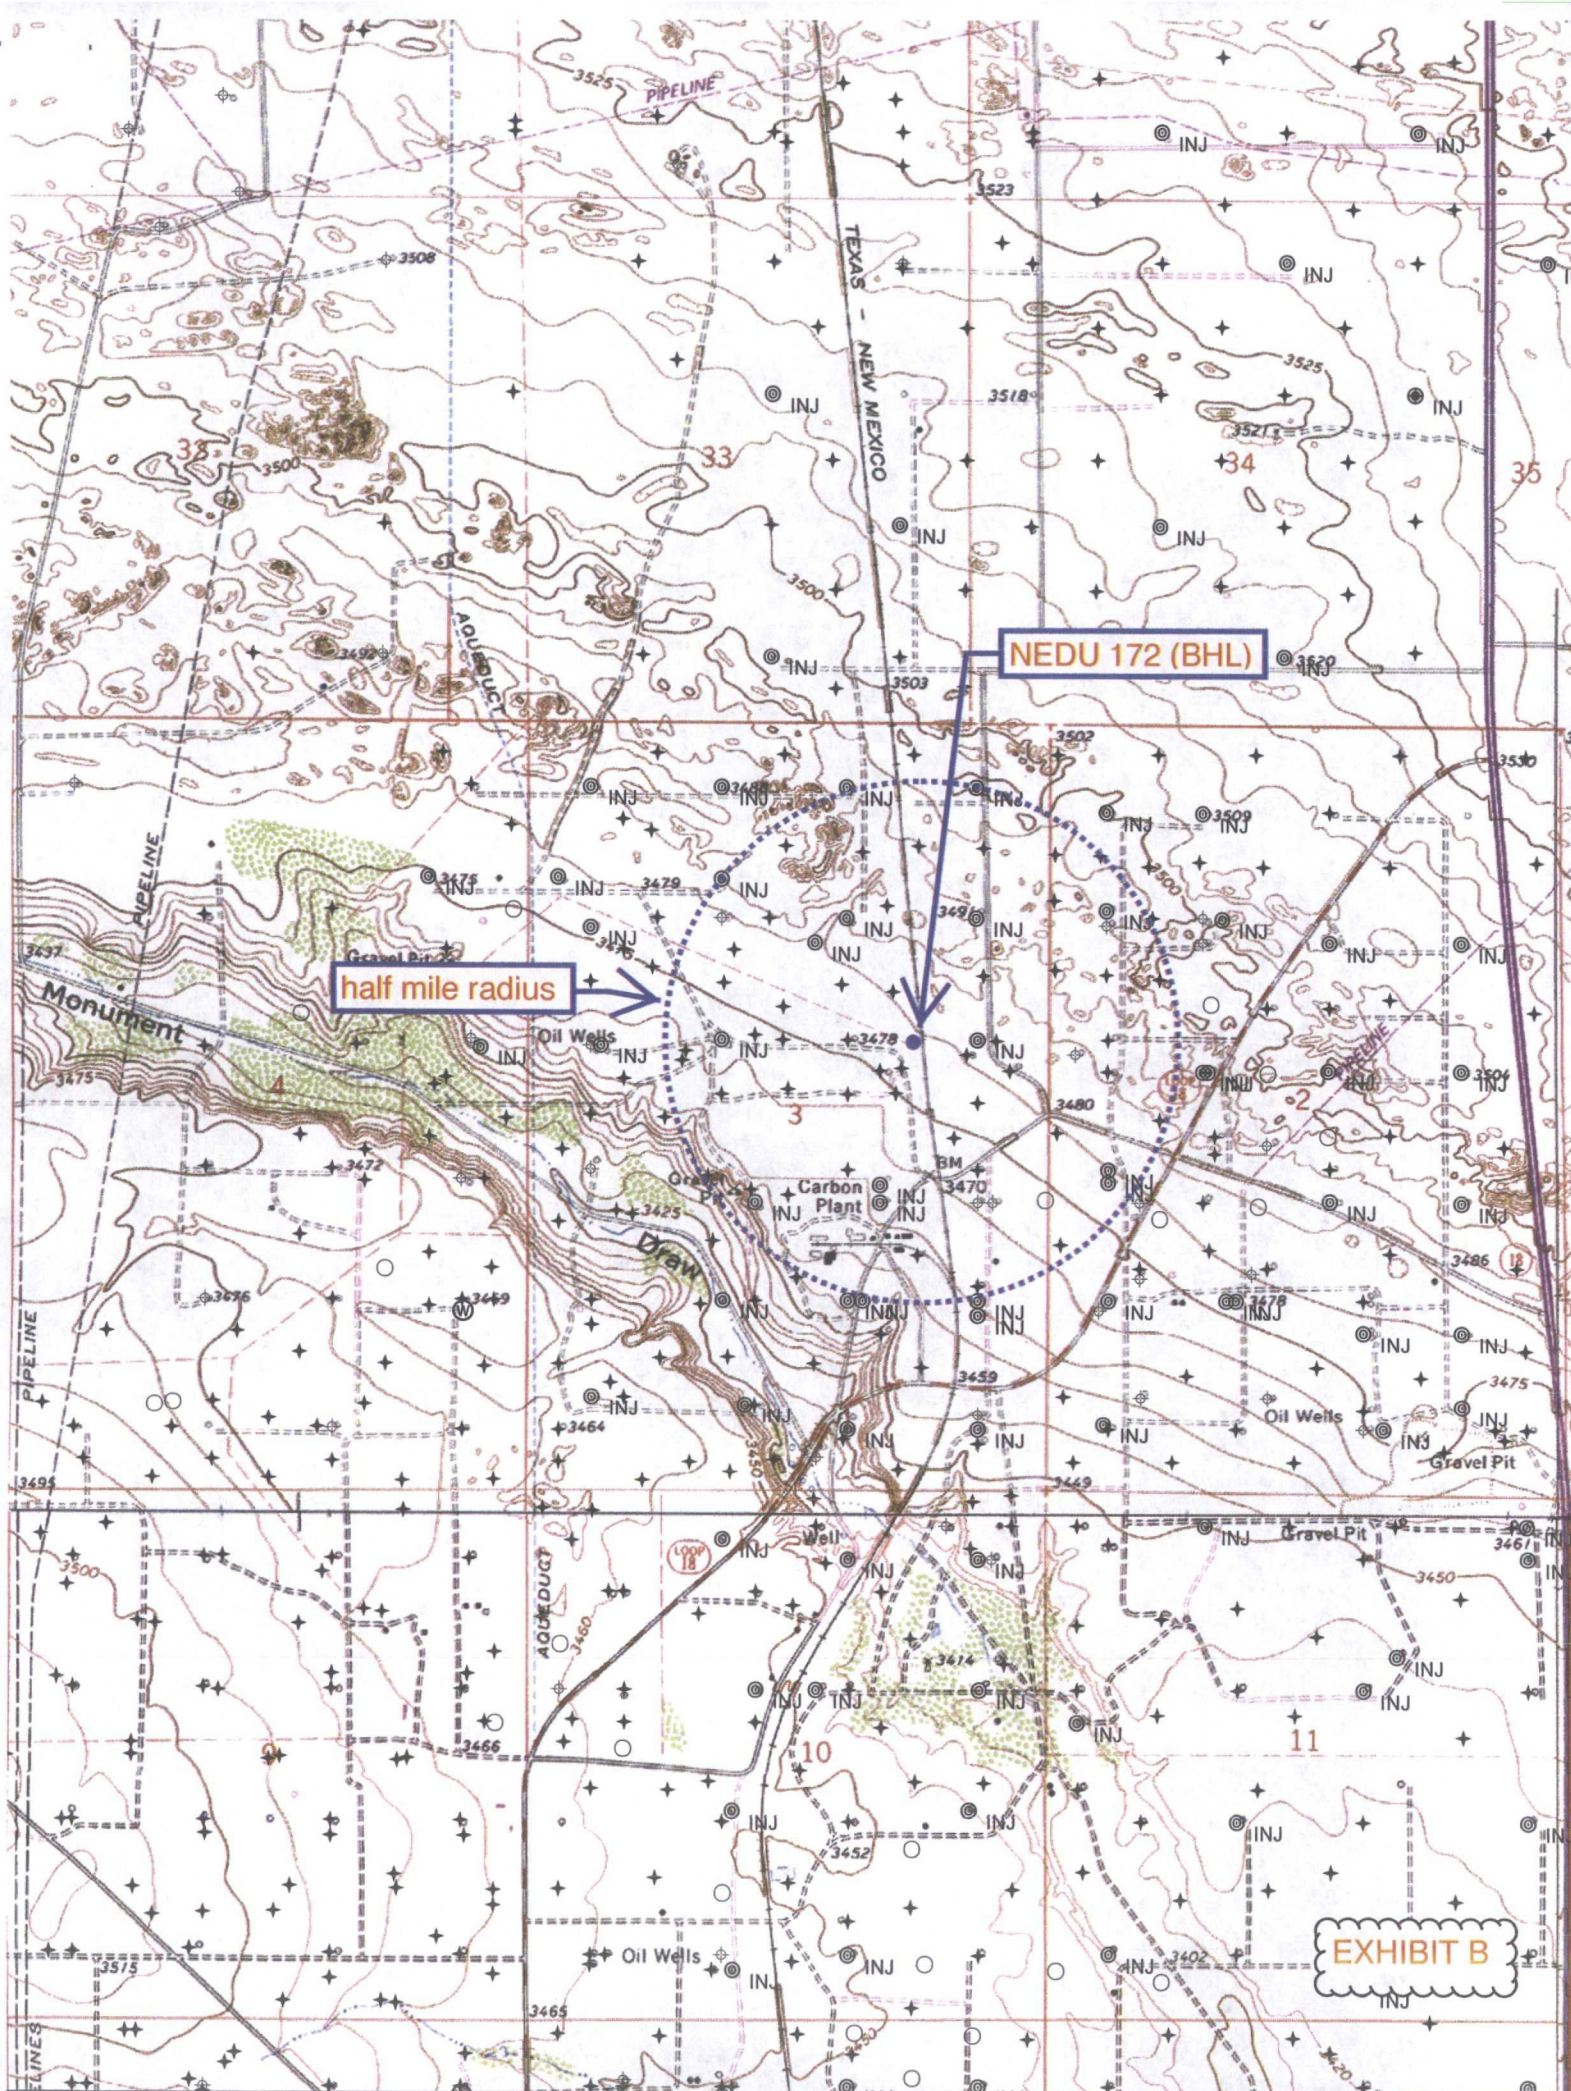





Northeast Drinkard Unit 172

two mile radius

EXHIBIT C

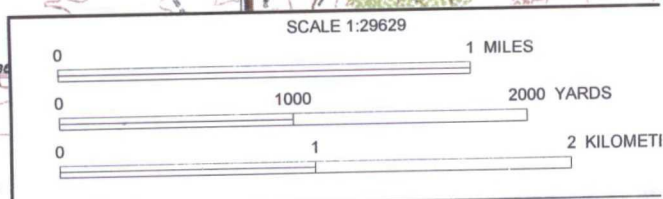

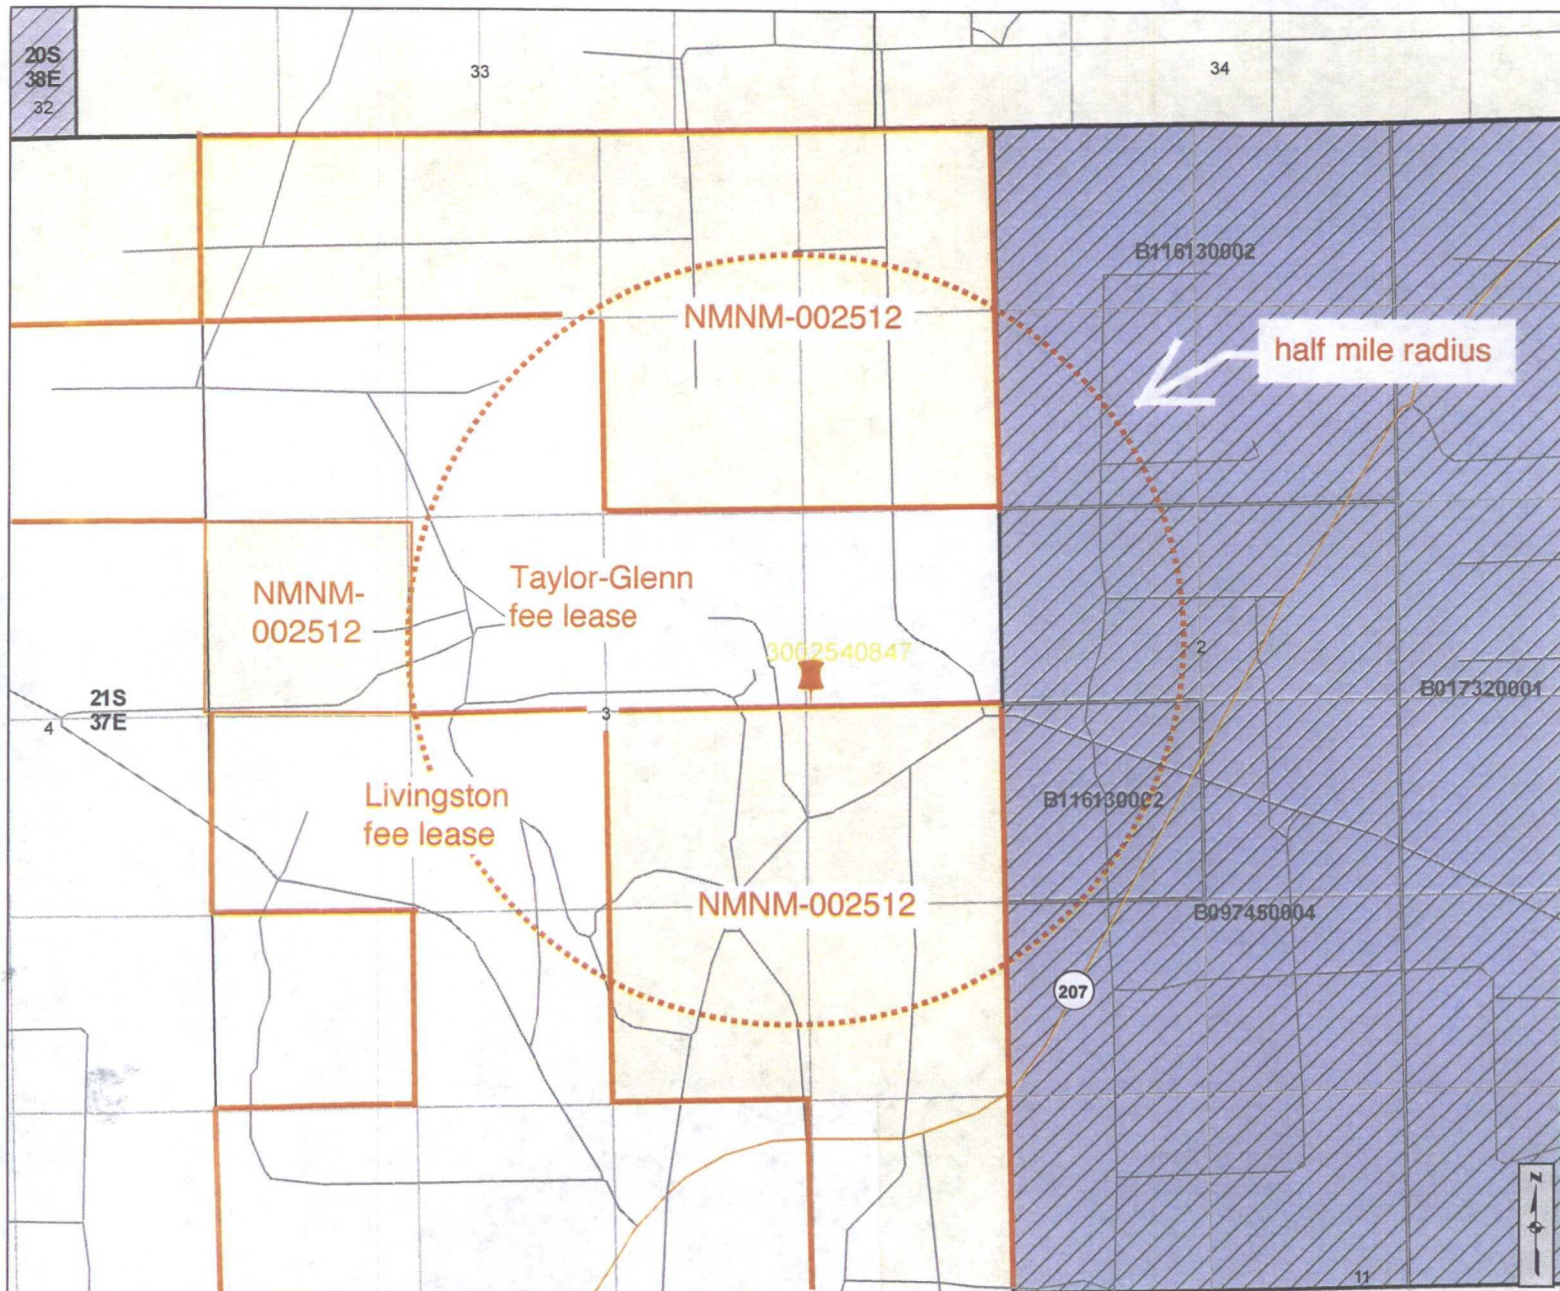

Point Locations

- County Seat
- ▲ SLO District Offices
- City, Town or Village
- ★ Volcanic Vents
- Highway Mileposts

NMOC Oil and Gas Wells

- Oil
- Injection
- ★ Carbon Dioxide
- Miscellaneous
- ☼ Gas
- ⊕ Water
- ◇ DA or PA
- △ Salt Water Disposal

Federal Minerals

- All Minerals
- Coal Only
- Oil and Gas Only
- Oil, Gas and Coal Only
- Other Minerals

State Trust Lands

- Surface Estate
- Subsurface Estate
- Both Estates


NMSLO Leasing

- Option Agreement
- Commercial Lease
- Minerals Lease
- Oil and Gas Lease
- Agricultural Lease
- Not Available for Oil and Gas Leasing
- Restriction Influences Oil and Gas Leasing

Other Boundaries

- Continental Divide
- State Boundary
- County Boundaries
- Oil and Gas Unit Boundary
- Participating Areas in Units
- Geologic Regions
- Potash Enclave (NMOC R-111-P)

For detailed legend of the Geologic Map of New Mexico, please see <http://geoinfo.nmt.edu/>



New Mexico State Land Office Oil, Gas, and Minerals

0 0.04 0.09 0.18 0.27 0.36
Miles

Universal Transverse Mercator Projection, Zone 13
1983 North American Datum


EXHIBIT D

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

Land Office Geographic Information Center
logic@slo.state.nm.us

Created On: 3/11/2013 10:44:45 AM

www.nmstatelands.org

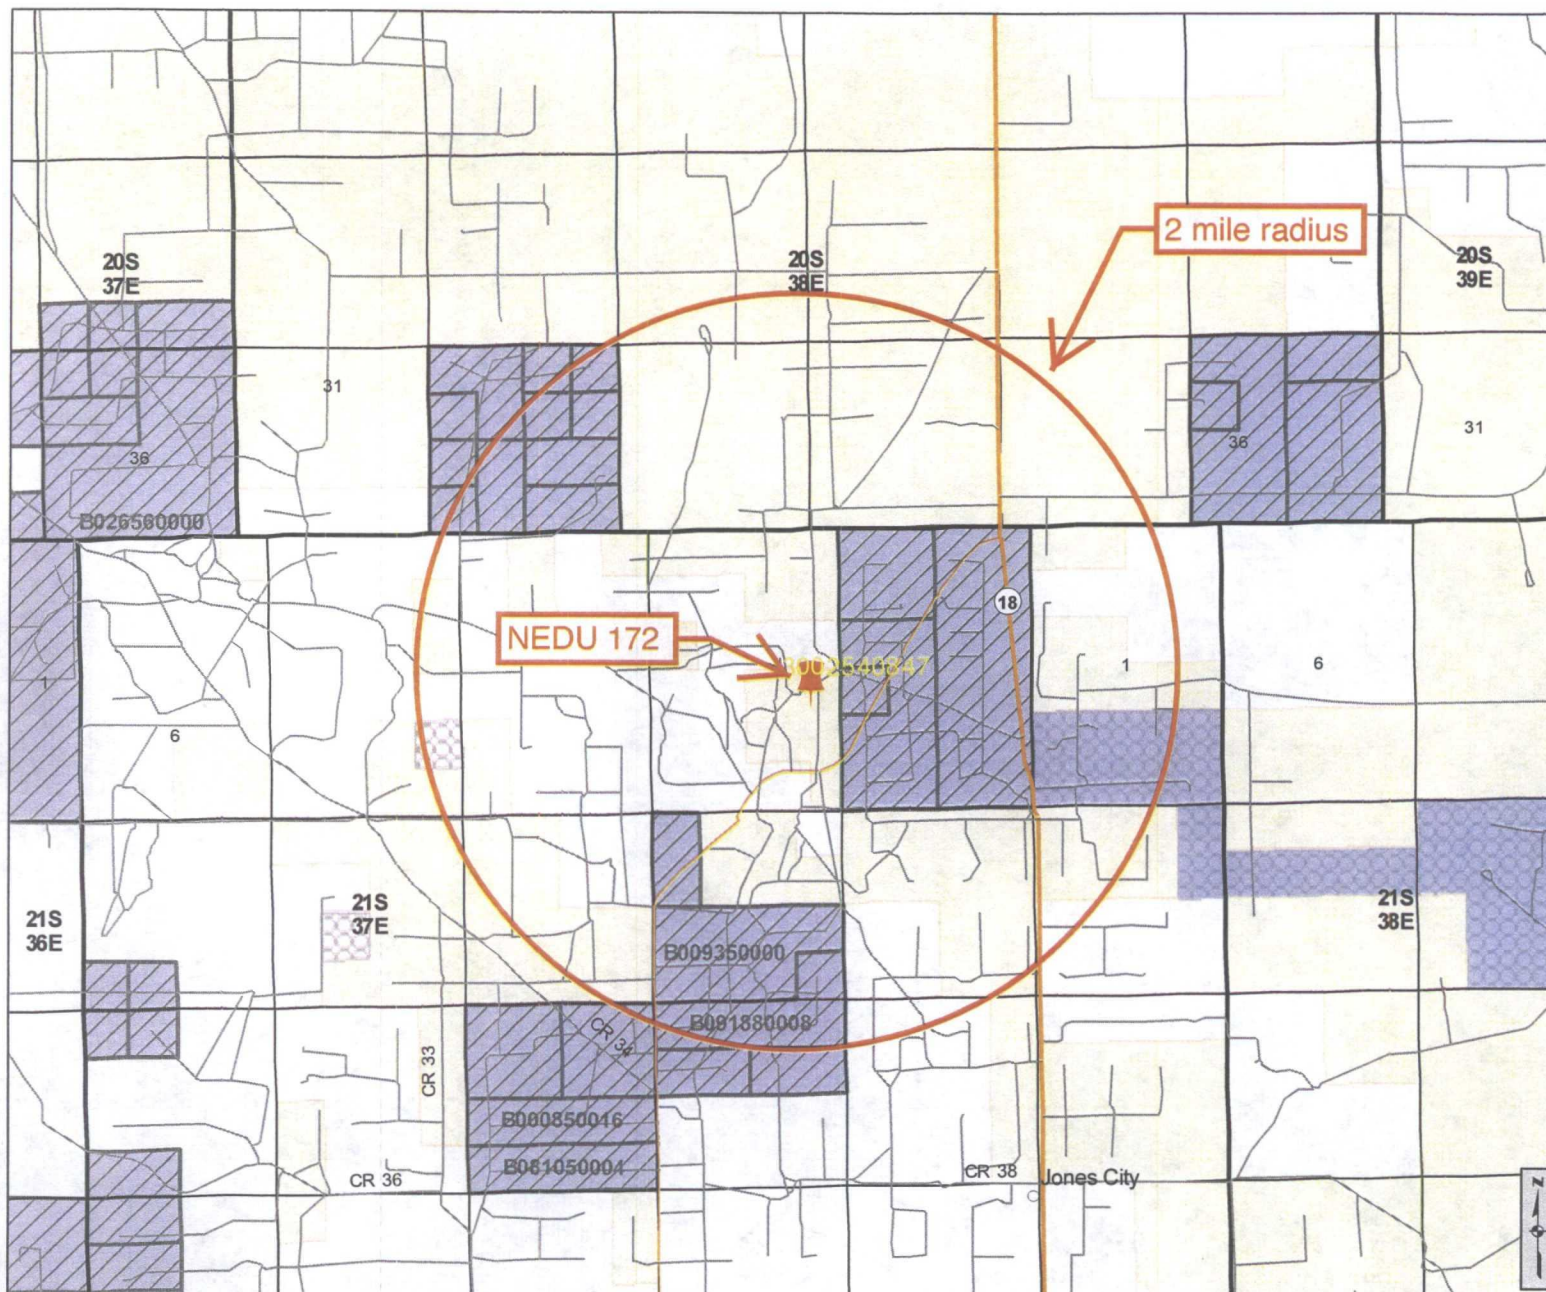

Point Locations

- County Seat
- ▲ SLO District Offices
- City, Town or Village
- ★ Volcanic Vents
- Highway Mileposts

NMOCD Oil and Gas Wells

- Oil
- Injection
- ★ Carbon Dioxide
- Miscellaneous
- ★ Gas
- ◆ Water
- ◇ DA or PA
- △ Salt Water Disposal

Federal Minerals

- All Minerals
- Coal Only
- Oil and Gas Only
- Oil, Gas and Coal Only
- Other Minerals

State Trust Lands

- Surface Estate
- Subsurface Estate
- Both Estates


NMSLO Leasing

- Option Agreement
- Commercial Lease
- Minerals Lease
- Oil and Gas Lease
- Agricultural Lease
- Not Available for Oil and Gas Leasing
- Restriction Influences Oil and Gas Leasing

Other Boundaries

- Continental Divide
- State Boundary
- County Boundaries
- Oil and Gas Unit Boundary
- Participating Areas in Units
- Geologic Regions
- Potash Enclave (NMOCD R-111-P)

For detailed legend of the Geologic Map of New Mexico, please see <http://geoinfo.nmt.edu/>



www.nmstatelands.org

New Mexico State Land Office Oil, Gas, and Minerals

0 0.2 0.4 0.8 1.2 1.6
Miles

Universal Transverse Mercator Projection, Zone 13
1983 North American Datum

EXHIBIT E

The New Mexico State Land Office assumes no responsibility or liability for, or in connection with, the accuracy, reliability or use of the information provided here, in State Land Office data layers or any other data layer.

Land Office Geographic Information Center
logic@slo.state.nm.us

Created On: 3/11/2013 1:48:40 PM

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
TAYLOR GLENN 005	5/14/52	8361	Wantz Abo	Oil	17.25	13.375	225	250 sx	GL	circulated out 90 sx
30-025-06384					11	8.625	3147	2200 sx	GL	circulated out 400 sx
J-3-21s-37e					7.875	5.5	8355	850 sx	2943	calculated
NEDU 228	10/18/98	6920	Blinebry-Drinkard-Tubb	Oil	11	8.625	1311	410 sx	GL	circulate 98 sx to pit
30-025-34427					7.875	5.5	6920	1200 sx	180	cement bond log
J-3-21s-37e										
TAYLOR GLENN 004	3/10/52	8119	Hare Simpson	Oil	17.25	13.375	200	250 sx	GL	circulated out 50 sx
30-025-06383					11	8.625	3147	2200 sx	GL	circulated out 300 sx
A-3-21s-37e					7.875	5.5	8115	875 sx	GL	circulated out 75 sx
NEDU 125	11/14/98	6910	Blinebry-Drinkard-Tubb	Oil	11	8.625	1300	410 sx	GL	circulated 120 sx to pit
30-025-34425					7.875	5.5	6910	1375 sx	GL	circulated 86 sx to pit
J-3-21s-37e										
NEDU 208	7/27/52	6707	Blinebry-Drinkard-Tubb	Oil	17	13.375	225	250 sx	no report	no report
30-025-06385					11	8.625	3147	2000 sx	GL	circulated out 280 sx
J-3-21s-37e					7.875	5.5	6600	600 sx	GL	circulated out 25 sx
NEDU 173	8/16/12	7050	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1352	700 sx	GL	circulated 173 sx to surface
30-025-40554					7.875	5.5	7050	1220 sx	GL	circulated 72 bbls to surface
B-3-21s-37e										
NEDU 211	1/4/50	6780	Blinebry-Drinkard-Tubb	WIW	17.25	13.375	222	300 sx	GL	circulated 260 sx
30-025-06381					11	8.625	2920	2200 sx	GL	cement circulated
I-3-21s-37e					7.875	5.5	6665	600 sx	6620	on misc. report 2/9/1950
NEDU 171	7/9/12	7065	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1421	700 sx	GL	circulated 8 bbls to surface
30-025-40553					7.875	5.5	7065	1375 sx	GL	circulated 47 sx to surface
I-3-21s-37e										

OK

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 163	11/30/10	7025	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1422	720 sx	GL	circulated 180 sx to surface
30-025-39914					7.875	5.5	7025	1275 sx	GL	circulated 106 sx to surface
B-3-21s-37e										
NEDU 158	11/7/10	7020	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1419	720 sx	GL	circulated 170 sx to surface
30-025-39440					7.875	5.5	7020	1250 sx	GL	circulated 124 sx to surface
A-3-21s-37e										
TAYLOR GLENN 003	11/11/51	8224	Wantz Abo	Oil	17.5	13.375	219	250 sx	GL	circulated out 50 sx
30-025-06382					11	8.625	3150	2000 sx	GL	circulated out 350 sx
A-3-21s-37e					7.875	5.5	8102	870 sx	GL	circulated out 10 sx
NEDU 229	11/1/98	6910	Blinebry-Drinkard-Tubb	Oil	11	8.625	1309	410 sx	GL	circulated 126 sx to pit
30-025-34429					7.875	5.5	6910	1325 sx	GL	circulated 170 sx to pit
J-3-21s-37e										
NEDU 209	3/4/53	8114	Blinebry-Drinkard-Tubb	WIW	no report	13.375	250	250 sx	no report	no report
30-025-06508						9.625	3133	1370 sx	no report	no report
O-3-21s-37e						7	8113	940 sx	3140	cement bond log
NEDU 212	5/14/57	6782	Blinebry-Drinkard-Tubb	Oil	no report	13.375	222	250 sx	no report	no report
30-025-06492						9.625	2819	650 sx	no report	no report
P-3-21s-37e						7	6781	675 sx	no report	no report
NEDU 124	10/31/98	6910	Blinebry-Drinkard-Tubb	Oil	11	8.625	1309	410 sx	GL	circulated 76 sx to pit
30-025-34424					7.875	5.5	6910	1425 sx	GL	circulated 86 sx to pit
K-3-21s-37e										
NEDU 210	8/2/52	8302	Blinebry-Drinkard-Tubb	WIW	17.25	13.375	269	260 sx	GL	circulated to surface
30-025-06502					12.25	9.625	3149	1360 sx	600	temperature survey
G-3-21s-37e					8.75	7	8301	940 sx	3125	temperature survey

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 111	4/18/80	6875	Blinebry-Drinkard-Tubb	WIW	12.25	8.625	1395	674 sx	GL	circulated 75 sx to surface
30-025-26670					7.875	5.5	6875	2782 sx	GL	circulated 170 sx to surface
G-3-21s-37e										
NEDU 157	8/8/16	7036	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1445.5	730 sx	GL	circulated 157 sx to surface
30-025-40696					7.875	5.5	7036	1260 sx	GL	circulated 140 sx to surface
B-3-21s-37e										
NEDU 113	4/15/58	6830	Blinebry-Drinkard-Tubb	WIW	17.5	13.375	211	250 sx	GL	circulated to surface
30-025-06496					12.25	9.625	3029	1210 sx	820	temperature survey
H-3-21s-37e					8.75	7	6829	770 sx	3038	temperature survey
HAWK B 3 008	9/23/56	8191	Ellenburger	P & A	no report	10.75	265	250 sx	GL	circulated to surface
30-025-06500						7.625	3149	1235 sx	975	temperature survey
P-3-21s-37e						5.5	8187	650 sx	3115	temperature survey
NEDU 126	8/16/02	6940	Blinebry-Drinkard-Tubb	Oil	11	8.625	1396	410 sx	GL	circulated 106 sx
30-025-34415					7.875	5.5	6940	1350 sx	GL	circulated 50 sx
E-2-21s-37e										
STATE SECTION 2 011	1/13/56	8015	Wantz Abo	Oil	17.25	13.375	211	250 sx	GL	circulated 60 sx to surface
30-025-06377					11	8.625	3140	400 sx	GL	circulated 90 sx to surface
D-2-21s-37e					7.875	5.5	8014	850 sx	3400	temperature survey
HAWK B3 003	2/8/56	8010	Hare-Simpson	Oil	no report	10.75	265	250 sx	GL	circulated
30-025-06505						7.625	3149	1045 sx	585	temperature survey
P-3-21s-37e						5.5	8009	573 sx	3500	calculated
NEDU 230	6/17/02	6930	Blinebry-Drinkard-Tubb	Oil	11	8.625	1363	400 sx	GL	circulated 120 sx
30-025-34412					7.875	5.5	6930	1305 sx	GL	circulated 110 sx
M-2-21s-37e										

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 242	6/10/06	6950	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1325	575 sx	GL	circulated to surface
30-025-37875					7.875	5.5	6950	1000 sx	GL	circulated to surface
G-3-21s-37e										
NEDU 206	9/29/47	8590	Blinebry-Drinkard-Tubb	WIW	17	13.375	301	250 sx	GL	circulated
30-025-06522					11	8.625	3879	4300 sx	GL	circulated
K-3-21s-37e					7.875	5.5	8060	675 sx	2915	temperature survey
NEDU 175	8/24/12	7050	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1371	700sx	GL	circulated 180 sx to surface
30-025-40516					7.875	5.5	7050	1150 sx	GL	circulated 106 sx to surface
C-3-21s-37e										
NEDU 226	6/3/98	6850	Blinebry-Drinkard-Tubb	Oil	11	8.625	1370	410 sx	GL	circulated 40 sx to surface
30-025-34380					7.875	5.5	6850	1200 sx	GL	circulated 25 sx to surface
Q-3-21s-37e										
NEDU 213	10/28/53	6760	Blinebry-Drinkard-Tubb	Oil	17.5	13.375	213	300 sx	GL	circulated out 30 sx
30-025-06368					11	8.625	2926	2200 sx	GL	circulated 200 sx to surface
D-2-21s-37e					7.875	5.5	6651	600 sx	3610	calculated
NEDU 159	6/23/12	7024	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1327	675 sx	GL	circulated 109 sx to surface
30-025-40497					7.875	5.5	7024	1290 sx	GL	circulated 100 sx to surface
C-3-21s-37e										

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
STATE SECTION 2 008	9/17/55	8156	Hare-Simpson	Oil	17.25	13.375	219	250 sx	GL	circulated
30-025-06374					11	8.625	3149	2000 sx	GL	circulated
L-2-21s-37e					7.875	5.5	8018	875 sx	GL	circulated out 10 sx
NEDU 131	7/10/99	6990	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1365	460 sx	GL	circ 109sx to pit, circ 125sx to pit
30-025-34609					7.875	5.5	6990	1525 sx	GL	circulated 125 sx to pit
A-3-21s-37e										
NEDU 154	10/25/10	7025	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1409	720 sx	GL	circulated 154 sx to surface
30-025-39439					7.875	5.5	7025	1340 sx	GL	circulated 152 sx to surface
B-3-21s-37e										
NEDU 207	7/31/52	6885	Blinebry-Drinkard-Tubb	WIW	17	13.375	215	250 sx	GL	circulated 65 sx to surface
30-025-06519					11	8.625	3153	1600 sx	GL	circulated 380 sx to surface
N-3-21s-37e					7.875	5.5	7000	810 sx	GL	reversed out 75 sx
NEDU 165	11/16/14	7054	Blinebry-Drinkard-Tubb	WIW	12.25	8.625	1461	720 sx	no report	no report
30-025-39915					7.875	5.5	7054	1135 sx	no report	no report
D-2-21s-37e										
NEDU 167	12/10/14	7075	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1515	700 sx	GL	circulated 32 sx to surface
30-025-39917					7.875	5.5	7075	1315 sx	GL	circulated 25 sx to surface
D-2-21s-37e										
NEDU 164	7/31/16	7030	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1445	780 sx	GL	circulated 170 sx to surface
30-025-40526					7.875	5.5	7030	1235 sx	GL	circulated 306 sx to surface
A-3-21s-37e										
NEDU 108	10/19/74	6805	Blinebry-Drinkard-Tubb	P&A	12.25	8.625	1361	600 sx	GL	circulated
30-025-24831					7.875	5.5	6805	1025 sx	2328	calculated
C-3-21s-37e										

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 214	5/4/53	6810	Blinebry-Drinkard-Tubb	WIW	17.5	13.375	163	175 sx	no report	no report
30-025-06491					12.25	9.625	2939	1600 sx	115	temperature survey
M-2-21s-37e					8.75	7	6810	600 sx	1970	temperature survey
HAWK B3 004	10/5/55	7845	Penrose-Skelly-Grayburg	Oil	15	10.75	270	250 sx	GL	circulated to surface
30-025-06504					9.875	7.625	3115	942 x	625	temperature survey
Q-3-21s-37e					6.75	5.5	7844	520 sx	3550	temperature survey
NEDU 227	10/17/98	6890	Blinebry-Drinkard-Tubb	Oil	11	8.625	1310	410 sx	GL	circulated 81 sx to pit
30-025-34428					7.875	5.5	6890	1315 sx	GL	circulated 64 sx to pit
J-3-21s-37e										
NEDU 306	1/18/56	8025	Blinebry-Drinkard-Tubb	WIW	13.75	10.75	273	225 sx	GL	no report
30-025-06507					9.875	7.625	3147	1150 sx	650	temperature survey
R-3-21s-37e					6.75	5.5	8024	625 sx	3200	temperature survey
NEDU 130	6/26/99	6950	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1365	460 sx	GL	circulated 27 sx to pit
30-025-34617					7.875	5.5	6950	1400 sx	GL	circulated 220 sx to pit
F-3-21s-37e										
NEDU 215	2/17/55	8083	Blinebry-Drinkard-Tubb	WIW	17.25	13.375	240	200 sx	GL	circulated
30-025-06341					11	8.625	3000	1800 sx	GL	circulated to surface
M-2-21s-37e					7.875	5.5	8010	550 sx	4060	temperature survey
NEDU 115	1/18/54	8620	Blinebry-Drinkard-Tubb	WIW	17.5	13.375	152	165 sx	GL	stated on misc. report
30-025-06340					12	9.625	3005	1600 sx	GL	stated on misc. report
E-2-21s-37e					7.875	5.5	8519	550 sx	4255	temperature survey
NEDU 132	5/30/03	6970	Blinebry-Drinkard-Tubb	Oil	12.25	8.625	1323	380 sx	GL	circulated 92 sx
30-025-34601					7.875	5.5	6970	1250 sx	GL	circulated 25 sx
E-2-21s-37e										
NEDU 225	3/1/02	6850	Blinebry-Drinkard-Tubb	Oil	11	8.625	1402	410 sx	GL	circulated 94 sx to pit
30-025-34249					7.875	5.5	6850	2250 sx	GL	circulated 210 sx to pit
L-2-21s-37e										
NEDU 305	9/13/59	6747	Blinebry-Drinkard-Tubb	WIW	17.5	13.375	199	250 sx	GL	circulated
30-025-06493					12.25	9.625	2969	1525 sx	725	temperature survey
J-3-21s-37e					8.75	7	6746	875 sx	3000	temperature survey

Sorted by distance from center well

WELL	SPUD	TD	POOL	WELL TYPE	HOLE O.D.	CASING O.D.	SET @	CEMENT	TOC	HOW DETERMINED
NEDU 232	10/6/98	6890	Blinebry-Drinkard-Tubb	Oil	11	8.625	1302	410 sx	GL	circulated 110 sx to pit
30-025-34430					7.875	5.5	6890	1225 sx	GL	circulated 129 sx to pit
Lot 14-3-21s-37e										
NEDU 308	11/11/53	6753	Blinebry-Drinkard-Tubb	WIW	no report	13.375	232	250 sx	no	no report
30-025-06494						9.625	2895	1100 sx	no report	no report
Q-3-21s-37e						7	6752	625 sx	no report	no report
NEDU 268	11/1/16	7000	Blinebry-Drinkard-Tubb	Oil	11	8.625	1293	500 sx	GL	circulated 190 sx to surface
3002540779					7.875	5.5	7000	1210 sx	GL	circulated 140 sx to surface
K-3-21s-37e										
NEDU 127	8/30/02	6850	Blinebry-Drinkard-Tubb	Oil	11	8.625	1390	410 sx	GL	circulated 78 sx to pit
30-025-34426					7.875	5.5	6980	1200 sx	GL	circulated 90 sx to pit
L-2-21s-37e										
NEDU 309	3/10/51	8021	Blinebry-Drinkard-Tubb	WIW	no report	10.75	268	250 sx	GL	circulated to surface
30-025-06499					no report	7.625	3128	1145 sx	1200	temperature survey
Q-3-21s-37e					no report	5.5	8014	550 sx	2550	temperature survey

Well: Hawk B-3 # 8

Field: Tubb

Current Status: P&A (5/90)

Location: 2970' FSL & 660' FEL
Unit P, Sec. 3, T-21S, R-37E
Lea County, New Mexico

API #: 30-025-06500

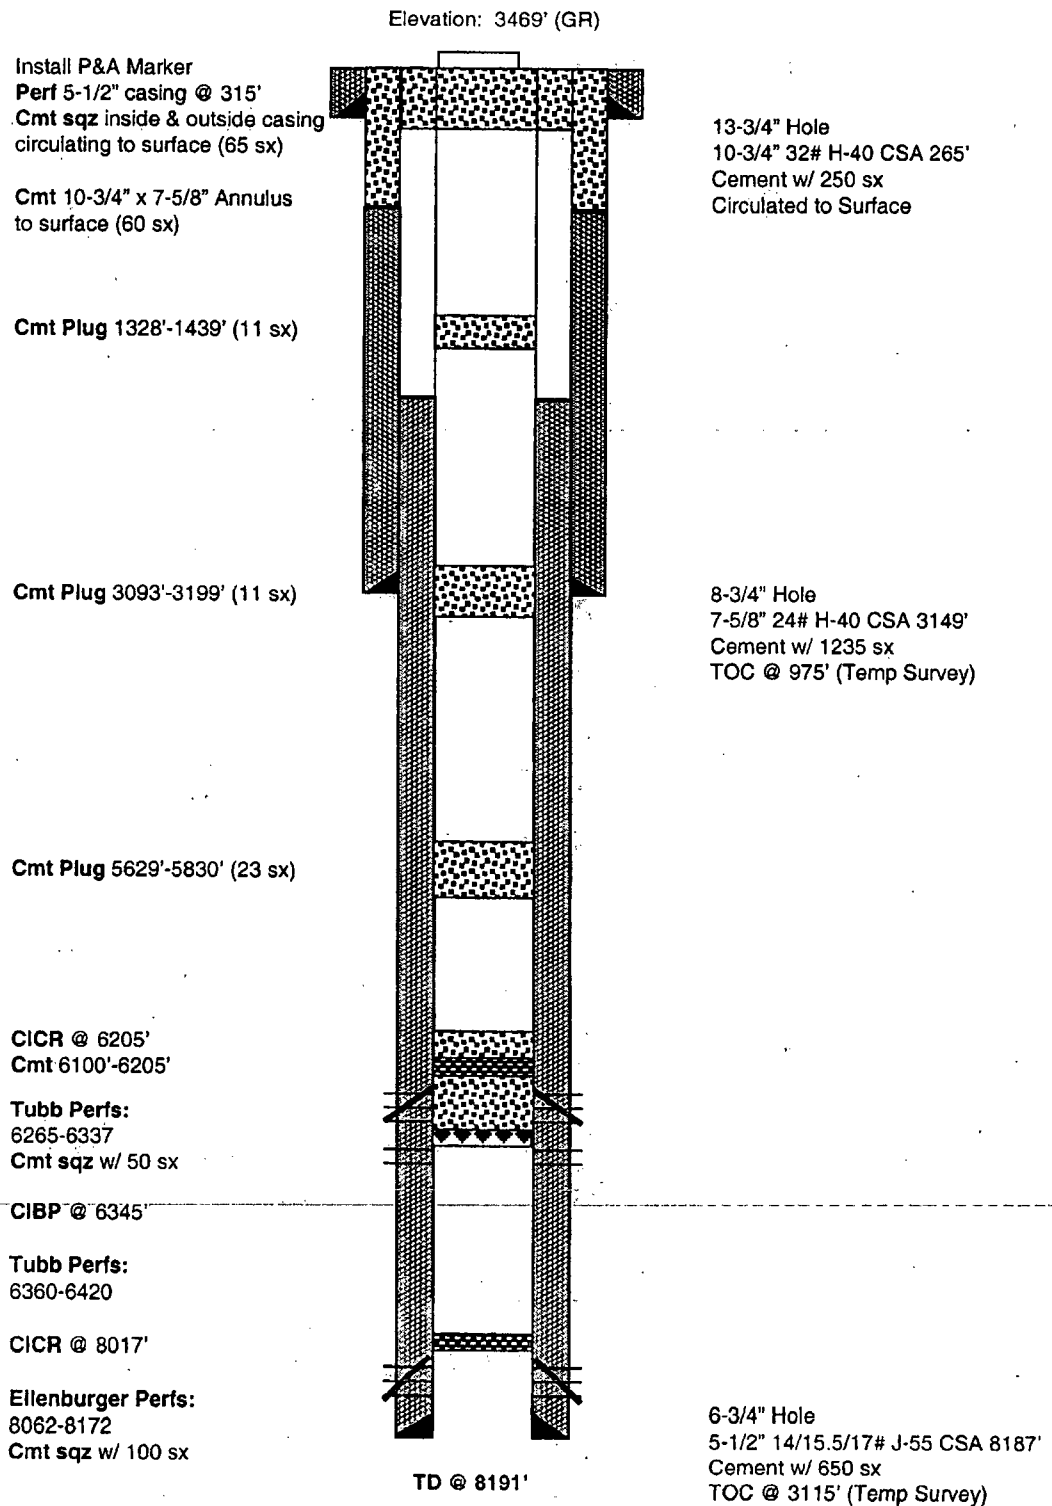


EXHIBIT F

Apache's
 State Section 2 #11
 API 30-025-06377
 3376 FSL & 330 FWL 2-21s-37e
 Spud 1-12-52 (as oil well) and Plug 4-10-02 (as oil well)

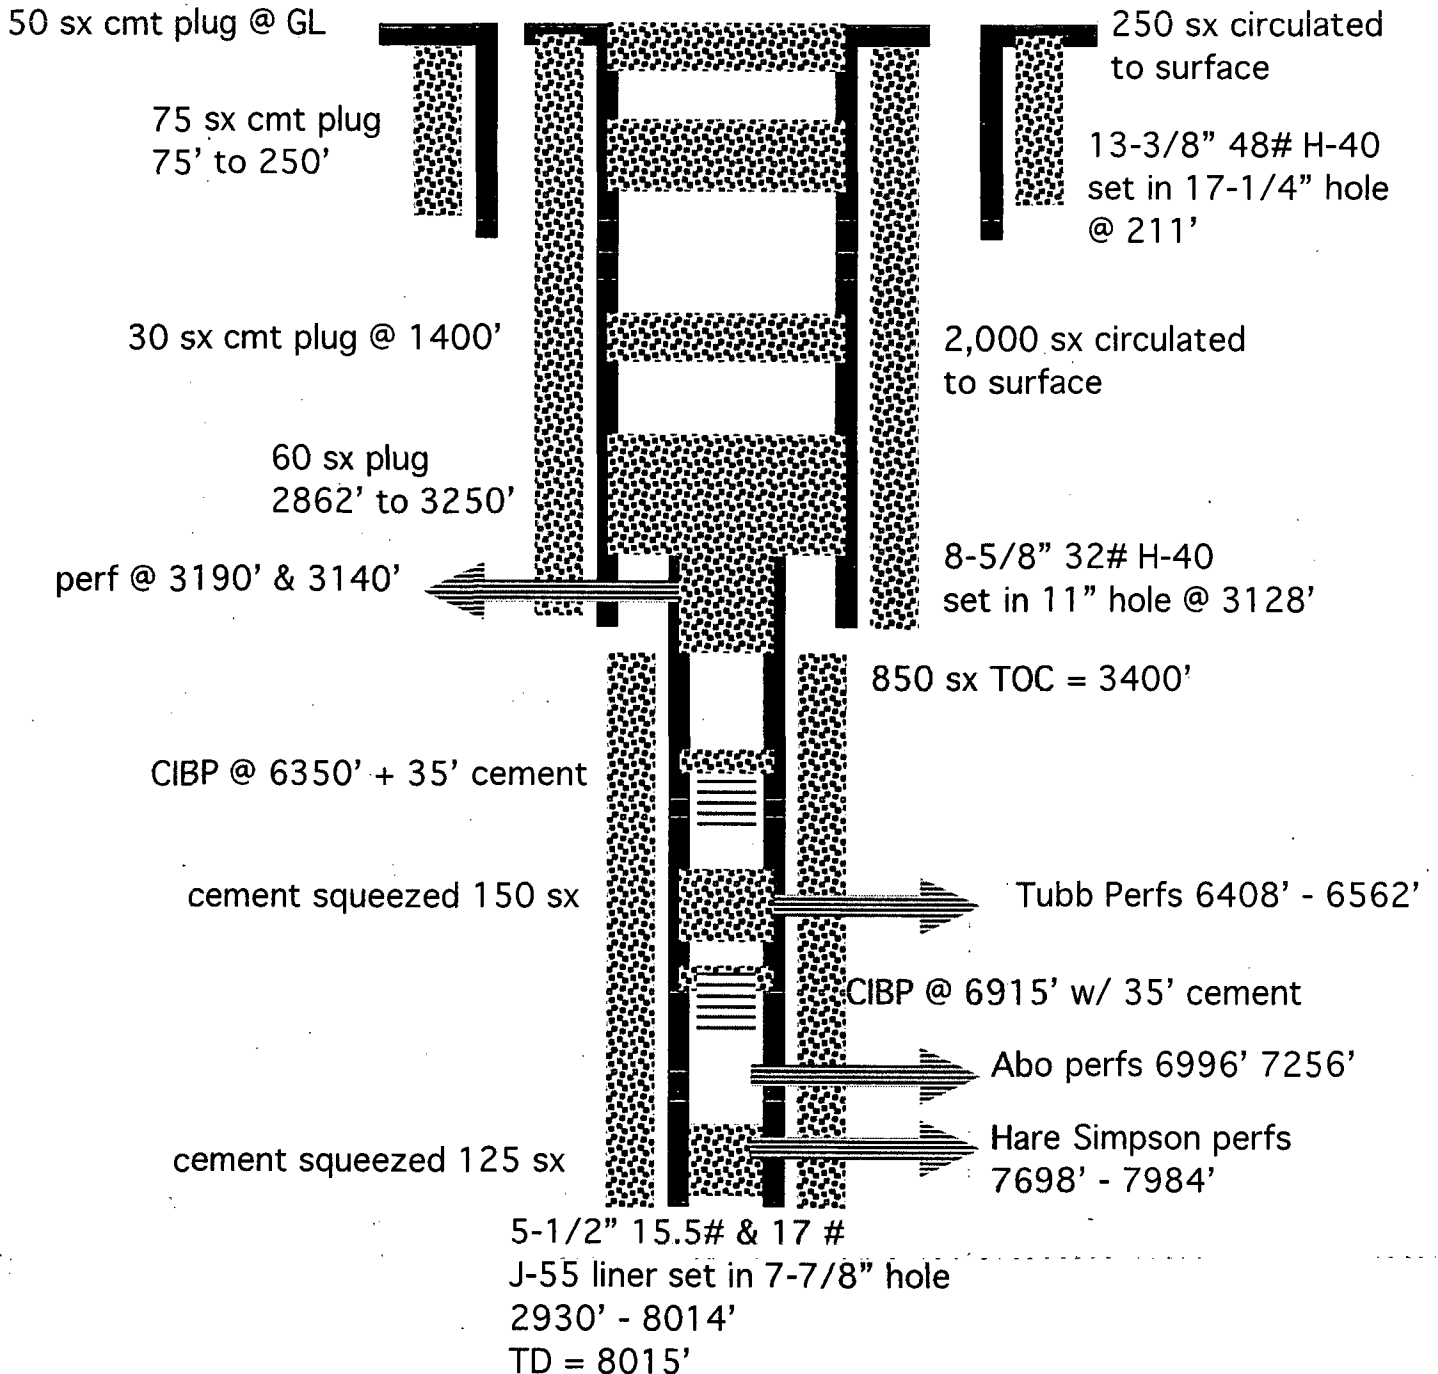


EXHIBIT F

(not to scale)

Well: Hawk B-3 # 3
Field: Hare
Location: 2970' FSL & 510' FEL
Unit P, Sec. 3, T21S, R37E
Lea County, New Mexico
API #: 30-025-06505

Current Status: P&A (5/90)

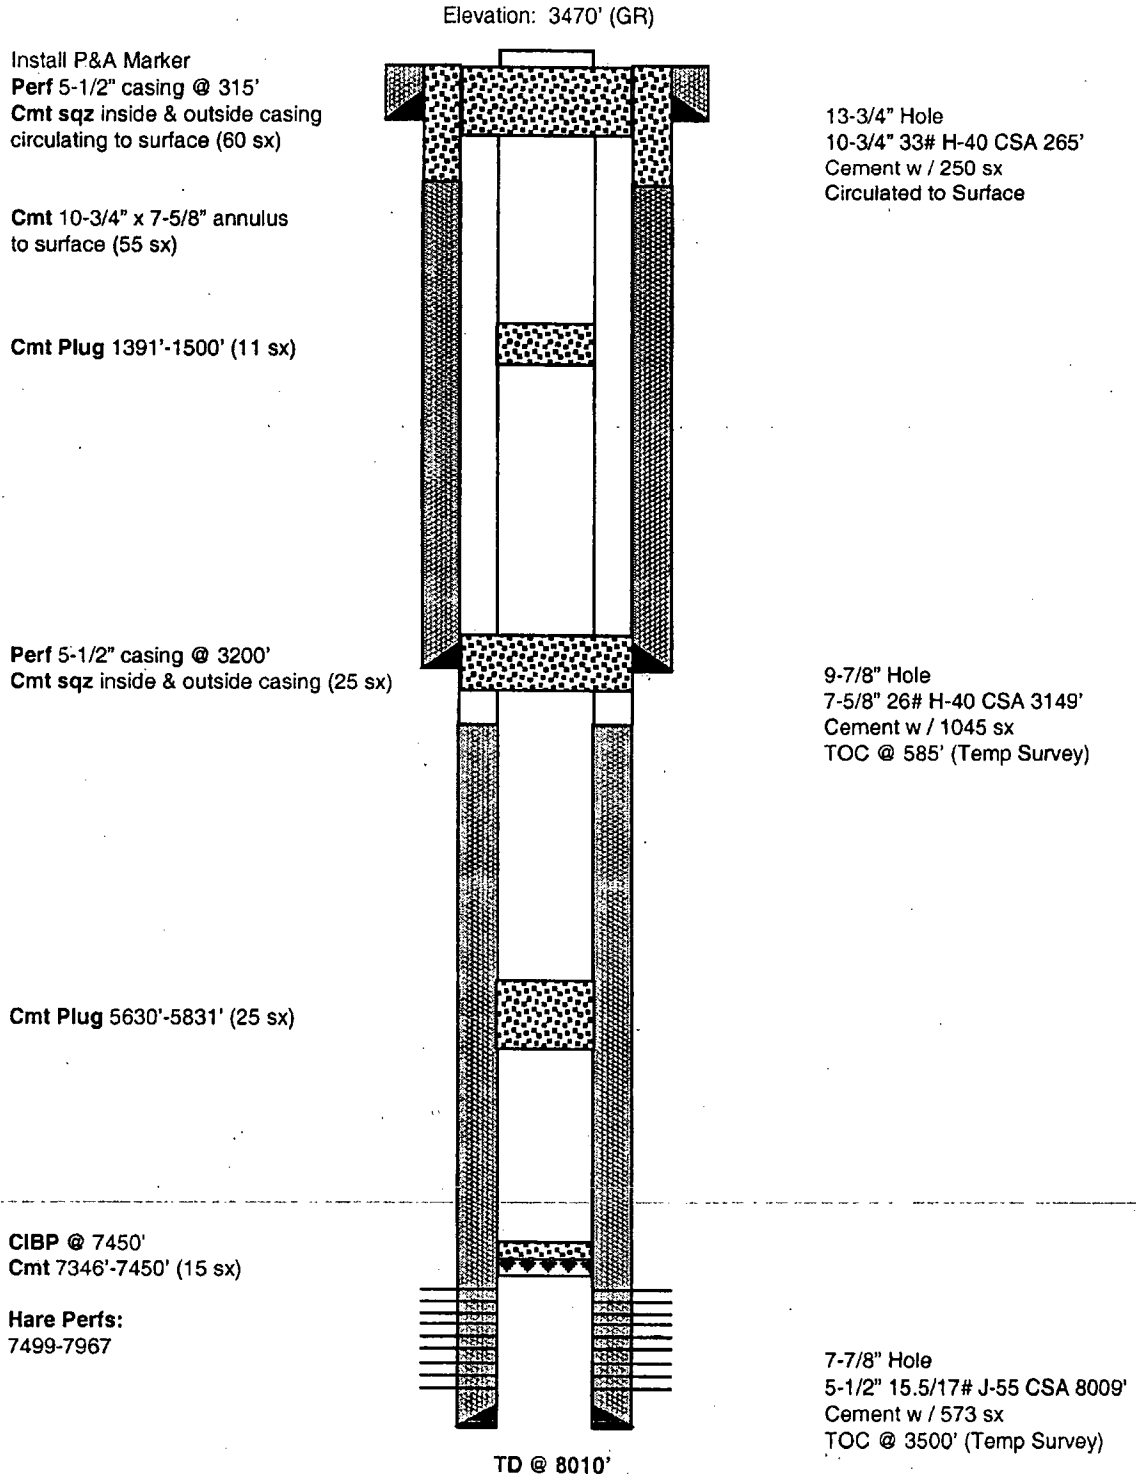


EXHIBIT F



LEASE NAME	North East Drinkard Unit
WELL #	108
API #	30-025-24831
COUNTY	Lea, NM

CURRENT WELLBORE SKETCH

perf @ 400' & squeeze to GL

perf @ 1420' & tag @ 1295'

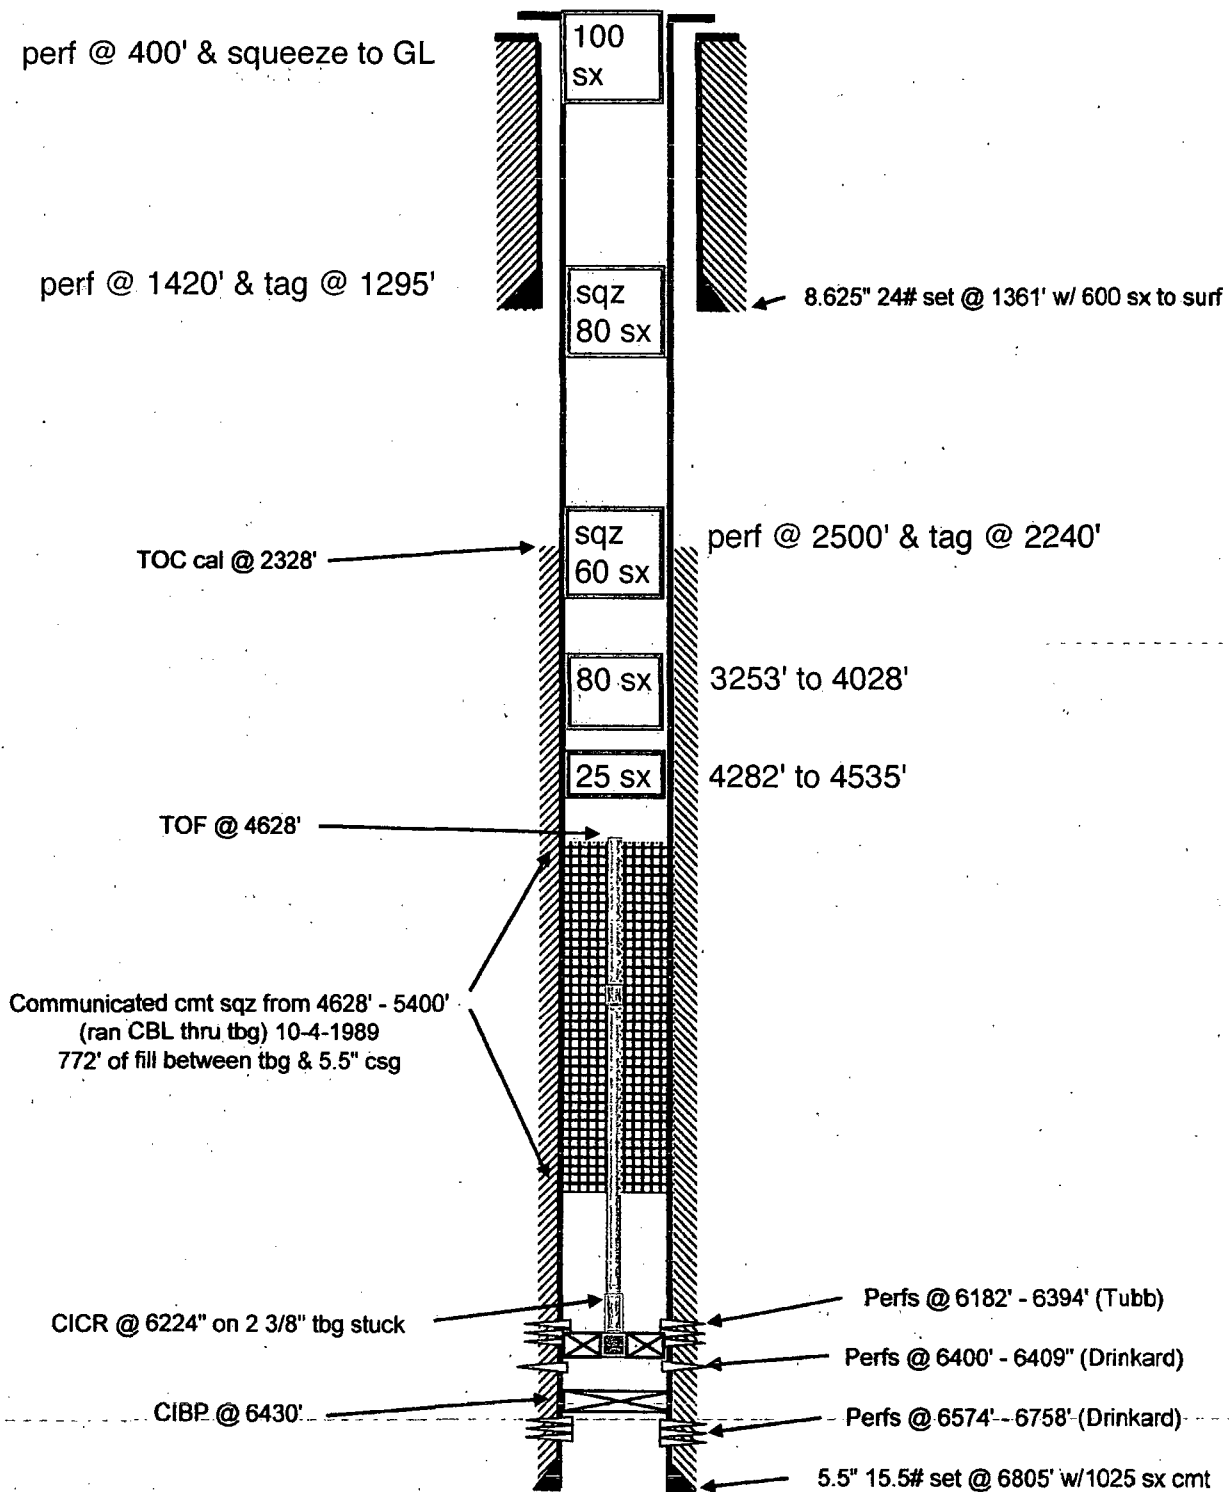


EXHIBIT F



from WFX-784

South Permian Basin Region

10520 West I-20 East

Odessa, TX 79765

(915) 488-9191

Lab Team Leader - Sheila Hernandez

(915) 495-7240

Water Analysis Report by Baker Petrolite

Company:	APACHE CORPORATION	Sales RDT:	33102
Region:	PERMIAN BASIN	Account Manager:	MIKE EDWARDS (505) 910-9517
Area:	EUNICE, NM	Sample #:	223099
Lease/Platform:	NORTHEAST DRINKARD UNIT	Analysis ID #:	28971
Entity (or well #):	WATER INJECTION STATION	Analysis Cost	\$40.00
Formation:	UNKNOWN		
Sample Point:	INJECTION PUMP DISCHARGE		

Summary		Analysis of Sample 223099 @ 75 °F					
Sampling Date:	10/3/02	Anions	mg/l	meq/l	Cations	mg/l	meq/l
Analysis Date:	10/4/02	Chloride:	10086.0	284.49	Sodium:	5799.5	252.26
Analyst:	SHEILA HERNANDEZ	Bicarbonate:	671.0	11.	Magnesium:	439.0	35.11
TDS (mg/l or g/m3):	20702.9	Carbonate:	0.0	0.	Calcium:	1099.0	54.84
Density (g/cm3, tonne/m3):	1.015	Sulfate:	2465.0	51.32	Strontium:	28.0	0.54
Anion/Cation Ratio:	1.000000	Phosphate:			Barium:	0.1	0.
Carbon Dioxide:	80 PPM	Borate:			Iron:	0.3	0.01
Oxygen:		Silicate:			Potassium:	115.0	2.94
Comments:		Hydrogen Sulfide:		90 PPM	Aluminum:		
		pH at time of sampling:		7.5	Chromium:		
		pH at time of analysis:			Copper:		
		pH used in Calculation:		7.5	Lead:		
					Manganese:		
					Nickel:		

Conditions		Values Calculated at the Given Conditions - Amounts of Scale in lb/1000 bbl										
Temp	Gauge Press.	Calcite CaCO ₃		Gypsum CaSO ₄ ·2H ₂ O		Anhydrite CaSO ₄		Celestite SrSO ₄		Barite BaSO ₄		CO ₂ Press
°F	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount	psi
80	0	1.18	75.54	-0.08	0.00	-0.14	0.00	0.07	2.75	0.75	0.00	0.21
100	0	1.25	85.15	-0.09	0.00	-0.09	0.00	0.07	3.09	0.60	0.00	0.3
120	0	1.33	95.11	-0.10	0.00	-0.02	0.00	0.09	3.78	0.47	0.00	0.42
140	0	1.41	105.41	-0.10	0.00	0.08	128.07	0.11	4.46	0.36	0.00	0.56

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.

Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: The reported CO₂ pressure is actually the calculated CO₂ fugacity. It is usually nearly the same as the CO₂ partial pressure.

EXHIBIT G

UNICHEM

A Division of BJ Services Company

Lab Test No. 23748

Apache

Sample Date: 3/10/99

Water Analysis

Listed below please find water analysis report from: NEDU

#919-S

Specific Gravity: 1.009
 Total Dissolved Solids: 13273
 pH: 6.49
 Conductivity (umhos):
 Ionic Strength: 0.265

WFX-774 application indicates
 this is San Andres source water

Cations:

		mg/l
Calcium	(Ca++):	608
Magnesium	(Mg++):	244
Sodium	(Na+):	3909
Iron	(Fe++):	0.00
Dissolved Iron	(Fe++):	
Barium	(Ba++):	0.38
Strontium	(Sr):	19
Manganese	(Mn++):	0.01

Anions:

Bicarbonate	(HCO3-):	562
Carbonate	(CO3--):	
Hydroxide	(OH-):	0
Sulfate	(SO4--):	1750
Chloride	(Cl-):	6200

Gases:

	ppm		
Carbon Dioxide (CO2):	80.00	Oxygen	(O2):
Hydrogen Sulfide (H2S):	408.00		

Scale Index (positive value indicates scale tendency) a blank indicates some tests were not run

Temperature	CaCO3 SI	CaSO4 SI
86F 30.0C	-0.14	-17.28
104F 40.0C	0.09	-17.28
122F 50.0C	0.35	-17.28
140F 60.0C	0.57	-16.80
168F 70.0C	0.87	-15.02
176F 80.0C	1.20	-15.51

Comments:

cc: Jerry White
 Jay Brown

P.O. Box 61427 • Midland, TX 79711 • 4312 S. County Rd. 1298, Midland, TX 79765
 Office: (915) 563-0241 • Fax: (915) 563-0243

#0240 P.002/010

UNICHEM LAB

MAR 25 1999 15:26 915 563 0243

APR-05-1999 15:15

3942740

96%

EXHIBIT G



fresh water well

approximate base
of Ogallala aquifer

outside of Ogallala

NEDU 172

EXHIBIT H



not drilled as of
Nov. 15, 2012

New Mexico Office of the State Engineer

Active & Inactive Points of Diversion

(with Ownership Information)

(R=POD has been replaced and no longer serves this file, (quarters are 1=NW 2=NE 3=SW 4=SE)
C=the file is closed) (quarters are smallest to largest) (NAD83 UTM in meters)

(acre ft per annum)

File No	Sub basin	Use	Diversion	Owner	County	POD Number	Code	Grant	Source	q q q	6416 4	Sec	Tws	Rng	X	Y	Distance
01037		EXP		0 MCNEILL RANCH	LE	CP 01037 POD1					2 2 2	10	21S	37E	674322	3597345	1449
00552		STK		3 MILLARD DECK	LE	CP.00552			Shallow		2 4	04	21S	37E	672700	3598022*	1550
00553		STK		3 MILLARD DECK	LE	CP 00553			Shallow		2 4	04	21S	37E	672700	3598022*	1550

Word Count: 3

UTMNAD83 Radius Search (in meters):

Easting (X): 674058

Northing (Y): 3598770

Radius: 2000

5,084' from SHL

Sorted by: Distance

EXHIBIT H

Location was derived from PLSS - see Help

data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.



not drilled as of
Nov. 15, 2012

New Mexico Office of the State Engineer

Active & Inactive Points of Diversion

(with Ownership Information)

(R=POD has been replaced
and no longer serves this file, (quarters are 1=NW 2=NE 3=SW 4=SE)
C=the file is closed) (quarters are smallest to largest) (NAD83 UTM in meters)

(acre ft per annum)

File No	Sub	Use	Diversion	Owner	County	POD Number	Code	Grant	Source	q	q	q	Sec	Tws	Rng	X	Y	Distance
	basin									64	16	4						
01037		EXP		0 MCNEILL RANCH	LE	CP 01037	POD1			2	2	2	10	21S	37E	674322	3597345	1509
00552		STK		3 MILLARD DECK	LE	CP 00552			Shallow	2	4	04	21S	37E		672700	3598022*	1606
00553		STK		3 MILLARD DECK	LE	CP 00553			Shallow	2	4	04	21S	37E		672700	3598022*	1606

Record Count: 3

UTM NAD83 Radius Search (in meters):

Easting (X): 674085

Northing (Y): 3598836

Radius: 2000

5,267' from BHL

Sorted by: Distance

EXHIBIT H

Location was derived from PLSS - see Help

data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

Analytical Report

Lab Order 1211780

Date Reported: 11/28/2012

Hall Environmental Analysis Laboratory, Inc.**CLIENT:** Permits West**Client Sample ID:** A NEDU SWD Wind#1**Project:** Apache-NEDU SWD**Collection Date:** 11/15/2012 6:02:00 PM**Lab ID:** 1211780-001**Matrix:** AQUEOUS**Received Date:** 11/19/2012 1:36:00 PM

Analyses	Result	RL	Qual	Units	DF	Date Analyzed
EPA METHOD 1664A						Analyst: JAL
N-Hexane Extractable Material	6.9	5.0		mg/L	1	11/26/2012

EXHIBIT H

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

Analytical ReportLab Order **1211780**Date Reported: **11/28/2012****Hall Environmental Analysis Laboratory, Inc.****CLIENT:** Permits West**Client Sample ID:** A NEDU SWD Wind #2**Project:** Apache-NEDU SWD**Collection Date:** 11/15/2012 6:02:00 PM**Lab ID:** 1211780-002**Matrix:** AQUEOUS**Received Date:** 11/19/2012 1:36:00 PM

Analyses	Result	RL	Qual	Units	DF	Date Analyzed
SM2540C MOD: TOTAL DISSOLVED SOLIDS						Analyst: JML
Total Dissolved Solids	1520	20.0		mg/L	1	11/21/2012 1:57:00 PM

EXHIBIT H

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1211780

28-Nov-12

Client: Permits West
Project: Apache-NEDU SWD

Sample ID	MB-4953	SampType:	MBLK	TestCode:	EPA Method 1664A					
Client ID:	PBW	Batch ID:	4953	RunNo:	7100					
Prep Date:	11/26/2012	Analysis Date:	11/26/2012	SeqNo:	205931	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
N-Hexane Extractable Material	ND	5.0								

Sample ID	LCS-4953	SampType:	LCS	TestCode:	EPA Method 1664A					
Client ID:	LCSW	Batch ID:	4953	RunNo:	7100					
Prep Date:	11/26/2012	Analysis Date:	11/26/2012	SeqNo:	205932	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
N-Hexane Extractable Material	34	5.0	40.00	0	84.8	78	114			

Sample ID	MB-4953	SampType:	MBLK	TestCode:	EPA Method 1664A					
Client ID:	PBW	Batch ID:	4953	RunNo:	7101					
Prep Date:	11/26/2012	Analysis Date:	11/27/2012	SeqNo:	205949	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Silica Gel Treated N-Hexane Extrac	ND	5.0								

Sample ID	LCS-4953	SampType:	LCS	TestCode:	EPA Method 1664A					
Client ID:	LCSW	Batch ID:	4953	RunNo:	7101					
Prep Date:	11/26/2012	Analysis Date:	11/27/2012	SeqNo:	205950	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Silica Gel Treated N-Hexane Extrac	13	5.0	20.00	0	66.5	64	132			

EXHIBIT H

Qualifiers:

- | | |
|--|--|
| * Value exceeds Maximum Contaminant Level. | B Analyte detected in the associated Method Blank |
| E Value above quantitation range | H Holding times for preparation or analysis exceeded |
| J Analyte detected below quantitation limits | ND Not Detected at the Reporting Limit |
| P Sample pH greater than 2 | R RPD outside accepted recovery limits |

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1211780

28-Nov-12

Client: Permits West

Project: Apache-NEDU SWD

Sample ID	MB-4917	SampType: MBLK			TestCode: SM2540C MOD: Total Dissolved Solids					
Client ID:	PBW	Batch ID: 4917			RunNo: 7074					
Prep Date:	11/20/2012	Analysis Date: 11/21/2012			SeqNo: 204919		Units: mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	ND	20.0								

Sample ID	LCS-4917	SampType: LCS			TestCode: SM2540C MOD: Total Dissolved Solids					
Client ID:	LCSW	Batch ID: 4917			RunNo: 7074					
Prep Date:	11/20/2012	Analysis Date: 11/21/2012			SeqNo: 204920		Units: mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	996	20.0	1000	0	99.6	80	120			

Sample ID	1211677-002AMS	SampType:	MS	TestCode:	SM2540C MOD: Total Dissolved Solids					
Client ID:	BatchQC	Batch ID:	4917	RunNo:	7074					
Prep Date:	11/20/2012	Analysis Date:	11/21/2012	SeqNo:	204932	Units:	mg/L			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	1050	20.0	1000	36.00	101	80	120			

Sample ID	1211677-002AMSD	SampType: MSD	TestCode: SM2540C MOD: Total Dissolved Solids							
Client ID:	BatchQC	Batch ID: 4917	RunNo: 7074							
Prep Date:	11/20/2012	Analysis Date: 11/21/2012	SeqNo: 204933	Units: mg/L						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Total Dissolved Solids	1060	20.0	1000	36.00	103	80	120	1.42	5	

EXHIBIT H

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits



Geologic Hazards Science Center

EHP Quaternary Faults

Search for fault:

Select a state or region map:

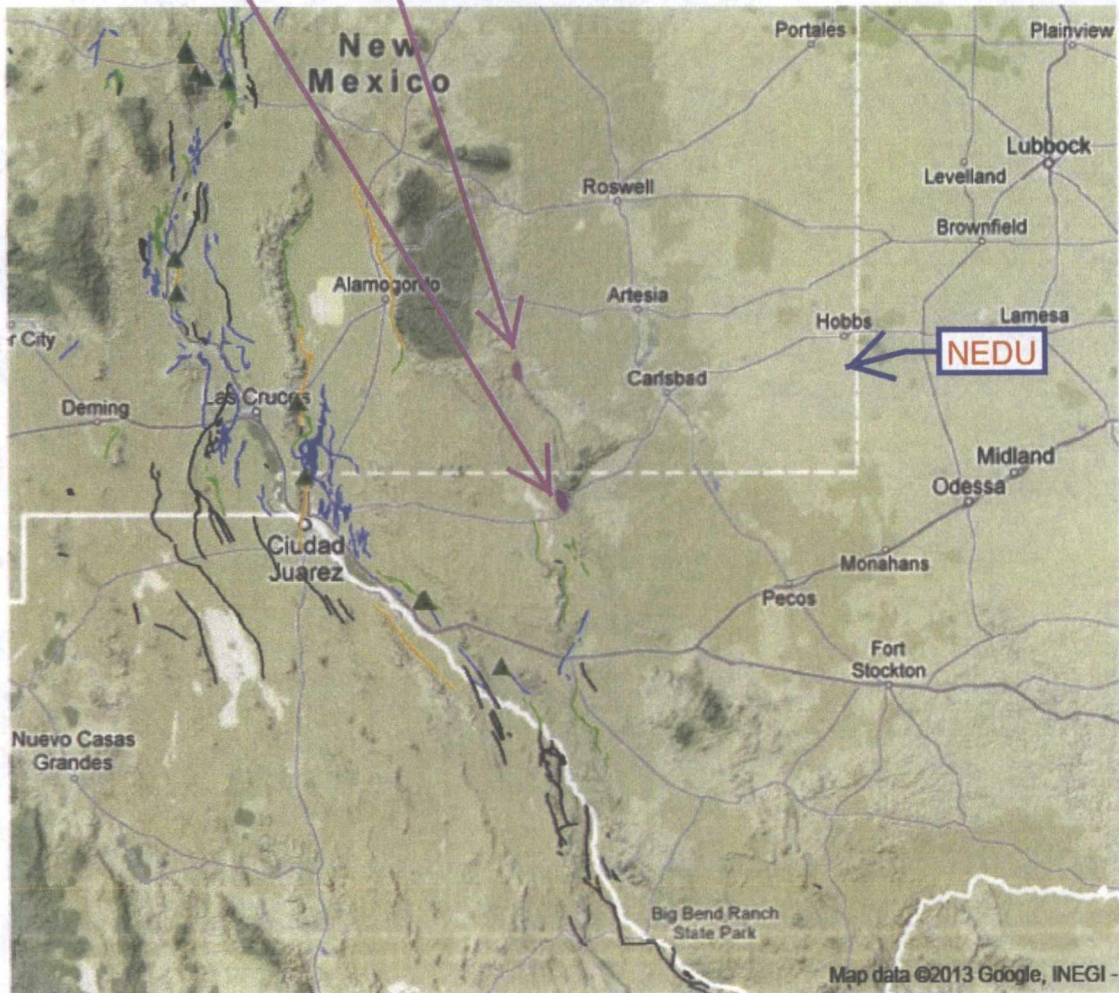


EXHIBIT I

PERMITS WEST INC.
PROVIDING PERMITS for LAND USERS
37 Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

March 13, 2013

Texas - New Mexico Railroad
103 North Steck Ave.
Wolfforth, TX 79382

Apache Corporation is applying (see attached application) to drill its Northeast Drinkard Unit #172 well as a water injection well. As required by NM Oil Conservation Division (NMOCD) Rules, I am notifying you of the following proposed water injection well. This letter is a notice only. No action is needed unless you have questions or objections.

Well Name: Northeast Drinkard Unit #172 (private lease) ID = 7,050
Proposed Injection Zone: Drinkard from 6,579' to 6,849'
SHL: 3515' FNL & 1425' FEL Sec. 3, T. 21 S., R. 37 E., Lea County, NM
BHL: 3300' FNL & 1330' FEL Sec. 3, T. 21 S., R. 37 E., Lea County, NM
Approximate Location: ~5 air miles north of Eunice, NM
Applicant Name: Apache Corporation (432) 818-1167
Applicant's Address: 303 Veterans Airpark Lane, #3000, Midland, TX 79705

Submittal Information: Application for a water injection well will be filed with the NMOCD. If you have an objection, or wish to request a hearing, then it must be filed with the NMOCD within 15 days of receipt of this letter. The New Mexico Oil Conservation Division address is 1220 South St. Francis Dr. Santa Fe, NM 87505. Their phone number is (505) 476-3440.

Please call me if you have any questions.

Sincerely,

Brian Wood

Brian Wood

U.S. Postal Service	
CERTIFIED MAIL RECEIPT	
(Domestic Mail Only, No Insurance Coverage Provided)	
For delivery information visit our website at www.usps.com	
OFFICIAL USE	
Postage	\$ 1.72
Certified Fee	3.10
Return Receipt Fee (Endorsement Required)	2.55
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$ 7.37
Sent To: TX NM	
Street, Apt. No., or PO Box No.	
City, State, ZIP+4	

PERMITS WEST INC.
PROVIDING PERMITS for LAND USERS
37 Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

March 13, 2013

Elizabeth Gervis Taylor, et al
614 W. Parkside Dr.
Palatine, IL 60067

Dear Ms. Taylor:

Apache Corporation is applying (see attached application) to drill its Northeast Drinkard Unit #172 well as a water injection well. As required by NM Oil Conservation Division (NMOCD) Rules, I am notifying you of the following proposed water injection well. This letter is a notice only. No action is needed unless you have questions or objections.

Well Name: Northeast Drinkard Unit #172 (private lease) ID = 7,050
Proposed Injection Zone: Drinkard from 6,579' to 6,849'
SHL: 3515' FNL & 1425' FEL Sec. 3, T. 21 S., R. 37 E., Lea County, NM
BHL: 3300' FNL & 1330' FEL Sec. 3, T. 21 S., R. 37 E., Lea County, NM
Approximate Location: ~5 air miles north of Eunice, NM
Applicant Name: Apache Corporation (432) 818-1167
Applicant's Address: 303 Veterans Airpark Lane, #3000, Midland, TX 79705

Submittal Information: Application for a water injection well will be filed with the NMOCD. If you have an objection, or wish to request a hearing, then it must be filed with the NMOCD within 15 days of receipt of this letter. The New Mexico Oil Conservation Division address is 1220 South St. Francis Dr. Santa Fe, NM 87505. Their phone number is (505) 476-3440.

Please call me if you have any questions.

Sincerely,

Brian Wood

Brian Wood

U.S. Postal Service	
CERTIFIED MAIL RECEIPT	
(Domestic Mail Only, No Insurance Coverage Provided)	
For delivery information visit our website at www.usps.com	
OFFICIAL USE	
Postage	\$ 1.72
Certified Fee	3.10
Return Receipt Fee (Endorsement Required)	2.55
Restricted Delivery Fee (Endorsement Required)	
Total Postage & Fees	\$ 7.37
Sent To: Taylor	
Street, Apt. No., or PO Box No.	
City, State, ZIP+4	

Affidavit of Publication

State of New Mexico,
County of Lea.

I, JUDY HANNA
PUBLISHER

of the Hobbs News-Sun, a
newspaper published at Hobbs, New
Mexico, do solemnly swear that the
clipping attached hereto was
published in the regular and entire
issue of said newspaper, and not a
supplement thereof for a period

of 1 issue(s).

Beginning with the issue dated
February 26, 2013
and ending with the issue dated
February 26, 2013.



PUBLISHER

Sworn and subscribed to before me
this 26th day of
February, 2013.



Notary Public

My commission expires
January 29, 2015
(Seal)

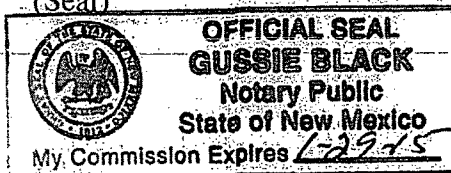

This newspaper is duly qualified to
publish legal notices or
advertisements within the meaning of
Section 3, Chapter 167, Laws of
1937 and payment of fees for said
publication has been made.

LEGAL	LEGAL
LEGAL NOTICE FEBRUARY 26, 2013 Apache Corporation is applying to directionally drill the Northeast Drinkard Unit #172 well as a water injection well. The SHL will be at 3515 FNL & 1425 FEL. The BHL will be at 3300 FNL & 1330 FEL. Both are in Sec. 3, T. 21 S., R. 37 E., Lea County, NM. This is 5 miles north of Eunice, NM. It will inject water into the Drinkard (maximum injection pressure = 1,315 psi) from 6,579 to 6,849'. Injection will be at a maximum rate of 1,000 bwpd. Interested parties must file objections or requests for hearing with the NM Oil Conservation Division, 1220 South Saint Francis Dr., Santa Fe, NM 87505, within 15 days. Additional information can be obtained by contacting: Brian Wood, Permits West, Inc., 37 Verano Loop, Santa Fe, NM 87508. Phone number is (505) 466-8120. #27957	

02108485

00109880

BRIAN WOOD
PERMITS WEST
37 VERANO LOOP
SANTA FE, NM 87508

EXHIBIT K