

DHC 3/27/00

**devon**

**ENERGY CORPORATION**

20 North Broadway, Suite 1500  
Oklahoma City, Oklahoma 73102-8260


Telephone 405/235-3611  
FAX 405/552-4550

March 3, 2000

**Certified Mail No. Z 068 589 785**

STATE OF NEW MEXICO  
Energy, Minerals and Natural Resources Dept.  
Oil Conservation Division  
2040 S. Pacheco  
Santa Fe, NM 87505-6429

RE: Downhole Commingling  
Falcon 3 B Federal #1  
Section B-3-18S-27E  
API #30-015-29188  
Red Lake (Q-GB-SA) and  
Red Lake (Glorieta-Yeso), NE Fields  
Eddy County, NM

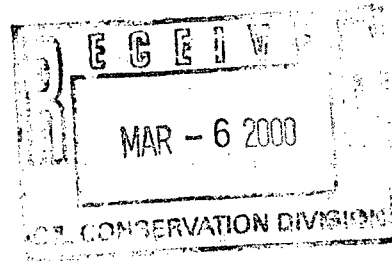


Gentlemen:

Concerning the referenced, enclosed please find the Form C-107A Application for Downhole Commingling and attachments (and three copies).

Please direct inquiries concerning this application to Ernie Buttross at (405) 235-3611, Ext. 4509.

Yours truly,

DEVON ENERGY CORPORATION (NEVADA)

  
Tonja Rutelonis  
Engineering Tech.

/trr  
Enclosures

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88241-1980  
DISTRICT II  
811 South First St., Artesia, NM 88210-2835  
DISTRICT III  
1000 Rio Brazos Rd, Aztec, NM 87410-1693  
DISTRICT IV  
2040 S. Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

2040 S. Pacheco  
Santa Fe, New Mexico 87505-6429

Form C-107-A  
Revised August 1999

APPROVAL PROCESS:

Administrative Hearing

EXISTING WELLBORE

YES NO

APPLICATION FOR DOWNHOLE COMMINGLING

Devon Energy Corporation (Nevada)

20 N. Broadway, Suite 1500, Oklahoma City OK 73102-8260

Operator

Address

Falcon 3 B Federal

1

B - 3-18S-27E

Eddy

Lease

Well No.

Unit Ltr. - Sec - Twp - Rge

County  
Spacing Unit Lease Types: (check 1 or more)

OGRID NO. 6137

Property Code 19622

API NO. 30-015-29188

Federal X, State, (and/or) Fee

The following facts are submitted in support of downhole commingling:	Upper Zone	Intermediate Zone	Lower Zone
1. Pool Name and Pool Code	Red Lake (Q-GB-SA)		Red Lake (Glor-Yeso), NE
2. Top and Bottom of Pay Section (Perforations)	1850'-2376'		To be perforated 2850'-3150'
3. Type of production (Oil or Gas)	Oil		Oil
4. Method of Production (Flowing or Artificial Lift)	Artificial Lift		Artificial Lift
5. Bottomhole Pressure Oil Zones - Artificial Lift: Estimated Current Gas & Oil - Flowing: Measured Current All Gas Zones: Estimated Or Measured Original	a. (Current) 50 psi producing BHP b. (Original)	a. b.	a. 100 psi producing BHP b.
6. Oil Gravity (°API) or Gas BTU Content	39.5°		41.8°
7. Producing or Shut-In?	Producing		Awaiting perfs
Production Marginal? (yes or no)	Yes		Expected to be marginal
• If Shut-In, give date and oil/gas/water rates of last production Note: For new zones with no production history, applicant shall be required to attach production estimates and supporting data	Date: N/A Rates:	Date: Rates:	Date: N/A Rates:
• If Producing, give date and oil/gas/water rates of recent test (within 60 days)	Date: 1/20/00 Rates: 11 BOPD, 20 MCFGPD, 10 BWPD	Date: Rates:	Date: N/A Rates: N/A
8. Fixed Percentage Allocation Formula - % for each zone (total of %'s to equal 100%)	Oil: 42 % Gas: 42 %	Oil: % Gas: %	Oil: 58 % Gas: 58 %

9. If allocation formula is based upon something other than current or past production, or is based upon some other method, submit attachments with supporting data and/or explaining method and providing rate projections or other required data.

10. Are all working, overriding, and royalty interests identical in all commingled zones? ☒ Yes ☐ No  
If not, have all working, overriding, and royalty interests been notified by certified mail? ☐ Yes ☐ No

11. Will cross-flow occur? ☐ Yes ☒ No If yes, are fluids compatible, will the formations not be damaged, will any cross-flowed production be recovered, and will the allocation formula be reliable. ☐ Yes ☐ No (If No, attach explanation)

12. Are all produced fluids from all commingled zones compatible with each other? ☒ Yes ☐ No

13. Will the value of production be decreased by commingling? ☐ Yes ☒ No (If Yes, attach explanation)

14. If this well is on, or communitized with, state or federal lands, either the Commissioner of Public Lands or the United States Bureau of Land Management has been notified in writing of this application. ☒ Yes ☐ No

15. NMOCD Reference Cases for Rule 303(D) Exceptions: ORDER NO(S).

16. ATTACHMENTS:  
\* C-102 for each zone to be commingled showing its spacing unit and acreage dedication.  
\* Production curve for each zone for at least one year. (if not available, attach explanation.)  
\* For zones with no production history, estimated production rates and supporting data.  
\* Data to support allocation method or formula.  
\* Notification list of working, overriding, and royalty interests for uncommon interest cases.  
\* Any additional statements, data, or documents required to support commingling.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tonia Rutelonis TITLE Engineering Technician DATE 3/2/00

TYPE OR PRINT NAME Tonia Rutelonis TELEPHONE NO. (405) 552-4515

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-102  
Revised February 10, 1994  
Instruction on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

## OIL CONSERVATION DIVISION

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

## WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number <b>30-015-29188</b>	Pool Code <b>51300 / 96836</b>	Pool Name <b>Red Lake (Q-GB-SA) &amp; Red Lake, Gbrieta-Yeso, NE</b>
Property Code <b>19622</b>	Property Name <b>Falcon 3 "B" Federal</b>	Well Number <b>1</b>
OGRID No. <b>6137</b>	Operator Name <b>Devon Energy Corporation (Nevada)</b>	Elevation <b>3598'</b>

## Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
<b>B</b>	<b>3</b>	<b>18 S</b>	<b>27 E</b>		<b>430</b>	<b>North</b>	<b>2430</b>	<b>East</b>	<b>Eddy</b>

## Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
<b>40</b>			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<b>OPERATOR CERTIFICATION</b>  I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.  <i>E. L. Buttross Jr.</i> Signature <b>EL. Buttross, Jr.</b> Printed Name <b>District Engineer</b> Title <b>August 20, 1996</b> Date
	<b>SURVEYOR CERTIFICATION</b>  I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  <b>July 6, 1996</b> Date Surveyed
	Signature & Seal of <b>L. JONES</b> Professional Surveyor 
	Certificate No. <b>Gary L. Jones</b> 1977 <b>PROFESSIONAL SURVEYOR</b> <b>BASIN SURVEYS</b>

# Falcon 3 B Federal #1


## Allocation Formula

Well Name	Producing Formation	*Daily Production Test	% of Total
		3-month Average	
Logan 35 B Federal #9	Red Lake (Glor-Yeso), NE	15 BO/45 MCF/91 BW	58 %
Falcon 3 B Federal #1	Red Lake (Q-GB-SA)	11 BO/20 MCF/15 BW	42 %


\* From attached production plots

The above production test represents stable production from a San Andres producer (Falcon 3 B Federal #1) and a Yeso producer (Logan 35 B Federal #9). We believe these rates of production represent an acceptable means to allocate production. **We have previously received approval for downhole commingling in these fields utilizing a similar allocation method.**

# **Falcon 3 B Federal #1 (San Andres)**

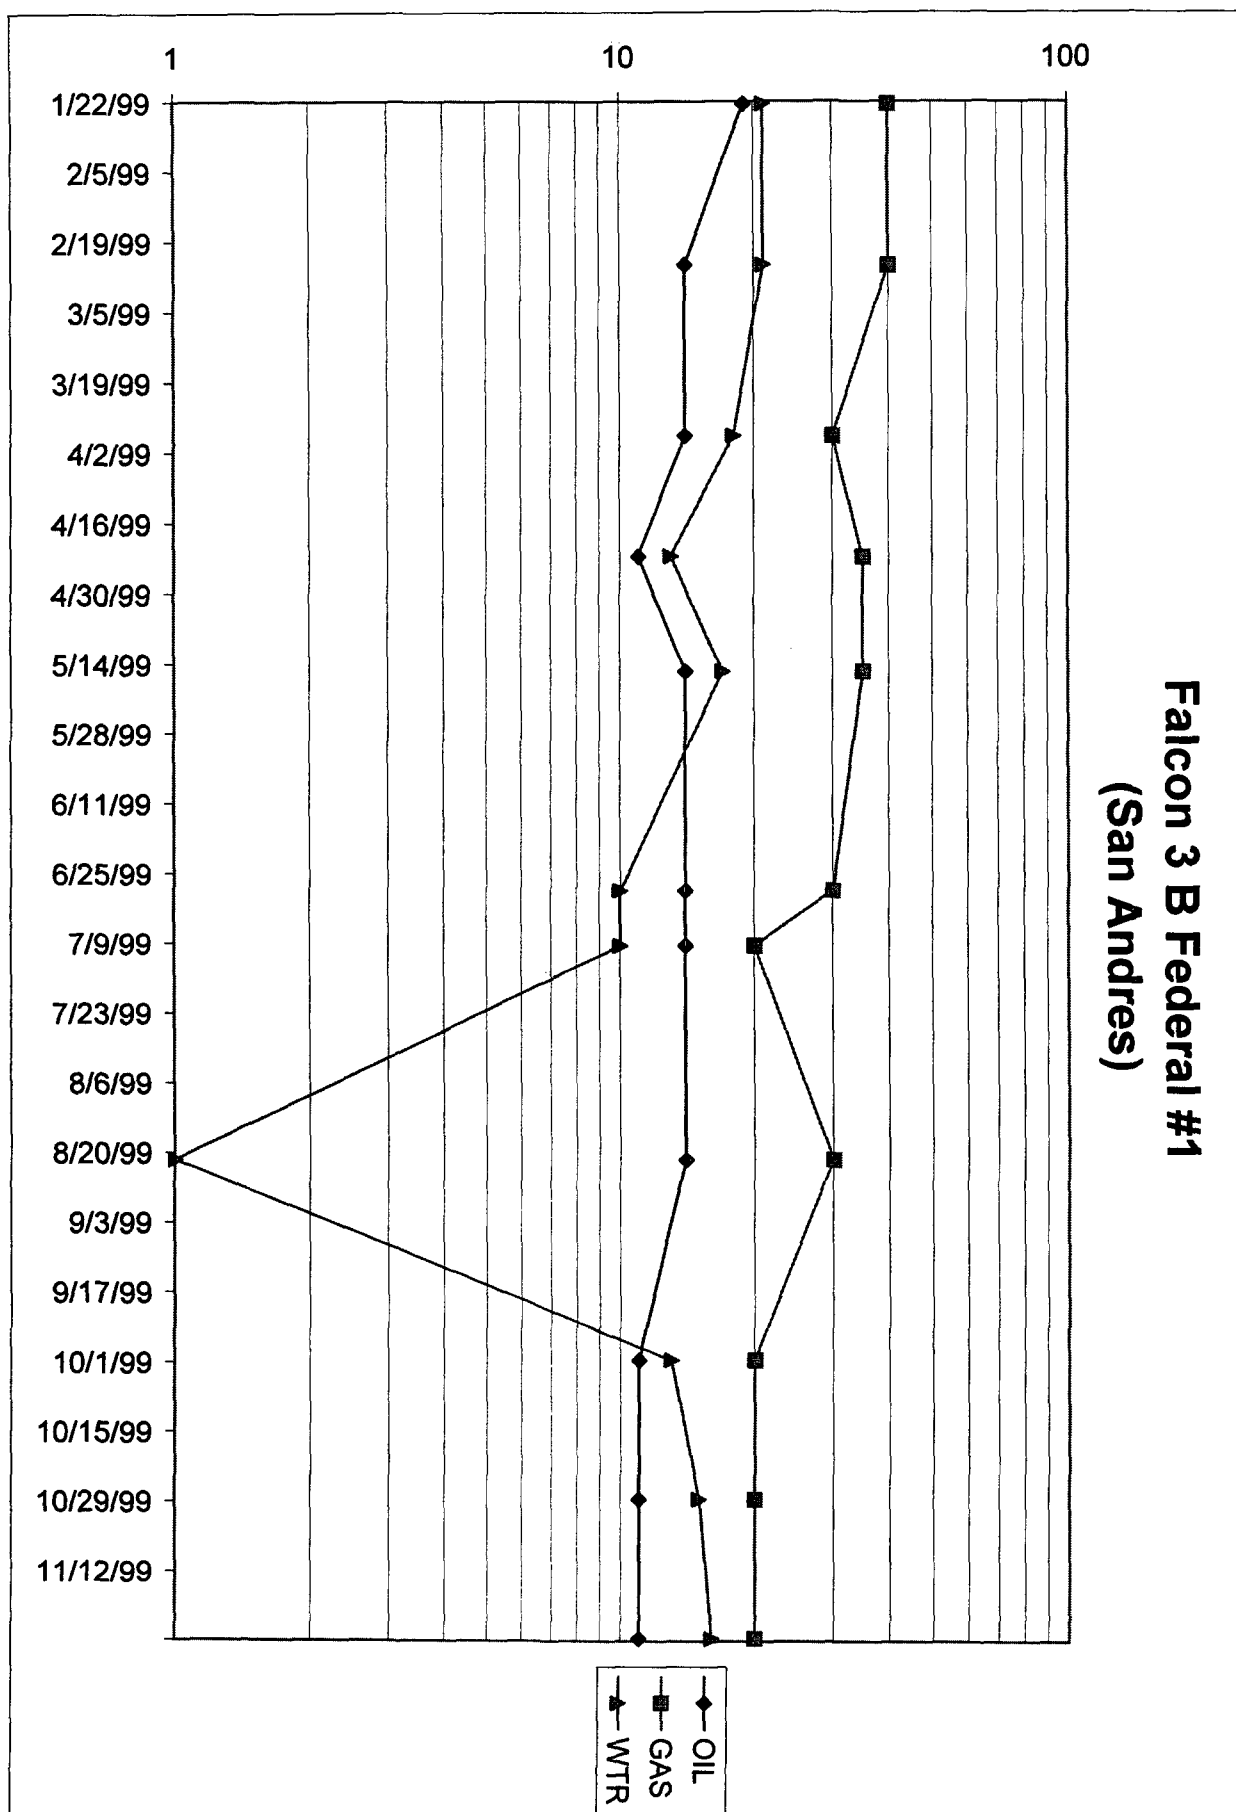


# Logan 35 B Federal #9 (Yeso)

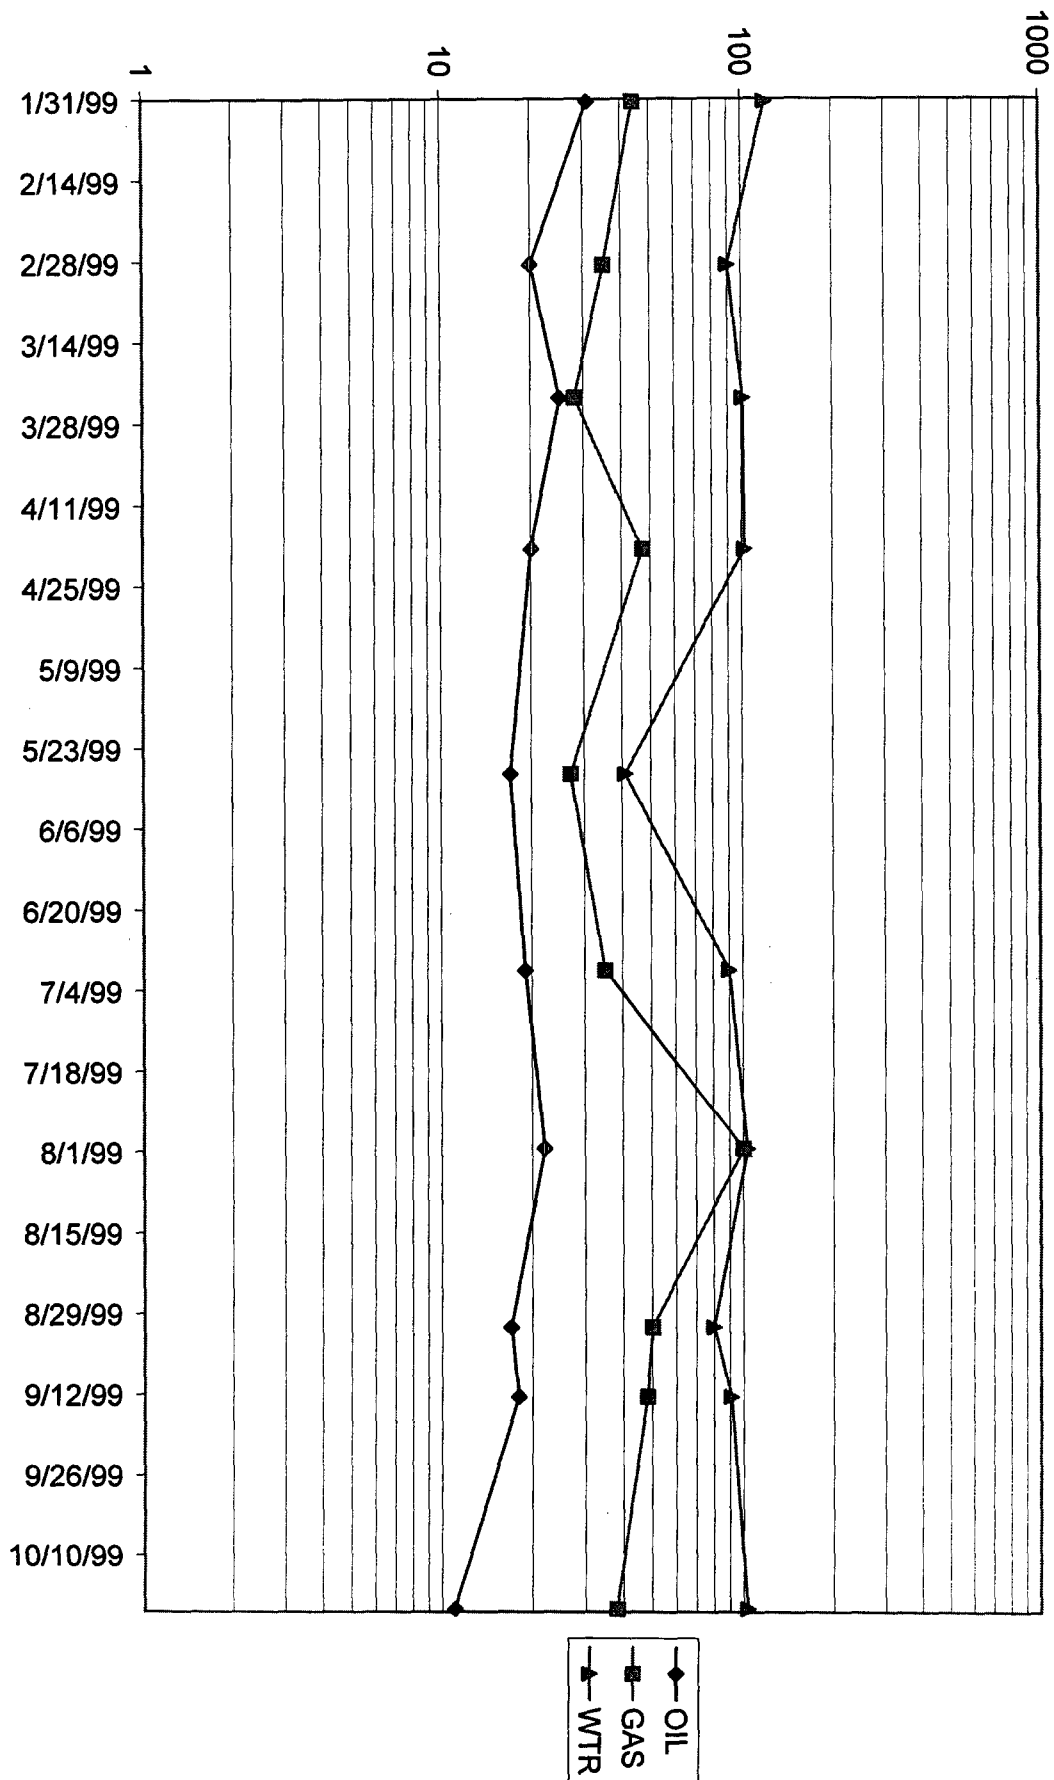

# DEVON ENERGY CORPORATION - WELLBORE SCHEMATIC

WELL NAME: Falcon 3 B Federal #1			FIELD: Red Lake			
LOCATION: 430' FNL & 2430' FEL, Section 3-18S-27E			COUNTY: Eddy			STATE: NM
ELEVATION: GL = 3598'			SPUD DATE: 12/29/96		COMP DATE: 1/23/97	
API#: 30-015-29188		PREPARED BY: T. Rutelonis			DATE: 2/9/00	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 1090'	8-5/8"	24#	J-55		12-1/4"
CASING:	0' - 2599'	5 1/2"	15.5#	J-55		7-7/8"
LINER:	2500' - 4000'	4"	10.46#	J-55	FL4S	4-3/4"
TUBING:	0' - 2470'	2-7/8"				
TUBING:						

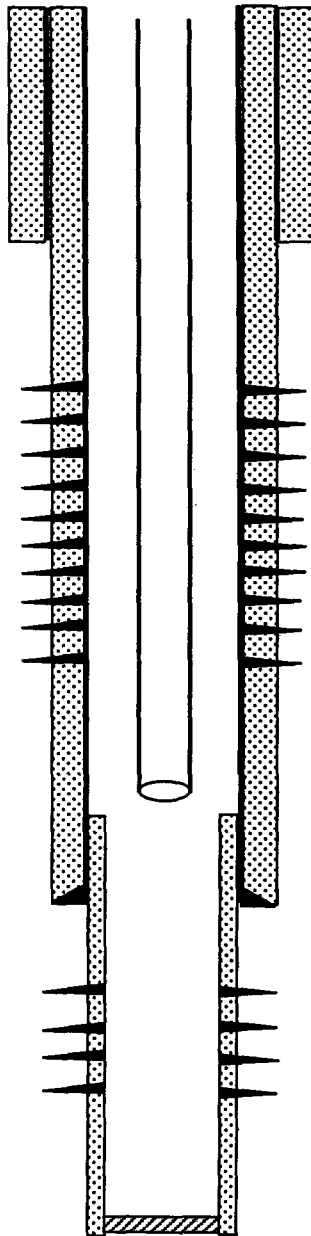

☐ CURRENT
 ☒ PROPOSED

OPERATOR: DEVON ENERGY CORPORATION

8-5/8" Casing, Set @ 1090' w/ 500 sxs cmt. TOC @ surface

**SAN ANDRES PERFORATIONS:**  
 1850'-2376'

2-7/8" tbg w/ SN @ 2470'

TOL @ 2500'  
 5 1/2" 15.5# J-55 Casing Set @ 2599' w/ 525 sxs cmt. TOC @ surf.

**YESO PERFORATIONS:**  
 ±2850'- ±3150' (20 HOLES, .38")

TD @ 4000'

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN

LOCATE\*

(See other instructions on reverse side)

FORM APPROVED

OPERATOR'S COPY

FILE  
COPY

## WELL COMPLETION OR RECOMPLETION REPORT AND LOG\*

1a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other ☐

b. TYPE OF COMPLETION:

NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF. RESER. ☐ Other ☐

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)\*

At surface 430' FNL &amp; 2430' FEL, Unit "B"

At top prod. interval reported below (SAME)

At total depth (SAME)

5. LEASE DESIGNATION AND SERIAL NO.  
LC-065478-B6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
NA7. UNIT AGREEMENT NAME  
NA8. FARM OR LEASE NAME, WELL NO.  
Falcon "3B" Federal #19. API WELL NO.  
30-015-2918810. FIELD AND POOL, OR WILDCAT  
Red Lake (Q-GB-SA)11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA  
"B", Section 3-18S-27E

14. PERMIT NO.

DATE ISSUED

9/24/96

12. COUNTY OR PARISH

Eddy County

13. STATE

NM

15. DATE SPUDDED

12/29/96

16. DATE T.D. REACHED

1/3/97

17. DATE COMPL. (Ready to prod.)

1/23/97

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\*

KB 3607'; GL 3598'; DF 3606'

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD &amp; TVD

2599'

21. PLUG, BACK T.D., MD &amp; TVD

2555'

22. IF MULTIPLE COMPL., HOW MANY\*

NA

23. INTERVALS

DRILLED BY

ROTARY TOOLS

X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\*

San Andres - 1850-2376'

25. WAS DIRECTIONAL SURVEY  
MADE  
No

26. TYPE ELECTRIC AND OTHER LOGS RUN

LDT/CNL/DLL/MSFL/GR; CBL

27. WAS WELL CORED  
No

## 28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1090'	12-1/4"	surf; 300 sxs lite & 200 sxs "C"	NA
5-1/2" J-55	15.5#	2599'	7-7/8"	surf; 150 sxs lite C & 375 sxs "C"	NA

## 29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	2283'	(OET)

## 30. TUBING RECORD

## 31. PERFORATION RECORD (Interval, size and number)

1850-1852' U. SAN ANDRES (2 - .40" EHD holes)

1905-2041' ALPHA (8 - .40" EHD holes)

2113-2157' "A" (5 - .40" EHD holes)

2174-2269' "B" (6 - .40" EHD holes)

2285-2327' "C" (4 - .40" EHD holes)

2337-2376' "D" (4 - .40" EHD holes)

## 32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1850-2376'	2500 gals of 15% NeFe acid
1850-2376'	1,000 gals PrePad + 2 drum Pro-Kem scale inhibitor +
	180,000 gals gel water + 6000# 100 mesh sand +
	100,000# 20/40 Brady sand & 143,000# 16/30 sand

## 33.\* PRODUCTION

DATE FIRST PRODUCTION 1/26/97	PRODUCTIONS METHOD (Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump)	WELL STATUS (Producing or shut-in) Producing
DATE OF TEST 2/4/97	HOURS TESTED 24	CHOKER SIZE
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE
		OIL-BBL. 101
		GAS-MCF. 101
		WATER-BBL. 407
		GAS-OIL RATIO 1000/1

34. DISPOSITION OF GAS (Solid, used for fuel, vented, etc.)

Vented (To be connected)

TEST WITNESSED BY

Danny Hokett

35. LIST OF ATTACHMENTS

Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED *Diana M. Keys*DIANA KEYS  
TITLE ENGINEERING TECHNICIAN

DATE February 13, 1997

\*(See Instructions and Spaces for Additional Data on Reverse Side)

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRIBUTED

FEB 13 97



Analysis: 24190

## Water Analysis Report from Baker Petrolite

Summary of Mixing Waters		
Sample Number	133534	112098
Company	DEVON ENERGY	DEVON ENERGY
Lease Well Sample Location	HAWK 8 WELL # 3 WELLHEAD <i>yeso</i>	HAWK "8" BATTERY FWKO <i>SAN ANDRES</i>
Anions (mg/L)		
Chloride	106,253	99,569
Bicarbonate	573	497
Carbonate	0.00	0.00
Sulfate	3,912	4,489
Phosphate	0.00	0.00
Borate	0.00	0.00
Silicate	0.00	0.00
Cations (mg/L)		
Sodium	67,918	63,725
Magnesium	369	509
Calcium	1,749	1,770
Strontium	36.0	49.0
Barium	0.06	0.10
Iron	48.0	0.40
Potassium	523	269
Aluminum	0.00	0.00
Chromium	0.00	0.00
Copper	0.00	0.00
Lead	0.00	0.00
Manganese	0.00	0.00
Nickel	0.00	0.00
Anion/Cation Ratio	1.00	1.00
TDS (mg/L)	181,381	170,877
Density (g/cm)	1.12	1.11
Sampling Date	10/26/99	7/28/99
Account Manager	CURRY PRUIT	CURRY PRUIT
Analyst	JOANNA RAGAN	JOANNA RAGAN
Analysis Date		8/4/99
pH at time of sampling	5.90	7.90
pH at time of analysis		
pH used in Calculations	5.90	7.90

Analysis: 24190

## Water Analysis Report from Baker Petrolite

Mixes at 80°F and 0 psi

### Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO <sub>2</sub>	Calcite CaCO <sub>3</sub>		Gypsum CaSO <sub>4</sub> ·2H <sub>2</sub> O		Anhydrite CaSO <sub>4</sub>		Celestite SrSO <sub>4</sub>		Barite BaSO <sub>4</sub>	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	5.52	-0.31		-0.20		-0.18		-0.21		0.13	0.01
90%	10%	4.90	-0.27		-0.19		-0.17		-0.18		0.17	0.01
80%	20%	4.30	-0.22		-0.18		-0.16		-0.16		0.20	0.01
70%	30%	3.70	-0.17		-0.17		-0.16		-0.14		0.23	0.02
60%	40%	3.10	-0.10		-0.17		-0.15		-0.12		0.26	0.02
50%	50%	2.51	-0.01		-0.16		-0.14		-0.10		0.29	0.02
40%	60%	1.92	0.09	7.5	-0.15		-0.14		-0.08		0.32	0.02
30%	70%	1.34	0.24	16.9	-0.15		-0.13		-0.06		0.35	0.03
20%	80%	0.78	0.46	26.8	-0.14		-0.13		-0.04		0.38	0.03
10%	90%	0.27	0.89	37.5	-0.14		-0.12		-0.02		0.40	0.03
0%	100%	0.05	1.51	48.8	-0.13		-0.12		0.00	0.18	0.43	0.03

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO<sub>2</sub> Pressure is absolute pressure. Total Pressure is gauge pressure.

## Mixture Predictions from Baker-Petrolite

133534 with 112098 at 80°F and 0 psi

Analysis: 24190

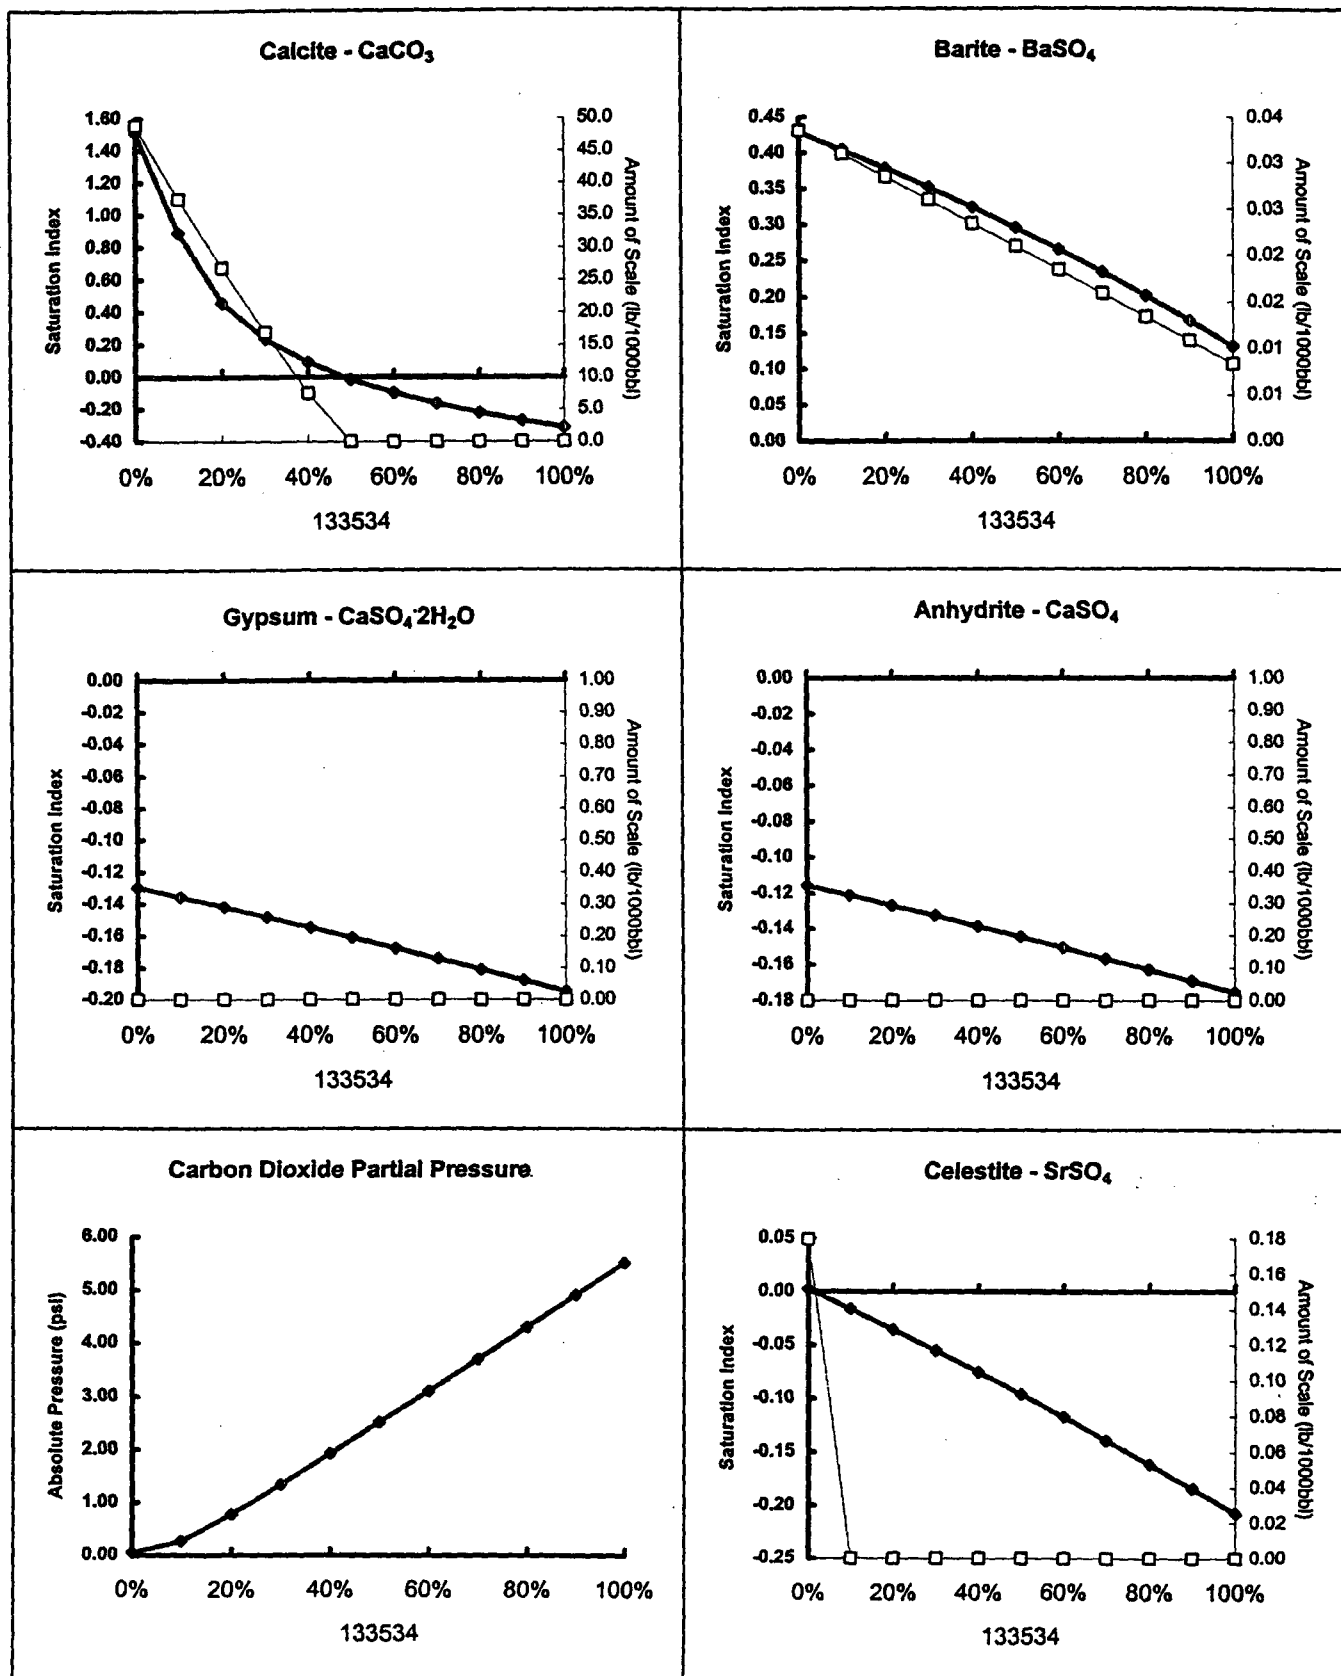

Analysis: 24190

## Water Analysis Report from Baker Petrolite

Mixes at 100°F and 0 psi

### Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO <sub>2</sub>	Calcite CaCO <sub>3</sub>		Gypsum CaSO <sub>4</sub> ·2H <sub>2</sub> O		Anhydrite CaSO <sub>4</sub>		Celestite SrSO <sub>4</sub>		Barite BaSO <sub>4</sub>	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	6.73	-0.22		-0.27		-0.19		-0.24		-0.08	
90%	10%	5.99	-0.18		-0.27		-0.18		-0.22		-0.04	
80%	20%	5.25	-0.13		-0.26		-0.18		-0.19		-0.01	
70%	30%	4.52	-0.07		-0.25		-0.17		-0.17		0.03	0.00
60%	40%	3.80	-0.00		-0.25		-0.16		-0.15		0.06	0.01
50%	50%	3.08	0.08	7.2	-0.24		-0.16		-0.13		0.09	0.01
40%	60%	2.37	0.18	15.2	-0.23		-0.15		-0.11		0.12	0.01
30%	70%	1.67	0.32	23.8	-0.22		-0.14		-0.09		0.15	0.01
20%	80%	0.99	0.53	32.8	-0.22		-0.14		-0.07		0.17	0.02
10%	90%	0.40	0.89	42.5	-0.21		-0.13		-0.05		0.20	0.02
0%	100%	0.11	1.37	53.0	-0.20		-0.12		-0.03		0.22	0.02

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO<sub>2</sub> Pressure is absolute pressure. Total Pressure is gauge pressure.

## Mixture Predictions from Baker-Petrolite

133534 with 112098 at 100°F and 0 psi

Analysis: 24190

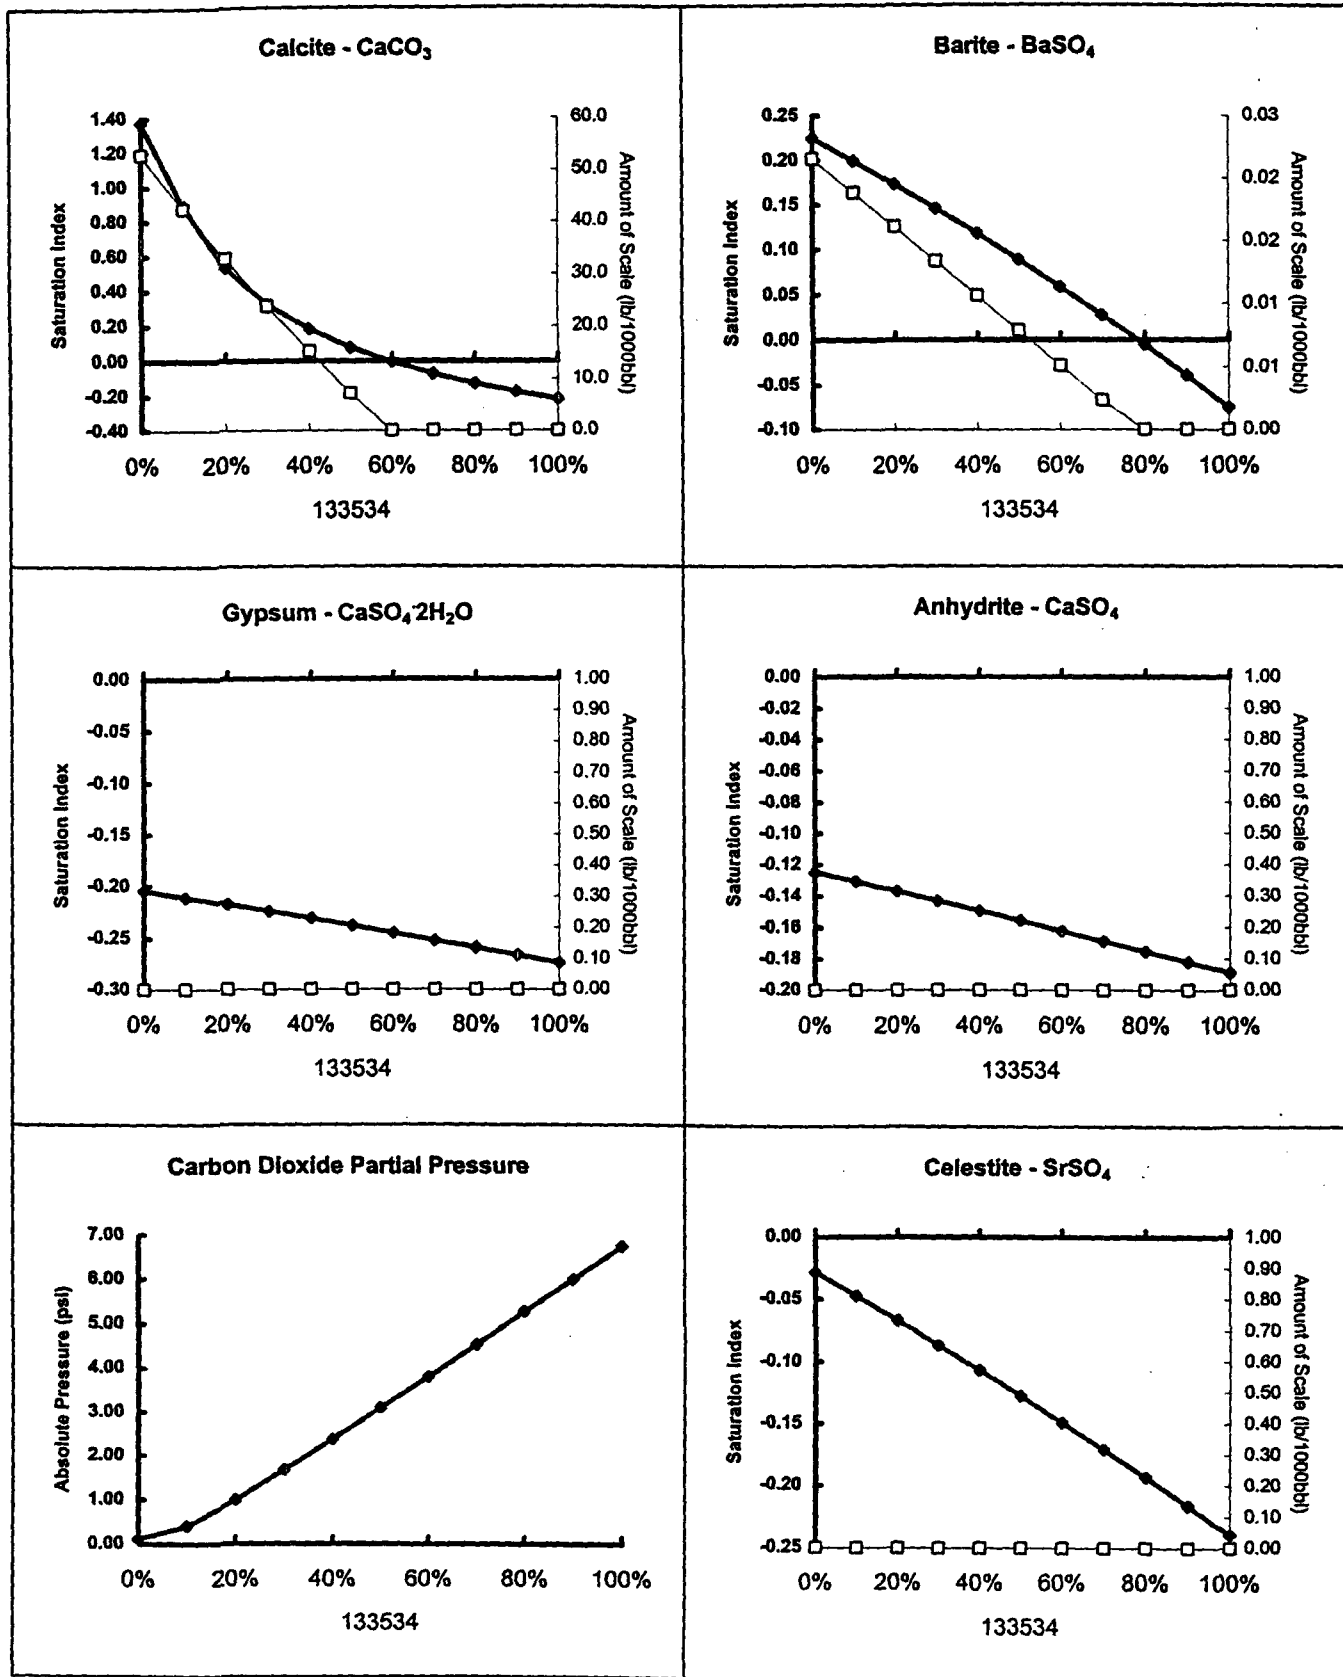

Analysis: 24190

## Water Analysis Report from Baker Petrolite

Mixes at 120°F and 0 psi

Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl												
Mix Waters		CO <sub>2</sub>	Calcite CaCO <sub>3</sub>		Gypsum CaSO <sub>4</sub> ·2H <sub>2</sub> O		Anhydrite CaSO <sub>4</sub>		Celestite SrSO <sub>4</sub>		Barite BaSO <sub>4</sub>	
133534	112098	psi	Index Amount		Index Amount		Index Amount		Index Amount		Index Amount	
100%	0%	7.93	-0.12		-0.34		-0.18		-0.26		-0.26	
90%	10%	7.06	-0.08		-0.33		-0.17		-0.24		-0.22	
80%	20%	6.20	-0.03		-0.33		-0.16		-0.21		-0.19	
70%	30%	5.34	0.02	2.7	-0.32		-0.16		-0.19		-0.15	
60%	40%	4.49	0.09	9.2	-0.31		-0.15		-0.17		-0.12	
50%	50%	3.65	0.17	16.1	-0.30		-0.14		-0.15		-0.09	
40%	60%	2.83	0.27	23.3	-0.30		-0.13		-0.13		-0.06	
30%	70%	2.01	0.41	31.0	-0.29		-0.13		-0.11		-0.03	
20%	80%	1.24	0.60	39.2	-0.28		-0.12		-0.09		-0.01	
10%	90%	0.58	0.90	47.9	-0.27		-0.11		-0.07		0.02	0.00
0%	100%	0.20	1.26	57.4	-0.27		-0.11		-0.05		0.04	0.01

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.


Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.

Note 3: CO<sub>2</sub> Pressure is absolute pressure. Total Pressure is gauge pressure.

# Mixture Predictions from Baker-Petrolite

133534 with 112098 at 120°F and 0 psi

Analysis: 24190

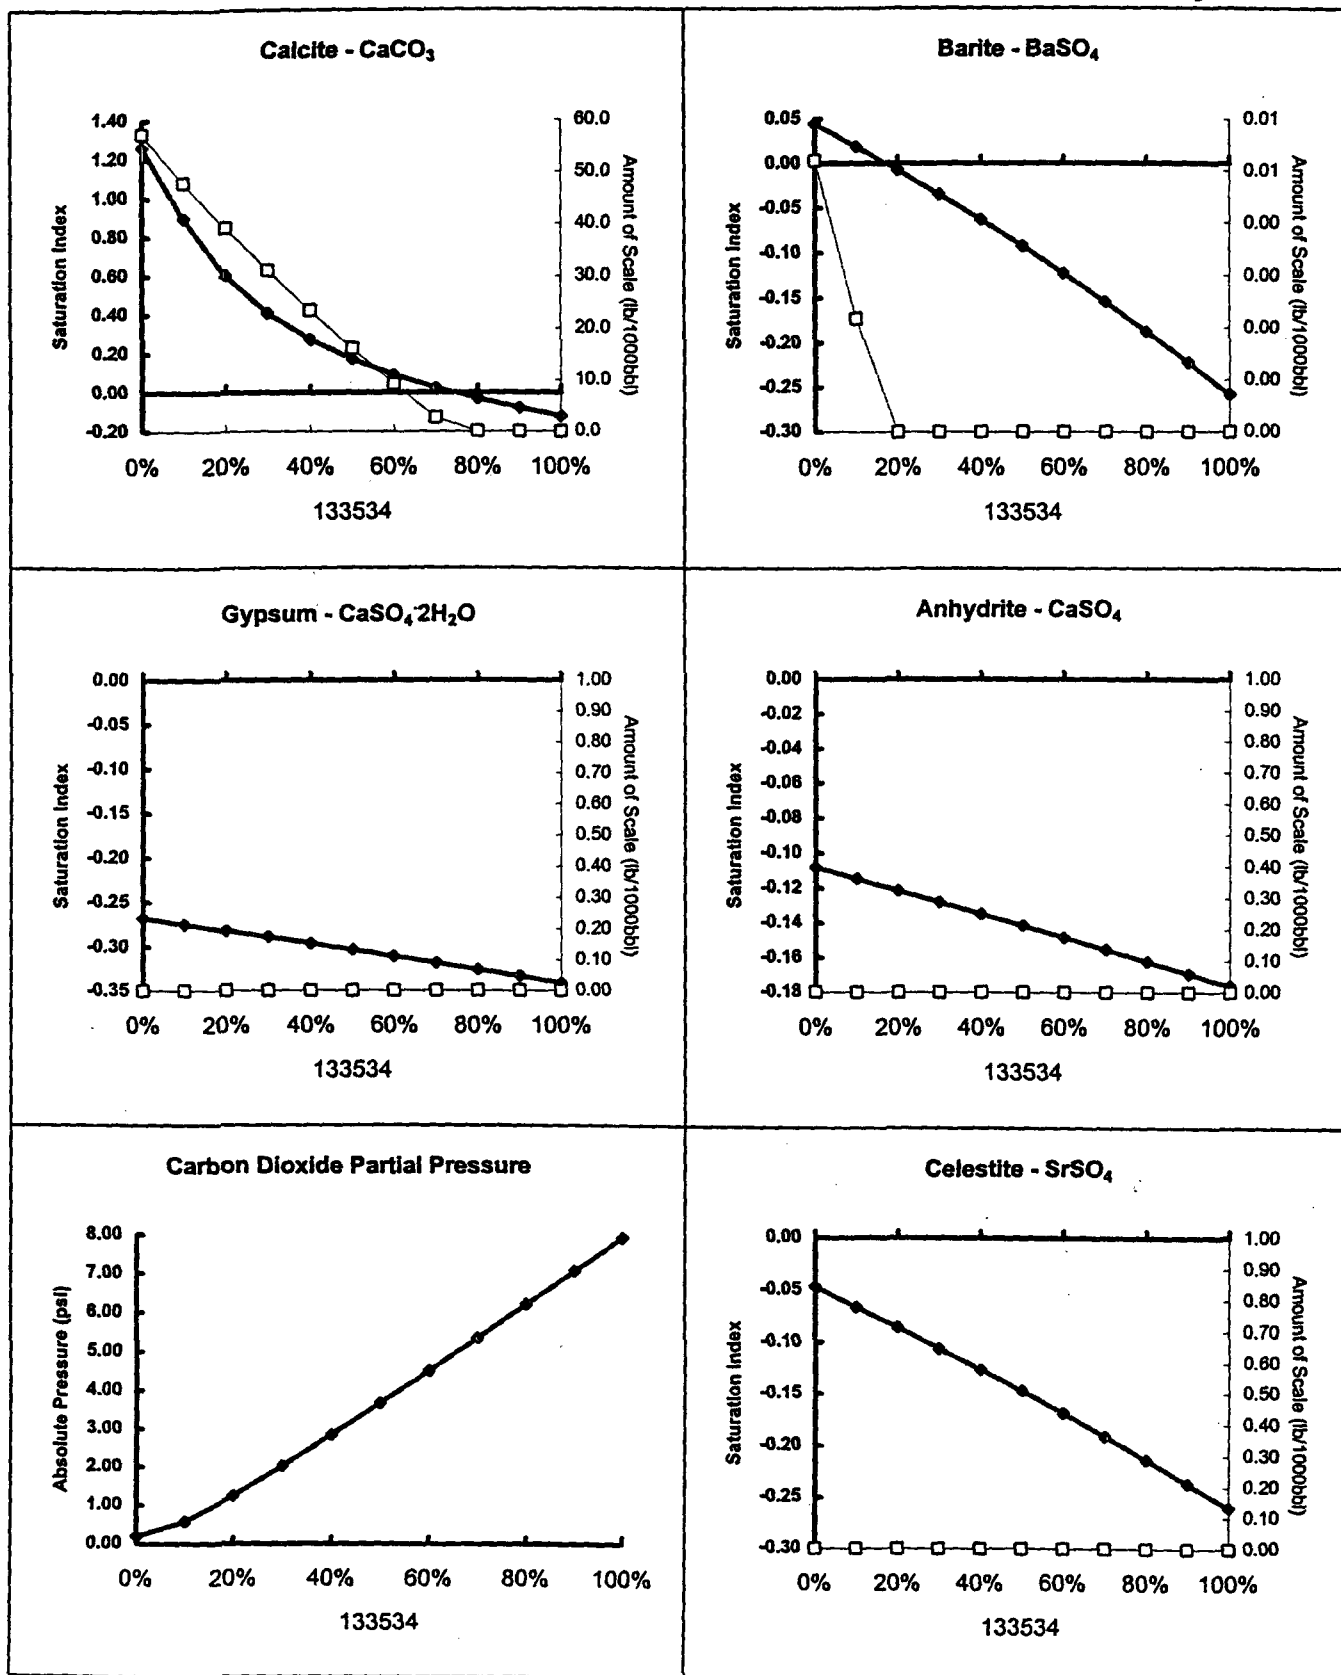

Analysis: 24190

## Water Analysis Report from Baker Petrolite

Mixes at 140°F and 0 psi

### Predictions of Carbon Dioxide Pressure, Saturation Index and Amount of Scale in lb/1000bbl

Mix Waters		CO <sub>2</sub>	Calcite CaCO <sub>3</sub>		Gypsum CaSO <sub>4</sub> ·2H <sub>2</sub> O		Anhydrite CaSO <sub>4</sub>		Celestite SrSO <sub>4</sub>		Barite BaSO <sub>4</sub>	
133534	112098	psi	Index	Amount	Index	Amount	Index	Amount	Index	Amount	Index	Amount
100%	0%	9.05	-0.02		-0.40		-0.14		-0.27		-0.42	
90%	10%	8.07	0.02	2.7	-0.39		-0.13		-0.25		-0.38	
80%	20%	7.09	0.07	8.0	-0.38		-0.13		-0.22		-0.35	
70%	30%	6.13	0.13	13.5	-0.38		-0.12		-0.20		-0.31	
60%	40%	5.17	0.19	19.3	-0.37		-0.11		-0.18		-0.28	
50%	50%	4.22	0.27	25.4	-0.36		-0.11		-0.16		-0.25	
40%	60%	3.29	0.37	31.9	-0.35		-0.10		-0.14		-0.22	
30%	70%	2.38	0.49	38.7	-0.34		-0.09		-0.12		-0.19	
20%	80%	1.53	0.66	46.0	-0.34		-0.08		-0.10		-0.17	
10%	90%	0.80	0.90	53.8	-0.33		-0.08		-0.08		-0.14	
0%	100%	0.34	1.18	62.3	-0.32		-0.07		-0.06		-0.11	

Note 1: When assessing the severity of the scale problem, both the saturation index (SI) and amount of scale must be considered.

Note 2: Precipitation of each scale is considered separately. Total scale will be less than the sum of the amounts of the five scales.


Note 3: CO<sub>2</sub> Pressure is absolute pressure. Total Pressure is gauge pressure.



# Mixture Predictions from Baker-Petrolite

133534 with 112098 at 140°F and 0 psi

Analysis: 24190

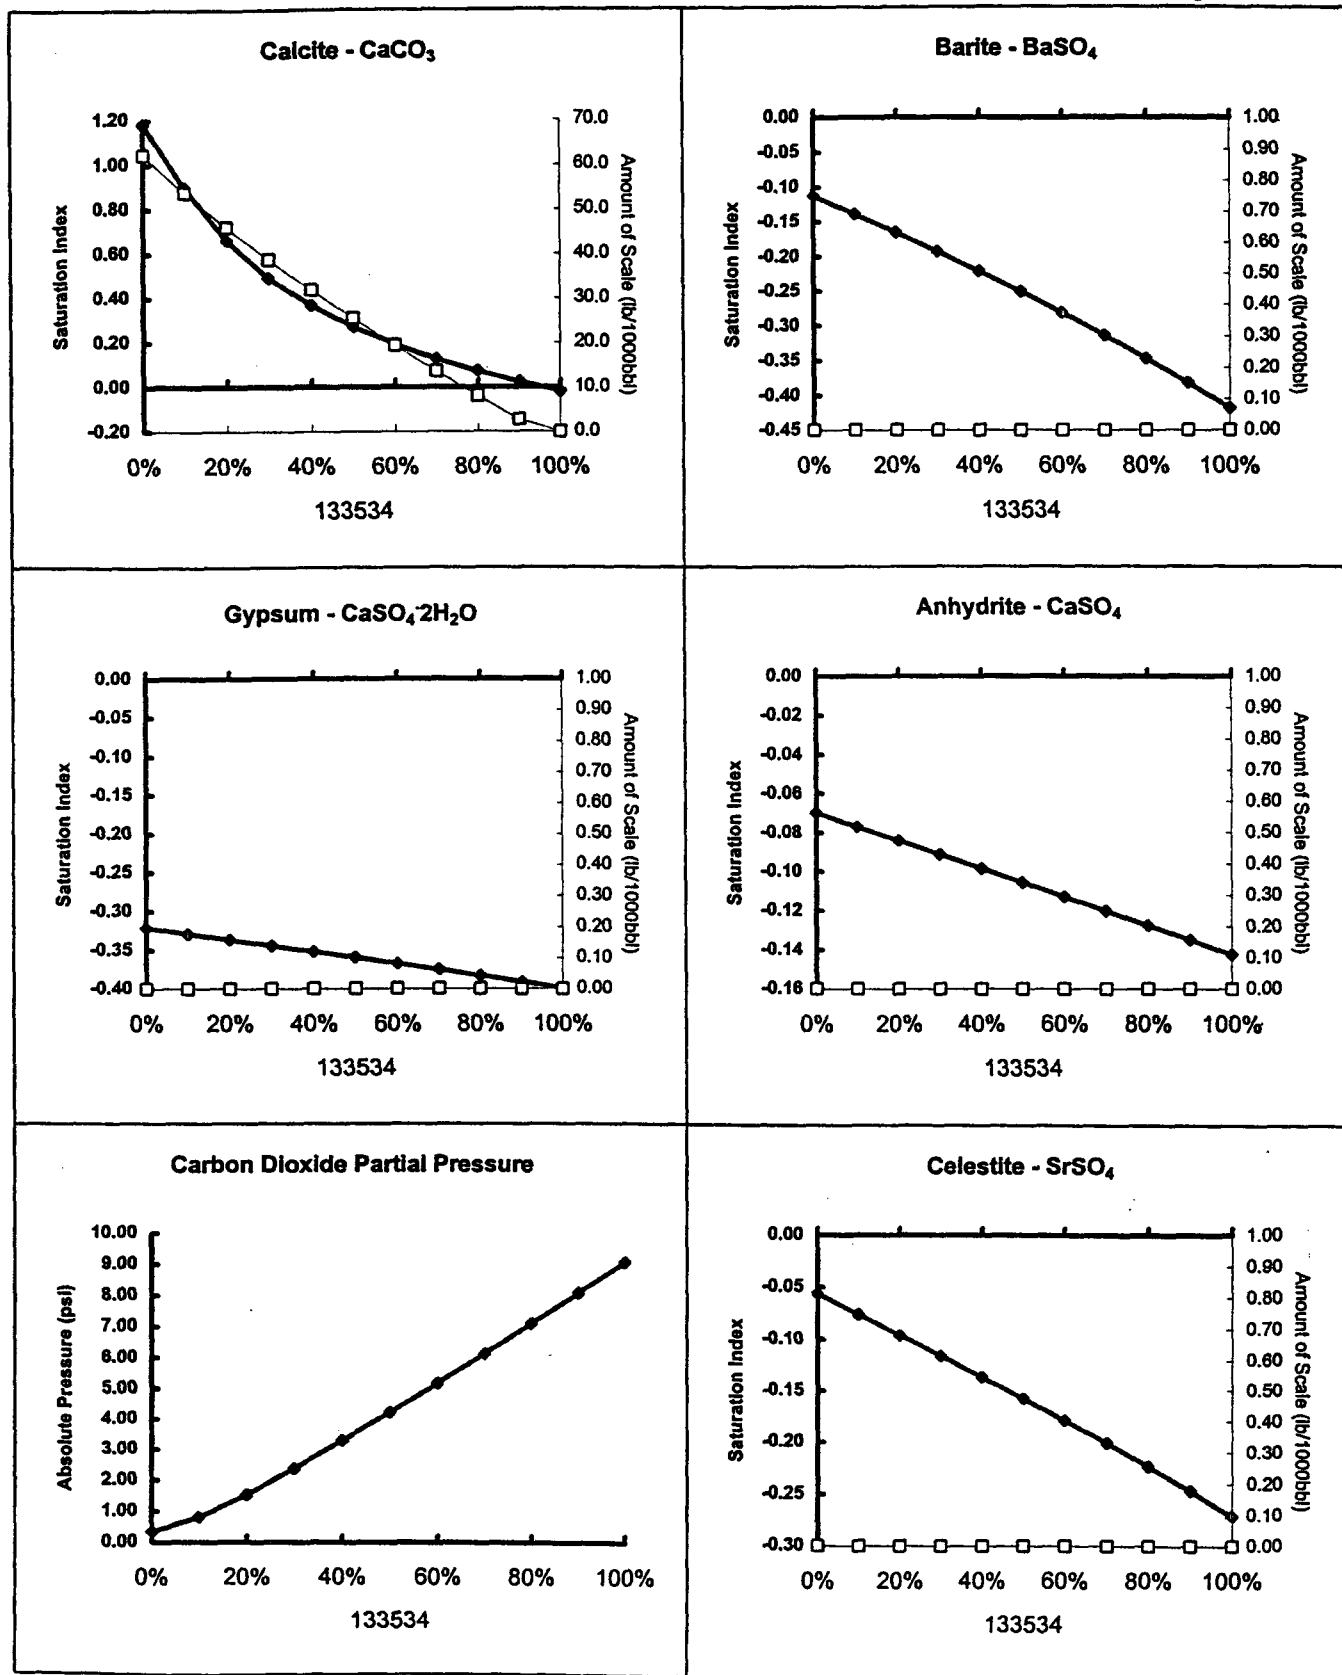

SEP-17-96 TUE 12:03 Laboratory Services

P. 02

*Mobile Analytical Laboratories*LABORATORIES IN ODESSA, GIDDINGS & STACY DAM  
WEST UNIVERSITY AND WESTOVER STREET

P.O. BOX 89210

ODESSA, TEXAS 79769-0210

PHONE 337-4744

FAX 337-4781

SEPTEMBER 16, 1996

MR. ROLLAND W. PERRY  
LABORATORY SERVICES  
1331 TASKER DR.  
HOBBS, NEW MEXICO 88240

DEAR MR. PERRY:

THE FOLLOWING ARE THE RESULTS OF THE SEVEN OIL SAMPLES FOR SULFUR  
CONTENT AND GRAVITY, SAMPLED 09/14/96, RECEIVED 09/15/96,  
LAB NOS. 1483-1489:


	SULFUR	API GRAVITY @ 60 °F	SPECIFIC GRAVITY @ 60 °F
LAB NO. 1483: DEVON HAWK #8-1	1.347 %wt	31.3	0.8691
LAB NO. 1484: DEVON HAWK #8-3	0.624 %wt	41.3	0.8188
LAB NO. 1485: DEVON HAWK #8-11	0.700 %wt	35.1	0.8492
LAB NO. 1486: DEVON HAWK #8-4	0.643 %wt	37.4	0.8380
<b>SAN ANDRES</b>			
LAB NO. 1487: DEVON HAWK #8-5	0.609 %wt	39.5	0.8275
LAB NO. 1488: DEVON WEST RED LAKE	0.690 %wt	39.0	0.8299
LAB NO. 1489: DEVON HONDO FED	0.522 %wt	38.2	0.8338

TEST METHOD: SULFUR ASTM D-4294

WE APPRECIATE THE OPPORTUNITY TO WORK WITH YOU ON THESE TESTS. IF YOU  
HAVE ANY QUESTIONS OR REQUIRE ANY FURTHER INFORMATION, PLEASE FEEL  
FREE TO CONTACT ME AT ANY TIME.

SINCERELY,

  
STEPHEN REIS  
SR/dt



## Laboratory Services, Inc.

4016 Fiesta Drive  
Hobbs, New Mexico 88240  
Telephone: (505) 397-3713

## SULFUR IN CRUDE OIL

Devon Energy  
P. O. Box 240  
Artesia, New Mexico 88211-0250

Dec 15, 1999

## YESO OIL Samples

	Total Sulfur	API Gravity @ 60° F	Specific Gravity @ 60° F
Hawk 8-3	0.4116 wt. %	42.6	0.8128
Eagle 83.9	0.4382 wt. %	37.3	0.8383
Logan 35-9	0.4752 wt. %	41.8	0.8165
Logan 35-14	0.4430 wt. %	41.8	0.8165

Thank You,  
Rolland Perry