

Additional Information

Injection Extension 7/7/20



Water Solutions

901 Tradewinds Blvd • Midland • TX • 79706
Phone (303) 815-1010 • Fax (303) 815-1011

July 7, 2020

Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

ATTN: Ms. Adrienne Sandoval
Division Director

RE: Request to Extend Order No. R-20884 (Case No. 20404)
NGL Water Solutions Permian, LLC
Whitt 31 SWD Well No. 1
API: 30-015-Pending

Dear Ms. Sandoval,

NGL Water Solutions Permian, LLC, seeks to extend the above-referenced order for an additional one-year term, or, should the Division find it acceptable and reasonable given the circumstances, an additional term of two or three years.

The original order was issued September 23, 2019, with a one-year term. In late 2019 when it was issued, NGL was in process of planning a drilling agenda for 2020. As unforeseeable circumstances throughout the world continue to unfold, it's well documented that, this year - 2020, has been quite deleterious to many industries, with oil and gas being no exception.

Now, in the summer of 2020, with this order set to expire in just a few months, NGL respectfully seeks an additional extension on this ordered permit to further evaluate the market, facilitate future drilling plans, and avoid any reapplication friction on the Division.

NGL has provided the following supportive documents for this request:

- a) Copy of Order R-20884
- b) Current ½ mile Radius Map
- c) Current ½ mile Radius Ownership Report

Based on the review of the well and permitting records included, there are no new wells or permits within the ½ mile radius that would require new notice.

Lastly, there has been no changes regarding the ownership of the disposal order or the tract of land on which it sits, which is still owned fully by NGL Water Solutions Permian, LLC.

Should any additional information be required, please let me know.

Sincerely,

A handwritten signature in blue ink, appearing to read 'J. Vargo', is written over a horizontal line.

Joseph Vargo
Director of Regulatory Affairs
NGL Water Solutions Permian, LLC
3773 Cherry Creek N. Drive
Denver, CO 80209
(303) 815-1010

**STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

**IN THE MATTER OF THE HEARING CALLED BY
THE OIL CONSERVATION DIVISION TO
CONSIDER:**

**AMENDED APPLICATION OF NGL WATER SOLUTIONS PERMIAN, LLC FOR
APPROVAL OF A SALT WATER DISPOSAL WELL, EDDY COUNTY, NEW MEXICO.**

**CASE NO. 20404
ORDER NO. R-20884**

ORDER OF THE DIVISION

BY THE DIVISION:

This case came on for hearing at 8:15 a.m. on May 2, 2019, at Santa Fe, New Mexico, before Examiner Scott A. Dawson.

NOW, on this 23rd day of September 2019, the Division Director, having considered the testimony, the record, and the recommendations of the Examiner,

FINDS THAT:

- (1) Due public notice has been given, and the Division has jurisdiction of this case and the subject matter.
- (2) NGL Water Solutions Permian, LLC (OGRID 372338) ["Applicant" or "NGL"] seeks authority to utilize its Whitt 31 SWD Well No. 1 (API No. 30-015-Pending; the "subject well"), to be located 1191 feet from the North line and 2335 feet from the West line (Lot 4 or Unit C) of Section 31, Township 26 South, Range 29 East, NMPM, Eddy County, New Mexico, for disposal of produced water into the Devonian and Silurian formations through an open hole interval from approximately 14990 to 16137 feet below surface.
- (3) NGL did not submit an administrative application to the Division for approval of the subject well.
- (4) Solaris Water Midstream, LLC, New Mexico State Land Office, COG Operating LLC, and ConocoPhillips Company each entered appearances. No other party appeared or otherwise opposed this application. There was no active opposition at the hearing.
- (5) Prior to the hearing, Solaris moved to dismiss the NGL objection as improperly noticed.

(6) Applicant appeared at the hearing through counsel and presented technical and land evidence to the effect that:

- (a) The Applicant seeks this well for use in a commercial saltwater disposal operation.
- (b) Applicant seeks a maximum injection rate of 50,000 barrels of water per day into the Devonian and Fusselman formations and a limiting surface tubing pressure of 2898 psi.
- (c) The well design includes surface pipe at 500 feet (into the Rustler formation) protecting fresh waters; then an intermediate pipe set at 2640 feet (top of the Delaware formation).
- (d) The next intermediate pipe (last pipe to surface) will be set from surface to 9600 feet in the upper Wolfcamp formation, covering the Delaware and Bone Spring formations. Finally, the liner will extend to 14990 feet, covering the Wolfcamp formation and the Pennsylvanian gas sands and will be landed in the top of the Devonian formation.
- (e) All casings will have cementing designed to circulate to the surface. The 7-5/8 inch liner extending from approximately 14990 feet to 9100 feet will be circulated with cement.
- (f) The Subject Well will inject fluids through plastic or fiberglass lined steel tapered tubing attached to a packer set at approximately 14960 feet.
- (g) Applicant stated that most of the produced water will come from the Bone Spring and Wolfcamp formations in the Delaware Basin.
- (h) Applicant researched the literature on location of faulting, then analyzed for probability of induced seismic events and has concluded the probability of such events is very low.
- (i) There are no production or disposal wells that penetrate the Devonian formation within the one half-mile Area of Review (AOR).
- (j) Applicant stated that the disposal operation will not harm oil and gas, correlative rights, or shallow fresh water sources.
- (k) Based on the records of the New Mexico Office of the State Engineer, there are three freshwater wells within one mile of the surface location of the Subject Well. Average well depth is 206 feet and average depth to water was 118 feet, producing from the Santa Rosa formation.

- (l) The Applicant provided evidence of notification of the hearing application to all “*affected persons*” within a one-mile radius of the Subject Well and with publication in a newspaper of general circulation in the county.

The Division Finds That

(7) At the Division’s request, Applicant has provided an expanded notice out to a radius of one mile from the surface location of the proposed well and has provided a statement by a qualified person assessing the potential of induced-seismic events associated with the disposal activities for the predicted service life of the proposed well.

(8) The motion by Solaris to dismiss the case based on lack of proper notice should be denied.

(9) Applicant’s proposed disposal depths extending 100 feet into the Montoya formation should be revised upwards 100 feet to not penetrate the Montoya formation. The approved disposal interval should therefore extend from approximately 14990 feet to approximately 16037 feet.

(10) The well casing and cement are adequately designed to isolate the Salado formation, protect fresh waters, and protect any oil and gas producing formations. The upper most casings should protect fresh waters; and the lowermost casings should protect producing formations. Applicant should work with the Division’s district geologist for any required changes to this design when permitting the well for drilling.

(11) Applicant should be required to install a SCADA system to monitor the annulus and injection pressure to assure continuous mechanical integrity and to obtain and report the initial reservoir pressure in the target injection formation.

(12) The application has been duly filed under provisions of 19.15.26.8 NMAC and Applicant has presented satisfactory evidence that all requirements prescribed in said rule have been met.

(13) Geologic and engineering interpretations submitted by the Applicant identified geologic seals at the top and at the base of the proposed disposal zone that would prevent the vertical migration of injection fluids.

(14) The possibility of induced seismic events is low according to testimony of the Applicant.

(15) Division records indicate NGL Water Solutions Permian, LLC (OGRID 372338) as of the date of this order complies with Division Rule 19.15.5.9 NMAC.

(16) Approval of disposal in the subject well will enable Applicant to support existing production and future exploration in this area, thereby preventing waste, and will not impair correlative rights.

IT IS THEREFORE ORDERED THAT:

(1) The operator, NGL Water Solutions Permian, LLC, is hereby authorized to utilize its Whitt 31 SWD Well No. 1 (API No. 30-015-Pending; the "Subject Well"), to be located 1191 feet from the North line and 2335 feet from the West line (Lot 4 or Unit C) of Section 31, Township 26 South, Range 29 East, NMPM, Eddy County, New Mexico, for disposal of Underground Injection Control Class II fluids into the Devonian and Silurian (including Fusselman) formations.

(2) Disposal shall be through an open hole interval from approximately 14990 to 16035 feet below surface comprising only the Devonian and Silurian (including Fusselman) formations. This order does not authorize injection into formations deeper than the Fusselman formation. Injection is to occur through internally coated tubing and packer set within 100 feet above the permitted interval.

(3) The tapered tubing is approved as stated in the application with the following stipulation. For the 5-1/2 inch diameter lowermost tubing, the 7-5/8 inch liner shall have a drift diameter of at least 6.5 inch. If the drift diameter of the 7-5/8 inch liner is smaller than 6.5 inch, then 5 inch or smaller diameter tubing shall be used inside said liner.

(4) The operator shall take all steps necessary to ensure that the disposed water enters only the permitted disposal interval and is not permitted to escape to other formations or onto the surface.

(5) Well construction and testing shall be in accordance with Division Rule 19.15.16 NMAC and all casing strings shall have cement designed to circulate to surface. If cement does not circulate up to any DV tool or to the surface, the operator shall run a cement bond log (CBL) or other log to determine placement and tops of cement and shall notify the Division's district office with the results on the emergency phone number prior to continuing with any further cement activity with the Subject Well. If the cement behind the surface casing or the 1st intermediate casing does not circulate to surface, the operator shall perform remedial cement job(s) to bring cement to surface.

(6) After installation of tubing, the casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge or an approved leak detection device in order to determine leakage in the casing, tubing, or packer. The casing shall be pressure tested from the surface to the packer setting depth to assure casing integrity.

(7) The operator shall run a mudlog over the approved disposal interval for assessment of the hydrocarbon potential and obtain a water sample for analysis of hydrocarbon content as well as general water chemistry (including major cations, major anions, and Total Dissolved Solids (TDS)). Prior to commencing injection, the operator shall supply the results of the water sample

and the mudlog to Division's district office and provide a copy of the same submittal to Engineering Bureau in the Santa Fe office. *If the analysis of the sample is found to contain a TDS concentration of 10000 mg/L or less, the injection authority under this Order shall be suspended ipso facto.*

(8) Prior to commencing disposal, the operator shall determine the initial bottom-hole pressure of the completed disposal interval and provide this information with the final completion sundry form.

(9) The Subject Well shall pass an initial mechanical integrity test ("MIT") prior to commencing disposal and prior to resuming disposal each time the well has significant equipment changes including, but not limited to, the packer being unseated, tubing being pulled, or when casing repairs have occurred. The operator shall notify the Division's district office a minimum of 48 hours in advance of the proposed date and time of the modification of disposal equipment and of any MIT test so that the same may be inspected and witnessed. All MIT procedures and schedules shall follow the requirements in Division Rule 19.15.26.11(A) NMAC.

(10) The operator shall file a Notice of Intent on Division Sundry Form C-103 with the Division's district office prior to any testing of the well or for any activities that shall modify the well construction or operation. The operator shall provide written notice of the date of commencement of disposal to the Division's district office. The operator shall submit monthly reports of the disposal operations on Division Form C-115, in accordance with Division Rules 19.15.26.13 NMAC and 19.15.7.24 NMAC.

(11) If the Subject Well fails a MIT or if there is evidence that the mechanical integrity of said well is impacting correlative rights, the public health, any underground sources of fresh water, or the environment, the Division Director shall require the Subject Well to be shut-in within 24 hours of discovery and the operator shall redirect all disposal waters to another facility. The operator shall take the necessary actions to address the impacts resulting from the mechanical integrity issues in accordance with Division Rule 19.15.26.10 NMAC, and the Subject Well shall be tested pursuant to Rule 19.15.26.11 NMAC prior to returning to injection.

(12) Without limitation on the duties of the operator as provided in Rules 19.15.29 NMAC and 19.15.30 NMAC, or otherwise, the operator shall immediately notify the Division's district office of any failure of the tubing, casing or packer in the Subject Well, or of any leakage or release of water, oil or gas from around any produced or plugged and abandoned well in the area, and shall take such measures as may be timely and necessary to correct such failure or leakage.

(13) The wellhead injection pressure on the Subject Well shall be limited to **no more than 2898 psi**. The disposal well shall be equipped with a pressure limiting device in workable condition which shall always limit surface tubing pressure to the maximum allowable pressure for this well. The Subject Well shall be included in a Supervisory Control and Data Acquisition (SCADA) system for operation as an injection well with controls capable of remotely monitoring pressures and rates and controlling the rate of fluids entering the well.

(14) The Director of the Division may authorize an increase in tubing pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the disposed fluid from the approved injection interval. Such proper showing shall be demonstrated by enough evidence including but not limited to an acceptable Step-Rate Test and verification of plug back depth.

(15) The injection authority granted under this order is not transferable except upon Division approval. The Division may require the operator to demonstrate mechanical integrity of any injection well that will be transferred prior to approving transfer of authority to inject.

(16) The Division may revoke this injection permit after notice and hearing if the operator is in violation of Division Rule 19.15.5.9 NMAC.

(17) The disposal authority granted herein shall terminate one (1) year after the effective date of this order if the operator has not commenced injection operations into the Subject Well. The Division, upon written request by the operator prior to the termination date, may grant an extension thereof for good cause.

(18) After commencement of injection operations; then if there occurs one (1) consecutive year of no reporting of injection into the Subject Well, the well will be considered abandoned and the authority to inject granted herein will terminate *ipso facto* as provided in Division Rule 19.15.26.12(C) NMAC.

(19) Compliance with this order does not relieve the operator of the obligation to comply with other applicable federal, state or local laws or rules, or to exercise due care for the protection of fresh water, public health and safety and the environment.

(20) The motion of Applicant to dismiss the objection of NGL is hereby denied.

(21) If the operator applies for revisions to this order and provides notice to all affected parties of the proposed revisions, the Division may after 15 days after notice, revise this order administratively if no objections are received. The Division may revise provisions in this order unilaterally by first notifying the operator and updating the record in this case.

(22) Jurisdiction is retained by the Division for the entry of such further orders as may be necessary for the prevention of waste and/or protection of correlative rights or upon failure of the operator to conduct operations (1) to protect fresh or protectable waters or (2) consistent with the requirements in this order; whereupon the Division may, after notice and hearing or prior to notice and hearing in event of an emergency, terminate the disposal authority granted herein.

DONE at Santa Fe, New Mexico, on the day and year hereinabove designated.




SEAL

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

A handwritten signature in blue ink, appearing to read "ASD", written over the printed name.

ADRIENNE SANDOVAL
Director

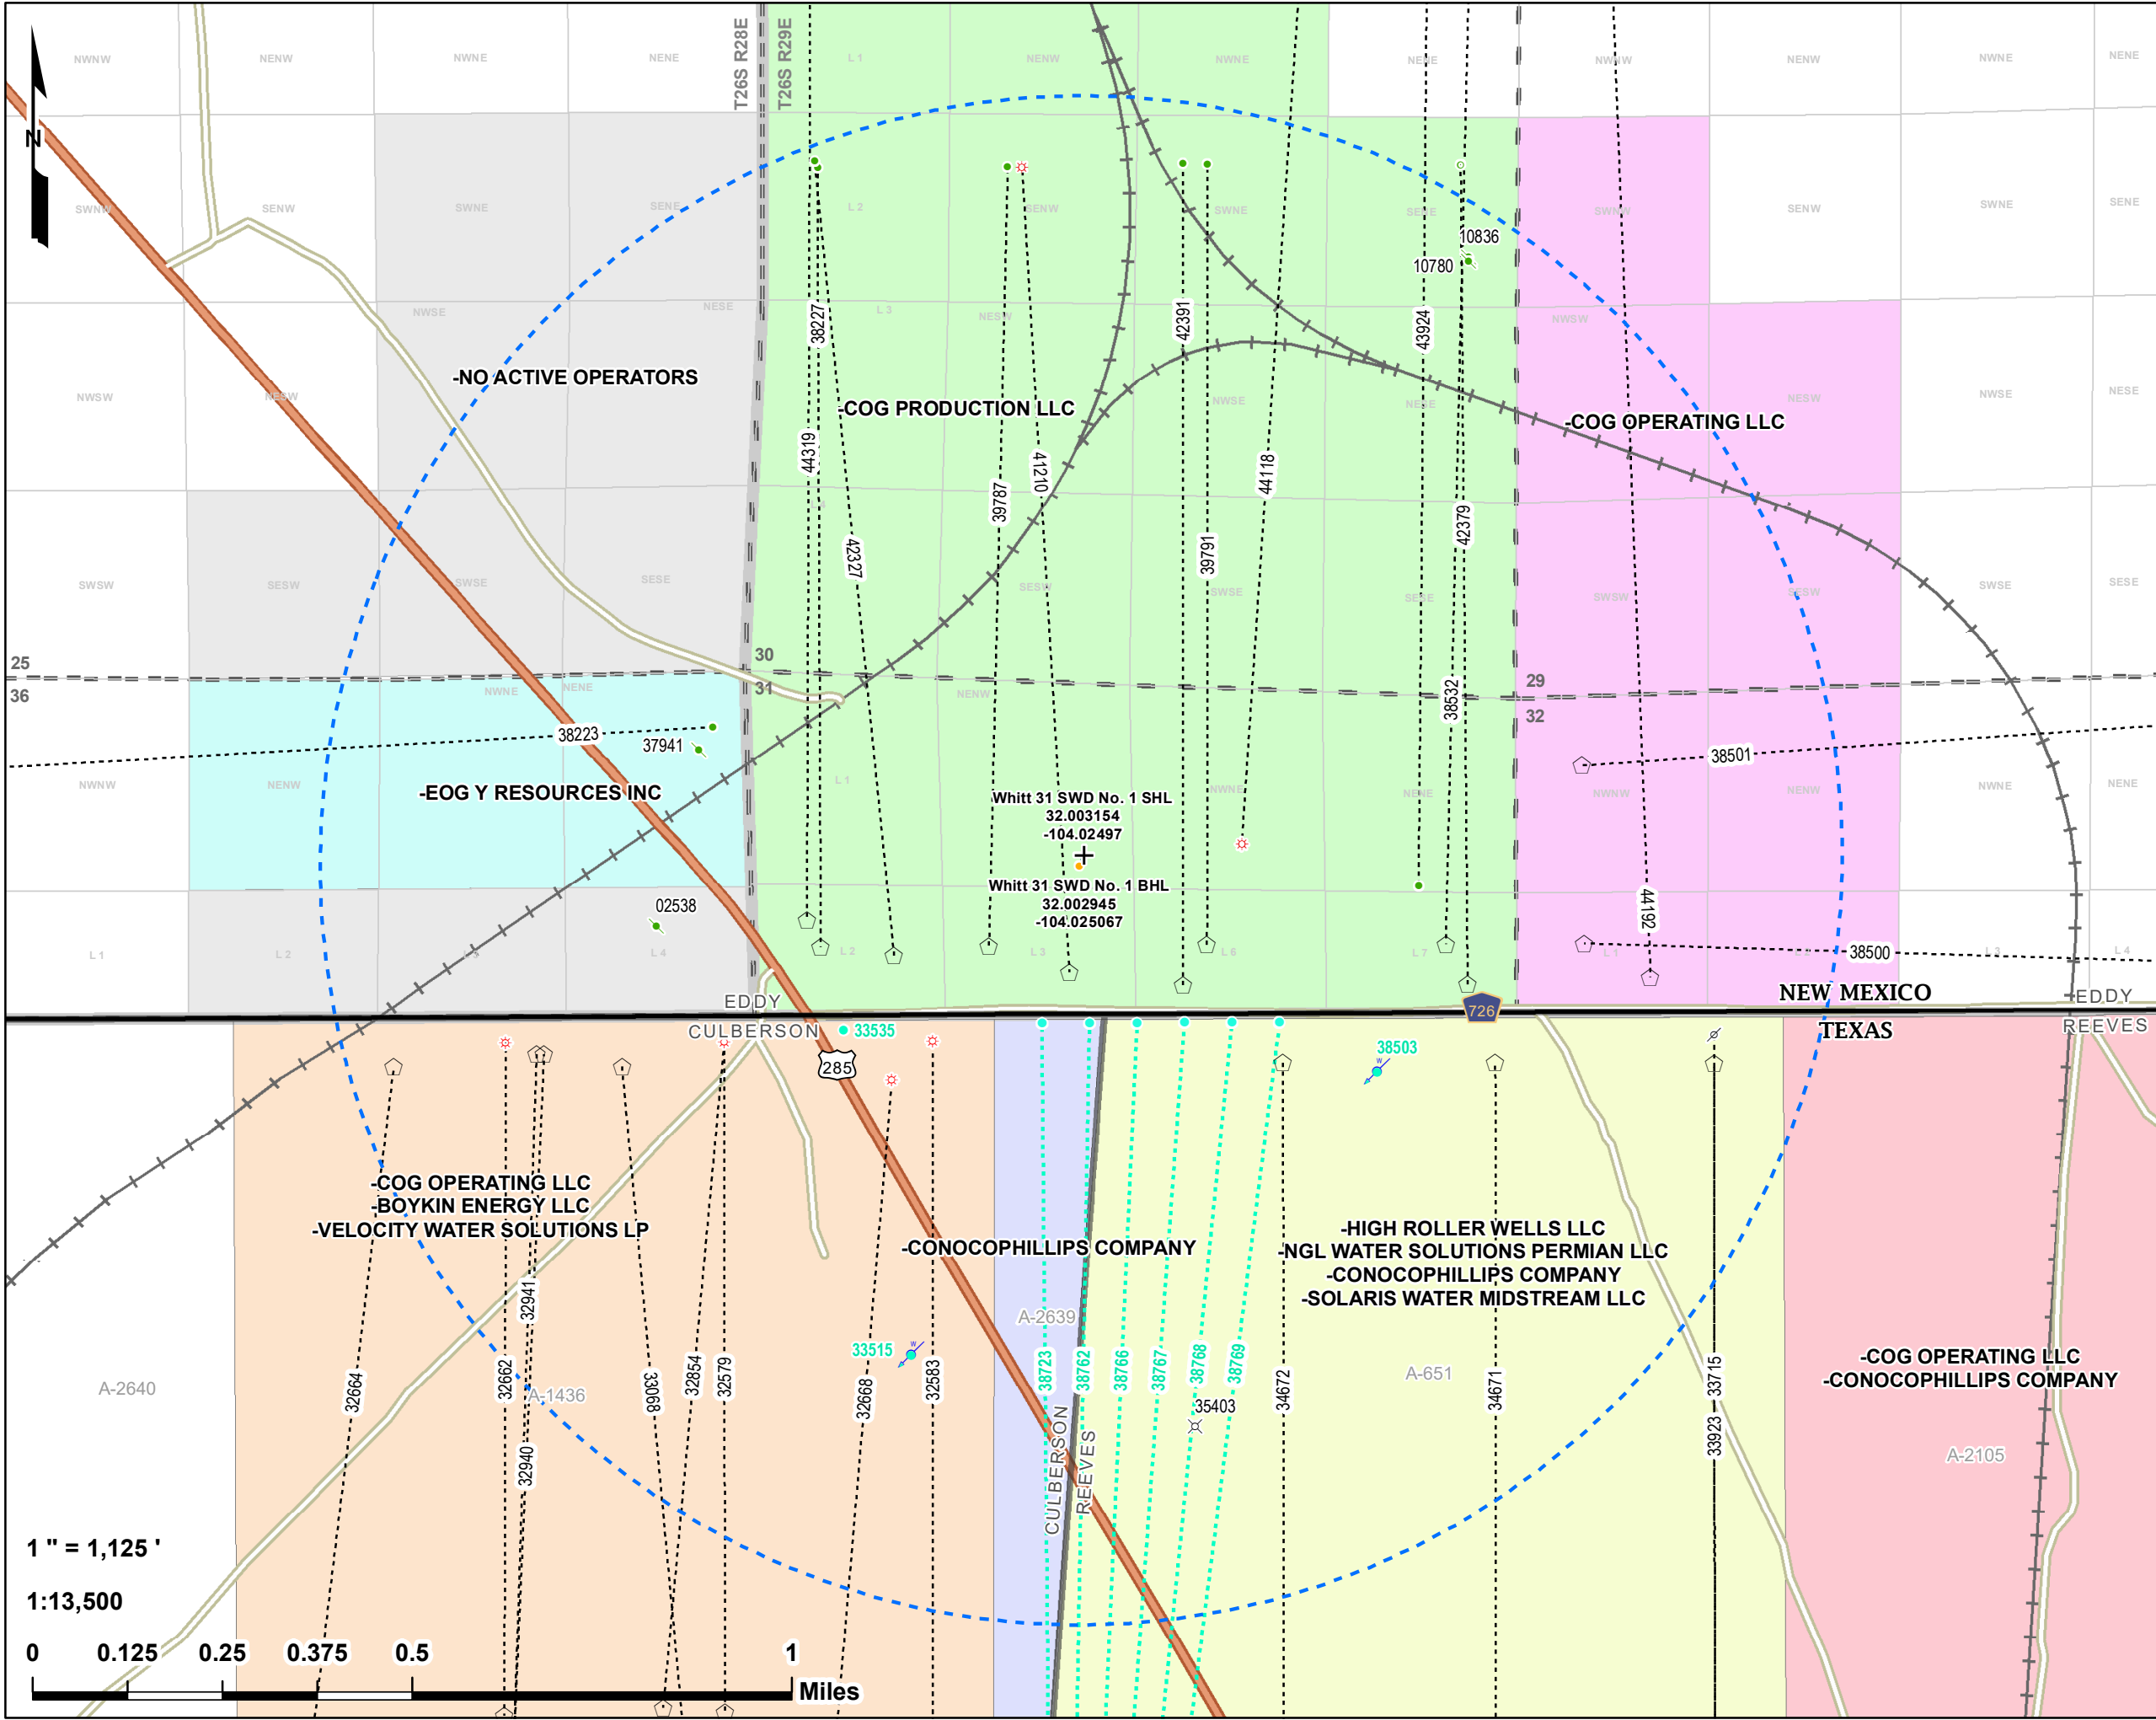

Whitt 31 SWD No. 1

1 Mile Offset Operators

NGL Water Solutions Permian, LLC

Eddy County, NM

PCS: NAD 1983 SPCS NM-E FIPS 3001 (US Ft.)

Drawn by: SJL

Date: 6/11/2020

Approved by: CBW

LONQUIST & CO. LLC

PETROLEUM ENGINEERS

ENERGY ADVISORS

AUSTIN • HOUSTON • CALGARY • WICHITA

DENVER • COLLEGE STATION • BATON ROUGE • EDMONTON

+

Whitt 31 SWD No. 1 SHL

●

Whitt 31 SWD No. 1 BHL

—

Proposed Directional Path

—

1 Mile Radius

—

QQ-Section (NM-PLSS 2nd Div.)

—

Section (NM-PLSS 1st Div.)

—

Township/Range (NM-PLSS)

—

Texas Abstracts

—

Counties

—

States

—

Original

—

New

NM API (30-015-...) SHL Status - Type (Count)

○

Horizontal Surface Location (15, Original)

●

Plugged (Site Released) - Oil (4, Original)

⚡

Plugged (Site Released) - Salt Water Disposal (1, Original)

NM API (30-015-...) BHL Status - Type (Count)

●

Active - Oil (8, Original)

⚡

Active - Gas (4, Original)

○

Permitted - Oil (1, Original)

●

Plugged (Site Released) - Oil (2, Original)

TX API (42-109/389-...) SHL Status - Type (Count)

⬢

Horizontal Surface Location (6, New)

⬢

Horizontal Surface Location (12, Original)

⚡

Active - Salt Water Disposal (2, New)

○

Permitted - Salt Water Disposal (1, New)

⌂

Permit - Expired (1, Original)

TX API (42-109/389-...) BHL Status - Type (Count)

●

Active - Oil (2, Original)

⚡

Active - Gas (7, Original)

⚡

Shut In - Gas (1, Original)

○

Permitted - Oil/Gas (6, New)

⌂

Permit - Expired (2, Original)

⌂

Canceled Location (1, Original)

Operators

—

-COG OPERATING LLC

—

-COG OPERATING LLC; -BOYKIN ENERGY LLC; -VELOCITY WATER SOLUTIONS LP

—

-COG OPERATING LLC; -CONOCOPHILLIPS COMPANY

—

-COG PRODUCTION LLC

—

-CONOCOPHILLIPS COMPANY

—

-EOG Y RESOURCES INC

—

-HIGH ROLLER WELLS LLC; -NGL WATER SOLUTIONS PERMIAN LLC; -CONOCOPHILLIPS COMPANY; -SOLARIS WATER MIDSTREAM LLC

—

-COG OPERATING LLC; -CONOCOPHILLIPS COMPANY

—

-NO ACTIVE OPERATORS

*Well Data Sources: TX-RRC, NM-OCD, DrillingInfo (2020)

Map Extent

Whitt 31 SWD No. 1
1 Mile Supplemental Area of Review List

API	WELL NAME	WELL NO.	STATUS	OPERATOR	TVD (FT.)	FIELD (RESERVOIR)	LATITUDE (NAD83 DD)	LONGITUDE (NAD83 DD)	DATE DRILLED
4210933515	SIMPSON SWD	1	Active - Salt Water Disposal	VELOCITY WATER SOLUTIONS LP (884481)	4571	SANDBAR (BONE SPRING)	31.9936114206	-104.028864260	4/4/2019
4210933535	CATFISH SWD	1	Permitted - Salt Water Disposal	BOYKIN ENERGY LLC (085182)	5600	SANDBAR (BONE SPRING)	31.9989940925	-104.018388730	-
4238938503	THANOS SWD	1	Active - Salt Water Disposal	SOLARIS WATER MIDSTREAM LLC (801148)	6020	BRUSHY DRAW (CHERRY CANYON)	31.9998083639	-104.030367516	8/20/2019
4238938723	ROULETTE	1H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9684993585	-104.025681881	-
4238938762	ROULETTE	2H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9684993594	-104.025613214	-
4238938766	ROULETTE	3H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9685031752	-104.025552175	-
4238938767	ROULETTE	4H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9685031760	-104.025491137	-
4238938768	ROULETTE	5H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9685050839	-104.025422469	-
4238938769	ROULETTE	6H	Permitted - Oil/Gas	CONOCOPHILLIPS COMPANY (172232)	17000	FORD, WEST (WOLFCAMP)	31.9685050847	-104.025361431	-