

Manual of
SURVEYING INSTRUCTIONS
1973

U.S. DEPARTMENT OF THE INTERIOR,
BUREAU OF LAND MANAGEMENT

Manual of
Instructions for the Survey of the
Public Lands of the United States
1973

Prepared by the
BUREAU OF LAND MANAGEMENT
TECHNICAL BULLETIN 6



UNITED STATES
DEPARTMENT OF THE INTERIOR

Fischer
Case No. 12910
Aug 22, 2002

Contents

	<i>Page</i>		<i>Page</i>
Chapter I.—The General Plan		Chapter VI.—Resurveys	
The Manual	1	The nature of resurveys	145
The public lands	3	Jurisdiction	146
Laws relating to surveys	4	Limit of authority of surveyor	147
General rules	8	Bona fide rights of claimants	147
Organization	9	General field methods	148
The public land States	10	The dependent resurvey	149
		The independent resurvey	151
Chapter II.—Methods of Survey		Chapter VII.—Special Surveys and Instructions	
Distance measurement	13	Special instructions	157
Photogrammetry	15	Special surveys	158
The direction of lines	19	Special surveys—water boundaries	165
The geodesy of large-scale cadastral surveys	51	Swamp and overflowed lands	179
		Soil classification	180
Chapter III.—The System of Rectangular Surveys		Chapter VIII.—Field Notes	
General scheme	59	Purpose and Style	183
Initial points	60	Titles	184
Principal meridian	61	Index	185
Base line	62	Headings	185
Standard parallels	62	Abbreviations	186
Guide meridians	62	The detailed field-note record	187
Township exteriors	63	Specimen field notes	189
Subdivision of townships	72		
Subdivision of sections	80	Chapter IX.—Plats	
Survey of parts of sections	88	The importance of the plat	191
Fractional townships	89	Plat requirements	191
Extension and completion surveys	90	Specimen township plat	192
Meandering	93	Drafting the base drawing	193
Limits of closure	98	Computation of areas	195
Marking lines between corners	99	Inking the drawing	198
Summary of objects to be noted, and sketches	101	Lettering	199
		Topography	199
Chapter IV.—Monumentation		Field sketch	203
Legal significance of the monument	105	Titles and subtitles	203
General requirements	105	Memorandum	204
Corner material	106	Certificates	204
Construction of monuments	106	Reproduction and distribution of plats	204
Special-purpose monuments	107	Supplemental plats	205
System of marking	109	Plats of mineral segregation surveys	206
Marks on corner monuments	109	Plats of fragmentary surveys	208
Marks on special-purpose monuments	121	Resurvey plats	210
Corner accessories	122		
Arrangement and marking of corner accessories	125	Chapter X.—Mineral Surveys	
		Distinguishing features of the mineral survey	219
Chapter V.—Restoration of Lost or Obliterated Corners		Requirements of field work	220
Identification of existent corners	129		
The restoration of lost corners	133		

The General Plan

THE MANUAL

Purpose and Scope of the Manual

1-1. The Manual of Surveying Instructions describes how cadastral surveys of the public lands are made in conformance to statutory law and its judicial interpretation. This chapter summarizes the various Acts and the general plan of surveying based on them. Previous editions of the Manual were issued in 1855 (reprinted as the Manual of 1871), 1881, 1890, 1894, 1902, 1930, and 1947.

1-2. Surveying, in general, is the art of measuring and locating lines, angles, and elevations on the surface of the earth, within underground workings, and on the beds of bodies of water. A "cadastral survey" creates (or re-establishes), marks, and defines boundaries of tracts of land. In the general plan this includes a field-note record of the observations, measurements, and monuments descriptive of the work performed and a plat that represents the cadastral survey, all subject to approval of the Director, Bureau of Land Management.

1-3. Details of the plan and its methods go beyond the scope of textbooks on surveying. The application to large-scale areas requires an understanding of the stellar and solar methods for making observations to determine the true meridian, the treatment of the convergency of meridians, the running of the true parallels of latitude, and the conversion in the direction of lines so that at any point the angular value will be referred to the true north at that place. These subjects are therefore explained and examples given with specific relation to the approved surveying practice. The use, care and adjustments of the solar transit are fully treated because of its wide use in public land

surveying. The applications of photogrammetry and electronic instrumentation to public land surveying are covered for the first time in this edition of the Manual.

1-4. Extended treatment is given to subdivision of sections, restoration of lost or obliterated corners, resurveys, and special surveys of many kinds. These now make up the major part of the surveying program of the Bureau of Land Management. Stress is placed on thoroughness in the identification and perpetuation of the surveys already completed.

Development of the Manual

1-5. The surveys of public lands have been conducted since 1785, when a beginning point was established where the west boundary of Pennsylvania crosses the north bank of the Ohio River. The first surveys, covering parts of Ohio, were made under supervision of the Geographer of the United States in compliance with the Ordinance of May 20, 1785. Detailed instructions were not needed in these initial surveys, because only the exterior lines of the townships were surveyed, and only mile corners were established. Township plats were marked by subdivisions into sections or "lots" one mile square, numbered from 1 to 36, commencing with No. 1 in the southeast corner of the township and running from south to north in each sequence to No. 36 in the northwest corner of the township.

1-6. The Act of May 18, 1796, provided for the appointment of a Surveyor General, whose duty was to survey the public lands northwest of the Ohio River. Half of the townships were to be subdivided into two-mile blocks, and the rule for numbering of sections within the town-

series shown on the previously approved plat, and proceeding in the usual order. The new series may begin with No. 1 if the fractional parts of the original area are not designated by lot number.

Completion of Township Subdivision

3-112. Only after the partially surveyed sections have been completed should the surveyor proceed with the subdivision of the remaining portions of the township. If no irregularities are found in the previously established lines the new survey may proceed normally. If defective conditions are encountered, the irregularities are not extended into unsurveyed sections any farther than necessary to incorporate the resulting fractional measurements into suitable fractional lots adjoining the former surveys. Preference should be given to extending all surveys from south to north and from east to west. If a better control is available by reversing the procedure in one or both directions, resulting in a simpler survey by minimizing the number of extra corners as well as fractional lots, reversal of the procedure is warranted.

3-113. In the event that the previously surveyed subdivision lines are defective, the new section lines may serve the function of a sectional guide meridian or a sectional correction line as required. The corners from which the new surveys are initiated are established as corners of four sections, or of two sections as appropriate. Where new section lines cannot be connected regularly with the previously established section corners by random and true line not exceeding 21' from cardinal, a closing section corner is established at intersection with the line of the old survey. The fractional measurements of the closing section lines are placed adjacent to the old surveys. The original lines forming the boundary of the lands to be surveyed are retraced, as already provided and the marks upon the original corners are appropriately modified as necessary. New quarter-section corners marked to control the subdivision of the new sections are established on the original lines at midpoints between the closing section corners, or at 40 chains from one direc-

tion, according to the manner in which a new section is subdivided.

3-114. There are often two or more ways in which a fractional subdivision may be completed, but careful study of a sketch plat representing existing conditions will generally reveal the superiority of one method over another.

MEANDERING

3-115. The traverse of the margin of a permanent natural body of water is termed a meander line. All navigable bodies of water and other important rivers and lakes are segregated from the public lands at mean high-water elevation. In original surveys, meander lines are run for the purpose of ascertaining the quantity of land remaining after segregation of the water area.

The running of meander lines has always been authorized in the survey of public lands fronting on large streams and other bodies of water. But the mere fact that an irregular or sinuous line must be run, as in the case of a reservation boundary, does not entitle it to be called a meander line except where it closely follows the bank of a stream or lake. The legal riparian rights connected with meander lines do not apply in the case of other irregular lines, as the latter are strict boundaries.

Low-water mark is the point to which a river or other body of water recedes, under ordinary conditions, at its lowest stage. High-water mark is the line which the water impresses on the soil by covering it for sufficient periods to deprive it of vegetation. The shore is the space between the margin of the water at its lowest stage and the banks at high-water mark. *Alabama v. Georgia*, 64 U. S. 505 (1859).

Numerous decisions in the United States Supreme Court assert the principle that meander lines are not boundaries defining the area of ownership of lands adjacent to the water. The general rule is that meander lines are run not as boundaries, but to define the sinuosities of the banks of the stream or other body of water, and as a means of ascertaining the quantity of land embraced in the survey; the stream, or other body of water, and not the meander line as actually run on the ground, is the bound-

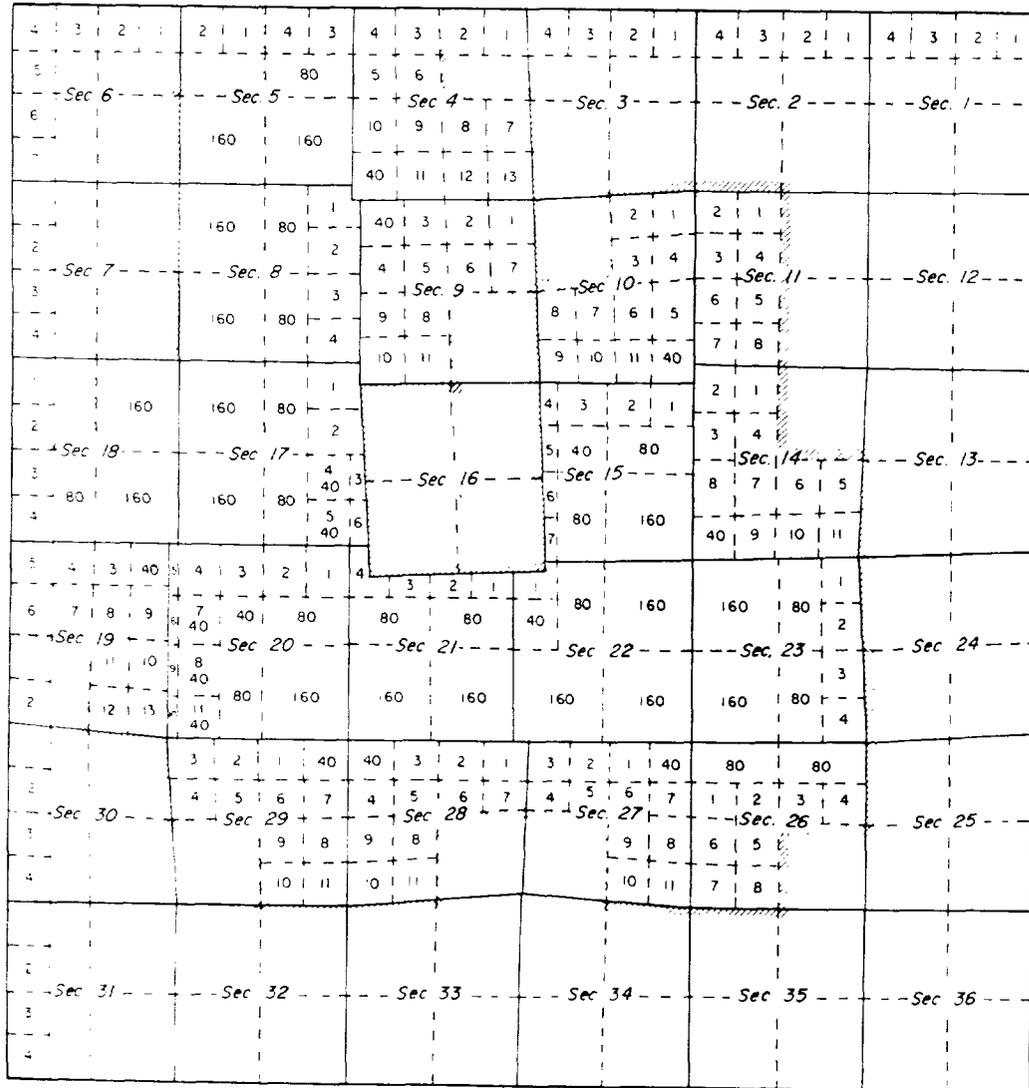


FIGURE 59.—Example showing completion of partially surveyed sections and completion of subdivisional lines of a township with necessary lottings.

ary. When by action of water the bed of the body of water changes, high-water mark changes, and the ownership of adjoining land progresses with it. *Lane v. United States*, 274 Fed. 290 (1921).

Meander lines will not be established at the segregation line between upland and swamp or overflowed land, but at the ordinary high-water mark of the actual margin of the river or lake on which such swamp or overflowed lands border.

3-116. Practically all inland bodies of water pass through an annual cycle of changes, be-

tween the extremes of which will be found mean high water. In regions of broken topography, especially where bodies of water are bounded by sharply sloping lands, the horizontal distance between the margins of the various water elevations is comparatively slight, and the surveyor does not experience much difficulty in determining the horizontal position of mean high-water level with approximate accuracy. Where the meanderable bodies of water are bordered by relatively flat lands, the horizontal distance between the successive levels is relatively great. The most reliable indication of

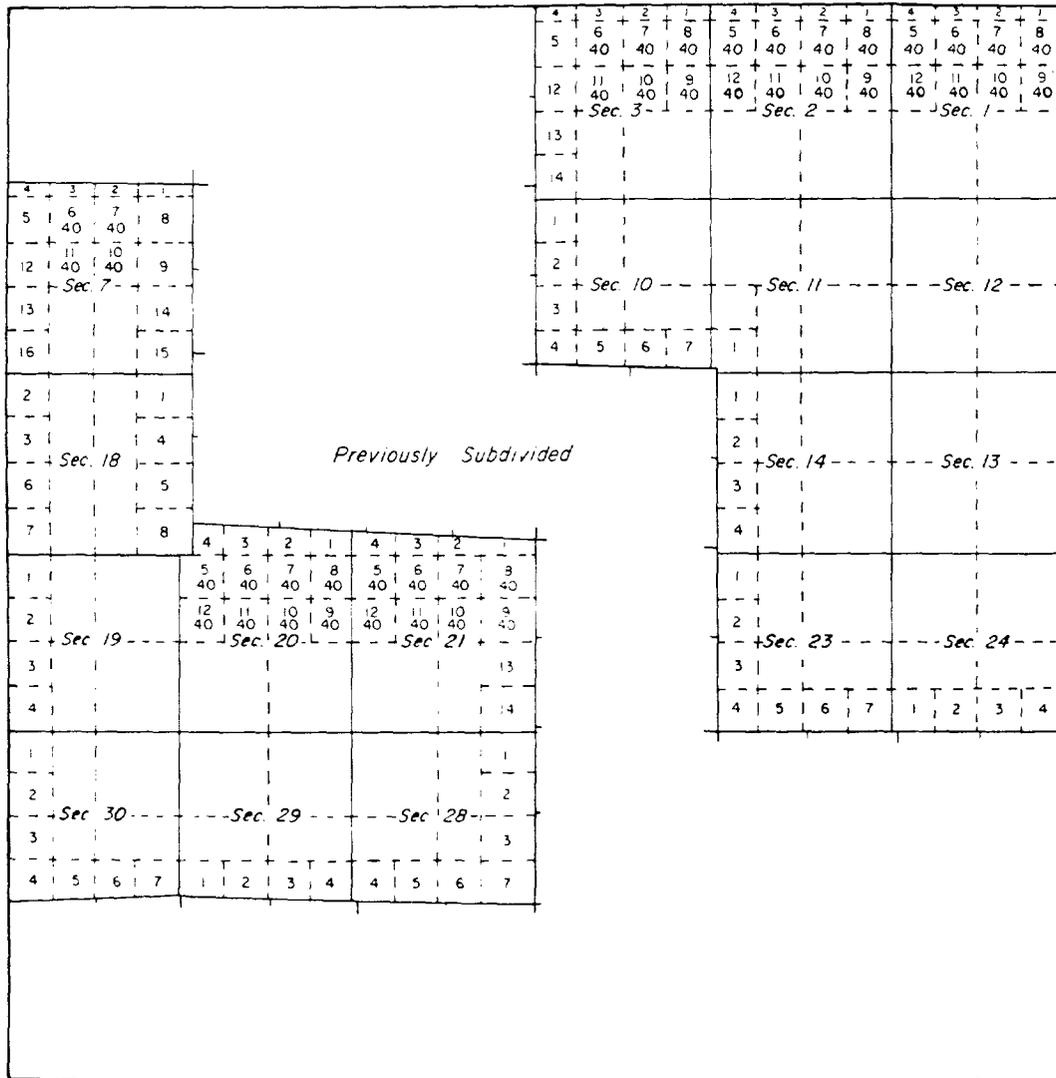


FIGURE 60.—Example showing completion of subdivisional lines of a township where outlying parts of sections returned earlier have been cancelled.

mean high-water elevation is the evidence made by the water's action at its various stages, which are generally well marked in the soil. In timbered localities a very certain indication of the locus of the various important water levels is found in the belting of the native forest species.

Mean high-water elevation is found at the margin of the area occupied by the water for the greater portion of each average year. At this level a definite escarpment in the soil is generally traceable, at the top of which is the true position for the meander line. A pronounced

escarpment, the result of the action of storm and flood waters is often found above the principal water level, and separated from the latter by the storm or flood beach. Another, less evident, escarpment is often found at the average low-water level, especially of lakes, the lower escarpment being separated from the principal escarpment by the normal beach or shore. While these questions properly belong to the realm of geology, they should not be overlooked in the survey of a meander line.

Where native forest trees are found in abundance bordering bodies of water, those trees

showing evidence of having grown under favorable site conditions will be found belted along contour lines. Certain mixed varieties common to a particular region are found only on the lands seldom if ever overflowed. Another group are found on the lands which are inundated only a small portion of the growing season each year, and indicate the area which should be included in the classification of the uplands. Other varieties of native forest trees are found only within the zone of swamp and overflowed lands. All timber growth normally ceases at the margin of permanent water.

3-117. A meander corner is established at every point where a standard, township, or section line intersects the bank of a navigable stream or other meanderable body of water. No monument should be placed in a position exposed to the beating of waves and the action of ice in severe weather. In such cases a witness corner should be established on the line at a secure point near the true point for the meander corner. The distance across a body of water is ascertained by triangulation or direct measurement, and the full particulars are given in the field tablets.

3-118. Inasmuch as it is not practicable in public-land surveys to meander in such a way as to follow and reproduce all the minute windings of the high-water line, the United States Supreme Court has given the principles governing the use and purpose of meandering shores in its decision in a noted case as follows:

Meander lines are run in surveying fractional portions of the public lands bordering on navigable rivers, not as boundaries of the tract, but for the purpose of defining the sinuosities of the banks of the stream, and as the means of ascertaining the quantity of land in the fraction subject to sale, which is to be paid for by the purchaser. In preparing the official plat from the field notes, the meander line is represented as the border line of the stream, and shows to a demonstration that the watercourse, and not the meander line as actually run on the land, is the boundary. *Railroad Co. v. Schurmeier*, 74 U.S. 272 (1868).

3-119. The surveyor commences at one of the meander corners, follows the bank or shore line, and determines the length and true bearing of each course, from the beginning to the next meander corner. All meander courses refer to the true meridian and are determined with precision. "Transit angles" showing only the

amount of the deviation from the preceding course are not acceptable in field notes of meanders. Where it is impossible to survey the meander line along mean high-water mark, the notes should state the distance therefrom and the obstacles which justify the deviation. A table of latitudes and departures of the meander courses should be computed before leaving the vicinity, and if misclosure is found, indicating error in measurement or in reading courses, the lines should be rerun.

The following items will be noted along the meander line: (1) all streams flowing into a river, lake, or meanderable bayou, with the width at their mouths; (2) the position, size, and depth of springs, and whether the water is pure or mineral; (3) the heads and mouths of all bayous; (4) all rapids and bars, with intersections to the upper and lower ends; (5) the elevation of the banks of lakes and streams, the height of falls and cascades, and the length and fall of rapids; and (6) artificial structures in both land and water areas.

The field notes of meanders show the corners from which the meanders commenced and upon which they closed, and exhibit the meanders of each fractional section separately. Following, and composing a part of the notes, should be given a description of the adjoining land, soil and timber, and the estimated depth of inundation to which the bottom land is subject.

Rivers

3-120. Facing downstream, the bank on the left hand is termed the left bank and that on the right hand the right bank. These terms will be universally used to distinguish the two banks of a river or stream.

Navigable rivers and bayous, as well as all rivers not navigable, the right-angle width of which is 3 chains and upwards, are meandered on both banks, at the ordinary mean high-water mark, by taking the general courses and distances of their sinuosities. Rivers not classed as navigable are not meandered above the point where the average right-angle width is less than 3 chains, except when duly authorized.

Shallow streams and intermittent streams without well defined channel or banks are not meandered, even when more than 3 chains wide.

Tidewater streams are meandered at ordinary mean high tide as far as navigable, even when less than 3 chains wide. Tidewater inlets and bayous are recorded, and are meandered if more than 3 chains in width, but when nonnavigable are not meandered when less than 3 chains wide.

Lakes

3-121. All lakes of the area of 50 acres and upwards, are meandered.

In the case of lakes which are located entirely within the boundaries of a section, a quarter-section line, if one crosses the lake, is run from one of the quarter-section corners, on a theoretical course to connect with the opposite quarter-section corner, to the margin of the lake, and the distance is measured. At the point thus determined a "special meander corner" is established.

Where one or both of the opposite quarter-section corners cannot be established, and in all cases where the distance across a lake exceeds 40 chains or the physical crossing is difficult, a temporary special meander corner is established at the computed intersection with the center line of the section when surveying the meander line. The temporary point is later corrected to the true center line position for monumentation, at midpoint in departure (or latitude), or at proportionate distance in a fractional section.

If a meanderable lake is found to be located entirely within a quarter section, an "auxiliary meander corner" is established at some suitable point on its margin, and a connecting line is run from the monument to a regular corner on the section boundary. A connecting traverse line is recorded, if run, but it is also reduced to the equivalent direct connecting course and distance, all of which is stated in the field notes. Only the course and length of the direct connecting line are shown on the plat of the survey.

The meander line of a lake lying within a section is initiated at the established special or auxiliary meander corner, as the case may be, and continued around the margin of the normal lake at its mean high-water level, to a closing at the point of beginning. All proceedings are fully entered in the field notes.

Artificial lakes and reservoirs are not segregated from the public lands, unless specially provided in the instructions, but the true position and extent of such bodies of water are determined in the field and shown on the plat.

Other exceptions to the general rule are shallow or poorly defined "lakes" which are actually pools that collect because of permafrost and lack of drainage or which are ephemeral desert playas formed seasonally or in wet years. These "lakes" should not be meandered even when larger than 50 acres.

Islands

3-122. Every island above the mean high-water elevation of any meanderable body of water, except islands formed in navigable bodies of water after the date of the admission of a State into the Union, is located by triangulation or direct measurement or other suitable process, and is meandered and shown upon the official plat.

Even though the United States has parted with its title to the adjoining mainland, an island in a meandered body of water, navigable or nonnavigable, in continuous existence since the date of the admission of the State into the Union, and omitted from the original survey, remains public land of the United States. As such the island is subject to survey. This is because such islands were not a part of the *bed* of the stream at the date of Statehood, and therefore their title remained in the United States, subject to survey and disposal when identified. The riparian right that attaches to the lottings along the meander line of the mainland pertains only to the bed of the stream, and to such islands as may form within the bed subsequent to the disposal of the title. The proof of the time of the formation of islands is often difficult. It is the practice to make a careful examination of the history of an island in relation to the question of its legal ownership.

Islands that have been given well-known proper names are so identified, both in the field notes and on the plat. Sometimes there are a number of islands in the same section without proper names. Some may have been surveyed, others omitted. Of the latter, some may rightfully belong to the State, some to a riparian

proprietor, so that any system of numbering may be uncertain, and if used may still be confused with a lot number, if and when surveyed. For these reasons their identification may be uncertain unless the following rule is applied:

Where there are several unnamed islands within the same section, these will be referred to in the field notes (when surveyed) according to the lot number (Island designated as lot No. —) that is assigned on the plat, excepting that islands which are crossed by section line boundaries, or by a center line of the section, are readily identified by location.

Any township boundary or section line which will intersect an island is extended as nearly in accordance with the plan of regular surveys as conditions permit, and the usual township, section, quarter-section, and meander corners are established on the island. If an island falls in two sections only, the line between the sections should be established in its proper theoretical position based upon suitable sights and calculations. If an island falls entirely in one section, and is large enough to be subdivided (over 50 acres in area), a suitable sight or calculation is made to locate on the margin of the island an intersection with the theoretical position of any suitable subdivision-of-section line. At the point thus determined a "special meander corner" is established. In the case of an island falling entirely in one section and too small to be subdivided, an "auxiliary meander corner" is established at any suitable point on its margin, which is connected with any regular corner on the mainland. The direct course and length of the connecting line is given in the field notes and shown on the plat.

The meander line of an island is surveyed in harmony with principles and rules heretofore stated. All township and section lines crossing the island are shown on the plat. If the island is large enough to be subdivided, the subdivision is accomplished by the protraction of suitable subdivision-of-section lines in their correct theoretical position.

Under special circumstances where administration or disposal requires no subdivision, an island is given a tract number within a township. In such cases, the section lines need not be extended to the island.

Agricultural upland within the limits of swamp and overflowed lands should be so classified and shown upon the plat accordingly, but such land is not meandered as an island.

Use of Photogrammetry

3-123. Where conditions are favorable, meander lines may be surveyed by the process of photogrammetry after the meander corners have been established in the regular manner. The field notes will state what lines were so determined and the date and identification of the photography.

LIMITS OF CLOSURE

3-124. The "error of closure" of a survey is defined in general terms as the ratio of the length of the line representing the equivalent of the errors in latitude and departure to the length of the perimeter of the figure constituting the survey. However, with due regard for the controlling coordinate governing lines of a rectangular survey, accuracy in latitude is not permitted to offset gross error in departure, or vice versa. A double test is therefore applied to United States rectangular surveys in place of the one expressed in general terms.

The "limit of closure" set for the public land surveys may now be expressed by the fraction $1/905$, provided that the limit of closure in neither latitude nor departure exceeds $1/1280$. Where a survey qualifies under the latter limit, the former is bound to be satisfied. An accumulative error of $6\frac{1}{4}$ links per mile of perimeter, in either latitude or departure, will not be exceeded in an acceptable survey.

The latitudes and departures of a normal section shall each close within 25 links, of a normal range or tier of sections within 88 links, and of a normal township within 150 links. The boundaries of each fractional section including irregular claim lines or meanders, or the meanders of an island or lake in the interior of a section, should close within a limit to be determined by the fraction $1/1280$ for latitude or departure considered separately. The same rule applies to all broken or irregular boundaries. All closings will be computed in the field.

THE NATURE OF RESURVEYS

6-1. A *resurvey* is a reconstruction of land boundaries and subdivisions accomplished by rerunning and re-marking the lines represented in the field-note record or on the plat of a previous official survey. The field-note record of the resurvey includes a description of the technical manner in which the resurvey was made, full reference to recovered evidence of the previous survey or surveys, and a complete description of the work performed and monuments established. The resurvey, like an original survey, is subject to approval of the directing authority.

6-2. Government resurveys involve considerations of a different character from those relating to original surveys. The object is twofold: First, the adequate protection of existing rights acquired under the original survey in the matter of location on the earth's surface, and second, the proper marking of the boundaries of the remaining public lands.

6-3. Although the discussion in this chapter pertains especially to the resurvey of an entire township, the same principles apply in the smaller projects necessary for proper management of the public lands. These smaller parcels must be considered in context with the township, which is the unit of resurvey because it was the unit of the original survey.

6-4. A *dependent resurvey* is a retracement and reestablishment of the lines of the original survey in their true original positions according to the best available evidence of the positions of the original corners. The section lines and lines of legal subdivision of the dependent resurvey in themselves represent the best possible identification of the true legal boundaries

of lands patented on the basis of the plat of the original survey. In legal contemplation and in fact, the lands contained in a certain section of the original survey and the lands contained in the corresponding section of the dependent resurvey are identical.

6-5. An *independent resurvey* is an establishment of new section lines, and often new township lines, independent of and without reference to the corners of the original survey. In an independent resurvey it is necessary to preserve the boundaries of those lands patented by legal subdivisions of the sections of the original survey which are not identical with the corresponding legal subdivisions of the sections of the independent resurvey. This is done by surveying out by metes and bounds and designating as tracts the lands entered or patented on the basis of the original survey. These tracts represent the position and form of the lands alienated on the basis of the original survey, located on the ground according to the best available evidence of their true original positions.

6-6. As in the case of original surveys, the records of resurveys must form an enduring basis upon which depends the security of the title to all lands acquired thereunder. The surveyor must therefore exercise the greatest care in his field work and in preparing the record so that the resurvey will relieve existing difficulties as far as possible without introducing new complications.

6-7. A *retracement* is a survey that is made to ascertain the direction and length of lines and to identify the monuments and other marks of an established prior survey. RetrACEMENTS may be made for any of several reasons. In the simplest case it is often necessary to retrace

several miles of line leading from a lost corner which is to be reestablished to an existent corner which will be used as a control. If no intervening corners are reestablished, details of the retracement are not usually shown in the record, but a direct connection between the two corners is reported as a tie. On the other hand, the retracement may be an extensive one made to afford new evidence of the character and condition of the previous survey. Recovered corners are rehabilitated, but a retracement does not include the restoration of lost corners or the reblazing of lines through the timber. The retracement may sometimes be complete in itself, but usually it is made as an early part of a resurvey.

6-8. In the case of *Cragin v. Powell*, 128 U.S. 691 (1888), the Supreme Court of the United States cited with favor the following quotation from a letter of the Commissioner of the General Land Office to the surveyor general of Louisiana:

The making of resurveys or corrective surveys of townships once proclaimed for sale is always at the hazard of interfering with private rights, and thereby introducing new complications. A resurvey, properly considered, is but a retracing, with a view to determine and establish lines and boundaries of an original survey, . . . but the principle of retracing has been frequently departed from, where a resurvey (so called) has been made and new lines and boundaries have often been introduced, mischievously conflicting with the old, and thereby affecting the areas of tracts which the United States had previously sold and otherwise disposed of.

JURISDICTION

6-9. Resurveys have been made since the early days of the public land surveys. Initially they were made as corrective surveys under the general surveying appropriations when gross errors were found. Resurveys of particular public lands in certain States were later authorized by special acts of Congress. General legislation providing for resurveys was enacted when it became apparent that many older surveys were so obliterated or distorted that the lines could not be identified with certainty.

The Act of March 3, 1909, (35 Stat. 845), as amended June 25, 1910, (36 Stat. 885; 43 U.S.C. 772) authorized the Secretary of the In-

terior to make such resurveys as, after full investigation, he may deem essential to properly mark the boundaries of the remaining public lands.

The Act of September 21, 1918, (40 Stat. 965; 43 U.S.C. 773), provided authority for resurvey of townships in which disposals exceed 50 percent of the total area. Such resurveys may be undertaken upon application of the owners of at least three-fourths of the privately owned land in the township, or upon application of a court of competent jurisdiction, and upon a deposit of the proportionate estimated cost of the resurvey.

The Act of July 14, 1960, (43 U.S.C. 1364), authorized the Secretary of the Interior to accept contributions for cadastral surveys performed on federally controlled or intermingled lands.

Conservation and intensive use of the public domain have made necessary the retracement and re-marking of lines of the older surveys in order to identify the boundaries between public and private lands. Limited resurveys for this purpose are carried out under the annual appropriations for the management of public lands and resources.

6-10. As delegated by the Secretary of the Interior, the authority for engaging in a general resurvey, where public lands are involved, can issue only through the Director, Bureau of Land Management. Other Federal agencies vested with the administration of the lands may request resurveys by addressing the Director through the usual official channels. Justification for such action must be shown.

The Bureau of Land Management has exclusive jurisdiction over all matters pertaining to surveys and resurveys affecting the public lands. As between owners of lands, the title to which has passed from United States, final determination in the matter of fixing the position of disputed land boundaries rests with the local courts of competent jurisdiction. The rules of procedure laid down in the Manual of Surveying Instructions for the re-marking of lines of previous surveys are intended to be in harmony with the leading court decisions in suits involving boundary disputes. The rules should be so applied that the courts may, with security,

accept the boundaries thus determined insofar as they represent the true location of a particular piece of land intended to be conveyed by a patent. The official resurveys are undertaken only when duly authorized, and the field work assigned to a cadastral surveyor, who in that manner is acting under the authority of the Secretary of the Interior through the Bureau of Land Management and under the immediate direction of subordinate supervising officers.

LIMIT OF AUTHORITY OF SURVEYOR

6-11. There are certain questions of a purely judicial nature involved in resurveys of every description where the decision is to be reserved to the Director of the Bureau of Land Management, particularly those relating to compliance with the general laws in respect to the entry of the public lands. Thus it comes within the realm of the surveying process to identify and mark out on the ground the various legal subdivisions of the public domain, but it is a judicial question beyond the function of the surveyor to determine whether or not specified lands have been duly earned under a certain entry. In the resurvey process the surveyor will determine whether or not lands embraced within a claim as occupied have been correctly related in *position* to the original survey. Where the demonstration of this question may be one involving more or less uncertainty, as is often the case, the surveyor will examine and weigh the evidence relating strictly to the surveying problem involved. He will interpret the evidence with respect to its effect upon the manner in which the resurvey shall be executed to protect valid rights acquired under the original survey. The surveyor has no authority to enter into an agreement concerning the exchange of one subdivision for another or to bind the Bureau of Land Management in this particular.

BONA FIDE RIGHTS OF CLAIMANTS

6-12. In order to carry out the provisions of the laws relating to resurveys, the surveyor

must understand the meaning of the term "bona fide rights" and under what circumstances it will be held that such rights have been impaired by a resurvey. The Act of March 3, 1909, (35 Stat. 845), as amended June 25, 1910, (36 Stat. 884; 43 U.S.C. 772) reads in part as follows:

That no such resurvey or retracement shall be so executed as to impair the bona fide rights or claims of any claimant, entryman, or owner of lands affected by such resurvey or retracement.

The rights of claimants are to be similarly protected under the provisions of the Act of September 21, 1918, (40 Stat. 965; 43 U.S.C. 773).

6-13. Bona fide rights are those acquired in good faith under the law. A resurvey can affect bona fide rights only in the matter of *position* or *location* on the earth's surface. The surveyor will be concerned only with the question of whether the lands covered by such rights have been actually *located* in good faith. Other questions of good faith (such as priority of occupation, possession, continuous residence, value of improvements and cultivation) do not affect the problem of resurvey except as they help to define the position of the original survey.

6-14. The basic principles of protecting bona fide rights are the same in either the dependent or the independent resurvey. Each is intended to show the original position of entered or patented lands included in the original description. The dependent resurvey shows them as legal subdivisions, the independent resurvey as segregated tracts. Each is an official demonstration by the Bureau of Land Management according to the best available evidence of the former survey. There is no legal authority for substituting the methods of an independent resurvey in disregard of identified evidence of the original survey.

6-15. The position of a tract of land, described by legal subdivisions, is absolutely fixed by the original corners and other evidences of the original survey and not by occupation or improvements, or by the lines of a resurvey which do not follow the original. A conveyance of land must describe the parcel to be conveyed so that it may be specifically and exactly identified, and for that purpose the law directs that a survey be made. Under fundamental law the

corners of the original survey are unchangeable. Even if the original survey was poorly executed, it still controls the boundaries of land patented under it.

The surveyor should neither rigidly apply the rules for restoration of lost corners without regard to effect on location of improvements nor accept the position of improvements without question regardless of their relation or irrela-tion to existing evidence of the original survey. Between these extremes will be found the basis for determining whether improved lands have been located in good faith or not. No definite set of rules can be laid down in advance. The solution to the problem must be found on the ground by the surveyor. It is his responsibility to resolve the question of good faith as to location.

6-16. It may be held generally that the entryman has located his lands in good faith if such care was used in determining his boundaries as might be expected by the exercise of ordinary intelligence under existing conditions. The relationship of the lands to the nearest corners existing at the time the lands were located is often defined by his fencing, culture, or other improvements. Lack of good faith is not necessarily chargeable if the entryman has not located himself according to a rigid application of the rules laid down for the restoration of lost corners where (1) complicated conditions involve a double set of corners, both of which may be regarded as authentic; (2) there are no existing corners in one or more directions for an excessive distance; (3) existing marks are improperly related to an extraordinary degree; or (4) all evidences of the original survey which have been adopted by the entryman as a basis for his location have been lost before the resurvey is undertaken.

6-17. In cases involving extensive obliteration at the date of entry, the entryman or his successors in interest should understand that the boundaries of the claim will probably be subject to adjustment in the event of a resurvey. A general control applied to the boundaries of groups of claims must be favored as far as possible in the interest of equal fairness to all and of simplicity of resurvey. A claim cannot generally be regarded as having been

located in good faith if no attempts have been made to relate it in some manner to the original survey.

6-18. Cases will arise where lands have been *occupied* in good faith, but whose boundaries as occupied disagree with the position of the legal subdivision called for in the description. Obviously the rule of good faith as to location cannot apply; relief must be sought through the process of amended entry under R. S. 2372, as amended (43 U.S.C. 697), to cover the legal subdivisions actually earned, rather than through an alteration of the position of established lines. This is a process of adjudication rather than one of resurvey. A case of this character should be regarded as erroneous location in precisely the same manner as if the question of resurvey were not involved.

GENERAL FIELD METHODS

6-19. In most areas that require resurveys the survey of record can be reconstructed by the methods of the dependent resurvey. The principal resurvey problem is one of obliteration with comparative absence of large discrepancies. The special instructions provide for a retracement and dependent resurvey, and these may be carried on at the same time if no complications develop. Even where the record survey proves to be badly distorted, the extent of private ownership may dictate that the resurvey will be of the dependent type. Many areas have a checkerboard pattern of ownership as the result of railroad or military road grants, and this same condition is approximated where extensive disposals have been made. Since an independent resurvey cannot affect boundaries of lands already alienated, it serves little purpose where every section line is the boundary of private land.

6-20. Occasionally, after a dependent resurvey has been commenced, complications develop which make the methods inapplicable. Provision should always be made in the special instructions calling for the surveyor to report such facts to the supervising office. The report should embody the same information as that required in the report of a preliminary examination hereinafter outlined.

6-21. Providing a large enough area of public land remains to warrant it, the methods of the independent resurvey are employed if there are intolerable discrepancies in the original survey. This occurs where the early survey was not faithfully executed with the result that some lines usually have not been established, have no actual existence, and cannot be reconstructed to conform to a fictitious record. Action should be taken to suspend the plat of record as a basis of disposals and leases before an independent resurvey is commenced.

When it is probable that an independent resurvey will be necessary, the special instructions provide that a preliminary field examination be made. No new monuments are constructed during the examination. Interested parties are to be informed that the examination is being made strictly for the purpose of developing information. They will be given to understand that, while new lines may be run later to identify the remaining public lands, the resurvey will be planned to protect all valid existing rights.

6-22. The report of a field examination consists of a diagram to scale, a narrative, and the field notes of the retracements made. The diagram shows the correlation of existent original corners, corners established by local surveyors, and any monuments of unknown origin. Line fences, line roads, and the boundaries of claims are also shown. The narrative includes a description of the recovered evidence and statements by witnesses regarding obliterated corners. The extent of obliteration and the degree of faithfulness of the original survey is discussed when this is pertinent. Disposals made by the Federal Government are listed and, if practicable, are shown on the diagram as well. Mention is made of improvements affected by the resurvey, the basis of claim locations, conflicts between claims, and any hiatus that may be anticipated. The field notes of the retracement form an important part of the report, since they show how correctly the natural features were represented in the original record. Finally, the surveyor recommends the procedure which he believes will best meet the existing conditions.

The report of the field examination is reviewed in the supervising office. Special instruc-

tions (or supplemental special instructions) are written to show the detail of the proposed resurvey. If the independent method is selected, an important consideration is the fixing of the out-boundaries of the township or townships within the planned resurvey. These limiting boundaries must be lines which can be restored in such a manner as to protect existing rights in the adjoining outside lands. An exception is where such a large area is to be independently resurveyed that it cannot all be included in one assignment. Occasionally, one portion of a township can be dependently resurveyed, while an independent resurvey is necessary in the remaining portion. In such a case the subdivisional lines separating the two types of resurvey must be dependently resurveyed.

6-23. Even when the procedures have been based on a preliminary examination, unforeseen difficulties may crop up in the progress of the resurvey by reason of the greater detail of the work. The new factors may make the special instructions inapplicable. If this occurs the surveyor should suspend further monumentation, make any additional examination required, then report the situation to the supervising office.

6-24. During the course of a resurvey the surveyor should advise all interested parties, as occasion and opportunity allow, that the resurvey is not official or binding upon the United States until it has been duly accepted by the Director, Bureau of Land Management, as provided by law. No alteration in the position of improvements or claim boundaries should be made in advance of the official acceptance of the resurvey.

THE DEPENDENT RESURVEY

6-25. The dependent resurvey is designed to restore the original conditions of the official survey according to the record. It is based, first, upon identified original corners and other acceptable points of control, and, second, upon the restoration of lost corners by proportionate measurement in harmony with the record of the original survey. Some flexibility is allowable in applying the rules of proportionate measure-

ment in order to protect the bona fide rights of claimants.

6-26. The dependent resurvey is begun by making a retracement of the township exteriors and subdivisional lines of the established prior survey within the assigned work. Concurrently, a study is made of the records of any known supplemental surveys, and testimony is obtained from witnesses concerning obliterated corners. The retracement leads at once to identification of known and plainer evidence of the original survey. A trial calculation is made of the proportionate positions of the missing corners, followed by a second and more exhaustive search for the more obscure evidence of the original survey. If additional evidence is found, a new trial calculation is made. Corners still not recovered are marked only as temporary points which may be influenced by acceptable locations. These steps give the basic control for the resurvey. The surveyor then weighs the less certain collateral evidence against the proportionate positions so obtained.

6-27. A comparison of the temporary points with the corners and boundaries of alienated lands often helps in determining how the original survey was made, how the claims were located, or both. In analyzing the problem of a particular corner's location, it is often helpful to determine where the theoretical corner point would fall if a three-point control were used. In extreme cases the collateral evidence may be weighed against the position obtained by use of two-point control, particularly when supported by well-identified natural features. It may then prove that the original corner, which would otherwise be lost, has been perpetuated by an acceptably located claim.

Ordinarily the one-point control is inconsistent with the general plan of a dependent resurvey. The courts have sometimes turned to this as the only apparent solution of a bad situation, and unfortunately this has been the method applied in many local surveys, thus minimizing the work to be done, and the cost. Almost without exception the method is given the support that "it follows the record." This overlooks the fact that the record is equally applicable when reversing the direction of the control from other good corners, monuments,

or marks. The use of one-point control is only applicable where the prior survey was discontinued at a recorded distance or where it can be shown conclusively that the line was never established. If the line was discontinued by record, the field notes may be followed explicitly. If it was discontinued by evident unfaithfulness in execution, its use would be limited to the making of a tract segregation where the claimant has given confidence to the so-called field notes.

6-28. Once it is accepted, a local point of control has all the authority and significance of an identified original corner. The influence of such points is combined with that of the previously identified original corners in making final adjustments of the temporary points. The surveyor must therefore use extreme caution in adopting local points of control. These may range from authentic perpetuations of original corners down to marks which were never intended to be more than approximations. When a local reestablishment of a lost corner has been made by proper methods without gross error and has been officially recorded, it will ordinarily be acceptable. Monuments of unknown origin must be judged on their own merits, but they should never be rejected out of hand without careful study. The age and the degree to which a local corner has been relied on by *all* affected landowners may lead to its adoption as the best remaining evidence of the position of the original corner. The surveyor must consider all these factors. However, he cannot abandon the record of the original survey in favor of an indiscriminate adoption of points not reconcilable with it.

The field-note record of the resurvey should clearly set forth the reasons for the acceptance of a local point where it is not identified by actual marks of the original survey. Recognized and acceptable local marks will be preserved and described. Where they are monuments of a durable nature, they are fully described in the field notes and a full complement of the required accessories recorded, but without disturbing or re-marking the existing monument. New monuments are established if required for permanence, in addition to, but without destroying the evidence of the local marks.

6-29. The surveyor should make certain while still in the field that he has noted complete descriptions of all identified or accepted corners for entry in the official record of the resurvey so that the record will embrace:

(1) A complete description of the remaining evidence of the original monument;

(2) A complete description of the original accessories as identified;

(3) A concise statement relating to the recovery of a corner based upon identified line trees, blazed lines, items of topography, or other calls of the field notes of the original survey, in the absence of evidence of the monument or its accessories;

(4) A statement relating to the relocation of an obliterated monument; or a statement of the determining features leading to the acceptance of a recognized local corner;

(5) A complete description of the new monument; and

(6) A complete description of the new accessories.

6-30. The running and measurement of the true lines of the dependent resurvey, the marking of lines between corners, the notation of objects to be recorded, and the monumentation of the survey must conform to the requirements for original surveys. The technical record of the resurvey shows the relationship between the original survey and the reestablished lines.

6-31. In the course of marking the true lines it is often desirable to establish sixteenth-section corners or minor subdivision corners which control the position of intermingled public land within a section. Later subdivision of the section would then not require a new resurvey of the section lines for that purpose.

6-32. The limit of closure already prescribed will be observed. Special stress will be given to the need for greater accuracy in the measurements, which largely govern the restoration of lost corners. (section 3-124).

THE INDEPENDENT RESURVEY

6-33. An independent resurvey is designed to supersede the prior official survey only insofar as the remaining public lands are concerned. The subdivisions previously entered or patented

are in no way affected as to location. All such claims must be identified on the ground, then protected in one of two ways. Whenever possible, the sections in which claims are located are reconstructed from evidence of the record survey just as in a dependent resurvey. Where unrelated control prevents the reconstruction of the sections that would adequately protect them, the alienated lands are segregated as tracts. A particular tract is identical with the lands of a specific description based on the plat of the prior official survey. The tract segregation merely shows where the lands of this description are located with respect to the new section lines of the independent resurvey. In order to avoid confusion with section numbers the tracts are designated beginning with number 37. The plan of the independent resurvey must be such that no lines, monuments, or plat representations duplicate the description of any previous section where disposals have been made.

6-34. The statutory authority to review the effect of an independent resurvey upon the boundaries of privately owned land rests in the courts. A decision of the court is binding in fixing a boundary between private lands. It would be contested in fixing a boundary between public and patented lands only if monuments of the official survey have not been considered, the court having no authority to set aside the official survey.

6-35. The independent resurvey is accomplished in three distinct steps:

(1) The reestablishment of the outboundaries of the area to be resurveyed, following the methods of a dependent resurvey.

(2) The segregation of lands embraced in any valid claim based on the former approved plat.

(3) The survey of new exterior, subdivisional, and meander lines by a new regular plan.

Reestablishment of Outboundaries

6-36. The limiting boundaries of the lands which are to be independently resurveyed must agree with the previously established and identified exterior or subdivisional lines of the approved original surveys. In order to qualify as a suitable limiting boundary, a line of the ac-

cepted established surveys must be conclusively identified in one position to the exclusion of all others. The lands on one side are to be resubdivided upon a new plan. On the opposite side the original subdivisions are to be strictly maintained, and none of the original conditions are to be disturbed. Where an outboundary has been reestablished by dependent resurvey, the subdivisions of a tract originally described as along or on opposite sides of the outboundary must agree with the line reestablished.

6-37. Although the outboundaries of the independent resurvey generally follow established township exteriors, section lines may qualify as suitable limiting boundaries in special cases. Particular attention should be given to this subject when the field examination is made, with a view to maintaining the original survey as far as it is consistent.

6-38. In some cases a proper limiting boundary cannot be secured without including a greater number of townships than it is practicable to resurvey in one assignment. One or more tracts requiring segregation may then extend across an independently resurveyed outboundary into a township not grouped for resurvey. Any such tract will be fully segregated whether or not the tract was originally described as in the township to be resurveyed. The necessary official steps will be taken to suspend disposal of lands in the adjoining township pending investigations with a view to the resurvey of that township.

Where the lines of the independent resurvey are not to be initiated or closed upon the restored original corners of the outboundaries, the new monuments will be marked only with reference to the township, range, and section to which they will thenceforth relate. New regular corners controlling the lines of the independent resurvey will be established as provided in chapter III under Defective Exteriors. During the preliminary stages of the resurvey there will often be doubt as to whether an old corner will retain its former control or not. The marking of the new monument and its accessories will be deferred until the future significance of the point is determined. Where an old point is not to be the corner of a subdivision, but is to

be perpetuated merely to control future alignment, it will be monumented as an angle point.

Metes-and-Bounds Survey of Private Claims

6-39. The special instructions should designate the sections containing alienated lands which will be dependently resurveyed. Where there is acceptable evidence of the original survey, the identification of the areas that have been disposed of must be the same as would ordinarily be derived by the regular subdivision of the section. The tracts which are to be segregated by metes-and-bounds survey are those areas that cannot be so identified, nor conformed satisfactorily, those where amendment of description appears not to be an available remedy, and those where the disposals are found to be in conflict by overlap. Every corner of these tracts is marked by angle-point monumentation, and a tie is made from each tract to a corner of the resurvey.

6-40. An abstract of pertinent records and a status diagram should be furnished to the surveyor showing lands whose boundaries cannot legally be disturbed. These include patented lands, valid entries, school sections, land grants, disposals, reservations, or selections of lands whose position and description are based upon the original survey and plat. The resurvey will not be complete until each claim described has received full protection in the matter of location. Each must be protected either by individual metes-and-bounds survey or by the assignment of subdivisions of the resurvey whose boundaries coincide or approximately agree with the tract boundaries. In addition it is often desirable to furnish to the surveyor the status of all claims in the adjacent sections of adjoining townships ungrouped for resurvey which might affect the resurvey procedure.

6-41. The survey of private claims need not be completed before beginning the projection of the new lines of the independent resurvey. It is logical, however, to consider the subject of the tract segregations in advance of the question of the establishment of new lines. The surveyor may find it expedient to carry both branches of the survey along together.

6-42. The jurisdiction of the Bureau of Land Management, the limit of the authority of the surveyor, and the bona fide rights of claimants, where entered or patented lands are involved, remain absolutely the same whether the resurvey is to be made upon the dependent or independent plan. Thus, where the independent type of resurvey has been adopted as more feasible, identified corners of the original survey in the immediate vicinity of lands to be segregated are employed for the control of the location of such lands. The question of the good faith of the entryman is fully considered, as previously outlined in this chapter. Where the evidence of the original survey is so obliterated that lack of good faith in location cannot be charged against an entryman, the available collateral evidence is to be regarded as the best indication of the original position of the claim. It is employed as far as consistent for the control of the section boundaries within which such claim is located.

6-43. Where the surveyor cannot definitely locate a claim by identification of the original survey, he should ask the claimant to point out his boundaries. The boundaries of the private claim, so determined, are fixed as between private and public lands, subject to official acceptance of the resurvey. The surveyor should explain that an acceptably located claim must have a form agreeing with the original entry, approximately regular boundaries, an area not widely inconsistent with that shown on the plat, and a location as nearly correct as may be expected from the existing evidence of the original survey.

6-44. Dispute may arise over adjustment of the line between adjoining patented tracts, each acceptably located. If it cannot be reconciled by the surveying process, the tracts are surveyed in conflict and so shown on the resurvey plat.

6-45. The surveyor cannot change materially the configuration of a tract as shown by its original description in order to indemnify the owner against deficiencies in area, to eliminate conflicts between entries, or for any other purpose. If improvements have been located in good faith, the tract survey should be so executed, or the conformation to the

lines of the resurvey so indicated, as to cover these improvements and at the same time maintain substantially the form of the entry as originally described. No departure from this rule is allowed.

6-46. The amendment of entries is a matter for adjudication by the Bureau of Land Management after the resurvey has been accepted and the plats filed in the land office.

6-47. An attempt should be made to consult an absentee owner so that he may point out the lands subject to a metes-and-bounds survey. If the owner cannot be found and there is no indication of the boundaries of a claim, the surveyor should locate it from the nearest original point of control or from a point of a neighboring claim, or assign to the entered or patented lands the appropriate subdivisions of the resurvey. The controlling factors are individual and neighborhood improvements (such as buildings, wells, springs of water, cultivated lands, public roads, fences, corners of recognized private surveys, etc.) which indicate the evident intention of the entryman or patentee as to the position of his land.

6-48. Each nonconformable valid claim in a township is given a serial tract number, commencing with No. 37 in the smallest numbered and entered section of the original plat, progressing through the township in the order in which lot and sections are numbered. A tract number is used but once in a township, and if any tract lies partly in two or more townships subject to resurvey the number applied to the tract in the first township resurveyed is not used for other tracts in the adjoining township.

6-49. The following rules will be observed in executing the metes-and-bounds survey of designated tracts:

(1) Each acceptably located claim which is at variance with the lines of the resurvey is surveyed and monumented at each angle point.

(2) Where the limiting boundary of the independent resurvey has been reestablished in its original position by dependent resurvey, the portion of a claim lying outside the boundary is not surveyed by metes and bounds. It is located in an area where the original conditions cannot be disturbed. The portion of the claim lying

within the area of the independent resurvey has at least one identifiable original boundary. It should be defined by segregation or conformation to the lines of the resurvey in a position which is properly related to the identified or restored corners on the limiting boundary.

(3) Where the boundaries of a claim are unacceptably located as pointed out by the claimant, the claim is surveyed and monumented in a suitable relation to the original survey. If the claimant protests the location, the surveyor should request that the protest be made in writing. The written protest will be submitted with the returns of the resurvey. Accurate ties should be made to the corners of the claim as unacceptably located. The surveyor should make a complete report of the facts with reference to the question of location. Further protection to the entryman may be sought by an amendment of entry.

(4) Where the metes-and-bounds segregation of a claim (or its conformation to the lines of the resurvey) does not cover the lands occupied, improved, or claimed, the claimant may express a desire to amend his entry. The fact should be stated in the field notes. A separate full report is made by the surveyor describing the subdivisions actually occupied and those sought under the amended entry which are not within the tract as surveyed. (See current regulations relating to the amendment of entries.)

(5) Where the regular quarter-quarter sections within a claim fall in approximately the same position as the regular quarter-quarter sections of the resurvey, the entryman or patentee may desire to conform his claim to the resurvey. If no apparent objection is found by the surveyor, the facts should be stated in the field notes and the claim so indicated upon the resurvey plat. Under this circumstance the metes-and-bounds survey of the tract is omitted. However, where a tract includes a fractional lot as originally described or where any part of a tract falls upon a fractional lot of the resurvey, the tract must be segregated as a whole by metes-and-bounds survey, even though some or all of the lines of the tract may coincide with certain subdivisional lines of the resurvey.

No claim should be conformed to the lines of an independent resurvey under an involved amended description which includes numerous subdivisions smaller than the regular quarter-quarter section, excepting as completely surveyed and monumented.

(6) Conflicting tracts, each acceptably located, are surveyed and monumented and the conflict shown upon the resurvey plat. Each intersection of conflicting boundaries is determined upon the ground and recorded in the field notes, which also show the number of acres in conflict with each other tract.

(7) The angle points of a tract are designated by serial numbers beginning with No. 1 at the northeast corner, and proceeding around the claim, running westerly from the initial corner. An angle point may be common to one, two, three, or four tracts. The monument is marked as in the following examples:

AP 4	AP 3	T 26 N	R 17 E
TR 38	TR 37	S 14	
AP 1	AP 2	AP 1	AP 2
TR 45	TR 46	TR 38	TR 37
1971		1971	

T 26 N	R 17 E
AP 1	S 14
TR 37	
1971	

(8) No accessories are required with the monuments at the angle points of the metes-and-bounds survey.

(9) At least one angle point of each tract is connected with a regular corner of the resurvey. Where claim lines are intersected by lines of the resurvey, a connection is made to the nearest claim corner and recorded in the field notes of the section line. This is considered a satisfactory connection to all *adjoining* claims located within the interior of either section. Where an extensive system of tract segregations has been surveyed, the interior tracts of the block do not require connections. The establishment of closing corners on the regular line when entering or leaving public land will con-

form to the practice described in Closing Section Lines, sections 3-68 through 3-73.

(10) All recovered monuments of the original survey not otherwise reported upon are connected by course and distance with a corner of the resurvey. The connection and a description of the traces of the original corner as identified are recorded in the field notes of the resurvey. The old monument is destroyed unless the point may be needed to control the position of a claim. (See also Defective Exteriors, section 3-36).

The Projection of New Lines

6-50. A plan for projecting new section lines can best be made after study of a layout showing (1) lines of the former survey which are to be restored and (2) the necessary tract segregations. If the report of the field examination is explicit, the plan may be incorporated in the special instructions. If the report does not fully identify the position of alienated lands, the plan must be delayed until these lands have been segregated.

6-51. The resubdivision of vacant public lands in a township by independent resurvey is an application of fragmentary subdivision as discussed in chapter III. However, an independent resurvey may involve the resubdivision of a group of many townships where the conditions are comparatively regular except for the tract segregations. First attention is given to completing the township exteriors which are to be independently resurveyed. These are completed as in the establishment of original surveys. The new section lines are surveyed and marked as in regular or fragmentary subdivision, whichever may be the case. New meander lines are run as required. The new exterior and subdivisional lines are usually extended across small blocks of tract segregation surveys, and connections are made as described under Metes-and-Bounds Survey of Private Claims, section 6-39. Where the new lines are so extended across tracts, the corners are fully monumented regardless of the fact that some points fall within the tract segregation surveys. They are required in order to determine the subdivision of the public lands.

6-52. After the plan of running new section boundaries has been determined, the creation of needed new lottings is considered. This must precede the marking of the corner monuments, which may be affected by the manner in which the lots are laid out and numbered.

Where any aliquot part (vacant) of a newly created section would normally have a description that duplicates the corresponding part (alienated) of an original section bearing the same section number, such part or parts of the new section are given appropriate lot numbers. The new lot numbers begin with the next number above the highest numbered lot of that section of the prior survey. Also, where there are new normal lottings in the sections along the north and west boundaries of the township, if those sections are not restorations of the corresponding sections of the prior survey (and same township and range), the lottings are given numbers beginning with the next higher number above those that were previously employed.

6-53. Some new sections may be elongated in order to absorb the discrepancy in the positions of the section-line boundaries as between the old and the new survey. This is taken care of in the lottings of the new sections. Such departure from normal procedure is made necessary by the discrepancies of the prior survey, where the location of the alienated lands cannot be changed.

6-54. Where a section of the resurvey is invaded by tract segregations, the lotting of the public lands is carried out in accordance with the usual plan of lotting within fractional sections. The numbering of the fractional lots begins with the number next higher than the highest number employed in the section of the original survey which bears the same township, range, and section number. This plan avoids any possible confusion which might arise from a duplication in the use of the same lot numbers.

6-55. The plan of the independent resurvey should be carefully studied for the proper placing of all needed quarter-section corners, for either one or two sections, so to provide for the position of the center lines of all sections, restored or new. Where two positions are found to come within less than half the closing limit pre-

scribed for a section, the point first derived as the appropriate position of the quarter-section corner of the restored section boundary is used for control in both sections. This rule is in the interest of simplicity of survey and monumentation.

6-56. The general requirements of chapters II, III, and IV must be fully observed in every

respect throughout the execution of the independent resurvey.

It is important that the surveyor make a careful study, during the period of the field work, the construction of the resurvey plats, to make certain that every possible condition has been given consideration and that all necessary data have been obtained.

he inde-
e a care-
work, of
to make
has been
ary data

Special Surveys and Instructions

SPECIAL INSTRUCTIONS

7-1. The detailed specifications for each survey are set out by the officer in administrative charge of the work in a written statement entitled "Special Instructions." The special instructions are an essential part of the permanent record of the survey, both as historical information and because they show that the survey was properly authorized. The immediate purpose is to outline the extent of the field work and the method and order of procedure. Coupled with the Manual, the special instructions contain the technical direction and information necessary for executing the survey. Emphasis is given to any procedure unusual in application, but no lengthy discussion is required of procedures that are adequately covered in the Manual. The special instructions are written in the third person.

7-2. Shown below is the arrangement of subject matter in the special instructions. Italicized portions denote standard phraseology.

(1) Title: *Special Instructions*

Group No. —, (State)

(Nature of survey, and location by township, range, and meridian)

(2) Preliminary statement:

In the execution of the surveys included under Group No. —, (State), the chief of field party is authorized and directed to make the described examination, retracements, reestablishment of points of control, surveys, and resurveys set out in these instructions. He will be guided by the Manual of Surveying Instructions, the provisions of the following special instructions, and such supplemental instruc-

tions as may be issued during the progress of the work.

(3) *Authority*

Cite departmental or bureau instructions or authorization, the request of another Federal agency having administrative jurisdiction over the lands whose survey is being requested, or any special act of Congress relating to the survey.

(4) *Appropriation*

The costs of the field and office work incurred in the execution of the survey, within approved official regulation, are payable from the appropriation: Give the title of the applicable appropriation, fund, or deposit, and cite the act of Congress under which a deposit has been received.

(5) *Limit and Character of Work*

Describe the lines to be surveyed by township, range, and meridian, with designation by section where only parts of townships are authorized. If the work involves other than original surveys, indicate the character of the fragmentary survey, the type of resurvey, or the nature of the field examination. Legal or technical questions related to the work may be pointed out here or in the part of the instructions dealing with methods, whichever is most appropriate. Similarly treated would be known facts concerning private rights that may be affected and directions for protecting those rights.

(6) *History of Earlier Surveys*

Each new survey, retracement, or resurvey is predicated on the surveys accepted previously. The pertinent existing surveys are reviewed in the special instructions with an explanation of known or presumed complications.

(7) *Method and Order of Procedure*

If the projected work is an extension of original surveys, it taken up in the following order in the instructions:

- (a) Standard parallels and guide meridians
- (b) Township exteriors
- (c) Subdivisions, including meander lines
- (d) Subdivision of sections if included

The instructions for each township should be completed separately. If complications are anticipated, the surveyor should be informed what to expect and what methods to apply. References to Manual rules are made by chapter and section numbers, but the surveyor is expected to understand regular practices and to be familiar with the Manual as a reference guide in unusual cases. The burden of this should not be transferred to the special instructions.

If the work involves other than original surveys, detailed specifications are stated for required examinations, fragmentary surveys, resurveys, topographic surveys, or special monumentation. There follows in this chapter a discussion of how the usual types of special surveys are treated.

Where precautions need to be taken for the preservation of esthetic values in the environment, such as the elimination of blazing on the lines or the limitation of vehicular use, the special instructions should so state. Additionally, the surveyor should be directed to exercise care in situations not covered by the instructions.

(8) *Diagrams and Supplemental Data*

In the case of original surveys a diagram constructed on a scale of 80 chains to an inch or larger should be furnished as a part of the instructions. The assigned work is usually shown by dashed lines and the adjoining previous surveys by solid lines. The diagram should indicate the directions and lengths of lines of the established surveys within two miles of the new assignment. Outlying areas protracted as though surveyed on the previous plats should always be shown.

A notation should be made in the instructions that copies of the plats and field notes of previous surveys pertinent to the assigned work will be furnished at the time of field assignment.

Known claims, improvements, or monuments

of other official surveys should be noted in the instructions.

When pertinent to the survey, the special instructions are supplemented by a status report, usually in the form of a diagram, showing disposals and withdrawals in the area to be surveyed or resurveyed. Streams upon which withdrawals for power sites or other purposes have been or may be made, and streams, ridges, or divides which constitute the boundaries of reserves, should be specified.

There should be supplied with the special instructions a list of available topographic maps, aerial photographs, and other data showing important map features. Any required additional mapping to be done in the field should be indicated.

(9) *Field Notes, Plats, and Reports*

The special instructions should include directions for the preparation of the field notes and point out the parts of the returns that will require special attention in the field. If a preliminary report or diagram is to be submitted during the progress of the field work, the instructions should so state. Special lottings or other unusual matters that are to be considered when the final returns are prepared should be specified.

Direction will be given to return for official use the special instructions and other papers that belong with the official record, data added in the field, and field computation sheets.

(10) *Modification of Instructions*

The special instructions should direct the chief of field party to report promptly conditions that call for additional or modified instructions together with a recommended procedure.

7-3. The special instructions are ordinarily prepared and signed by the technical officer in direct administrative charge of the particular surveying program. Approval of the instructions is by the office head in administrative charge of the area where the survey is made, or as delegated by current regulations. The date of the instructions and date of approval are always shown.

SPECIAL SURVEYS

7-4. Special surveys are surveys that involve unusual applications of or departures

from the rectangular system. They often carry out the provisions of a special legislative act. A particular category of special surveys has to do with various types of water boundaries. In some cases the special instructions merely expand the methods outlined in chapter III. In the more complicated special surveys the methods must be carefully detailed.

The following discussion of the several types of special surveys illustrates what is to be emphasized in the special instructions for each.

Tracts and Lots

7-5. Special surveys may involve areas of land that are not aliquot parts of sections but are designated as lots or tracts. In common usage the term "tract" is applied to an expanse of land of no particular size, often irregular in form. In modern public land surveys the term is used specifically to mean a parcel of land that lies in more than one section or that cannot be identified in whole as a part of a particular section. It is properly described by tract number and township. Tracts within a township are numbered beginning with 37 or the next highest unused numerical designation to avoid confusion with section numbers.

7-6. Unless tracts have been segregated in the course of an independent resurvey, in which case they are treated as described under that subject, an irregular parcel lying entirely within a surveyed section should be designated as a lot of that section. "Small tracts," when not aliquot parts of sections, are designated as lots wherever they can be identified as parts of a section. The description is by lot, section, and township.

7-7. Except in independent resurveys, or if the proper name is "Tract _____," an area of non-public land should be designated as a parcel, not as a lot or tract, when a special designation is necessary for identification. To distinguish among several parcels, they may be called "Parcel A," "Parcel B," and so on.

Subdivision of Sections-Special Cases

7-8. The need for subdivision of sections and any usual methods required are brought out in the special instructions. Examples are

Indian allotment surveys, subdivisions within reclamation projects, the determination of boundaries between intermingled public and patented lands within a section, the subdivision of sections into "small tracts," and various fragmentary surveys needed to mark the boundaries of the remaining public lands. In complicated cases the subdivision of sections may be advisable to avoid the possibility of an incorrect local survey.

7-9. Nearly always the subdivision-of-section lines are run out in accordance with the showing of the official plat. An uncommon exception is when a disposal has been made of a parcel whose description clearly differs from the lottings or aliquot parts represented on the plat.

7-10. The customary lottings are often not shown on plats of very old surveys. A determination of what the disposals were intended to convey can then be made only by reference to the record of the disposals themselves. Furthermore, in some of the old surveys quarter-section corners were not established on all true lines of the survey. Instead, the record shows that "half-mile" points were marked on the random line and not corrected to the true line midpoints. All such unusual problems should be brought out in the special instructions, as the diversity of the questions arising and the limited applicability of the answers precludes extended Manual treatment. (See Half-Mile Posts, Alabama and Florida, section 5-39.)

7-11. Where special methods are unavoidable, they should be made to conform as nearly as possible with the rules for the subdivision of sections discussed in chapter III. The special instructions should specify the procedure when the areas do not conform to the rectangular system of surveys.

7-12. If a section is subdivided, the center quarter-section corner is established and monumented. If a quarter section is subdivided, all sixteenth-section corners are established and monumented. Monuments of lower order are established where necessary to mark the actual boundaries of the minor subdivisions involved. Only the required boundaries need be surveyed within the sixteenth section, but, if this method is used, such lines must be connected to and

established in addition to the angle points and witness points. The plan of monumentation should be designated in the special instructions for the survey.

Metes-and-bounds surveys located upon surveyed land are connected to a regular corner of the subdivisional survey. If the area surveyed lies entirely within a surveyed section, it should be designated as a lot of that section and be numbered accordingly. If the location is within an unsurveyed township, the special instructions should call for the running of a connecting line to an established corner, the establishment of a location monument, or the determination of the geographic position of the initial point.

Nonriparian boundaries of these irregular areas, as called for by the law or executive order creating them, have sometimes been partly or entirely located along a natural boundary such as a watershed. Boundaries of this sort are normally winding, and it should be understood that they are technically defined by the natural feature and not by the straight lines between angle points monumented in a survey. *Northern Pacific Railway Co. v. United States*, 227 U.S. 355 (1913).

Townsite Surveys

7-17. R.S. 2380 and 2381 (43 U.S.C. 711, 712) and numerous special acts make provision for the executive withdrawal of public lands for townsite purposes. A townsite survey, in public-land surveying practice, is a survey made within one or more regular units of the township subdivision by which the land is divided into blocks, streets, and alleys as a basis for the disposal of title in village or town lots.

Ordinarily special instructions are prepared for a preliminary reconnaissance of the townsite and for the resurvey and subdivision of sections which may be necessary. These are followed by supplemental instructions based on the findings of the examination and providing for the townsite survey proper.

Planning the Survey

7-18. Townsite surveys fall into two general classes, those with few or no prior im-

provements and those where villages or towns already exist. Occasionally a townsite may be planned in connection with some Federal project where the survey must fit special requirements already set up. Whatever class the townsite falls in, a study of approved townsite plats with similar elements is helpful in planning. A visit to some of these developed areas may be worth-while to show good and bad planning clearly.

7-19. Consideration of every facet of townsite planning is beyond the scope of this Manual. There may be need for consultation with specialists in architectural and industrial planning, landscaping, and various branches of city engineering such as water supply, sewerage, street, highway, and railroad location. Provision is needed for public school grounds, other public buildings, and park areas. All these things are interdependent, and, wherever possible, local planning bodies should be asked to present plans which meet with zoning requirements. The planner should also refer to some of the many books on the subject of town planning.

Surveying the Townsite

7-20. The rules that follow set out the minimum specifications for the running and measuring of the lines, the monumentation, and the elements of plat construction by which the blocks and lottings may be identified. The detail of the plan should be set out in the special instructions.

The character of the area—the topography, its location, and whether it is a new townsite or an addition to an old one—to a large extent determines the detail of the street and block system. A topographic survey is of value in ascertaining the layout best suited; the special instructions should call for the appropriate contour interval. Wherever practicable, especially where there are existing improvements, photogrammetry should be employed in the preliminary examination with panelled boundary monuments incorporated in the aerial control.

7-21. In the typical townsite the block dimensions are usually between 300 and 400 feet. The principal streets are usually made 80 feet in width, though frequently as much as 100 feet where greater width is called for. The

less important intersecting streets, though narrower, are seldom given a width of less than 60 feet.

The normal frontage of the lots is 50 feet. Unless conditions require a special plan, the whole system is laid out on cardinal. The blocks are given serial numbers, usually beginning with the northeast block and proceeding with the numbers alternately to the west and to the east. The lots are given serial numbers within the block.

7-22. The foot unit is employed in townsite surveys, and long steel tapes graduated in that unit are furnished for the purpose. Lengths of lines are reduced to the horizontal. In most cases the necessary accuracy can be secured only with the use of a spring balance for the maintenance of the proper tension, and with allowance for temperature corrections to the degree at which the tape is standard.

7-23. The field traverse of the townsites will ordinarily be made to close within an error not to exceed $1/5000$, and never to exceed $1/2000$. The determined lengths of lines and their bearings are balanced to secure a perfect closure for the data which are to be carried to the plat. Instrumental accuracy is obtained by the method of repetitions in turning the angles. These data should leave no discrepancy whatever in any calculated position, whether working from one monument to another, or between any two points.

7-24. If the proposed townsite is in an area already surveyed, great care should be exercised to identify the original section lines and to subdivide the section or sections in the proper legal manner to ascertain the assigned townsite boundaries. Permanent monuments are placed at each angle of the townsite boundary. These may be the regulation $2\frac{1}{2}$ -inch iron post or a tablet seated in a concrete post, 3 feet long and at least 8 inches square in cross section. Markings consist of the usual subdivisional identification marks, the capital-letter initials of the townsite name, and the letters "TS" in the appropriate quadrant.

7-25. The boundary streets are laid out first, then the other streets, blocks, and lots. Permanent control monuments are established

and connecting line measurements made as necessary to afford an exact relocation of any point. All data, including true bearings and deflection angles, connecting lines, and dimensions of streets, blocks, and lots are carried to the townsite plat. Their sufficiency may be tested by the ease with which the position of any given point can be ascertained and the area of any lot can be calculated. If there are curved lines, the curve elements are shown on the plat.

7-26. Permanent monuments are placed at the intersections of the street center lines and connections made to the block corners to insure a ready restoration of any block corner which might be obliterated. The $2\frac{1}{2}$ -inch iron post or a tablet seated in a concrete post, 24 inches long and at least 6 inches square in cross section may be used. These should be sub-surface monuments, placed as much as a foot below the probable grade line of the street and marked only for the point of intersection.

Where the street center-line intersections are intervisible, the markers may be placed at alternate intersections. Otherwise, a marker is placed at each intersection.

7-27. Where the street center-line intersection is not marked, the adjacent block corners are monumented with the regulation post set with the top flush with the ground and with a guard stake. If the intersection is monumented, durable markers such as galvanized iron pipes are set at the block corners and the front corners of the lots. These points are always monumented. The lot corners are set only on the block lines. Only the monuments at block corners are marked with the appropriate numbering. A permanent monument is placed at each angle point within the block boundary, when irregular, and at each point of curvature and point of tangency if the line of the block has been placed on a curve.

7-28. Lengths of lines and all angles or bearings are determined in the field for all irregular blocks and lots. In such cases both the side lines and back lines are always measured in the field. The dimensions are carried to the plat wherever needed, as when the lines cannot be readily located by the method of intersections.

Use of Photogrammetry

7-29. Photogrammetry is especially useful in showing the irregular layout of an existing town or village. With the extent of the improvements known, the streets, blocks, and lots can be laid out on a trial basis on the photographs in order to determine the best plan. If the coordinates of lot corners, street center lines, monuments, and other points of significance are to be determined, the work should be done with a first order plotting instrument or by analytical methods. A sufficient number of positions are marked in advance of photography to reduce the work of transit and tape to a minimum.

Field Notes and Plats

7-30. The field notes of the townsite survey describe the resurvey of the old section lines, the restoration of any needed corners, the subdivision of sections, and the controlling monuments. All important connecting lines and measurements between the boundary monuments and the corners of the block lines, or to the permanent monuments marking the street center lines adjacent to the boundaries, are included. The plan followed in the townsite survey is explained and a general statement made as to the monumentation. Beyond this, the further detail of all directions and lengths of lines is carried to the plat but omitted in the field note record. If any improvements are unavoidably left in conflict with the townsite layout, the information is brought out in the field notes but omitted from the plat.

7-31. Townsite plats are usually published at a scale of 200 feet to an inch, but they are frequently drawn at a somewhat larger scale, subject to reduction when published. A marginal diagram is usually supplied in order to show the relation of the townsite boundaries to the section lines, with lengths of lines here given in the chain unit. Tenths and hundredths of links are used where appropriate for making reduction to the lengths of lines shown on the main drawing.

On the main drawings all lengths of lines are shown in the foot unit, with tenths where needed. All directions and lengths of lines, intersection angles, and connecting lines to monu-

ments are given on the plat with a view to the location of any point by calculation from the points of permanent control. This facilitates ready calculation from the plat of the area of any individual lot.

The drawing shows the block and lot numbers, areas of lots to the nearest square foot, and the designation of streets by letters, numbers or names. In drafting the data for the regular blocks some of the figures which would be applied in each lot of the block may be omitted if it is left clear within the block that the lottings are regular for dimension and area.

All permanent monuments are shown on the main drawing and connecting data supplied. The widths of the streets should be plainly shown, but not repeated needlessly. Where all of the lots in a block are of the same dimensions, it is sufficient to show the measurements only along the block lines. A memorandum is supplied to note the general plan of monumentation, with an outline description of the monuments.

If there are reservations for public-school grounds, or of grounds for other public buildings or parks, the provision should be stated in the special instructions. The designated blocks are shown upon the plat, numbered regularly and titled, but not subdivided.

Reference should be made to chapter IX for the usual requirements regarding the title and the certificates which are to appear on the townsite drawing.

Small Tract Surveys

7-32. The Act of June 1, 1938, (52 Stat. 609), as amended by the Act of June 8, 1954 (68 Stat. 239; 43 U.S.C. 682a), provides for the sale or lease of small tracts not exceeding five acres. The survey made to delineate the tracts differs from a townsite survey in that it normally follows a pattern of progressional subdivision down to the desired lot sizes without block designations or the segregation of streets and alleys. Regulations provide for reserving rights-of-way in the patents or leases.

7-33. The first requirement of the survey is the establishment or reestablishment of the section boundaries. The ensuing subdivision into small tracts should not be made without a

study of the terrain. Under favorable circumstances the section may be subdivided into legal subdivisions and thereafter into lesser aliquot parts. However, it is sometimes necessary to depart from normal subdivision lines in order to make the tract layout compatible with drainage features, existent roads, and improvements on adjoining lands.

7-34. Aerial photographs and topographic maps are helpful in devising a suitable plan of subdivision. A preliminary survey and development of a topographic map may be necessary. The small tracts might then take an irregular form so to fit the topography. While the individual parcels are called "small tracts," they are designated on the official plat as lots when not describable as aliquot parts of the section. If the survey is in the vicinity of urban or suburban development, the plan should be discussed with local officials as to suitability.

7-35. Small-tract surveys should always be executed within a closure limit of 1:2560 in either latitude or departure. If stricter limits are desirable in an urban or suburban area, provision will be made in the special instructions.

7-36. All corners of each lot should be monumented. Regulation monuments are used on section boundaries and on subdivisional lines down to 1/64 section lines. Further monumentation may be with approved materials called for in the special instructions such as iron pipes, rods, or angles. On an irregular lotting scheme regulation monuments should be used at approximate intervals of ten chains, preferably at intervisible points. Where all corners of an individual lot can be established on the lines of larger subdivisions, the minor subdivisional lines need not be surveyed.

7-37. The final field notes contain the regular record of the survey or resurvey of the section lines and subdivisional lines to the extent of all actual field surveys. The plat shows all data relating to established lines and measurements. Lot lines and measurements developed by protraction should be appropriately dashed and shown parenthetically. Bearings should be shown to 15" of angular value and distances to tenths of links. Each "tract" is assigned an appropriate lot number, and the area is shown to hundredths of an acre.

7-38. Topographic detail on the plat should be kept to a necessary minimum and subordinated to the base data. *Anticipated* new rights-of-way for road and public utility purposes, to be reserved in the lease or conveyance of the lots, need not be shown. It may be desirable to show the scheme of corner monumentation on the plat by appropriate symbols.

Mineral Segregation Surveys

7-39. A mineral segregation survey is a metes-and-bounds survey made to define the limits of non-mineral public land adjoining one or more mining claims and to supply data for lotting the non-mineral land against the claims. Although a necessary part of the survey is to ascertain the boundaries and position of the mining claims, it is not a mineral survey and confers no permanent rights upon the mineral claimant. If the subsisting records furnish the information necessary for a proposed segregation of mineral claims from the non-mineral public lands, no mineral segregation survey is required.

7-40. Mineral segregation surveys fall into two classes:

(1) Where the record of official mineral surveys is faulty or fails to locate the claims accurately with respect to the rectangular net. Proper segregation usually requires the resurvey of section boundaries with connections to the mineral surveys.

(2) Where unsurveyed mining claims require segregation from land embraced in a pending administrative action. The field work consists of metes-and-bounds surveys of the mining claims, with connections to corners of the public land net, and the resurvey of section boundaries.

7-41. Where regular conditions are found, the mineral segregation survey consists only in running not less than two connecting lines from identified corners of the rectangular survey to a corner or corners of the mineral location, followed by a survey of the outboundaries of the mining claim or group of claims.

Monuments are placed at the angle points along the boundary of the mining claim or outboundaries of a group of claims as needed to mark the limits of the non-mineral land. The

angle points of the claim are numbered in accordance with the practice in mineral surveys. Each monument is marked with the initials of the name of the claim or claims and the angle point number. If the monument at the corner of the mineral location is in proper position, constructed of durable material, and suitably marked, the monument may be adopted without any alterations, and its description entered in the field notes.

7-42. In townships where there appears to be an extensive obliteration of monuments, or where the condition of the lines does not conform to the original plat and field notes, the survey will consist of such retracements and restoration of the corners of the section lines as may be necessary to define the non-mineral land or pending entry. If the distortion of the section lines is so great as to warrant the subdivision of one or more sections, the work authorized should be described in the special instructions or supplemental instructions.

7-43. The retracement of the lines of the mineral location should be made with the same degree of accuracy as a mineral survey, but all measurements are returned in the chain unit. It is essential that the requirements regarding the legal length and width of the mineral claims be observed, including parallelism of end lines. That is, the claim should be confined to the legal length along the mineral lode, the side lines should be placed within the legal width as determined from the center of the vein at the surface, and the end lines of each claim should be parallel. The segregated claim is to be made identical with, or be embraced within, the boundaries of its location, as provided in the mining regulations. A corner of the survey not identical with the corresponding corner of the location is tied to that corner.

7-44. Rules for the plat construction are found in chapter IX.

Mine Surveys

7-45. This class of survey is important in connection with the leasing of mineral lands, particularly coal lands. The field work usually consists of a dependent resurvey and partial

subdivision of the section or sections involved, a traverse of the main entries of the mine, with ties to the portals and improvements, and the marking of the section and subdivision-of-section lines within the mine which divide private and public ownership.

A plat showing the subdivisions of the section or sections is prepared with an additional diagram added to show the underground workings of the mine or mines. This diagram should generally be drawn to the same scale as that used on the plat of the mine operations, which is usually 1 inch to 50 or 100 feet, thus permitting a direct comparison. The traverses of the underground workings should be shown by broken lines and the section and surveyed subdivision-of-section boundaries indicated by solid lines.

SPECIAL SURVEYS—WATER BOUNDARIES

7-46. The subject of water boundaries has been divided into a number of parts—navigability, beds of nonnavigable streams and lakes, apportionment of accretion and reliction, accretion after survey but prior to entry, avulsion, and erroneously omitted areas—in order that the elements of each type of problem can be brought out clearly. As a practical matter, two or more of the conditions discussed are nearly always present along water boundaries where the surveyor will be working. An overall analysis is necessary to find out which problems are involved. A study of the available historic maps and aerial photographs should be made in all but the simplest cases.

Navigability

7-47. Upon the admission of a State into the Union title to the beds of navigable bodies of water inures to the State as an incident of sovereignty. In *Pollard's Lessee v. Hagan*, 44 U.S. 212 (1844), the Supreme Court held that:

First. The shores of navigable waters, and the soils under them, were not granted by the constitution to the United States, but were reserved to the States respectively. Secondly. The new States have the same rights, sovereignty, and jurisdiction over this subject as the original States.

7-48. The question of navigability in law, where there may be controversy, is a matter to be decided by the courts, based upon the facts and conditions in each case as these prevailed at the date of Statehood. A frequently cited definition of navigability appears in *The Daniel Ball*, 77 U.S. 557 (1870):

Those rivers must be regarded as public navigable rivers in law which are navigable in fact. And they are navigable in fact when they are used, or are susceptible of being used, in their ordinary condition, as highways for commerce, over which trade and travel are or may be conducted in the customary modes of trade and travel on water.

The same definition is applied to lakes. In *United States v. Holt State Bank*, 270 U.S. 49 (1926), the Supreme Court stated:

The rule long since approved by this court in applying the Constitution and laws of the United States is that streams or lakes which are navigable in fact must be regarded as navigable in law; that they are navigable in fact when they are used, or are susceptible of being used, in their natural and ordinary condition, as highways for commerce, over which trade and travel are or may be conducted in the customary modes of trade and travel on water; and further that navigability does not depend on the particular mode in which such use is or may be had—whether by steamboats, sailing vessels or flatboats—nor on an absence of occasional difficulties in navigation, but on the fact, if it be a fact, that the stream in its natural and ordinary condition affords a channel for useful commerce.

Artificial or natural changes subsequent to the date of Statehood do not bear on the subject of navigability. However in *United States v. Appalachian Electric Power Co.*, 311 U.S. 377 (1940), the Supreme Court made the following clarification:

"Natural and ordinary condition" refers to volume of water, the gradients and the regularity of the flow. A waterway, otherwise suitable for navigation, is not barred from that classification merely because artificial aids must make the highway suitable for use before commercial navigation may be undertaken.

7-49. The legal question of navigability is determined by the facts in any particular case and not from any action on the part of the surveyor. In *Oklahoma v. Texas*, 258 U.S. 574 (1922), the Supreme Court stated:

A legal inference of navigability does not arise from the action of surveyors in running meander lines along the banks of the river. Those officers are not clothed with the power to settle the questions of navigability.

7-50. The navigability or nonnavigability of a body of water may have been resolved by a jury upon consideration of the evidence and the opinion of competent witnesses. Courts have often taken judicial notice of the navigability or nonnavigability of streams and lakes. Where such determinations have not been made, studies by the Corps of Engineers in connection with the improvement of rivers and harbors are helpful in showing whether a river is navigable in fact. In questionable cases the necessary research as to navigability should be made and the facts noted in the special instructions.

Beds of Nonnavigable Streams and Lakes

7-51. Nonnavigable streams and lakes are meandered under certain conditions which were described in chapter III. Title to the beds remains in the United States until the shore lands have passed into private ownership. *United States v. Oregon*, 295 U.S. 1 (1935). The Government's conveyance of title to a fractional subdivision fronting upon a nonnavigable body of water, unless specific reservations are indicated in the patent, carries ownership to the middle of the bed *in front of* the basic holding. *Oklahoma v. Texas*, 261 U.S. 345 (1923). See also 43 U.S.C. 931, quoted in chapter I.

7-52. It is necessary at times to survey the beds of nonnavigable streams and lakes, or the portions of the beds owned by the Government, in connection with the administration of the public lands. Where all the shore remains in public ownership, the survey is simply an extension of the regular system. More commonly, it is desired to establish partition lines between private and public lands. In either case, if the area is covered by water, the survey cannot be monumented in the regular manner, and many of the lines cannot be surveyed on the ground. The plat then represents a survey made largely by protraction. The procedure should be outlined in detail in the special instructions.

7-53. The field work usually consists of: (1) a dependent resurvey of the lands bordering on the area to be surveyed; (2) the subdivision of the upland sections when necessary to determine the boundaries of publicly owned riparian subdivisions; (3) the monumentation of as many corners as practicable; (4) the exten-

sion of section lines across the bed to the extent needed for making computations; and (5) the establishment of median and partition lines if this is to be done on the ground.

Median Lines

7-54. It is sometimes necessary to define a line representing the limits of ownership between opposite banks. In navigable waters such a line might be either the deepest navigable channel (thalweg) or a median line. This is occasionally important in cases of reliction to public land fronting a navigable body of water. In nonnavigable waters the common property line is usually the median line.

The median line is a continuous line, formed by a series of intersecting straight line segments or a combination of straight line and curved line segments, every point of which is equidistant from the nearest point on the opposite shores. The method by which the median line is to be determined should be specified in the special instructions.

7-55. *Definition by Salient Points.*¹ The simplest method of determining the median line is by use of salient points. This method is of limited application in public land surveys, where the median line is nearly always determined from the meander lines. In certain surveys in Alaska no ground survey is required along meanderable water boundaries, and the salient point method may be used. It may also be applicable in special circumstances elsewhere if the meander lines are not defined. A salient point is any point on the shore that has an effect on the location of the median line. Along smooth shore lines the number of salient points becomes infinite, and a mathematical definition by this method is impracticable.

The angle points of the median line are first approximated graphically on suitably controlled

¹ The salient point method is that used generally in connection with sea boundaries. As defined in the United Nations' "Convention on the Territorial Sea and the Contiguous Zone," held in Geneva in 1958, a median line is a "line every point of which is equidistant from the nearest points on the baseline." In that case, the "baseline" is the line of mean low water. The definition may be made applicable to inland submerged land boundaries by substituting "line of ordinary high water" for "baseline."

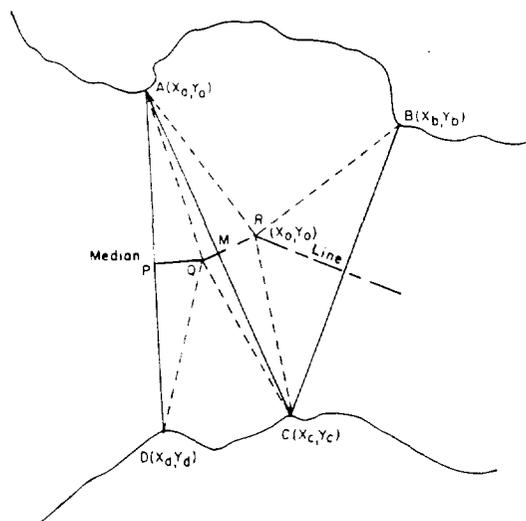


Figure 75.—Definition of a median line by salient points.

aerial photographs or reliable maps. The coordinates of the points are then determined analytically with values placing them truly equidistant from the nearest salient points. The analysis treats the salient points as lying on the circumference of a circle with radii extending from an angle point of the median line.

In figure 75 the median line has been initiated at point P midway between salient points A and D. The median line must pass through point P and be perpendicular to the line connecting A and D.

The coordinates of a point on the median line exactly midway between two salient points, such as point P, are

$$x_p = \frac{x_a + x_d}{2},$$

and

$$y_p = \frac{y_a + y_d}{2}$$

Line segment QR represents a portion of the line every point of which is equidistant from salient points A and C, one on each opposite shore. The median line passes through point M midway between salient points A and C, and is perpendicular to line AC.

Angle points on the median line occur at the intersection of adjacent straight line segments. At an angle point such as point R, the median line is equidistant from three salient points, one

of which must be located on the shore opposite the other two.

The coordinates $((x_o, y_o))$ of point R are determined from the equations

$$y_o = \frac{H_b^2 (x_b - x_a) - H_a^2 (x_c - x_a)}{2 G}$$

and

$$x_o = \frac{H_a^2 - 2y_o - (y_b - y_a)}{2(x_b - x_a)}$$

in which:

$$G = (y_c - y_a)(x_b - x_a) - (y_b - y_a)(x_c - x_a)$$

$$H_a^2 = x_b^2 + y_b^2 - x_a^2 - y_a^2$$

$$H_b^2 = x_c^2 + y_c^2 - x_a^2 - y_a^2$$

x_a = the x coordinate of point A, and

y_b = the y coordinate of point B, etc.

If the angle point is equidistant from more than three salient points, any three points can be used in determining the coordinates of the angle point. The three points selected should form the strongest possible geometric figure, that is, most nearly form the vertices of an equilateral triangle.

7-56. Definition Between Meander Lines

When the original meander line defines the true shore, or where new meanders have been run preliminary to the determination of the median line, the points on the median line may be considered as the centers of circles tangent to the meander course on either shore or coincident with one or more angle points of the meander line. The resulting median line is made up of intersecting straight line segments and curved line segments.

Straight line segments represent those portions of the median line every point of which is equidistant from straight line segments of the two meander lines, one on each opposite shore and more or less parallel to one another. Straight line segments also occur under certain conditions when the median line passes between two meander line angle points on opposite shores.

Angle points occur at points of intersection between adjacent straight line segments of the median line. At angle points the median line is equidistant from three or more straight line segments of the two meander lines, one of which segments must be located on the shore opposite the others. Median line angle points usually occur in the vicinity of a meander line angle

point when one shore line is concave toward the median line and the opposite shore line is straight.

Curved line segments of the median line occur whenever the median line is equidistant from an angle point on the meander line on one shore and a straight meander course on the opposite shore. The meander line at the angle point is convex toward the median line.

The approximate positions of the angle points on the median line can be determined most easily by graphical means based on aerial photography or maps. A detailed analysis is too lengthy to include here. The surveyor should present the survey data for office computation.

Partition Lines

7-57. The partition lines are established in accordance with the same principles for both rivers and lakes. Some variation is necessary in adapting the methods to particular cases. Care must be taken to award each basic holding on the shore the part of the bed *in front of* it. If one method fails to do this, another method, or a combination of methods, must be used.

RIVERS

7-58. Instructions for surveying the partition lines are found in 50 L.D. 216 (1923), in the syllabus:

In establishing the side boundaries of claims of riparian proprietors to the area between the original meander line on the north and the medial line of Red River in Oklahoma in accordance with the decisions of the Supreme Court in the case of *Oklahoma v. Texas*, lines should be run from points representing the limits of frontage of the original claims on the meander line to points on the medial line at distances thereon proportionate to the lengths of frontage of the respective abutting owners.

This is an adaptation of the rule outlined in the case of *Johnston v. Jones*, 66 U.S. 117 (1861). By that rule the new frontage along the water boundary of an accreted area was apportioned in the same ratio as the frontage along the ancient bank. In applying the rule, if the shore has deep indentations or sharp projections, the general shoreline, not the actual length, should be taken in setting the ratio. Normal lines are extended to the median line, above and below the area to be apportioned, at

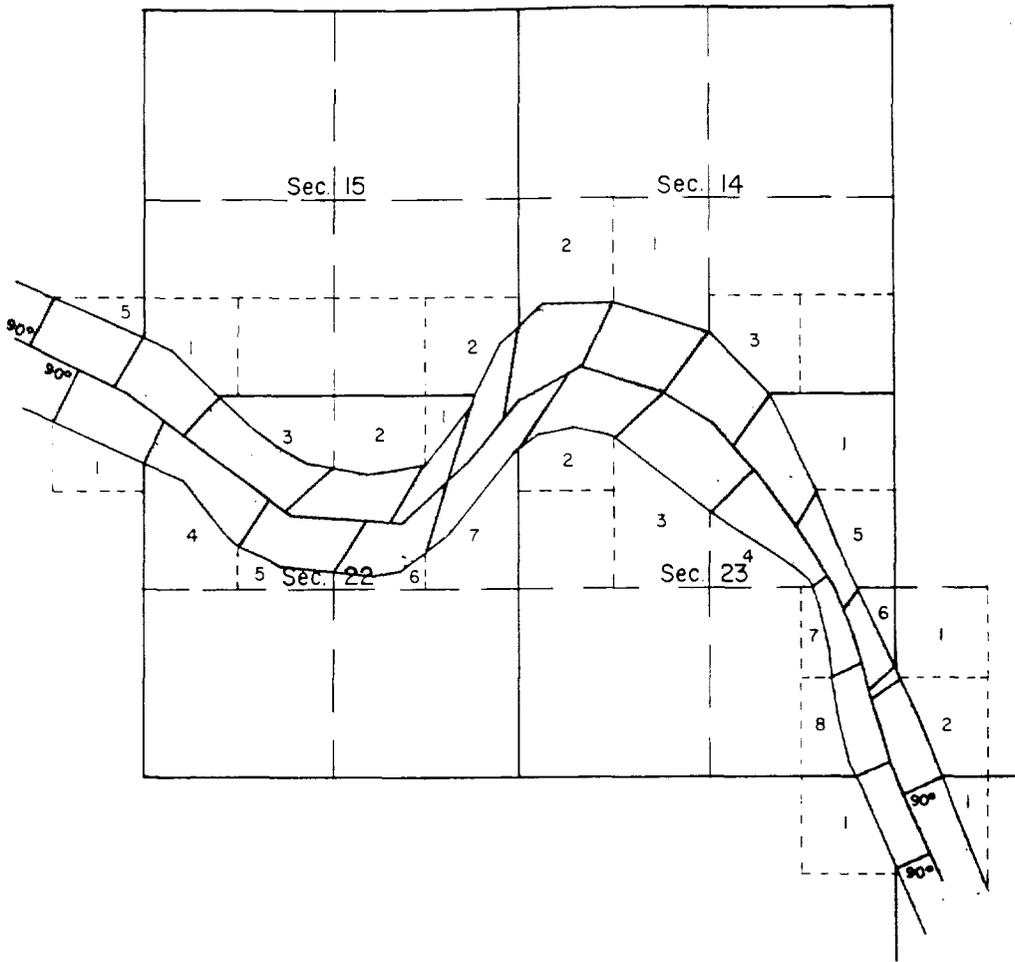


FIGURE 76(a).—Method of apportioning the bed of a nonnavigable river. Points were selected above and below the bend from which normals were extended to the median line. The intervals along the median line were determined by proportionate measurement. In this case the results are not as satisfactory as those obtained by the method shown in figure 76 (b).

points where the river's course is straight, or nearly so. The intermediate distance along the median line is then prorated according to the frontage. See figure 76 (a).

7-59. An alternate method is to run each partition line normal to the median line. This method awards to each riparian lot the area immediately in front of it. Where a winding stream course causes the normals to deflect rapidly, more than one normal can sometimes be extended from a single point on the shore, or perhaps no suitable normal can be drawn. A combination of methods may then have to be used to obtain equitable results. For instance, normals might be drawn to the median line at straight parts of the river, and the intermediate

parts apportioned along the median line. See figure 76 (b).

LAKES

7-60. The method of procedure depends on the shape of the shore line. The courts have generally held that the bed of a round lake should be divided among the riparian owners by ascertaining the center point and connecting that point by straight lines to the boundary corners on the shore. When a lake is long in comparison with the width, the methods applied to streams, with converging lines only at the ends, make the best division.

7-61. In figure 77 the ends of the lake have

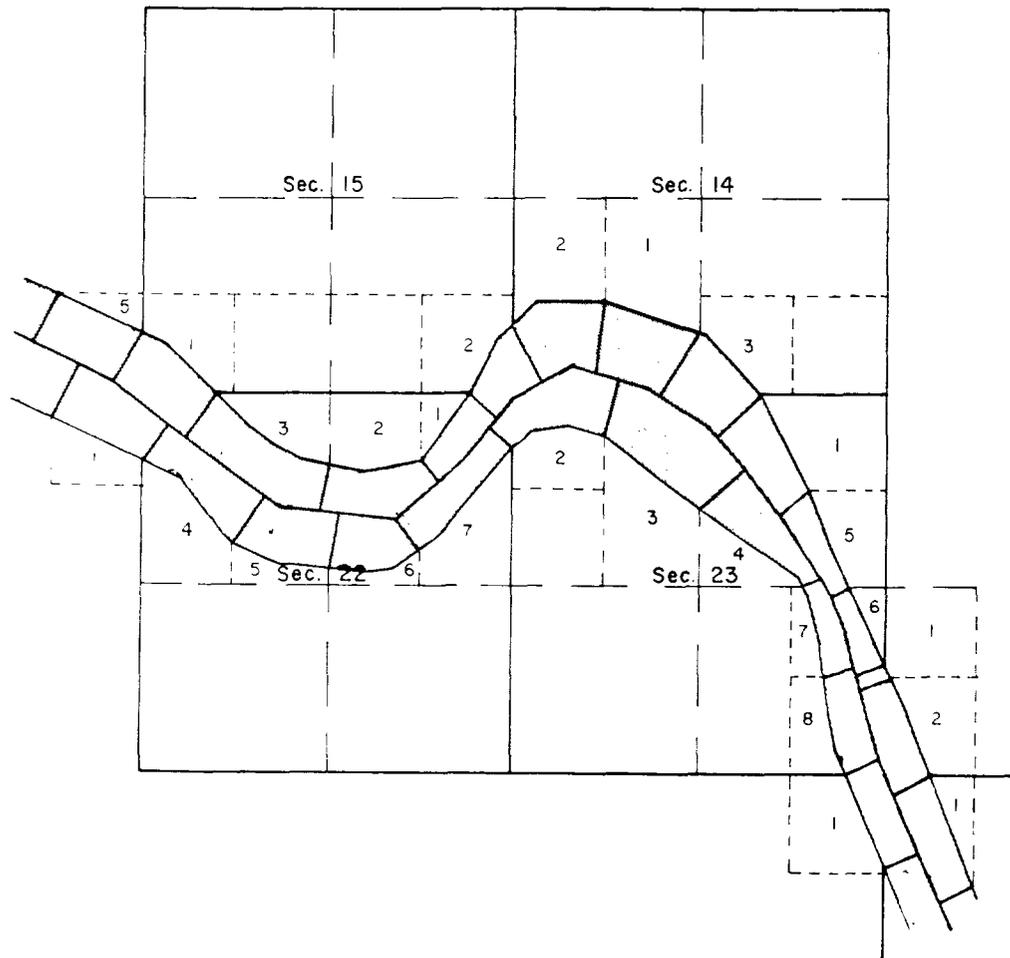


FIGURE 76(b).—Alternate method of apportioning the bed of a non-navigable river by extending normals to the median line.

been treated as arcs of a circle; the remainder of the bed has been divided by use of proportionate measurement along the median line. In this case normals to the median line would have resulted in the encroachment of some lots in front of others, and two normals could have been projected from several points as indicated by the dashed lines.

Apportionment of Accretion and Reliction

7-62. The term "accretion" is applied both to the gradual and imperceptible deposition of material along the bank of a body of water and the lands formed by this process.

7-63. "Reliction" is the gradual uncovering of land caused by the recession of a body of

water. Relicted land is treated in the same manner as accreted land insofar as its survey is concerned.

7-64. A meander line is not surveyed as a boundary. When the Government conveys title to a fractional lot fronting on a navigable body of water, the intention, in all ordinary cases, is that the lot extends to the water's edge.

7-65. The title and rights of riparian owners in areas *below* the line of mean high water of navigable bodies of water are governed by State law rather than Federal law. Whether Federal or State law controls the ownership of land accreted to a riparian holding has been answered in a series of cases:

In *Borax Consolidated, Ltd. v. Los Angeles*, 296 U. S. 10 (1935), the Supreme Court held that "The question as to the extent of this

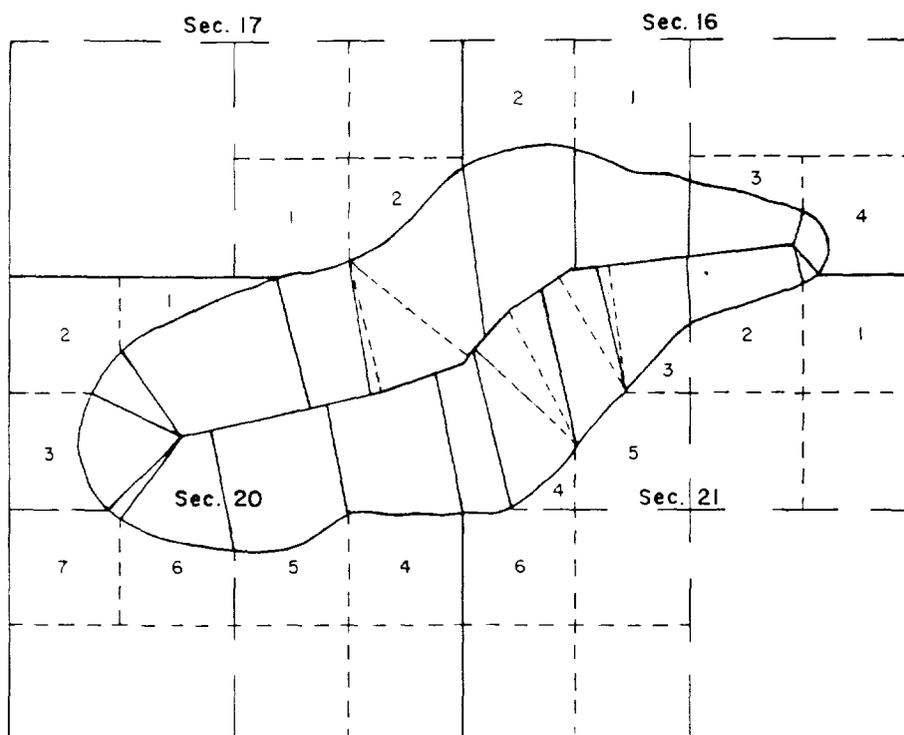


FIGURE 77.—Apportionment of the bed of a non-navigable lake.

federal grant, that is, as to the limit of the land conveyed, or the boundary between the upland and the tideland, is necessarily a federal question.”

The ownership of accretion to land covered by an Indian trust patent was considered in *United States v. Washington*, 294 F. 2d 830 (1961), *cert. den.*, 367 U. S. 817 (1962). The Ninth Circuit Court of Appeals held that Federal law applied because of the underlying Federal title.

The general question of whether Federal or State law controls as to ownership of accretion was considered in *Hughes v. State of Washington*, 389 U. S. 290 (1967). The Supreme Court ruled:

The question for decision is whether federal or state law controls the ownership of land, called accretion, gradually deposited by the ocean on adjoining upland property conveyed by the United States prior to statehood. . . .

We hold that this question is governed by federal, not state, law and that under federal law Mrs. Hughes, who traces her title to a federal grant prior to statehood, is the owner of these accretions. . . .

This brings us to the question of what the federal rule is. The State has not attempted to argue that

federal law gives it title to these accretions, and it seems clear to us that it could not. A long and unbroken line of decisions of this Court establishes that the grantee of land bounded by a body of navigable water acquires a right to any natural and gradual accretion formed along the shore. . . .

We therefore hold that petitioner is entitled to the accretion that has been gradually formed along her property by the ocean.

It is therefore settled that wherever it retains title to the original subdivisions along a body of water, either navigable or nonnavigable, the Government may subdivide the lands formed by accretion or by recession of the water, since these, too, are public lands.

7-66. A survey of accreted or relicted land is usually made when one or more of the riparian subdivisions has been disposed of, and it is desired to mark the boundaries of the remaining public land. As in the apportionment of the beds of nonnavigable bodies of water, the riparian owner is entitled to the area lying *in front of* his basic holdings. In the case of navigable waters the extent of survey is the water's edge. Accrued lands granted by State law to riparian proprietors within the bed of a navigable body of water are not considered here, since their

definition would be in accordance with State law.

Apportionment of the accreted lands is usually made by proportioning the new frontage in the same ratio as the frontage along the old shore as outlined in the case of *Johnson v. Jones*, 66 U.S. 117 (1861), discussed in sections 7-58 and 7-61.

7-67. If there should be substantial areas of accretion to be dealt with that fact will be brought out in the special instructions, with outline of the governing procedure, and the surveying work in reference to all accretion areas will be distinctly mentioned in the field notes and so shown upon the plat.

Accretion Prior to Entry

7-68. Occasionally, subsequent to survey, but before entry, a *large* body of land has formed by accretion between the meander line and the high water line. If such land had formed *after entry*, it would merely attach to the riparian holdings. If the land had been in place before the survey and at all subsequent times, it would fall in the class of omitted land, to be treated as hereafter described under that subject. But, in this special case, the meander line is treated as the boundary line of the grants, and patent is construed to convey only the lands within the meander line. *Madison v. Basart*, 59 I.D. 415 (1947).

7-69. The lands accreted after survey but before entry are not usually surveyed as would be ordinary accreted lands. Instead, the regular rectangular survey is extended to the body of water. The same procedure would be followed in surveying regular accreted lands only if none of the riparian lots had been patented and it was desired to extend the survey.

7-70. In determining what constitutes a "substantial" accretion, to which the rule in *Madison v. Basart* is applicable, the area of accretion should be compared quantitatively with the riparian lots to which it attached. Some consideration should also be given to the total area accreted. Accretion to a small lot might be large in proportion but negligible in absolute size. From the standpoint of *size* and *relative size*, the area in question can be weighed as in the case of omitted lands.

Avulsion

7-71. "Avulsion" is the sudden and rapid change of channel of a boundary stream, or a comparable change in some other body of water forming a boundary, by which an area of land is cut off. An island may result or the avulsed land may become attached to the opposite shore.

7-72. In the case of *Nebraska v. Iowa*, 143 U.S. 359 (1892), the Supreme Court held:

When grants of land border on running water, and the banks are changed by the gradual process known as accretion, the riparian owner's boundary line still remains the stream; but when the boundary stream suddenly abandons its old bed and seeks a new course by the process known as avulsion, the boundary remains as it was, in the centre of the old channel: and this rule applies to a State when a river forms one of its boundary lines.

7-73. An avulsive change cannot be assumed to have occurred without positive evidence. When no such showing can be made, it must be presumed that the changes have been caused by gradual erosion and accretion.

7-74. The change in course of a stream is clearly avulsive when the land between the old and new channels remains substantially as it was. The unaltered condition of the land may be indisputably shown by the continued existence of improvements in place or of timber, undergrowth, and other vegetation. A study of historic documents, especially maps and aerial photographs, will often help in determining what process has taken place. As a general rule the abandoned channel is easily identifiable where an avulsive action has occurred.

7-75. The bed of a new channel resulting from avulsion continues to belong to the owner of the land encroached upon. The bed of the former channel continues to belong to the riparian owners if the stream is nonnavigable. Ownership of the abandoned bed of a navigable stream is governed by State law.

7-76. When the change in a water course is avulsive, and the boundaries remain unchanged, any subsequent movement of the avulsive channel, whether caused by accretion or by another avulsive action, does not change property lines.

Erroneously Omitted Areas

7-77. Lands exposed by changes in water level or accreted subsequent to survey are not

erroneously omitted lands. This title is applied to lands, not shown on the plat of the original survey, which were excluded from the survey by some gross discrepancy in the location of a meander line. The unsurveyed land typically lies between the actual bank of a lake, stream, or tidewater and the record meander line.

7-78. In some older surveys temporarily flooded lands, or swamp and overflowed lands, were meandered as if they were permanent bodies of water. In a few cases, meander lines were reported where no body of water ever existed in fact. In still other instances, several lakes have been surveyed as one lake. All are treated in the same manner as those where the discrepancy is a grossly erroneous position of the record meander line. The converse is sometimes found where the record meander line leaves the bank and extends into the body of water. A water area may thus be shown as land.

7-79. Marginal discrepancies between the meander lines and the water at the time of survey fall into two classes, those that are merely technical differences and those that constitute erroneous omission. The guide lines for determining the class of a particular case are laid down in court and departmental decisions.

7-80. If land is to be regarded as erroneously omitted from survey, it must first be shown affirmatively that the area was *land in place* at the date of the original subdivision of the township. Then, if the land is similar to the surveyed lands, the usual inference that the official survey was correct may be set aside, and the conclusion may be substituted that the land should have been covered by that survey. However, a convincing showing is needed that the representations of the original plat and field notes are *grossly* in error.

7-81. Applications for the extension of the subdivisional lines to include the areas erroneously omitted from the original survey may be initiated either by settlers on the omitted land or by the owners of the adjoining land. The owner of the surveyed land, or a claimant who has purchased from him, may apply for the survey as a preliminary to quieting the title. There may or may not be adverse claims. The immediate question is the merit of the application

under the acts of Congress which grant relief in these cases. A field examination is nearly always required to verify the conditions alleged in the applications. It is objectionable in principle to amend a plat unless large and unwarranted discrepancies can be shown.

7-82. The survey of erroneously omitted lands may also be undertaken as an administrative responsibility for identifying public lands. Such cases may be brought to the attention of the Bureau by a Federal agency having administrative authority over the general area.

7-83. No proof is required to show the whys and wherefores of an erroneous meander line, but only that the line as run and as represented on the plat and in the field notes is in effect grossly in error. The rule is concisely stated in *John McClennen*, 29 L.D. 514 (1900):

It is not necessary to search for the source of the error. The result is the same whether such error arose from mistake, inadvertence, incompetency or fraud on the part of the men who made the former survey.

7-84. Where lands have been determined to be erroneously omitted from the original survey, the original meander line is made a fixed and limiting boundary segregating the previously surveyed areas from the unsurveyed public lands. The line is reestablished and marked with permanent monuments at the old angle points. Retracement between successive meander corners nearly always will show differences from the record in latitude and departure. The positions of the angle points are adjusted by the broken boundary method described in section 5-43 under "Angle Points of Nonriparian Meander Lines." The angle points are given serial numbers which do not duplicate numbers that may have been previously assigned in that section. The monuments are marked as shown in section 4-45.

The position of the original meander line having been determined, the survey is extended across the unsurveyed areas. Finally, a new meander line is surveyed in the correct position.

7-85. The requirements for making the plats to represent omitted land surveys are outlined in sections 9-78 through 9-83. The plat should carry a memorandum precisely stating the situation with reference to the survey represented, as in the following cases:

The position of the original record-meander courses of the so-called Moon Lake is shown by an irregular line with numbered angle points. This line as thus originally reported was grossly in error, and has therefore been marked as a fixed boundary, with the directions and lengths of the several courses adjusted to the record of the original survey.

The position of the original record-meander courses of Ferry Lake fronting along lot 4, section 9, and lots 2, 3, and 4, section 10, is shown by an irregular line with numbered angle points. This line as thus originally reported was grossly in error, and has therefore been marked as a fixed boundary, with the directions and lengths of the several courses adjusted to the record of the original survey.

The position of the original record-meander courses of a lake reported as having been located in section 36 is shown by an irregular line with numbered angle points. This line as thus originally reported was grossly in error, and, with the exception of certain courses fronting along lots 1, 2, and 9, has therefore been marked as a fixed boundary, with the directions and lengths of the several courses adjusted to the record of the original survey.

This memorandum is in addition to the memorandum referring to the dependent resurvey of the original section lines.

7-86. The three examples represented by the memoranda in section 7-85 are situations where the survey of erroneously omitted areas has been necessary. An examination of the manner in which each type was treated will help in determining how to approach similar cases.

7-87. *Nonexistent Moon Lake:* The plat of T. 12 N., R. 9 E., Fifth Principal Meridian, Arkansas, approved October 27, 1845, shows a meandered lake occupying the greater part of sections 22 and 27, and extending a short distance into section 26. The field notes of the line between sections 26 and 27 call for an intersection with the southeast side of "Sunk Lake," here classed as impassable and navigable. The surrounding fractional subdivisions as surveyed were all patented to the State under the provisions of the swamp land grant.

The case originated on the report of the removal of timber from portions of the area under the color of title arising through the ownership of the adjoining land. The report indicated that practically all of the area was high, dry land, covered with a growth of large timber, with no difference in the character of the land from that which had been included in the original subdivision. The topography, elevation, and timber

all revealed little if any change since the date of the subdivision of the township.

The greater part of the excluded area was found to be covered with various species of oak, maple, cottonwood, hickory, sycamore, hackberry, cypress, and willow. Many of the trees were of great age, 300 years or more, and many of them indicated strictly upland site conditions. The area was found to be level land, at about the same elevation and in some places higher than the surrounding lands, though there was evidence of what had been a slough along parts of the edge of the so-called lake.

7-88. By decision dated November 30, 1909, bearing departmental approval, the Commissioner of the General Land Office held that the area, 853.25 acres, was not a navigable lake on June 15, 1836, the date when Arkansas was ad-

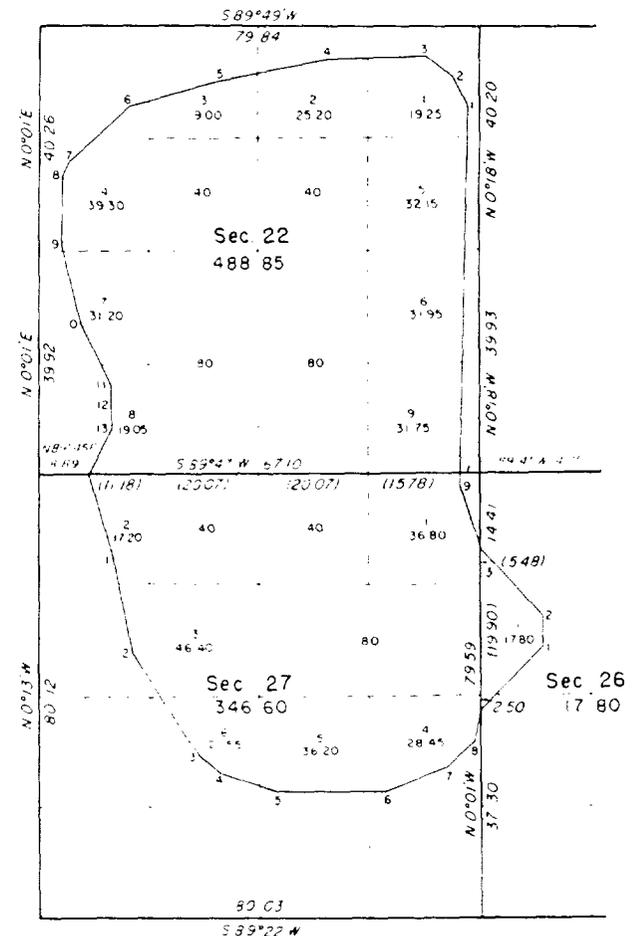


FIGURE 78.—The nonexistent "Moon Lake."

mitted into the Union, nor in 1841 at the date of the subdivision of the township. As the land was in place at that period and was not permanently covered by water, it was part of the public domain, and title had not passed from the Government.

On November 5, 1917, the Supreme Court announced an opinion (*Lee Wilson & Company v. United States*, 245 U.S. 24) denying the merits of the riparian claims to the area within the meander line of the so-called lake, restating two legal propositions held indisputable because settled by previous decisions:

First. Where, in a survey of the public domain a body of water or lake is found to exist and is meandered, the result of such meander is to exclude the area from the survey and to cause it as thus separated to become subject to the riparian rights of the respective owners abutting on the meander line in accordance with the laws of the several States. *Hardin v. Jordan*, 140 U.S. 371 (1891); *Kean v. Calumet Canal Co.*, 190 U.S. 452 (1903); *Hardin v. Shedd*, 190 U.S. 508 (1903).

Second. But where upon the assumption of the existence of a body of water or lake a meander line is through fraud or error mistakenly run because there is no such body of water, riparian rights do not attach because in the nature of things the condition upon which they depend does not exist and upon the discovery of the mistake it is within the power of the Land Department of the United States to deal with the area which was excluded from the survey, to cause it to be surveyed and to lawfully dispose of it. *Niles v. Cedar Point Club*, 175 U.S. 300 (1899); *French-Glenn Live Stock Co. v. Springer*, 185 U.S. 47 (1902); *Security Land & Exploration Co. v. Burns*, 193 U.S. 167 (1904); *Chapman & Dewey Lumber Co. v. St. Francis Levee District*, 232 U.S. 186 (1914).

Other important points in this and similar cases are found summarized in the syllabus:

If, in the making of a survey of public lands, an area is through fraud or mistake meandered as a body of water or lake where no such body of water exists, riparian rights do not accrue to the surrounding lands, and the Land Department, upon discovering the error, has power to deal with the meandered area, to cause it to be surveyed, and lawfully to dispose of it.

The fact that its administrative officers, before discovery of the error, have treated such a meandered tract as subjected to the riparian rights of abutting owners, under the State laws, and consequently as not subject to disposal under the laws of the United States, cannot stop the United States from asserting its title in a controversy with an abutting owner; and even as against such an owner, who acquired his property before the mistake was discovered and in

reliance upon such actions and representations of Federal officers carrying assurance that such riparian rights existed, the United States may equitably correct the mistake and protect its title to the meandered land. The equities of the abutting owner, if any, in such circumstances are not cognizable judicially, but should be addressed to the legislative department of the Government.

The swamp land act of September 28, 1850 (ch. 84, 9 Stat. 519), did not convey land of its own force, without survey, selection, or patent.

7-89. The surveying in the Moon Lake case consisted of a retracement of the boundaries of the several sections, a restoration of the obliterated corners, a remonumentation of all of the corners, a retracement of the record meander line with monumentation of the angle points, and a completion of the fractional section lines.

7-90. *Erroneously meandered Ferry Lake:* Ferry Lake is one of the lakes formed by the "Great Raft" of the Red River. The "Great Raft" was a complex series of logjams which probably began to form in the fifteenth century. Over a long period of time the raft moved upstream as the lower end decayed and additional material lodged against the upper end. As the raft moved, it blocked off tributaries and forced the main river into new channels. Numerous lakes and bayous were formed which extended almost to the Arkansas-Louisiana State line. Ferry Lake was formed near the close of the eighteenth century. It was a permanent, navigable body of water in 1812 when Louisiana was admitted into the Union. Because the "Great Raft" was a hindrance to navigation and transportation, Congress provided funds by the Act of May 23, 1828, to remove it. Clearing the river was a slow process, and the removal of the "Great Raft" was not completed until 1873. Most of the lakes were thereby artificially lowered or drained, and the State retained the uncovered portions of the beds. Only lands above the line of mean high water *before the artificial reliction* could be considered in determining if there had been an erroneous omission from the original survey. Location of the mean high water line was one of the complications of the case.

The plat of T. 20 N., R. 16 W., Louisiana Meridian, Louisiana, approved August 31, 1839, shows the north boundary of the township discontinued on the bank of Ferry Lake (now Cad-

The plat of fractional sections 4, 9, and 10 of the same township, approved August 18, 1871, represents an extension of the lines between sections 3 and 10, and between sections 4 and 9, to the main lake front. The corner of sections 3, 4, 9, and 10 was established in this survey, also a meander corner on the west side of a narrow bayou which drains out of the north part of section 9; but again, for no apparent reason, in running south on the line between sections 9 and 10 the survey was terminated at a point more than 3,400 feet north of the bank of Ferry Lake. A part of the meander courses in sections 4 and 9 were accurately run, but the remaining courses, particularly those which connected with the terminal point on the line between sections 9 and 10, were merely a traverse line through the woods, though represented in the field notes and shown on the plat to be the bank of the lake.

Following the discovery of oil and gas, mineral applications were filed with the Department in 1909 and 1910. The locations covered not only the omitted area but the bed of the lake. It was alleged that large errors had been made in running the meander lines, that the lake was merely a temporary body of water, and that it had not been navigable in 1812 when Louisiana was admitted to the Union. By 1910 all of the fractional lots adjoining the omitted area had been disposed of by the United States.

The report of the field investigation covered the historical data, the geology of the lake basin, an examination of the forest trees, and the surveying situation. It was concluded that Ferry Lake existed as a navigable body of water in 1812, though there had been a marked recession of the lake by 1910; and that in neither of the surveys of 1839 and 1871 had the lake been correctly meandered in sections 9 and 10, either as it was at the dates of the surveys or as it was in 1812.

The soil, topography, and timber on the omitted area were the same as found on the surveyed land. Along most of the meander line there was no indication of there ever having been a lake bank or water-washed escarpment of any kind.

The forest growth on the omitted land included overcup oak, sweet gum, and red gum on the lower levels, and on the higher levels post

oak, blackjack oak, Spanish oak, hickory, pine, and other varieties, many of them of great age, and clearly the descendants of a mixed forest that had existed for many centuries. The overcup oak was found in a belt immediately above a belt covered predominately by cypress, which occupied the plain terraces above and below an easily traceable escarpment. This bank, which had been made by the waters of Ferry Lake, continued without interruption around the entire basin. A contour survey showed the elevations in the omitted area in sections 9 and 10 to range up to 17 feet above the former lake level. The area omitted in these sections amounted to 229.67 acres.

7-91. Upon a review of the record, the Attorney General of the United States, in a letter to the Secretary of the Interior, dated September 11, 1916, concluded:

That no action should be taken to enforce or assert any claim by the Government to that portion of the area involved which is covered by the waters of the lake because if the State's title by virtue of its sovereignty should fail for any reason, I see no way of successfully resisting her claim under the swamp land grant.

However, in so far as concerns the land lying between the old meander line and the waters of the lake, I entirely agree with you that it constitutes unsurveyed public land of the United States, and . . .

On January 2, 1923, the Supreme Court of the United States announced an opinion (*Jeems Bayou Fishing & Hunting Club v. United States*, 260 U.S. 561), denying the claims to the land in sections 9, 10, 15 and 16, adverse to those of the Government, and commented:

The inaccuracy of the plat is plainly apparent upon a like inspection. Why ——— made the survey and returned the plat as he did is a matter of speculation, but the facts demonstrate that no survey of the large, compact body of land, which includes the tract in controversy, was ever made. The circumstances, as well as the extent and character of the lands, necessitate the conclusion that the omission was of deliberate purpose or the result of such gross and palpable error as to constitute in effect a fraud upon the Government.

7-92. Surveying the Ferry Lake case consisted of the steps mentioned in the Moon Lake case, also a monumentation of the contour which agreed with the evident mean high-water elevation of the lake as it was in the year 1812.

7-93. *Crooked Lake and Bear Lake*: The plat of T.43 N., R. 6 E., Fourth Principal Meri-

1812, when

), owing
section
was no
ine. Ex-
e, as de-
bank as

dian, Wisconsin, approved April 6, 1863, shows a meandered lake in section 36. Meander corners were established regularly on the south and east boundaries of the section. The field notes show the running of meander courses through the section on opposite sides of the lake, and call for high banks, along timbered land. No mention is made of an arm of a lake extending northwesterly into section 25. The fractional lottings were disposed of according to the representations of the plat.

By letter dated April 16, 1923, the Commissioner of the General Land Office advised the Secretary of the Interior of an application to make a forest lieu selection for the NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 36 (lot 15, figure 80), which according to the representations of the township plat would be located entirely within the bed of the meandered lake as above described. This letter contains a review of the facts as developed by a field examination, and concludes with a recommendation that the land theretofore shown as a meandered lake be surveyed and a proper plat constructed. The proposed action bears departmental approval.

The report of the field examination showed the following facts:

The south and east boundaries of the section

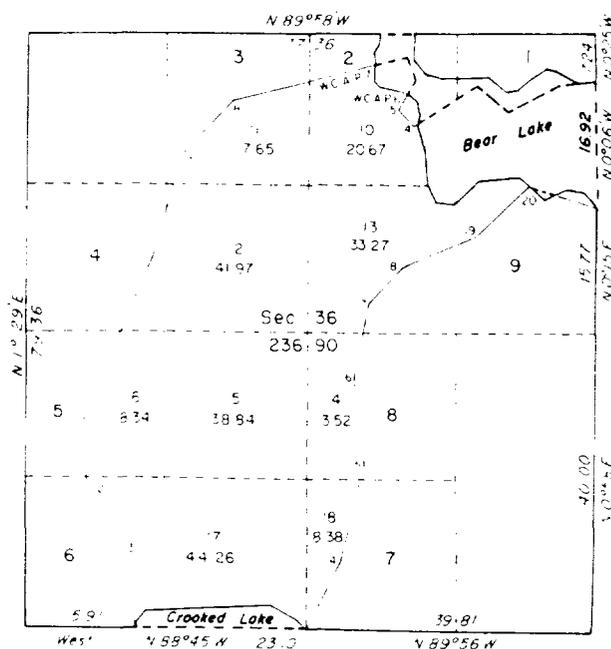


FIGURE 80.—The Crooked Lake and Bear Lake case.

cross two lakes instead of one, the lakes being separated by a body of land amounting to 236.90 acres contained within the lines represented on the original plat as the banks of the one meandered lake. This area is rolling upland ranging up to 50 feet above the level of either lake, and forested with pine, hemlock, birch, maple and spruce timber. There was no evidence of any changes in the water level of the lakes, nor of any escarpment along the fictitious meander courses connecting them, these lines having been found to traverse rolling land instead of following a contour, with not the slightest difference between the character of the land, soil or timber on the area theretofore surveyed and that which had been omitted. The shores of the two lakes were well defined, with banks from 3 to 8 feet high, bordered by a strip of level land from 10 to 30 feet in width, surrounded by rolling hills. The geologic formation, as well as the forest trees, indicated great age.

The surveying work to be done consisted of the steps previously outlined in the Moon Lake case.

Survey of Land Outside Meander Line Where No Gross Error Is Involved

7-94. Lands omitted from the original survey lying between the position for the record meander line and the actual bank of a lake, stream, or tidewater, situated in front of Government-owned subdivisions, are subject to survey as public land although they may not be of sufficient size and extent to constitute gross error or fraud in the original surveys.

If title to all the subdivisions in a section, shown to be riparian by the plat of the original survey, is still in the Government, and there is no reason for retaining the original lottings, new areas and designations may be returned for the public land. This procedure ordinarily is not involved unless warranted by the values involved, or justified by the difference in area of the subdivisions. However, when title to some of the record riparian subdivisions has passed into private ownership and no claim can be maintained by the United States to the omitted land in front of these subdivisions, partition lines are run and monumented segregating the public land from the area belonging to the pri-

vate owners. Generally it is necessary to subdivide the sections in the regular manner, reestablish the original meander line, and remeander the body of water. Lot numbers and areas are shown on the official plat for the public land being surveyed for the first time.

Where title to all the land in a section based upon the plat of the original survey has passed from the Government, it is not necessary to reestablish the original meander line. This line is protracted upon the survey plat, which should be prepared in the manner similar to the method adopted for showing an area formed by accretion in front of patented lands (figure 88, chapter IX). The division lines between patented holdings are not surveyed in the field or shown by protraction upon the plat.

The partition lines between the Government land and privately owned land are run in the same manner as partition lines dividing areas formed by accretion. The general rule is to follow the method described in *Johnston v. Jones*, 66 U.S. 117 (1861), that is, to apportion the new frontage along the water boundary in the same ratio as that along the line of the record meander course. There are acceptable variations to this rule where local conditions prevail and the added lands are not of great width or extent. In such cases the extension of normal lines to the water boundary is an equitable division to the avoidance of unrealistic or oblique lines which are not commensurate with the considered manner of the land's formation.

SWAMP AND OVERFLOWED LANDS

7-95. The acts of Congress which granted to certain States the swamp and overflowed lands within their respective boundaries were listed in chapter I. These lands are not conveyed without survey, selection, or patent. *Lee Wilson & Company v. United States*, 245 U.S. 24 (1923). They are surveyed as public lands and subject to classification at that time.

In *San Francisco Savings Union, et al v. Irwin*, 28 Fed. 708 (1886), aff. *Irwin v. San Francisco Savings Union, et al.*, 136 U.S. 578 (1890), the court stated:

The act of 1850 grants swamp and overflowed lands. Swamp lands, as distinguished from overflowed lands.

may be considered such as require drainage to fit them for cultivation. Overflowed lands are those which are subject to such periodical or frequent overflows as to require levees or embankments to keep out the water, and render them suitable for cultivation.

Swamp lands include marshes and intermittent ponds which do not have effective natural drainage, particularly where such conditions are long continued.

Overflowed lands include essentially the lower levels within a stream flood plain as distinguished from the higher levels, according to the characteristic effect of submergence where long continued.

7-96. Tidelands are coastal areas situated above mean low tide and below mean high tide, particularly as they are alternately uncovered and covered by the ebb and flow of the daily tides. As a part of the bed of navigable waters, such lands belong to the States. *Pollard's Lessee v. Hagan*, 44 U.S. 212 (1844). Tidelands are mentioned here to stress their distinction from swamp and overflowed lands. Coastal "salt marshes" that are covered by the daily tide are tidelands and not subject to survey. On the other hand, coastal marshes that are not covered by the daily tide are swamp and overflowed lands within the meaning of the grants and are subject to survey.

7-97. It has already been emphasized in section 3-115 that meander lines will not be established between the upland and the swamp and overflowed lands. Riparian rights, which are applicable within the beds of lakes, streams, and tidal waters, are not enforceable over the swamp and overflowed lands granted to the States. The survey of meander lines at the margin of swamps in the past has been an important cause of the erroneous omission of lands from survey.

7-98. The following rules should be followed in making surveys or field examinations of swamp and overflowed lands:

(1) According to R.S. 2481 (43 U.S.C. 984), any legal subdivision the greater part of which is "wet and unfit for cultivation," shall be included in the category of swamp and overflowed lands. When the greater part of a subdivision is not of that character, the whole of it shall be excluded. The legal subdivision referred to is the quarter-quarter section or comparable lot.

(2) "Wet and unfit for cultivation" is interpreted to mean that the land must have been so swampy or subject to overflow during the planting, growing, or harvesting season, in the majority of years at or near the date of the grant, as to be unfit for cultivation in any staple crop of the region in which it is located, without the use of some artificial means of reclamation such as levee protection or drainage ditches.

(3) A subdivision which becomes swampy or overflowed at a season of the year when this condition does not interfere with the planting, cultivating, or harvesting of a crop at the proper time and by the ordinary methods is not "made unfit for cultivation" and does not qualify under the swamp land grant.

(4) Tame grass or hay, when produced by the ordinary methods of preparing the ground, is considered a staple crop, as well as the cereals, or cotton, or tobacco.

(5) In the administration of the swamp acts the States have been allowed optional methods of preparing the lists of subdivisions that are to be identified as swamp and overflowed within the meaning of the acts. But the surveyor must determine with accuracy the position and extent of the swamp and overflowed land within the area under survey regardless of the methods employed by the States in asserting claims.

(6) Alabama, Indiana, Louisiana, Michigan, Minnesota (excepting as to lands within the Indian reservations), Mississippi, Ohio, and Wisconsin have elected to base their swamp-land lists on the field note record. In these States it is imperative that the field notes include a specific list of the subdivisions each of which is more than 50 per cent wet and unfit for cultivation, regarding such character as at the date of the passage of the granting act.

Arkansas, by the Act of April 29, 1898 (30 Stat. 367; 43 U.S.C. 991), relinquished all right, title, and interest to the remaining unappropriated swamp and overflowed lands within its boundaries.

(7) In California, under R.S. 2488 (43 U.S.C. 987), the swampland lists are based upon the representations of the plat of survey, and in this State it is imperative that the plats correctly show the conditions in this respect.

(8) The selection of swamp lands in Florida,

Illinois, Iowa, Missouri, and Oregon, and in Indian reservations within Minnesota, is based upon investigations and reports by representatives of the State and of the Bureau of Land Management, but this does not set aside the Manual requirements for the usual complete showing of the character of the land.

7-99. It is always important to note any marked changes in the water level and drainage conditions of the region, and to ascertain the situation as of the date of the granting act. It is desirable to secure the testimony of persons who have known the lands for long periods. The most convincing evidence of the land's character at the date of the granting act is the older native timber, as the varieties reflect their site conditions with great certainty.

This line of investigation requires an inquiry into the habitat of the forest species which are found, particularly as to whether the usual range of the tree is within low wet ground, as for example the cypress, tupelo, sweet gum, water ash, water locust, and red bay of the southern latitudes, and the tamarack, white cedar, black spruce, swamp spruce, and black ash of the northern latitudes of the United States. The presence of any of the species named indicates the possibility of swamp land, and, while conclusive with some of them, others of the species named have a wider range and may be found associated with upland varieties. If upland varieties are present the plain inference will be that the site conditions are that of upland, even though a forest species may favor moist rich soil.

SOIL CLASSIFICATION

7-100. Earlier manuals have stressed the appraisal of soil characteristics as an essential part of the survey returns. This classification has been an invaluable aid in the development of the public domain, both to the prospective settler and in the administration of natural resources. Such information is now generally available from other sources, and its provision by the field notes is not as important as it once was. Yet, in the making of original surveys, it is necessary to tie the available information to specifically described lands. Further, the gen-

eral law (R.S. 2395; 43 U.S.C. 751) requires the surveyor to note and report upon the soil types. These requirements will hereafter be limited to lands being surveyed for the first time and need not be routinely applied to resurveys unless provided for by the special instructions.

7-101. The soil types, when considered in relation to precipitation and other climatic factors, the drainage, the adaptability of the terrain to irrigation, the elevation, and the latitude, will indicate whether the highest and best use of the land is for farming, grazing, forestry, or other purposes.

7-102. An outline of the matters to be considered in soil studies is presented below as a guide to the surveyor in making his report.

(1) Texture: Gravel, coarse and fine; sand, coarse and fine; sandy loam; silt loam; loam; clay, heavy and light; and muck.

(2) Structure: Single grained, pulverulent, and lumpy.

(3) Color: Surface soil and subsoil, both when dry and when wet.

(4) Chemical properties: Acidity, alkalinity, and humus content.

(5) Depth: Surface soil and subsoil.

(6) Location: River bottom or flood plain, bench, slope, plateau, prairie, and mountain.

(7) Topography: Level, rolling, broken, hilly and mountainous; and elevation above sea level.

(8) Drainage: Direction, depth to water table, and quality, as poor, good, or erosive.

(9) Mode of formation: Water laid, glacier laid, wind laid, and residual.

(10) Geological derivation:

(a) Sedimentary rocks are either formed of fragments of other rock transported from their sources and deposited as conglomerate, sandstone, and shale; or formed by simple precipitation from solution, as limestone, or of secretions of organisms, as some coastal rocks.

(b) Metamorphic rocks: Formed through change in constitution, especially those due to great pressure, heat, and water, and resulting in a more compact or more highly crystalline condition, including, for example, quartzite, marble, slate, and schist.

(c) Igneous rocks: Formed through the action of intense heat, including, for example (first, eruptive rocks) basalt, lava, and volcanic ash; (second, trap rock) felsite and quartz-porphry; and (third, granular rock) granite, diorite, and porphyry.

7-103. Soil has its origin in the material which comes from the disintegration of the rocks. Roots and other vegetable matter in the soil are by decay gradually converted into humus, which is found only in the surface soil, and in quantities which vary with the activity and profusion of plant life. Plant food comes from the chemical elements contained in the rock and the humus; one is the product of inorganic matter, the other a product of the decomposition of organic matter. Plants draw four elements from the soil that are essential to their development: phosphorus, potassium, nitrogen, and calcium. Other elements are usually present in plentiful supply and so are of less importance. The amount of humus is important to the fertility of the soil, and it absorbs and retains moisture.

Soil bacteria thrive best in soil that is rich in decaying vegetation, with favorable proportions of lime, air, light, warmth, and moisture, and through their presence much nitrogen is taken from the air for storage in the ground. The relation of these things leads to the notable observation that soils seem to select their plants, or vice versa. There is found in a certain soil type one class of grasses or forest cover, in another soil very different plant life. These are the keys to a study of the soil, and when all are considered in connection with the moisture, climatic, and other conditions of the environment, will very largely determine its value for agriculture, stock grazing, or forestry.

7-104. The following is an illustration of a general description of the land and soil types found within a selected township, designed to bring out rather minute references to the soil structure:

Land, level, and gently rolling plateau, with elevation from 500 to 700 feet above sea level. Soil, fine sandy loam; surface soil dark gray to black, rich in humus, from 10 to 15 inches deep; subsoil, light brown loam, 36 inches deep, rest-

ing on gravel bed; sedimentary origin, lake laid. Drainage good, the stream system being the _____ River and its tributaries. The normal precipitation of the region is ordinarily deficient for general farming, but

the soil is well adapted to any of the cereals usually grown in this latitude by dry-farming methods, and it produces excellent grasses, both native and tame. _____