


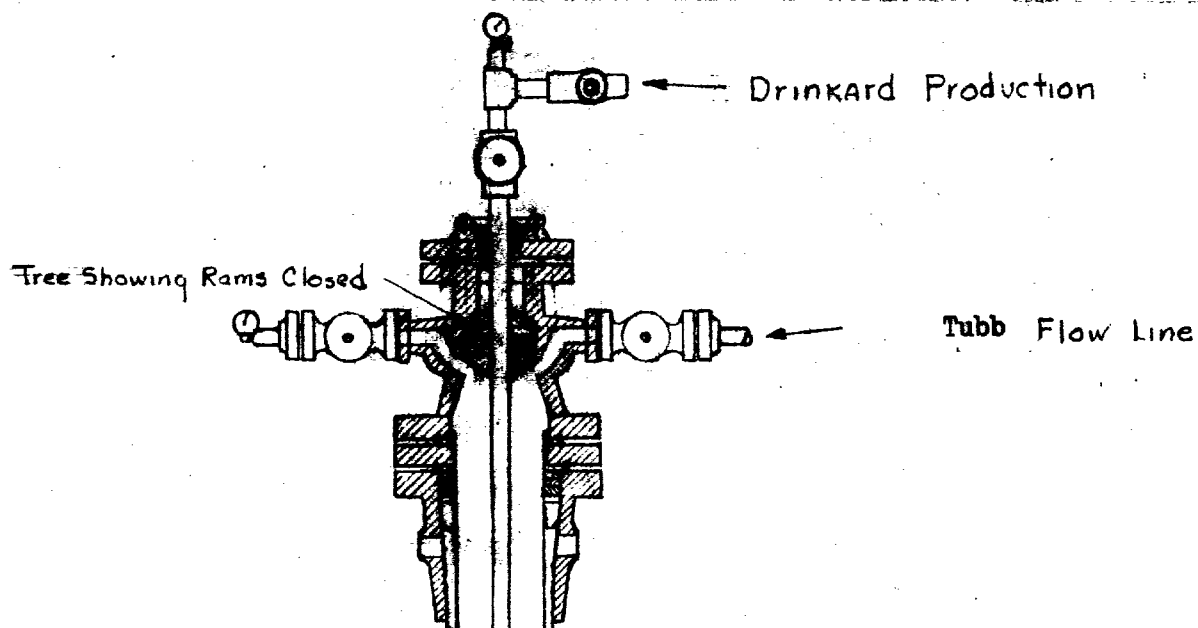

8 5/8" Casing Cemented @ 2915'
 Cement Circulated to surface w/ 1200
 SXS. 3 7/8" 300 SXS. Neat.

Casing Jet Perforated
 w/ 4-21 gram shots / foot
 From 5970' to 6240'.

Otis Side Door Choke
 Blanked Off
 @ 6465'


Baker Model "D" Retainer
 Production Packer
 Set @ 6470'.

5 1/2" Casing Cemented @ 6520' w/ 500 SXS. Neat
 Estimated Top Cement 3550'.

Tubing Perforations

TD - 6618'

Detail of Mechanical Equipment To Be
 Installed In Dually Completed Drinkard And
 Tubb Wells For Submission To Oil
 Conservation Commission

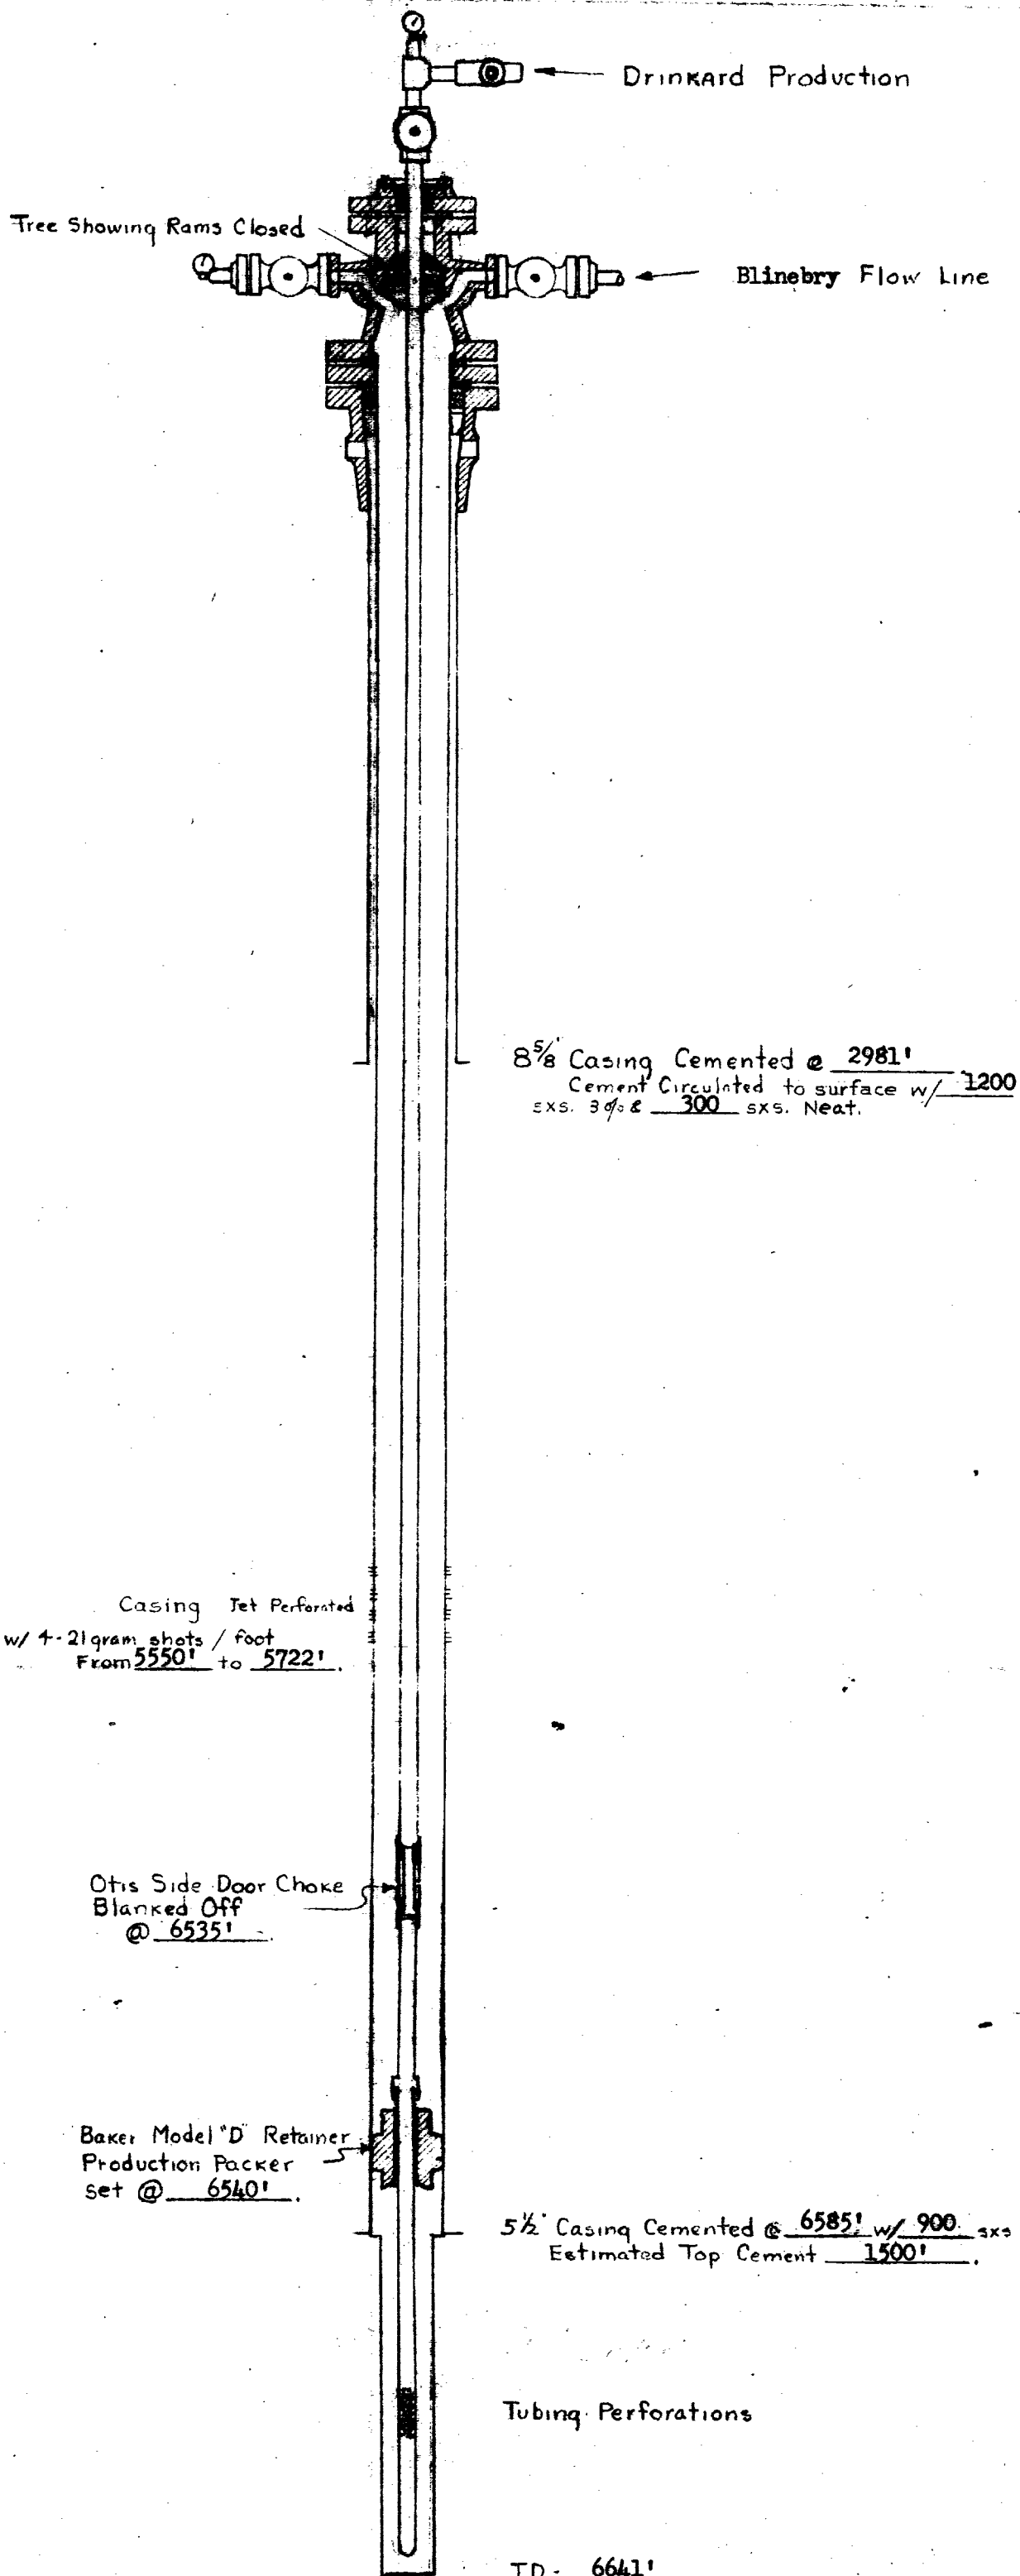

8 5/8" Casing Cemented @ 2981'
 Cement Circulated to surface w/ 1200
 SXS. 300 SXS. Neat.

Casing Jet Perforated
 w/ 4-21gram shots / foot
 From 5550' to 5722'

Otis Side Door Choke
 Blanked Off
 @ 6535'

Baker Model "D" Retainer
 Production Packer
 set @ 6540'

5 1/2" Casing Cemented @ 6585' w/ 900 SXS Neat
 Estimated Top Cement 1500'

Tubing Perforations

TD - 6641'

Detail of Mechanical Equipment To Be
 Installed In Dually Completed Drinkard And
 Blinebry Wells For Submission To Oil
 Conservation Commission