


HANSON "D" #1 NW/4 SW/4 NW/4 Sec 26, T20S, R34E

PLUGGING COMPLETE 11/30/87

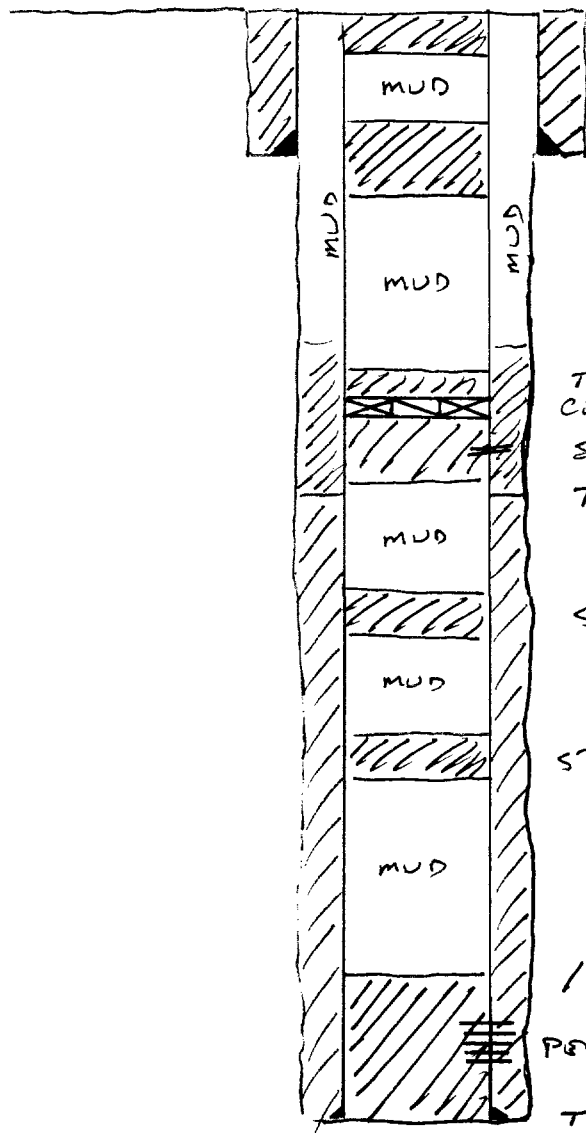

50' CEMENT PLUG RESULTS

CEMENT PLUG 220' TO 320'
8 7/8" C270' CEMENT CIRC. TO SURFACE

TOP OF CEMENT @ 1365'
CEMENT RETAIN @ 1400'
SQUEEZ PER @ 1450'
TO C @ 1500'

50 SK CEMENT 1690'-1740' (TOP OF SALT)

S^o SK CEMENT 3270'-3320' (BASE OF SALT)

100 SK CEMENT PLUG TO 3500

PAGES 364-3631

TD 3728' 5-1/2" CSG SMOB @ 3728' IN 7 7/8" HOLE

NEW MEXICO
OIL CONSERVATION DIVISION


524195

4A

CASE NO. 10985


HANSON "D" #2 NW/4 NE/4 NW/4 Sec 26, T20S, R34E

PLUGGING COMPLETED 10/2/63

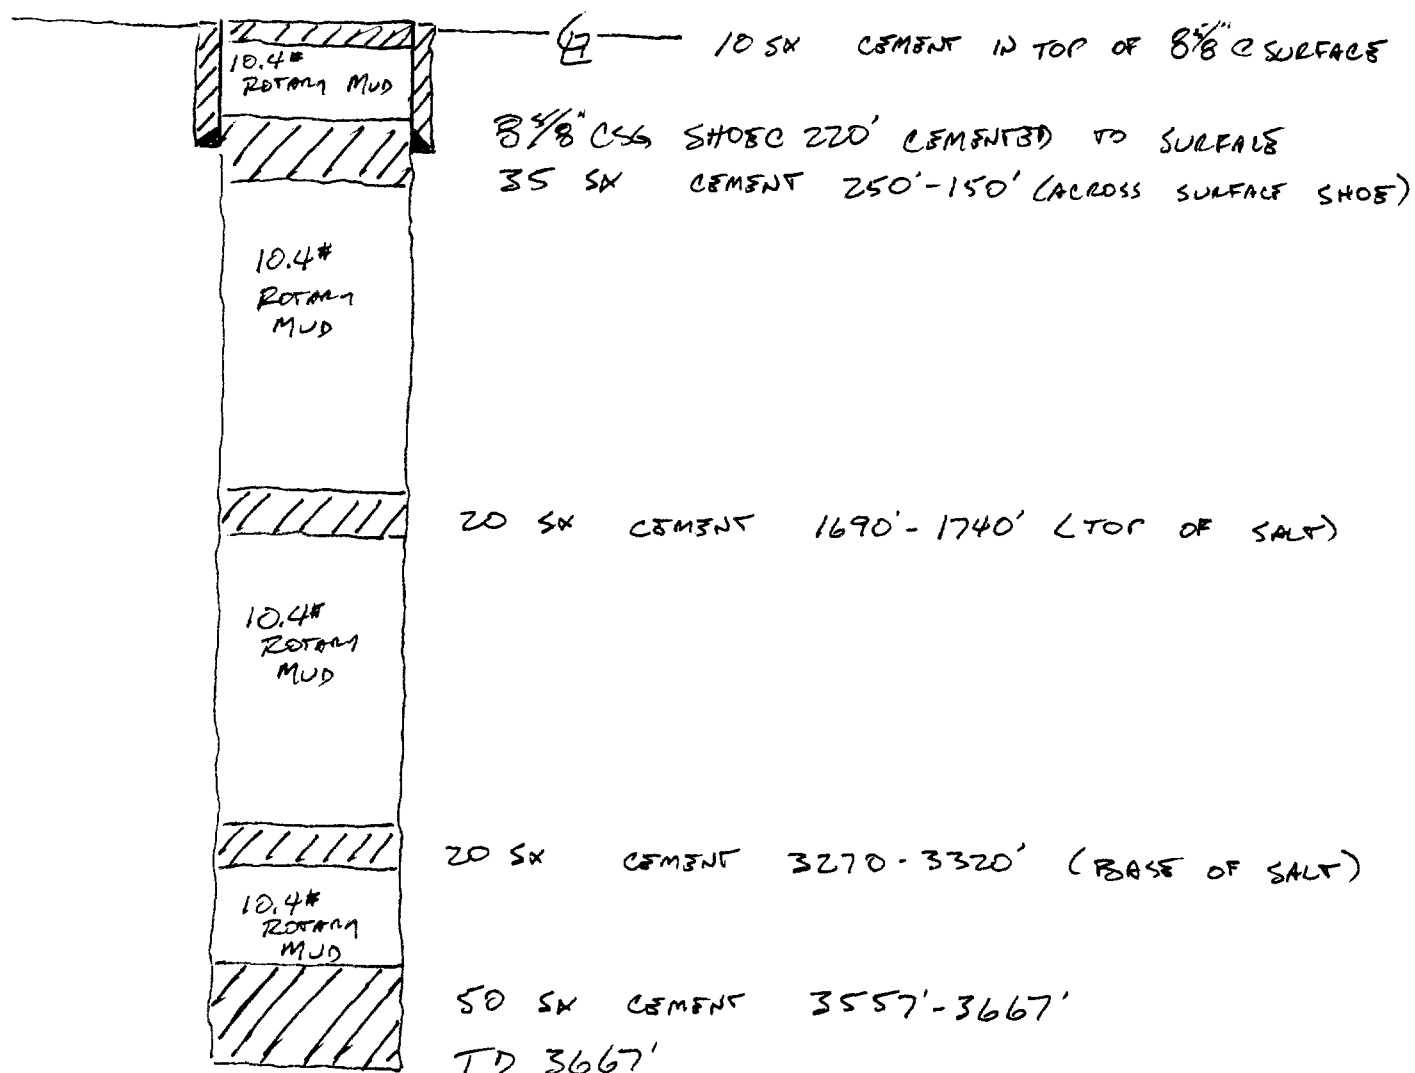

HANSON "C" #2 SW/4 NW/4 SW/4 SEC 23, T20S, R34E

PLUGGING COMPLETED 8/24/63

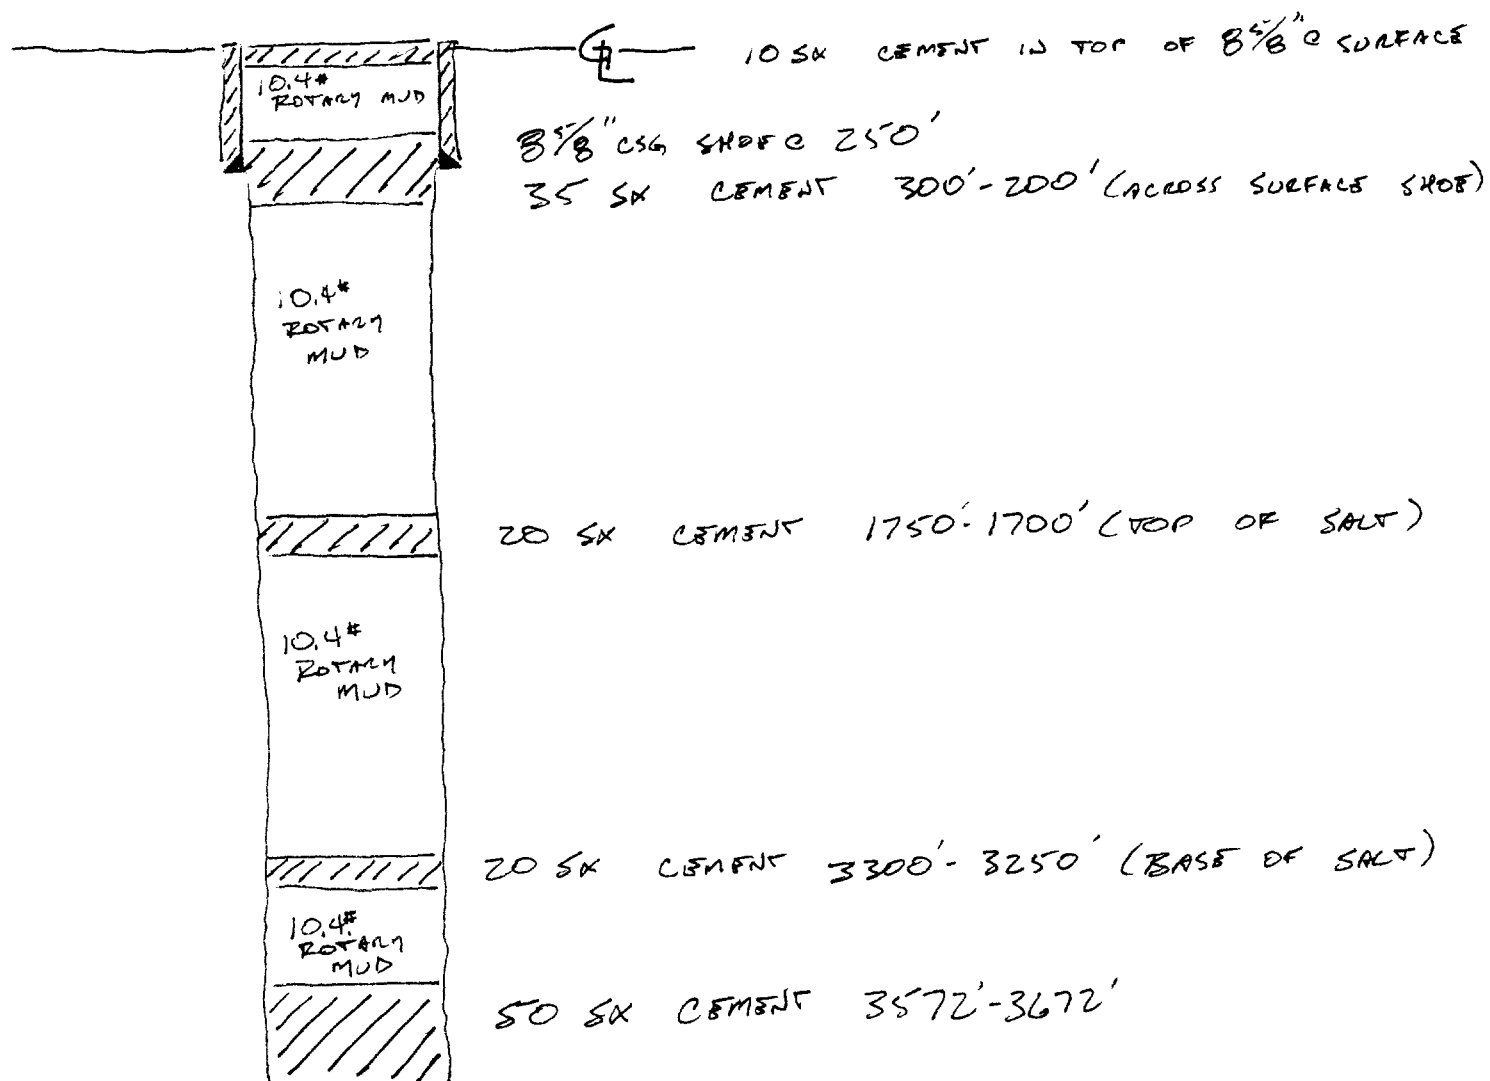

D#8 FEDERAL #1 SW/4 SW/4 SE/4 Sec 23, T20S, R34E

PLUGGING COMPLETED 8/9/61

