

YATES DRILLING COMPANY
PROPOSED CACTUS QUEEN UNIT
CHAVES COUNTY, NEW MEXICO

NMOCD FORM C-108

*C-108 for
the Statutory Unit Area*

BEFORE EXAMINER STOGNER	
OIL CONSERVATION DIVISION	
YATES	EXHIBIT NO. 14
CASE NO. 9809, 9810, 9823	

TABLE OF CONTENTS

BASIC NMOCD FORM C-108	1-2
SUPPLEMENTAL TEXT	3-7
I. Purpose	3
II. Operator	3
III. Injection Well Data	3
IV. Existing Project	4
V. Ownership	4
VI. Well Data	4
VII. Project Data	4-5
VIII. Geologic Data	5-6
IX. Stimulation Program	6
X. Well Logs	6
XI. Fresh Water	6
XII. Injection Zone Isolation	7
XIII. Proof of Notice	7
XIV. Certification	7
 AREA LEASE OWNERSHIP MAP	 8
 AREA OF REVIEW MAP	 9
 INJECTION WELL DATA	 10-21
Apache State 27 #2	10-11
Burkitt Federal #3	12-13
Doyal #1	14-15
Doyal #3	16-17
Doyal #4	18-19
Garner Federal #7	20-21
 WELLS WITHIN AREA OF REVIEW DATA	 22-40
Apache State 27 #1	22
Apache State 27 #2	23
Burkitt Federal #1	24
Burkitt Federal #2	25
Burkitt Federal #3	26
DeLuna Federal #3	27
Doyal #1	28
Doyal #2	29
Doyal #3	30
Doyal #4	31
Gallagher State #1	32
Garner Federal #2	33
Garner Federal #3	34
Garner Federal #7	35
Garner Federal #9	36
Rich Federal #1 Plugged & Abandoned	37-38
Toles Federal #1 Plugged & Abandoned	39-40

FRESH WATER & PRODUCED WATER ANALYSIS	41-58
Letter to State Engineer's Office	41
Response from State Engineer's Office	42-45
Summary of Fresh Water Well Locations	46
Map of Fresh Water Well Locations	47
Fresh & Produced Water Analysis	48-58

APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: Secondary Recovery Pressure Maintenance Disposal Storage
Application qualifies for administrative approval? yes no

II. Operator: Yates Drilling Company

Address: 105 South 4th Street, Artesia, New Mexico 88210

Contact party: Tobin L. Rhodes Phone: (505) 748-1471

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? yes no
If yes, give the Division order number authorizing the project _____.

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)

XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Tobin L. Rhodes Title Petroleum Engineer

Signature: Tobin L. Rhodes Date: 10-13-89

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

I. WELL DATA

The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

IV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells;
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2000, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

OIL CONSERVATION DIVISION
FORM C-108 (Supplement)

Application of Yates Drilling Company
For a Secondary Recovery Project
(Proposed Cactus Queen Unit)
Chaves County, New Mexico

I. Purpose:

Application is made for authorization to inject water into the Queen formation underlying the boundaries of the proposed Cactus Queen Unit. The proposed unit consists of 560 acres, more or less, of Federal, State, and Fee lands in Unit M (SW/4 SW/4) of Section 26, Units I, J, K, M, N, O, P, (SE/4, E/2 SW/4, SW/4 SW/4) of Section 27, Units A, B, C, D, H, (N/2 NE/4, N/2 NW/4, SE/4 NE/4) of Section 34 and Unit D (NW/4 NW/4) of Section 35, Township 12 South, Range 31 East, Chaves County New Mexico. This project would be classified as a secondary recovery project with the objective of recovering hydrocarbons that will not and can not be recovered by primary means.

Many wells in the proposed unit area are primary depleted or are very near primary depletion. Our studies show that the injection of water into selected wells will result in the recovery of oil in economic quantities not otherwise recoverable. This project should provide economic benefits to all parties holding any type of interest in the unit acreage.

II. Operator:

Yates Drilling Company
105 South Fourth Street
Artesia, New Mexico 88210

Phone Number: (505) 748-1471

III. Injection Well Data:

A well data sheet is attached for each of the six wells proposed for water injection. Each injection well data sheet includes a downhole schematic of how each individual well will be configured if this application is approved.

IV. Existing Project:

The proposed project is not an expansion of an existing project and will be a totally new project.

V. Ownership:

A lease ownership map is attached which identifies all wells and lease ownership within two miles of any of the six proposed injection wells. A map is also attached on which the area of review has been identified by drawing a one-half mile circle around each injection well.

VI. Well Data:

There are presently seventeen wells including proposed injection wells that fall within the boundaries of the proposed unit or within the area of review. Two of these wells have been plugged and abandoned, one well is temporarily abandoned, and the remaining fourteen wells are active pumping oil wells producing from the Queen formation. Available data for each of the wells is included in the attached well data sheets. Additionally a downhole schematic has been drawn depicting each of the two plugged and abandoned wells.

Production figures and decline curves are attached for each well within the proposed unit that has produced from the Queen formation.

VII. Project Data:

1. The proposed daily average water injection rate is approximately 200 barrels per day for each of the six proposed water injection wells. Total water injection for the unit would be 1200 barrels per day. The maximum injection rate for any individual well will be based on fracture pressure as determined by step-rate pressure tests to be conducted on each injection well.

2. Produced water will be stored in covered steel storage tank(s) and in open top fiberglass tanks making the produced water system an open system. Any fresh water will be stored in a covered steel tank. Produced oil will immediately be separated from produced water.

The oil will be stored in a steel covered production tank until sold.

3. Initially the injection wells may take water on a vacuum, but as the reservoir fills a positive surface injection pressure will be required to inject water. The maximum injection pressure will also be determined by proposed step-rate pressure tests. At no time prior to the step-rate tests will the injection pressure exceed a pressure limitation of 0.2 PSIG per foot of depth to the top of the injection interval.

4. The source of injection fluid will be produced water from the producing wells within the unit and fresh water from the Ogollala aquifer in the area. No commitment has been made but commercial sources of fresh water are available in the area.

5. No water compatibility problems are expected as Ogollala water has been successfully injected into the Queen formation, throughout the Caprock Queen Field, without excessive problems. Compatibility tests have been run commingling the produced water and fresh water and no adverse problems were observed.

VIII. Geologic Data:

The Proposed Cactus Queen Unit produces from the upper sandstone member of the Queen formation, upper Guadalupian series, Permian system. The average producing depth in the field is approximately 2989 feet. The existing producing formation will be the interval into which water will be injected.

The productive/injection interval, as indicated from a whole core analysis on the DeLuna Federal #3 (330' FNL & 1980' FEL, 34-12s-31e) and sidewall core data from numerous wells, is fine grained, friable, gray, quartz sandstone. The grains are sub-angular to sub-rounded and well sorted. The cementing material is variously from anhydrite and dolomite. The exact depositional environment is unknown. Porosity and permeability are intergranular in nature. The sandstone is not naturally fractured.

The Cactus Queen Field is a stratigraphic trap. Cementation of the sandstone results in the loss of porosity and permeability, creating a barrier on all sides with the exception of the east. A tilted oil-water contact limits the production in that direction. The oil/water contact has been established at (+1440)

in the southeast end of the field and (+1446) at the northeast edge.

The primary underground source of fresh water in this area is the Ogollala formation of Tertiary age, the base of which is estimated to be 300 feet below the surface. This aquifer is protected behind the surface pipe and cement of all existing wells in the unit area. The Chinlee formation is also a fresh water aquifer which immediately underlies the Ogollala formation. The Base of the Chinlee is estimated to be approximately 500 feet below the surface in the unit area. The Chinlee is behind the production casing in all existing wells in the unit area.

IX. Stimulation Program:

Each of the currently producing wells has previously received a fracture treatment. The details of these treatments are outlined in the data sheet for each individual well. There are no plans to stimulate any of the existing wells which will be producing wells in this project.

The wells which will be injection wells may require a small clean-up acid treatment prior to injection. We plan to treat each of the proposed injection wells with 1000 to 2000 gallons of 15% hydrochloric acid. This treatment should insure that existing perforations are open and that each well will accept water or gas at the lowest possible pressure.

X. Well Logs:

Well logs for each of the existing wells in the proposed unit have previously been submitted to the Hobbs office of the NMOCD. Attached for zone identification purposes is a cross section containing portions of the logs from wells in the reservoir.

XI. Fresh Water:

The Office of the State Engineer in Roswell has a record of six wells within one mile of the proposed unit. The total depths of two of the wells are unknown, however all six wells are assumed to be producing from the Ogollala formation. Analysis

reports for water taken from three of the wells are attached.

XII. Injection Zone Isolation:

Available engineering and geologic data has been examined and no evidence of open faulting or any other hydrologic connection between the injection zone and any underground source of drinking water has been found.

XIII. Proof of Notice:

A listing of off-set leasehold operators within 1/2 mile of any injection wells and the surface owners that have received a copy of this application by certified mail is attached.

XIV. Certification:

I hereby certify that the information submitted with this application is true and correct to best of my knowledge and belief.

Tobin L. Rhodes



Petroleum Engineer

October 13, 1989

<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>	
<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>	
<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>	
<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>	
<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>		<p>Reading & Bates E.S. May Jr. et al 10-1-52 10-1-52 10-1-52</p>	


TOWNSHIP 13 S TOWNSHIP 12 S

RANGE 31 E RANGE 32 E

YATES DRILLING COMPANY
PROPOSED CACTUS QUEEN UNIT
CHAVES CO., NEW MEXICO
LEASE OWNERSHIP MAP

ILLEGIBLE

R31E

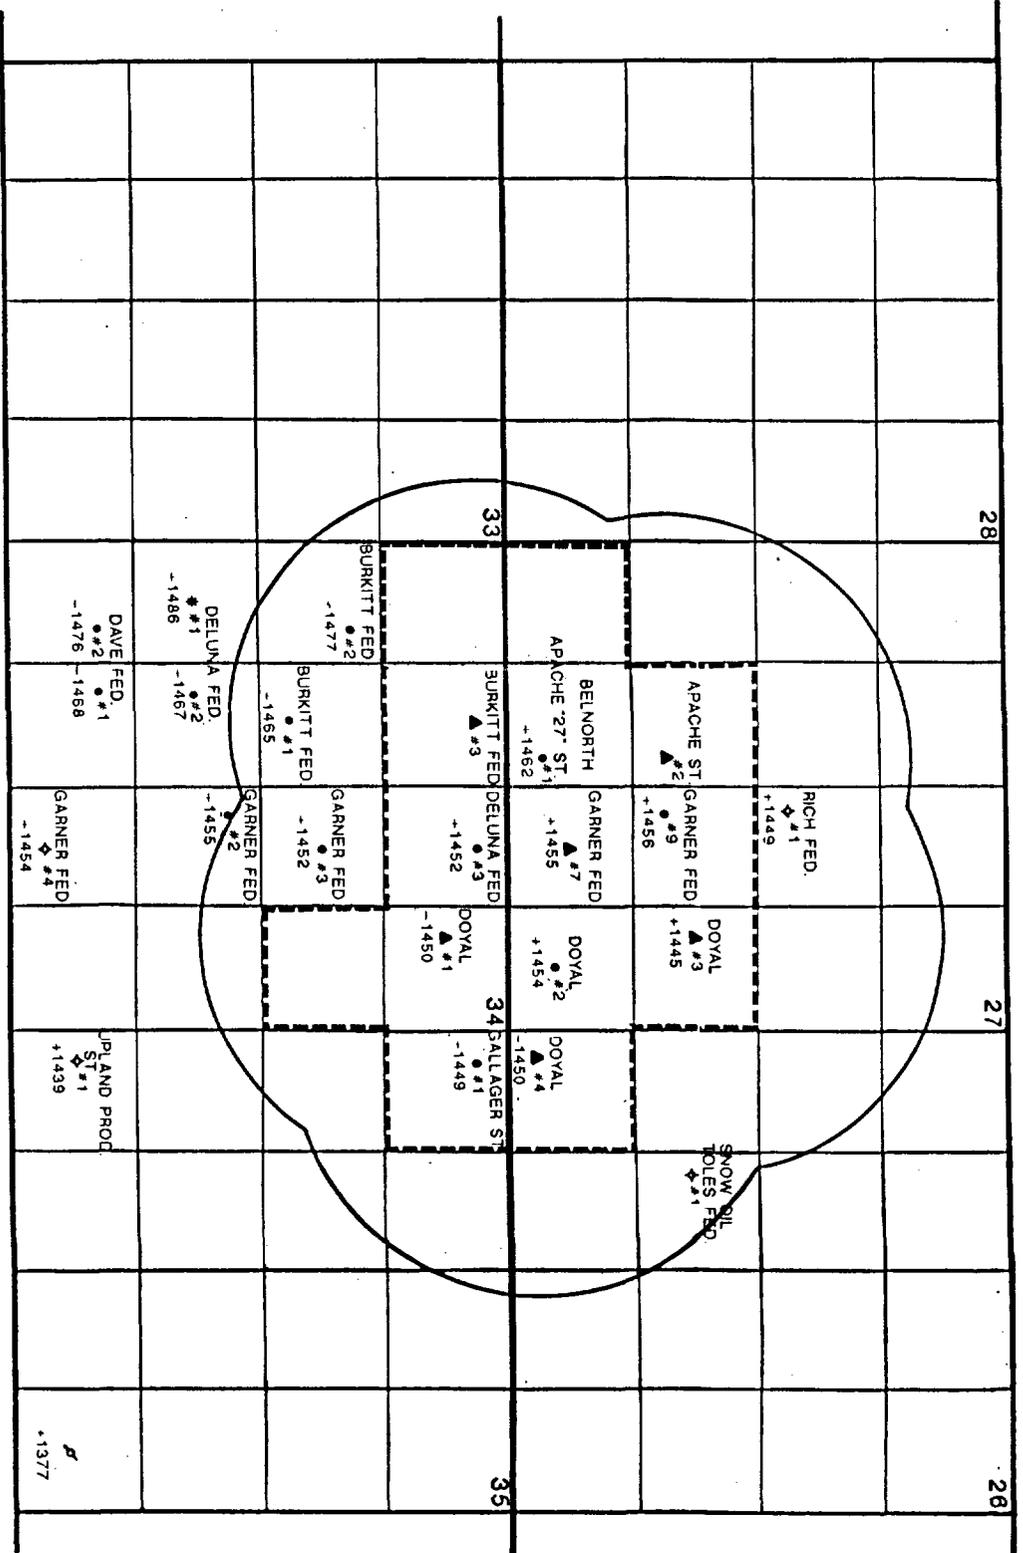

} AREA OF REVIEW
 ▲ PROPOSED INJECTION WELL
 - - - - - UNIT OUTLINE

YATES DRILLING
 PROPOSED CACTUS QUEEN UNIT
 CHAVES CO., N.M.

T
12
S

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 2 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 454

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'
TOTAL DEPTH: 3150'

INJECTION INTERVAL

2996' FEET TO 3000' FEET - PERFORATED


TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2946' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA:
None known.

WELL SCHEMATIC ATTACHED

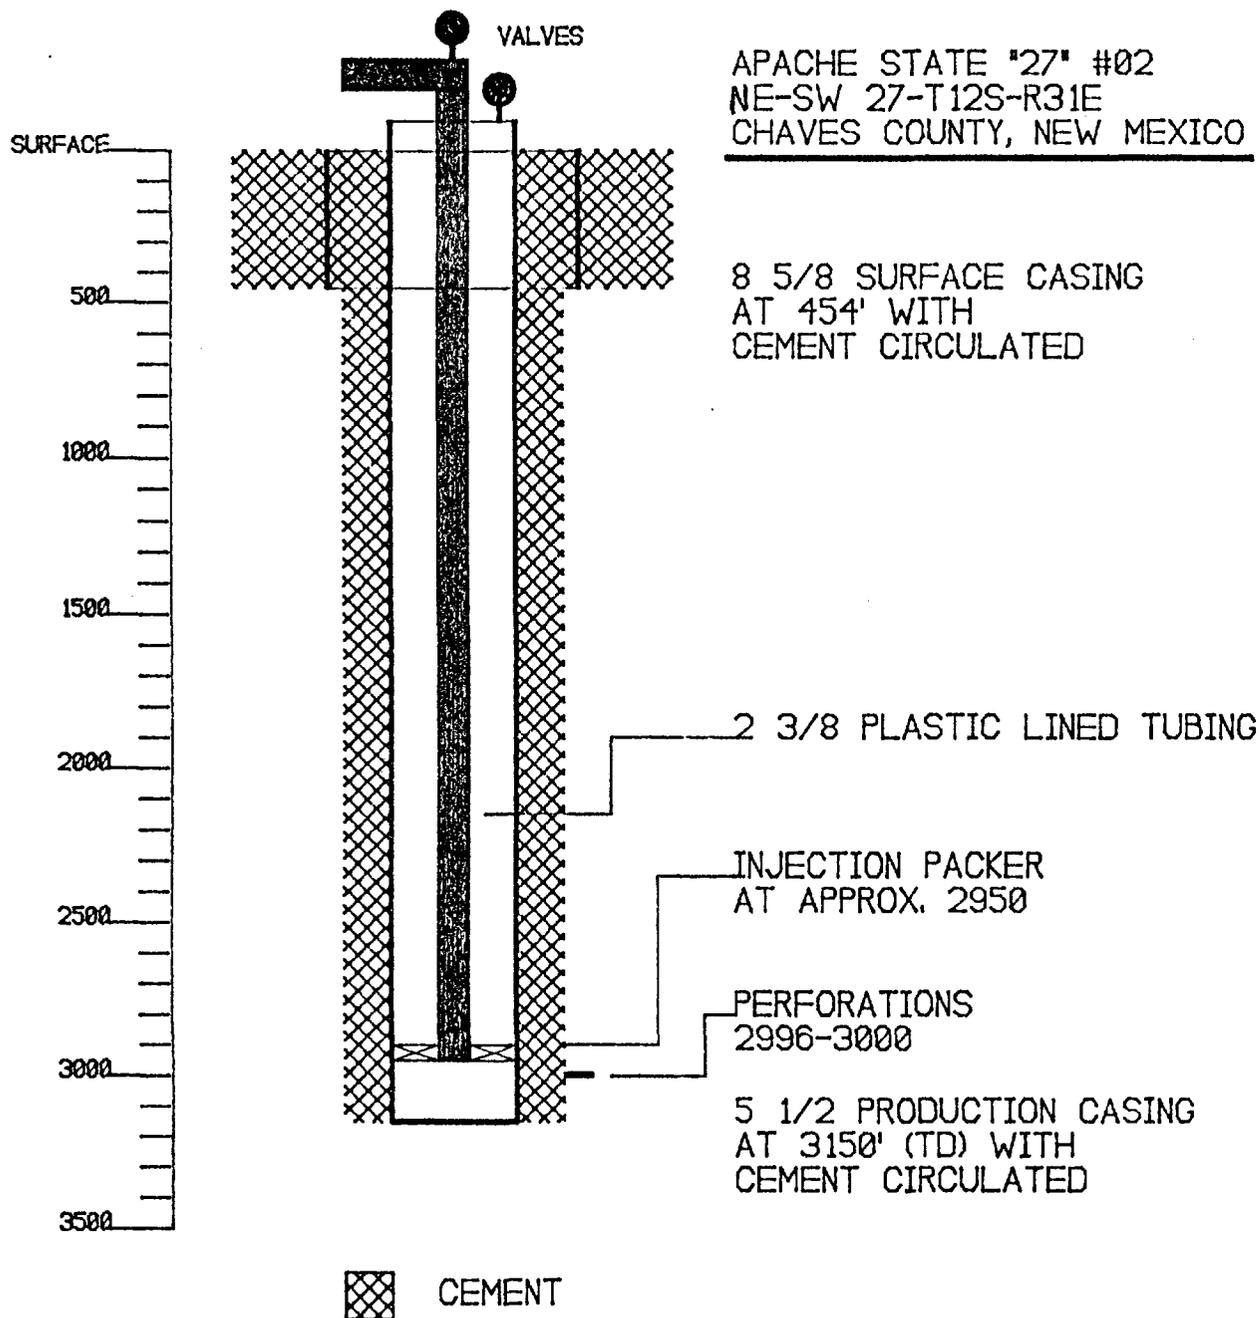

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 3 FOOTAGE: 330'FNL-2310'FWL SEC: 34-T126-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 270 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 424

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 260 SX.
TOC: 1640' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3083'
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2988' FEET TO 2992' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2938' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: _____
None known.

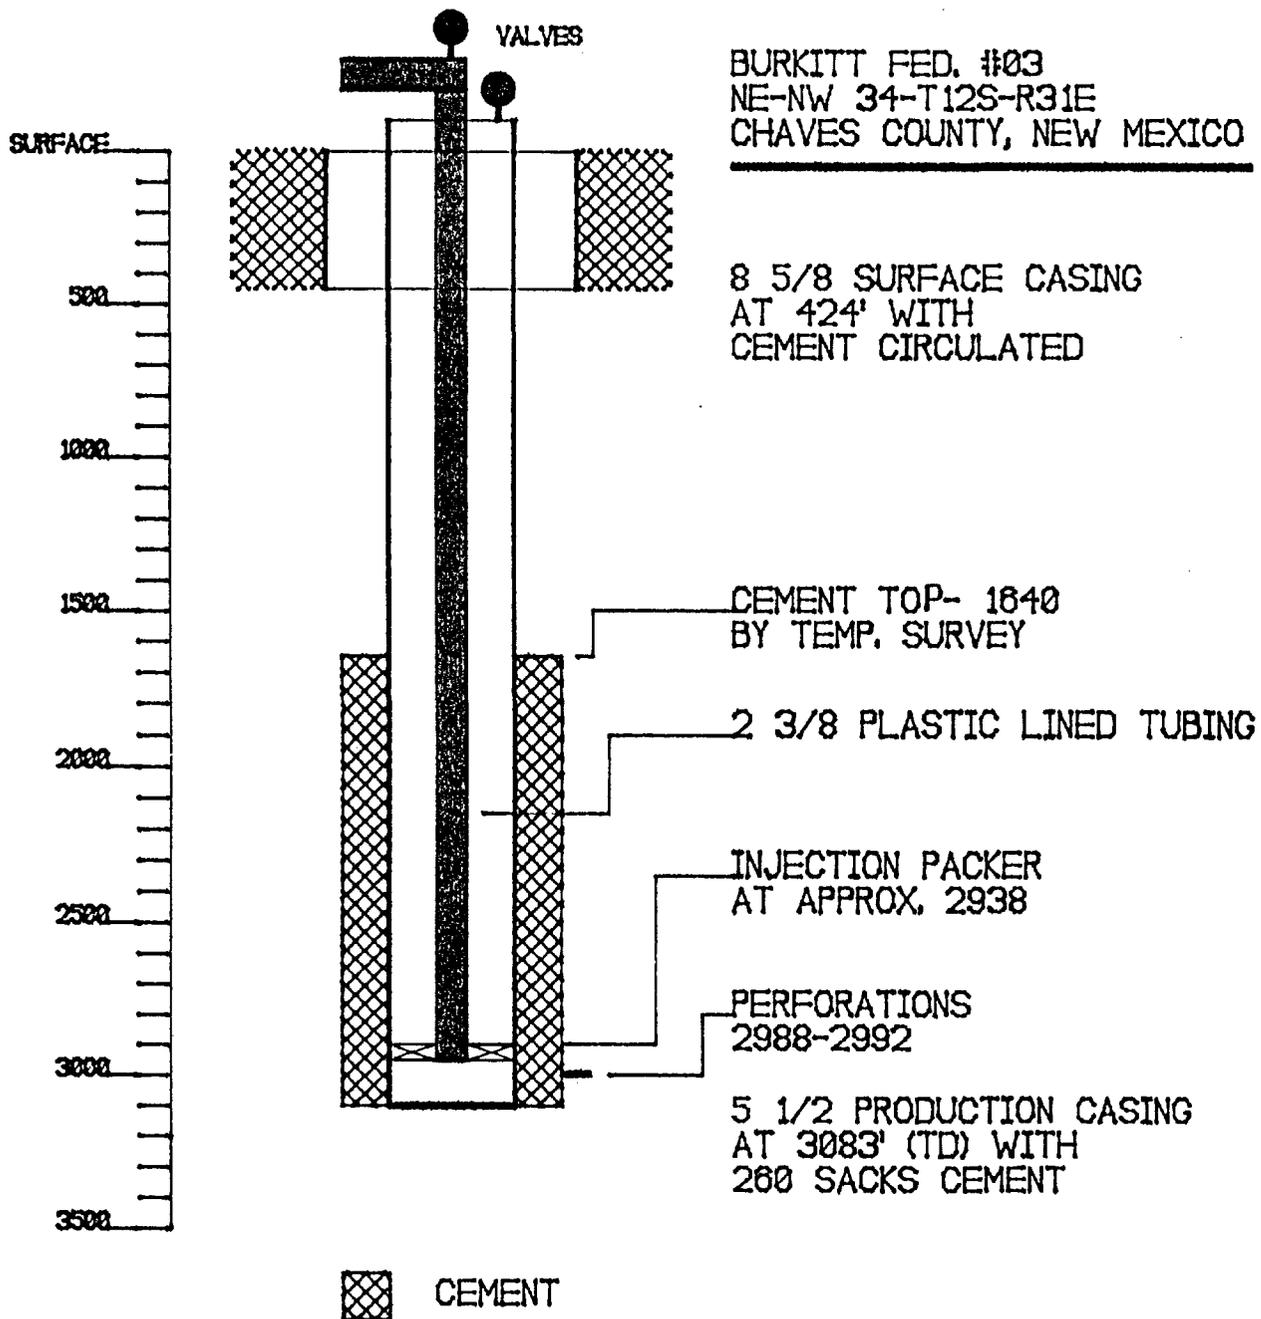

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 1 FOOTAGE: 660'ENL- 990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 409.46

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.
TOC: 2200' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3100'
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2982' FEET TO 2989' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2932' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: _____
None known.

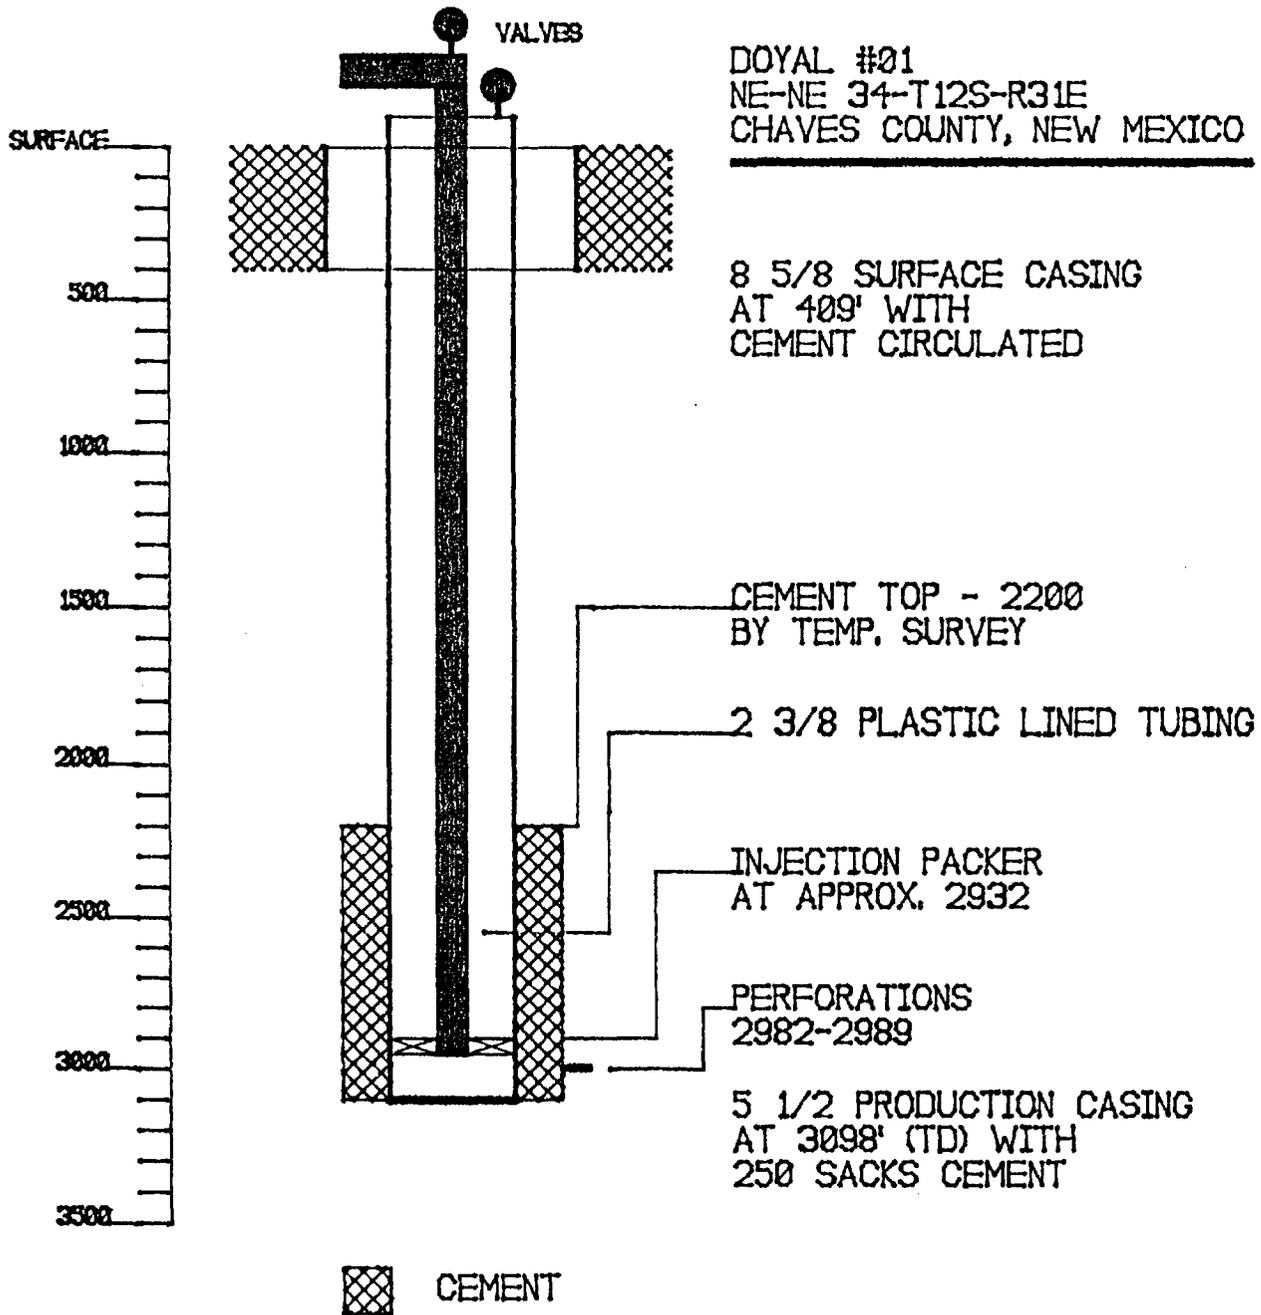

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doval

WELL NO.: 3 FOOTAGE: 1980' FSL - 990' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 260 SX.
 TOC: Surface FEET DETERMINED BY: Circulation
 HOLE SIZE: 12-1/4" SETTING DEPTH: 409'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
 TOC: _____ FEET DETERMINED BY: _____
 HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 850 SX.
 TOC: 630' FEET DETERMINED BY: Cement Bond Log
 HOLE SIZE: 7-7/8" SETTING DEPTH: 3099'
 TOTAL DEPTH: 3100'

INJECTION INTERVAL

2991' FEET TO 2997' FEET - PERFORATED

TUBING


TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2941' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
 IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
This well is temp. aban. due to high water production
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
 LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
 DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____

5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
 UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: _____
None known.

WELL SCHEMATIC ATTACHED

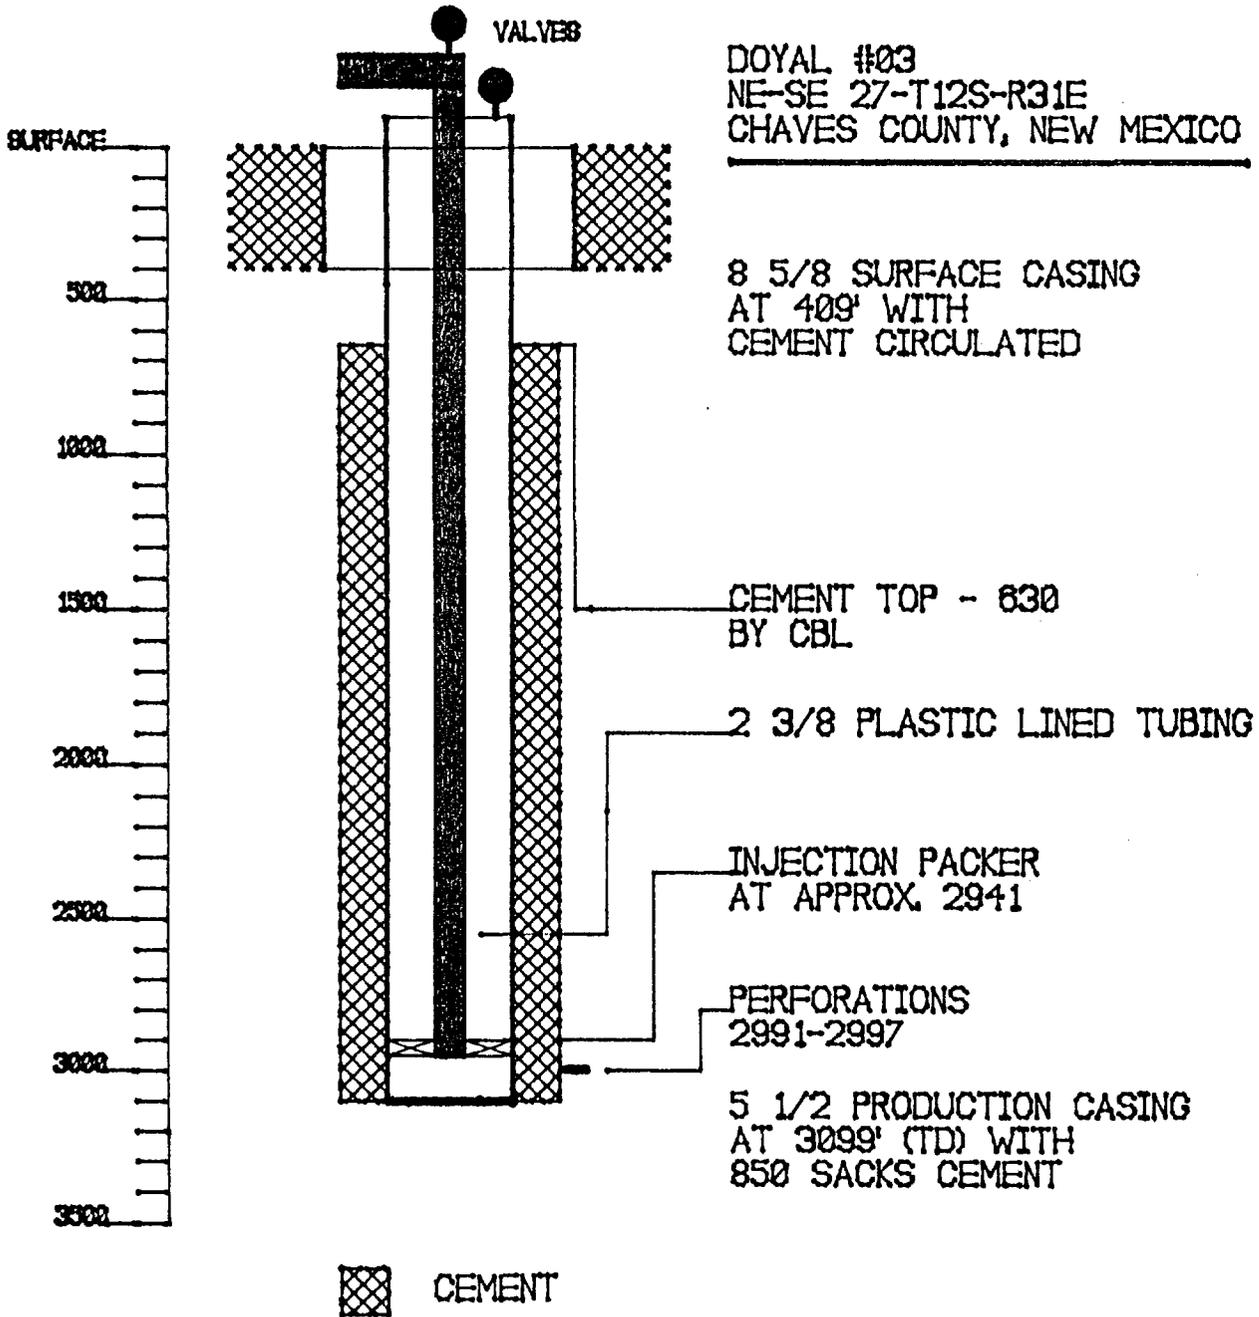

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 4 FOOTAGE: 330' FSL- 330' FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 400

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 975 SX.
TOC: 310' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3088'
TOTAL DEPTH: 3100'

INJECTION INTERVAL


2982' FEET TO 2985' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2932' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: _____
None known.

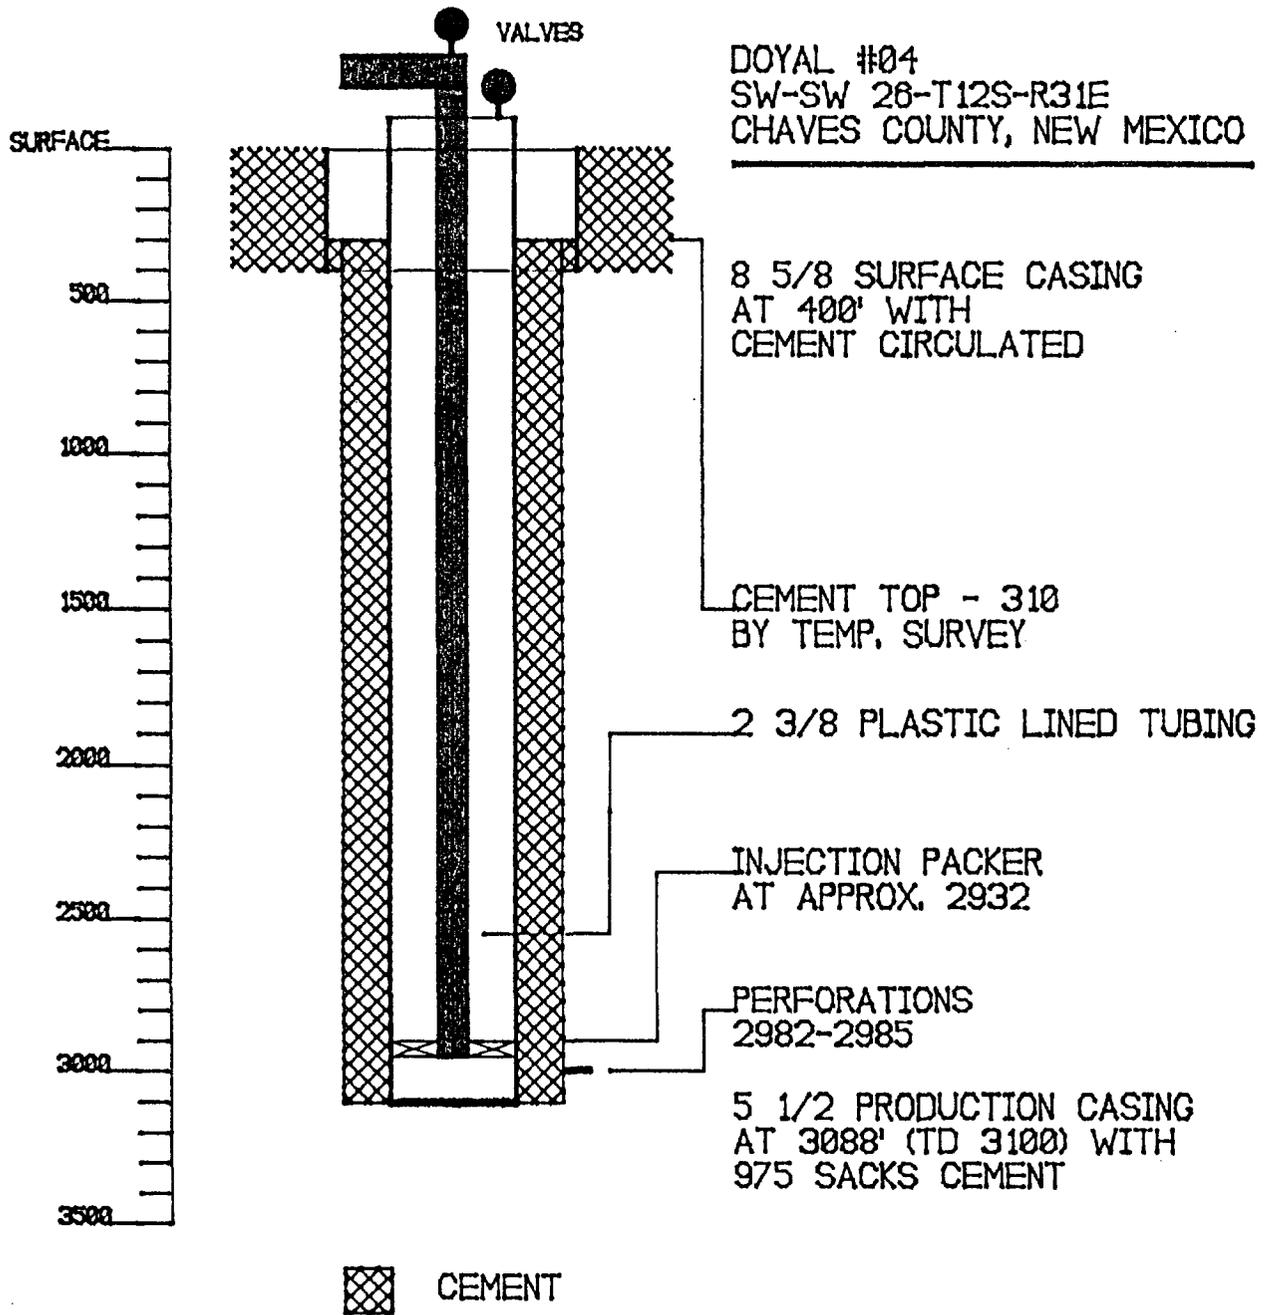

INJECTION WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 7 FOOTAGE: 660' FSL-1980' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 424

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 270 SX.
TOC: 1900' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098.54'
TOTAL DEPTH: 3100'

INJECTION INTERVAL

2987' FEET TO 2993' FEET - PERFORATED

TUBING

TUBING SIZE: 2-3/8" LINED WITH: Plastic SET IN A
Baker AD-1 PACKER AT: 2937' FEET

OTHER DATA

1. NAME OF INJECTION FORMATION: Queen
2. NAME OF FIELD OR POOL (IF APPLICABLE): SE Chaves Queen
3. IS THIS A NEW WELL DRILLED FOR INJECTION? No
IF NO, FOR WHAT PURPOSE WAS THE WELL ORIGINALLY DRILLED?
This well was drilled as a Queen producing well.
4. HAS WELL EVER BEEN PERFORATED IN ANY OTHER ZONE(S)? No
LIST ALL SUCH PERFORATED INTERVALS AND GIVE PLUGGING
DETAILS (SACKS OF CEMENT OR BRIDGE PLUG(S) USED): _____
5. GIVE DEPTH TO AND NAME OF ANY OVERLYING AND/OR
UNDERLYING OIL OR GAS ZONES (POOLS) IN THIS AREA: _____
None known.

GARNER FED #07
SW-SE 27-T12S-R31E
CHAVES COUNTY, NEW MEXICO

8 5/8 SURFACE CASING
AT 424' WITH
CEMENT CIRCULATED


CEMENT TOP - 1900
BY TEMP. SURVEY

2 3/8 PLASTIC LINED TUBING

INJECTION PACKER
AT APPROX. 2937

PERFORATIONS
2987-2993

5 1/2 PRODUCTION CASING
AT 3098' (TD) WITH
270 SACKS CEMENT

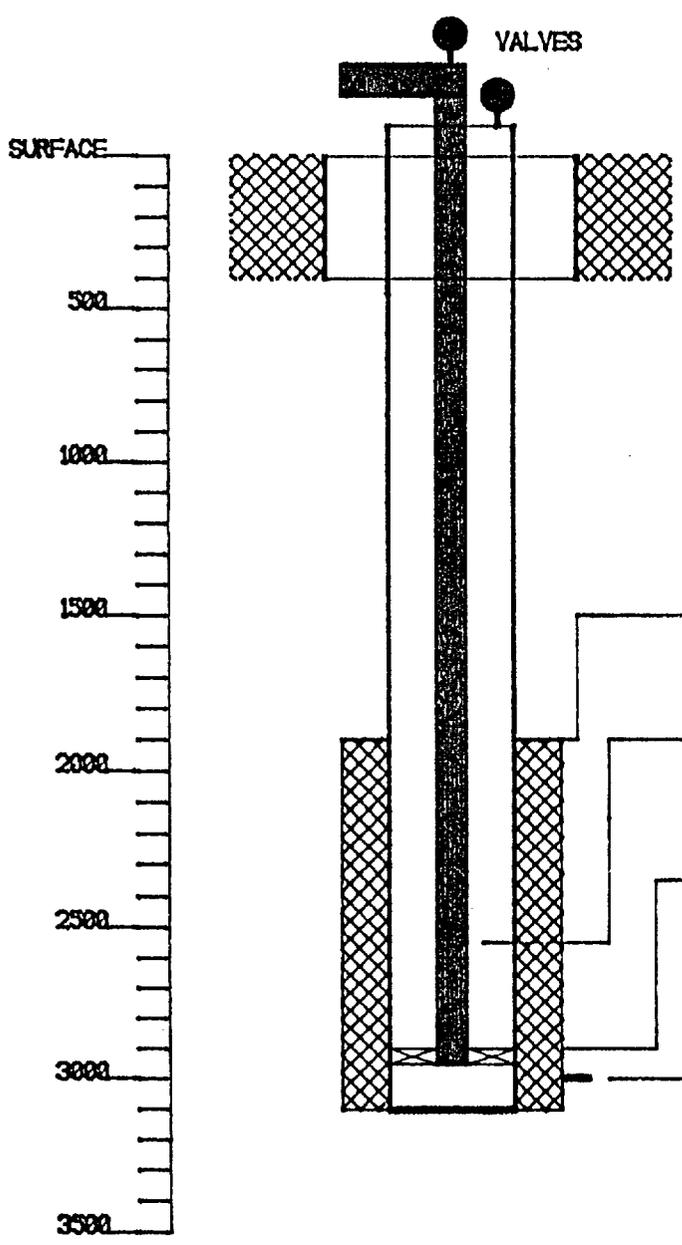

 CEMENT

WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 1 FOOTAGE: 330' FSL-2310' FWL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 422'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: _____ SX.
TOC: 210' FEET DETERMINED BY: _____
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 5-9-85 COMPLETION DATE: 6-27-85
PERFORATED: 2984 FEET TO 2991 FEET

STIMULATION: 100 gals. 15% HCl acid, 12000 gals. gel water
4000 gals. CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Company LEASE: Apache "27" State

WELL NO.: 2 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 9-5/8" CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 454'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 7-7/8" SETTING DEPTH: 3150'
TOTAL DEPTH: 3150'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 7-29-85 COMPLETION DATE: 8-23-85
PERFORATED: 2976 FEET TO 3000 FEET

STIMULATION: 850 gals. 15% HCl acid, 16000 gals. gel water
25% CO2, 10500# 20/40 sand, 10000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 1 FOOTAGE: 2310'FNL-1980'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 300 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 450'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 360 SX.
TOC: 1650' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3080'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 3-23-84 COMPLETION DATE: 4-7-84
PERFORATED: 2874 FEET TO 2882 FEET

STIMULATION: 750 gals. 15% HCl acid, 20000 gals. 30# gel,
25% CO2, 16500# 20/40 sand, 6000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 2 FOOTAGE: 1650'FNL- 990'FWL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 375 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 370'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.
TOC: 1678' FEET DETERMINED BY: Cement Bond Log
HOLE SIZE: 7-7/8" SETTING DEPTH: 2845'
TOTAL DEPTH: 2850'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 5-5-84 COMPLETION DATE: 7-10-84
PERFORATED: 2754 FEET TO 2760 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. 30# gel,
5000 gals CO2, 14500# 20/40 sand, 2500# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Burkitt Federal

WELL NO.: 3 FOOTAGE: 330'FNL-2310'FWL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 270 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 260 SX.
TOC: 1640' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3083'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SFUD DATE: 8-9-85# COMPLETION DATE: 10-1-85
PERFORATED: 2988 FEET TO 2992 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. gel water
24 tons CO2, 12000# 20/40 sand, 7000# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: DeLuna Federal

WELL NO.: 3 FOOTAGE: 330'FNL-1980'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 300 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 410 SX.
TOC: 1900' FEET DETERMINED BY: Cement Bond Log
HOLE SIZE: 7-7/8" SETTING DEPTH: 3094'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 2-11-85 COMPLETION DATE: 3-20-85
PERFORATED: 2987-1/2 FEET TO 2993 FEET

STIMULATION: 750 gals. 15% hcl, 15000 gals. 30# gel, 23-1/2
tons CO2, 13000# 20/40 sand, 10000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 1 FOOTAGE: 660'FNL- 990'FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 409.46'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.
TOC: 2200' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 7-31-84 COMPLETION DATE: 8-25-84
PERFORATED: 2982' FEET TO 2989' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel
, 5000 SCF N2 per barrel, 10900# 20/40 sand, and 4200# 10/20
sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 2 FOOTAGE: 500'FSL- 760'FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 275 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 411'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" CEMENTED WITH: 250 SX.
TOC: 2200' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 9-7-84 COMPLETION DATE: 9-20-84
PERFORATED: 2981' FEET TO 2987' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel
, 25% CO2 12000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well.

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 3 FOOTAGE: 1980' FSL - 990' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 260 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 409'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 850 SX.
TOC: 630' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3099'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 9-20-84 COMPLETION DATE: NONE
PERFORATED: 2991' FEET TO 2997' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel
, 25% CO2 20000# 20/40 sand, 10000# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Temp. Abandoned

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Doyal

WELL NO.: 4 FOOTAGE: 330'ESL- 330'FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 400'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 975 SX.
TOC: 310' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3088'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 11-18-84 COMPLETION DATE: 1-24-87
PERFORATED: 2982' FEET TO 2985' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel, 22 tons CO2, 12000# 20/40 sand, 8500 # 12/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Gallagher State

WELL NO.: 1 FOOTAGE: 330'FNL- 330'FWL SEC: 35-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 433'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 900 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 7-7/8" SETTING DEPTH: 3084'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 10-28-84 COMPLETION DATE: 11-9-84
PERFORATED: 2982' FEET TO 2987' FEET

STIMULATION: 650 gallons of 15 % HCl, 15000 gallons 30# gel, 22 tons CO2, 12000# 20/40 sand, 10750# 10/20 sand.

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 2 FOOTAGE: 2310' FSL-2310' FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 410'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 550 SX.
TOC: 1992' FEET DETERMINED BY: Cement Bond Log
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 4-29-84 COMPLETION DATE: 6-1-84
PERFORATED: 2982 FEET TO 2990 FEET

STIMULATION: 750 gals. 15% HCl acid, 20000 gals. 30# gel,
25% CO2, 16500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 3 FOOTAGE: 1980' FNL-1980' FEL SEC: 34-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 225 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 408'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 250 SX.
TOC: 1810' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3100'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 7-2-84 COMPLETION DATE: 8-12-84
PERFORATED: 2981 FEET TO 2986 FEET

STIMULATION: 750 gals. 15% HCl acid, 15000 gals. 30# gel,
5000 SCF N2 per barre, 1500# 20/40 sand, 1700# 12/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 7 FOOTAGE: 660' FSL-1980' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 424'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 270 SX.
TOC: 1900' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098.54'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 10-14-84 COMPLETION DATE: 10-30-84
PERFORATED: 2987' FEET TO 2993' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel
1000 SCF/BBL CO2 13000# 20/40 sand, 9000# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Garner Federal

WELL NO.: 9 FOOTAGE: 1650' FSL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 428'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 5-1/2" 14# CEMENTED WITH: 320 SX.
TOC: 1820' FEET DETERMINED BY: Temp. Survey
HOLE SIZE: 7-7/8" SETTING DEPTH: 3098'
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 11-11-84 COMPLETION DATE: 11-30-84
PERFORATED: 2985' FEET TO 2995' FEET

STIMULATION: 750 gallons of 15 % HCl, 15000 gallons 30# gel
. 16 tons of CO2, 18000# 20/40 sand, 12500# 10/20 sand

OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Pumping oil well

IF P&A, LIST PLUGGING DETAILS: _____

WELL DATA SHEET

OPERATOR: Yates Drilling Co. LEASE: Rich Federal

WELL NO.: 1 FOOTAGE: 2310' FNL-2310' FEL SEC: 27-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" 24# CEMENTED WITH: 250 SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 412'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: 7-7/8" SETTING DEPTH: _____
TOTAL DEPTH: 3100'

PRODUCING INTERVAL

FORMATION: None POOL OR FIELD: SE Chaves Queen
SPUD DATE: 11-30-84 COMPLETION DATE: None
PERFORATED: _____ FEET TO _____ FEET

STIMULATION: None



OTHER PERFORATED ZONES: None

CURRENT STATUS

WHAT IS CURRENT STATUS OF WELL? Plugged and Abandoned

IF P&A, LIST PLUGGING DETAILS: P&A 12-12-84
Plug 3040-2940' 35 sx Class "C" neat, Plug 2100-2000' 75 sx
Class "C" w/2% CaCl2, plug 1500-1400' 35 sx Class "C" neat,
Plug 462-362' 50 sx Class "C" w/2% CaCl2, Plug 50-Sur. 20sx
Class "C" neat

RICH FED. #01
SW-NE 27-T12S-R31E
CHAVES COUNTY, NEW MEXICO

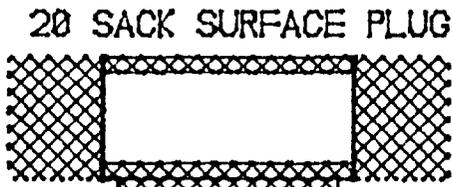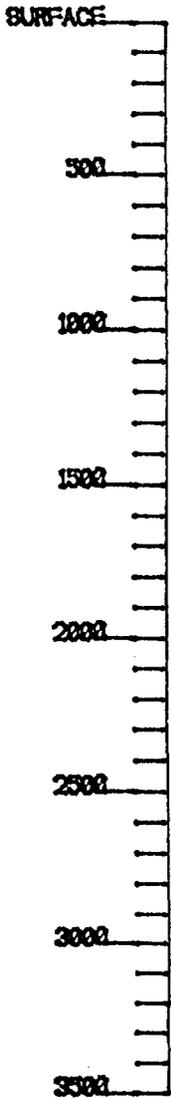

8 5/8 SURFACE CASING
AT 412' WITH
CEMENT CIRCULATED

50 SACK PLUG
362-462

35 SACK PLUG
1400-1500

75 SACK PLUG
2000-2100

35 SACK PLUG
2940-3040

 CEMENT

WELL DATA SHEET

OPERATOR: Snow Oil Company LEASE: Toles Federal

WELL NO.: 1 FOOTAGE: 1980' FSL-1650' FWL SEC: 26-T12s-R31e

TUBULAR DATA

SURFACE CASING

SIZE: 8-5/8" CEMENTED WITH: _____ SX.
TOC: Surface FEET DETERMINED BY: Circulation
HOLE SIZE: 12-1/4" SETTING DEPTH: 473'

INTERMEDIATE CASING

SIZE: None CEMENTED WITH: _____ SX.
TOC: _____ FEET DETERMINED BY: _____
HOLE SIZE: _____ SETTING DEPTH: _____

LONG STRING

SIZE: 4-1/2" CEMENTED WITH: _____ SX.
TOC: 900' FEET DETERMINED BY: Estimate
HOLE SIZE: _____ SETTING DEPTH: 3115'
TOTAL DEPTH: 3115'

PRODUCING INTERVAL

FORMATION: Queen POOL OR FIELD: SE Chaves Queen
SPUD DATE: 1-8-85 COMPLETION DATE: None
PERFORATED: 2344 FEET TO 2845 FEET

STIMULATION: _____


OTHER PERFORATED ZONES: None

CURRENT STATUS


WHAT IS CURRENT STATUS OF WELL? Plugged and Abandoned

IF P&A, LIST PLUGGING DETAILS: 3sx plug on CIBP @ 2990'
3sx plug on CIBP @ 2290', cut and pulled 4-1/2" casing @ 825
35sx plug @ 867', 35sx plug @ 524', 10sx plug @ surface

TOLES FED. #01
NE-SW 28-T12S-R31E
CHAVES COUNTY, NEW MEXICO

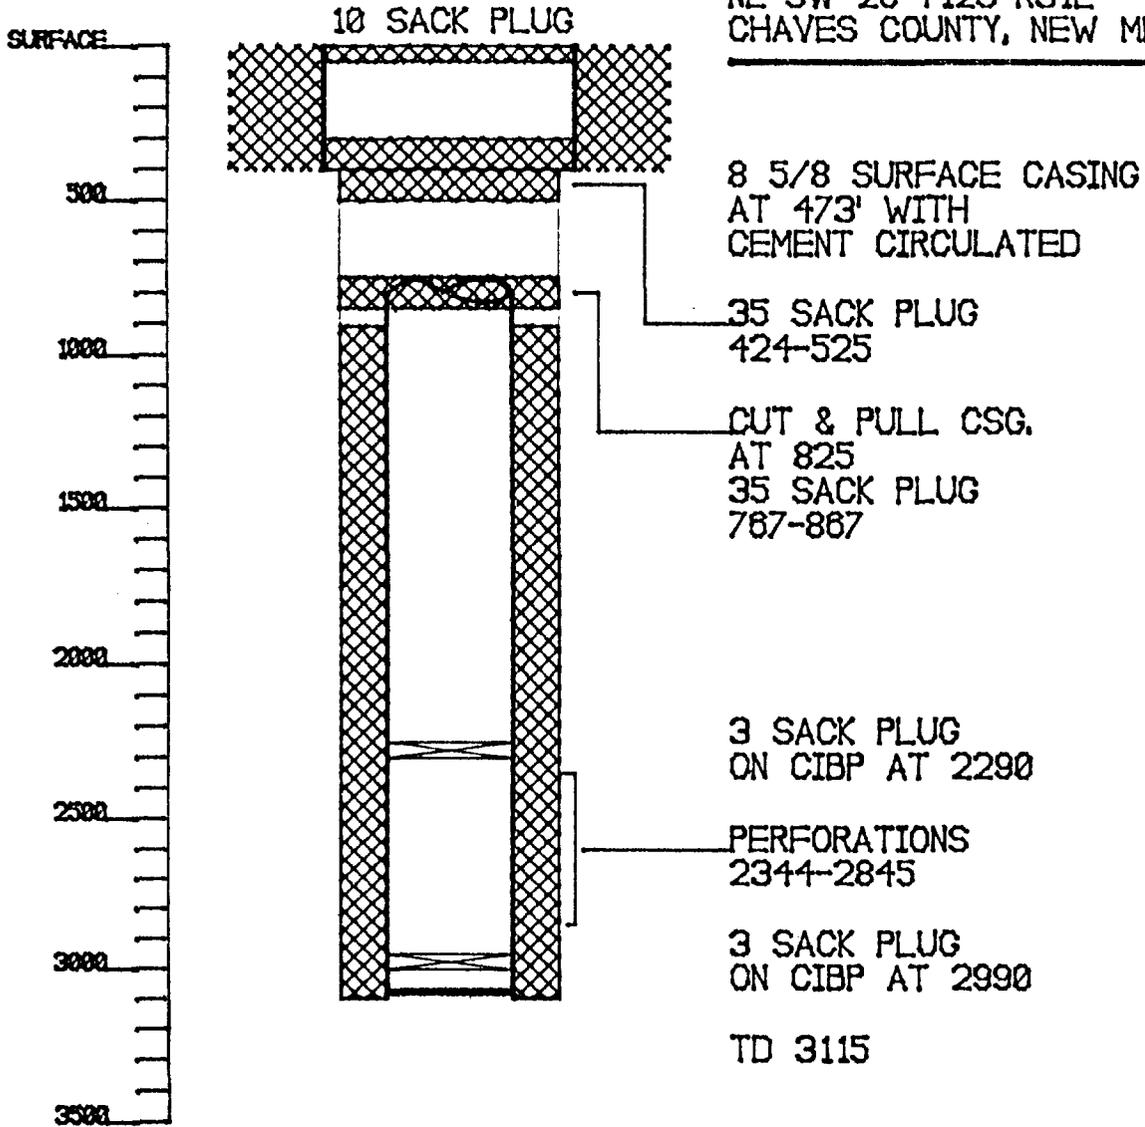

 CEMENT



YATES DRILLING COMPANY

105 SOUTH FOURTH STREET -- (505) 746-9889

FAX (505) 746-6480

TELEX 508891 (YPCART)

ARTESIA, NEW MEXICO 88210

May 31, 1989

PEYTON YATES
PRESIDENT

S. P. YATES
VICE PRESIDENT

RANDY G. PATTERSON
SECRETARY

DENNIS G. KINSEY
TREASURER

New Mexico State Engineer
District 2 Office
P.O. Box 1717
Roswell, New Mexico 88202

Attention: Glen Brim, District Supervisor 

Gentlemen:

Yates Drilling Company is proposing to waterflood the Queen formation underlying portions of Township 12 South, Range 31 East and Township 13 South, Range 31 East, Chaves County, New Mexico.

To insure the protection of fresh water aquifers in this area we would like to obtain the location, depth and geological name of the producing formation for any water wells located in either described township. Additionally, the identification of any commercial water wells in the area would be helpful.

Any information that your office can provide concerning this matter will be greatly appreciated.

Sincerely yours,

YATES DRILLING COMPANY



Tobin L. Rhodes
Petroleum Engineer


'89 JUN 1 PM 8 35
STATE ENGINEER OFFICE
ROSWELL, NEW MEXICO

JUN 12 1989

June 9, 1989

Yates Drilling Company
ATTN: Tobin L. Rhodes, Petroleum Engineer

Enclosed are well locations and some information pertaining to these wells. They were drilled and finished in the Ogallala Formation (TO). Record of other wells finished deeper on other water formations were found north of Township 12 South in Township 11 South, Range 31 East. These wells are finished in the Triassic Formation (TRC), depth of wells are between + 200 feet to 300 feet.



Johnny R. Hernandez
Basin Supervisor

tion 24 Township 12 South Range 31 East

993 NE 1/4 SW 1/4 Dom. T.D. 146 5 1/2" casing - Shallow

6649 SE 1/4 SE 1/4 Dom & Stk T.D. 160 4 1/2" casing - Shallow

tion 26 Township 12 South Range 31 East

2117	NW 1/4 SW 1/4	Irr.	
-6746	SW 1/4 NW 1/4	Dom. & Stk	T.D. 166' Not cased - shallow
-6749	SW 1/4 SE 1/4	Comm. & DOM & STK	T.D. 178' 6" casing - shallow
-9566	SW 1/4 SE 1/4	COM, Oil & Gas	Same

Well L-9566 is stock well L-6749** Comm.

Section 27 Township 12 S Range 31 E.

L-6650 SE 1/4 NE 1/4 Dom & Stk - T.D. 160 4 1/2" casing - shallow

Section 35 Township 12 South Range 31 East

-2932	SE 1/4	OWD	
-4170	NW 1/4 SE 1/4 NW 1/4	Dom.	T.D. 55'
-4296	NW 1/4 NW 1/4	WF	Cancelled
-4296-X	SW 1/4 SW 1/4	WF	Cancelled
-4296-X-2	NE 1/4 NE 1/4	WF	Cancelled
-4296-X-3	SE 1/4 SE 1/4	WF	Cancelled

↑ casing 8" shallow
NO wells
↓

Section 23 Township 13 South Range 31 East

-3914-X-10	SE $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
-3914-X-11	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
-3914-X-12	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
-3914-X-13	SE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
-3914-X-14	NW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.

↑
WELLS NOT DRILLED
↓

Section 24 Township 13 South Range 31 East

-3914	NE $\frac{1}{4}$ SE $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
-3914-X	NE $\frac{1}{4}$ SW $\frac{1}{4}$	Ind.
-3914-X-2	NE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
-3914-X-3	SW $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
-3914-X-4	SE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
-3914-X-5	NE $\frac{1}{4}$ SE $\frac{1}{4}$	Ind.
-3914-X-6	NW $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
-3914-X-7	NE $\frac{1}{4}$ NE $\frac{1}{4}$	Ind.
-3914-X-8	SW $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.
-3914-X-9	SE $\frac{1}{4}$ NW $\frac{1}{4}$	Ind.

T.D. 196' 8 $\frac{5}{8}$ " casing - Shallow
↑
WELLS NOT DRILLED
↓

Section 35 Township 13 South Range 31 East

L-2849	SW $\frac{1}{4}$ SE $\frac{1}{4}$ NW $\frac{1}{4}$	Dom.
--------	--	------

No well record info.

Section 1 Township 13 South Range 31 East

60
61
37
37-X

~~SE 1/4 NE 1/4 SW 1/4~~
~~SE 1/4 SE 1/4 SE 1/4~~
~~SW 1/4 SW 1/4 SW 1/4~~
~~SW 1/4 SW 1/4 SW 1/4~~

WF - TD. 170' 8 5/8" casing - shallow
WF - TD. 220' 8 5/8" casing - shallow
Com. & Stock - Rptd TD 165' 6" casing - shallow
Com. & Stock - Rptd TD. 190' 7" casing - shallow

Section 2 Township 13 South Range 31 East

06
33
34
35
95

~~SE 1/4 SE 1/4 SE 1/4~~
~~NE 1/4 NE 1/4 SE 1/4~~
~~SW 1/4 SE 1/4 NE 1/4~~
~~SW 1/4 SE 1/4 NE 1/4~~
SE 1/4 NE 1/4

Stock NO well record info.
Com. With drawn. No well
Dec. - Rptd - TD 165' 6 3/4" casing - shallow
Dec. - Rptd - TD 165' 6 3/4" casing - shallow
WF

914
2745

NE 1/4 SE 1/4 NE 1/4 SRO - TD. 194' 8 5/8" casing - shallow
NE 1/4 NE 1/4 SE 1/4 SRO - TD. 216' 6 3/4" casing - shallow

Section 12 Township 13 South Range 31 East

934
3460

NE 1/4
NE 1/4 NE 1/4

OWD NO well record info.
SRO - T.D. 217' - 8 5/8" casing - shallow

Section 13 Township 13 South Range 31 East

2933

NE 1/4

OWD NO well record info.

SEC	TWN	RNG	UNIT LTR	QTR OF UNIT	TD	TYPE	#
24	12S	31E	K	?	148	DOM.	L4993
24	12S	31E	P	?	160	DOM.	L6649
26	12S	31E	E	?	166	DOM. & STK	L6746
✓26	12S	31E	L	?	?	IRR.	L2117
✓26	12S	31E	O	?	198	COM. (OIL & GAS)	L9566
✓26	12S	31E	O	?	198	COM., DOM. & STK	L6749
✓27	12S	31E	H	?	160	DOM. & STK	L6650
✓35	12S	31E	F	NW	55	DOM.	L4170
✓35	12S	31E	IJOP	?	?	?	L2932
1	13S	31E	K	SE	190	WF	L3460
1	13S	31E	P	SE	220	WF	L3461
1	13S	31E	M	SW	190	COM. & STK	L3837X
1	13S	31E	M	SW	165	COM. & STK	L3837
2	13S	31E	H	SW	165	DEC.	L3834
2	13S	31E	H	?	?	WF	L4295
2	13S	31E	H	NE	196	SRO	L3914
2	13S	31E	H	SW	165	DEC.	L3835
2	13S	31E	P	SE	?	?	L3806
2	13S	31E	I	NE	216	SRO	L2745
12	13S	31E	A	?	217	SRO	L3460
13	13S	31E	ABCD	?	?	OWD	L2933
24	13S	31E	H	NE	196	IND.	L3914
35	13S	31E	F	SW	?	DOM.	L2849

+ + + + +

Rich Fed #1

● WW

● WW

TOLES FED. #1

● WW

33

UNIT BOUNDARY

Apache 27 St. #1 ●

Burkitt Fed #3 ▲

Deluna Fed #3 ●

Dogal #1 ▲

34

Callagher St. #1 ●

Apache 27 St. #2 ▲

Garner Fed #9 ●

Garner Fed #7 ▲

Dogal #2 ●

Dogal #4 ▲

Dogal #3 ▲

Burkitt Fed #2 ●

Burkitt Fed #1 ●

Garner Fed #3 ●

Garner Fed #2 ●

● WW

WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88
 Field Caprock County Chavez
 Lease Graham Water Station State NM
 Well _____ Formation _____
 Type of Water Fresh Water, B/D _____
 Sampling Point Water Tanks Sampled By Blackwell

DISSOLVED SOLIDS

CATIONS

	mg/l		meq/l
Sodium, Na+(Calc)	230	÷ 23	10
Calcium, Ca++	120	÷ 20	6
Magnesium, Mg++	24	÷ 12.2	2
Barium, Ba++	neg	÷ 68.7	-
Iron, Fe (Total)			

OTHER PROPERTIES

pH 8.2
 Specific Gravity 1.000
 H₂S neg
 Total Dissolved Solids 1144
 Total Hardness 400

ANIONS

Chloride, Cl-	350	÷ 35.5	10
Sulfate, So ₄ =	120	÷ 48	3
Carbonate, Co ₃ =	0	÷ 30	0
Bicarbonate, HCo ₃ -	300	÷ 61	5

Remarks and Recommendations _____

WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88
 Field Caprock County Chavez
 Lease Graham Water well (fresh) State NM
 Well North of Lease Formation _____
 Type of Water Fresh Water, B/D Blackwell
 Sampling Point Well head Sampled By _____

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l		meq/l
Sodium, Na+(Calc)	<u>115</u>	÷ 23	<u>5</u>
Calcium, Ca++	<u>120</u>	÷ 20	<u>6</u>
Magnesium, Mg++	<u>15</u>	÷ 12.2	<u>1</u>
Barium, Ba++	<u>Neg</u>	÷ 68.7	_____
Iron, Fe (Total)	_____		_____
_____	_____		_____
_____	_____		_____

OTHER PROPERTIES

pH 8.3
 Specific Gravity _____
1.000
 H₂S Neg
 Total Dissolved _____
 Solids 817
 Total Hardness _____
360

ANIONS

Chloride, Cl-	<u>200</u>	÷ 35.5	<u>6</u>
Sulfate, So ₄ =	<u>55</u>	÷ 48	<u>1</u>
Carbonate, Co ₃ =	<u>0</u>	÷ 30	<u>0</u>
Bicarbonate, HCo ₃ -	<u>312</u>	÷ 61	<u>5</u>
_____	_____		_____
_____	_____		_____

Remarks and Recommendations _____

WATER ANALYSIS REPORT

Company Yates Drilling Report Date Sampled 1-22-88
 Field Caprock County Lea
 Lease Williams Ranch State NM
 Well Williams Fresh Water Formation _____
 Type of Water Fresh Water Water, B/D _____
 Sampling Point Well head Sampled By Blackwell

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l	meq/l
Sodium, Na+(Calc)	<u>70</u> ÷ 23	<u>3.0</u>
Calcium, Ca++	<u>80</u> ÷ 20	<u>4.0</u>
Magnesium, Mg++	<u>20</u> ÷ 12.2	<u>1.6</u>
Barium, Ba++	<u>Neg</u> ÷ 68.7	
Iron, Fe (Total)		

OTHER PROPERTIES

pH	<u>8.2</u>
Specific Gravity	<u>1.000</u>
H ₂ S	<u>Neg</u>
Total Dissolved Solids	<u>602</u>
Total Hardness	<u>271</u>

ANIONS

Chloride, Cl-	<u>100</u> ÷ 35.5	<u>2.8</u>
Sulfate, So ₄ ⁼	<u>40</u> ÷ 48	<u>0.8</u>
Carbonate, Co ₃ ⁼	<u>0</u> ÷ 30	<u>0</u>
Bicarbonate, HCo ₃ ⁻	<u>292</u> ÷ 61	<u>4.8</u>

Remarks and Recommendations _____

WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Gallagher	State	NM
Well	1	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l	meq/l
Sodium, Na+(Calc)	98100	23
Calcium, Ca++	3750	20
Magnesium, Mg++	12900	2.2
Barium, Ba++	neg	0.7
Iron, Fe (Total)		

OTHER PROPERTIES

pH	5.9
Specific Gravity	1.200
H ₂ S	Neg
Total Dissolved Solids	314,240
Total Hardness	62,800

ANIONS

Chloride, Cl-	198000	35.5
Sulfate, So ₄ ⁼	1350	48
Carbonate, Co ₃ ⁼	0	0
Bicarbonate, HCo ₃ ⁻	140	0.1

Remarks and Recommendations

PERMIAN

Treating Chemicals, Inc.

P.O. BOX 72
LOVINGTON, NM
PHONE (505) 396

WATER ANALYSIS REPORT

Company	Yates Drilling	Date Sampled	1-22-88
Field	Caprock	County	Lea
Lease	Doyle	State	NM
Well	12 & 4	Formation	Queens
Type of Water	Produced	Water, B/D	
Sampling Point	Treater	Sampled By	Blackwell

DISSOLVED SOLIDS

CATIONS

	mg/l		meq/l
Sodium, Na+(Calc)	97900	÷ 23	4257
Calcium, Ca++	3800	÷ 20	190
Magnesium, Mg++	13300	÷ 12.2	1090
Barium, Ba++	0	÷ 68.7	
Iron, Fe (Total)	58		

OTHER PROPERTIES

pH	5.7
Specific Gravity	1.200
H ₂ S	neg.
Total Dissolved Solids	312,598
Total Hardness	64,900

ANIONS

Chloride, Cl-	196,000	÷ 35.5	5521
Sulfate, So ₄ =	1400	÷ 48	29
Carbonate, Co ₃ =	0	÷ 30	0
Bicarbonate, HCo ₃ -	140	÷ 61	2.3

Remarks and Recommendations

WATER ANALYSIS REPORT

Company Yates Drilling Date Sampled 1-22-88
 Field Caprock County Lea
 Lease Burkett State NM
 Well _____ Formation Queens
 Type of Water Produced Water, B/D _____
 Sampling Point Treater Sampled By Blackwell

DISSOLVED SOLIDS

<u>CATIONS</u>	mg/l		meq/l
Sodium, Na+(Calc)	98000	÷ 23	4261
Calcium, Ca++	4100	÷ 20	205
Magnesium, Mg++	12800	÷ 12.2	1049
Barium, Ba++	Neg	÷ 68.7	
Iron, Fe (Total)			

OTHER PROPERTIES

pH 5.9
 Specific Gravity
1.200
 H₂S Neg.
 Total Dissolved
 Solids 313,220
 Total Hardness
6300

<u>ANIONS</u>			
Chloride, Cl-	197,000	÷ 35.5	5549
Sulfate, So ₄ =	1200	÷ 48	25
Carbonate, Co ₃ =	0	÷ 30	
Bicarbonate, HCo ₃ -	120	÷ 61	2

Remarks and Recommendations _____

ERMEAN

Water Testing Chemicals, Inc.

P.C. 104722
 1000 C. 1. 18920
 1000 C. 1. 300-567

WATER ANALYSIS REPORT

Company Yates Drilling
 Field _____
 Lease Deluna
 Well _____
 Type of Water Produced
 Sampling Point Treater

Date Sampled 1-22-88
 County Lea
 State NM
 Location Queens
 Water, W/B
 Supplied by Blackwell

DISSOLVED SOLIDS CATIONS

Sodium, Na (Calc)	97600
Calcium, Ca	3960
Magnesium, Mg	12900
Barium, Ba	0
Iron, Fe (Total)	0

mg/l	4243
	198
	1075

OTHER PROPERTIES

PH	6.0
Specific Gravity	1.200
H ₂ S	Neg
Total Dissolved Solids	135,148
Total Hardness	63,000

ANIONS

Chloride, Cl ⁻	194,000
Sulfate, SO ₄ ²⁻	1200
Carbonate, CO ₃ ²⁻	0
Bicarbonate, HCO ₃ ⁻	88

mg/l	5465
	25
	1.1

Remarks and Recommendations

ERMIAN
 Drilling Chemicals, Inc.

PC 104756
 2005 05 11 0820
 1005 001334567

Company Yates Drilling
 Field _____
 Lease Garner
 Well 7
 Type of Water Produced

Date Sampled 1-22-88
 Locality Lea
 State NM
 Location Queens
 Water, B/D
 Sampled by Blackwell

DISSOLVED SOLIDS
CATIONS

Sodium, Na (ppm)	105,000	4565
Calcium, Ca (ppm)	4,750	238
Magnesium, Mg (ppm)	11,900	975
Barium, Ba (ppm)		
Iron, Fe (Total) (ppm)		

OTHER PROPERTIES

pH	5.8
Specific Gravity	1.200
H ₂ S	Neg
Total Dissolved Solids	326,955
Total Hardness	60,700

ANIONS

Chloride, Cl ⁻ (ppm)	204,000	5746
Sulfate, SO ₄ ²⁻ (ppm)	1,100	23
Carbonate, CO ₃ ²⁻ (ppm)	0	
Bicarbonate, HCO ₃ ⁻ (ppm)	205	3.4

Remarks: _____

HALLIBURTON DIVISION LABORATOR

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W539, W540 & W541-89

TO Yates Drilling
105 South Fourth Street
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof, nor a copy thereof, is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services

Submitted by Date Rec. October 16, 1989

Well No. Depth Formation

Field County Source

Table with 4 columns: Parameter, SPEAR WW #1, GF #7, DEL FED. #3. Rows include Resistivity, Specific Gravity, pH, Calcium, Magnesium, Chlorides, Sulfates, Bicarbonates, Soluble Iron.

Remarks:

Eric Jacobson
Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

NOTICE:

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, express or implied, as to the accuracy of the contents or results. Any user of this report agrees Halliburton shall not be liable for any loss or damage, regardless of cause, including any act or omission of Halliburton, resulting from the use hereof

HALLIBURTON DIVISION LABORATORY

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W536, W537 & W538-89

TO Yates Drilling
105 South Fourth Street
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor a copy thereof is to be published or disclosed without first securing the express written approval of laboratory management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

Submitted by _____ **Date Rec.** October 16, 1989

Well No.	Depth	Formation
Field	County	Source
	<u>BUR FEDERAL #3</u>	<u>GALLAHAN ST. #1</u>
	<u>AP STATE #1</u>	
Resistivity	<u>0.051 @ 70°</u>	<u>0.051 @ 70°</u>
Specific Gravity ..	<u>1.1200 @ 70°</u>	<u>1.137 @ 70°</u>
pH	<u>6.5</u>	<u>6.6</u>
Calcium	<u>6,070</u>	<u>5,620</u>
Magnesium	<u>10,912</u>	<u>12,685</u>
Chlorides	<u>184,000</u>	<u>180,000</u>
Sulfates	<u>Heavy</u>	<u>Medium</u>
Bicarbonates	<u>214</u>	<u>183</u>
Soluble Iron	<u>10</u>	<u>25</u>

Remarks:

Eric Jacobson

 Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

HALLIBURTON DIVISION LABORATOR.

HALLIBURTON SERVICES

ARTESIA DISTRICT

LABORATORY REPORT

No. W542, W543 & W544-89

TO Yates Drilling
105 South Fourth Street
Artesia, NM 88210

Date October 17, 1989

This report is the property of Halliburton Services and neither it nor any part thereof nor copies thereof is to be published or disclosed without first securing the express written approval of Laboratory Management. It may however, be used in the course of regular business operations by any person or concern and employees thereof receiving such report from Halliburton Services.

Submitted by _____ Date Rec. October 16, 1989

Well No. _____ Depth _____ Formation _____

Field _____ County _____ Source _____

	<u>Graham WW #1</u>	<u>Graham WW #2</u>	<u>Doy #1</u>
Resistivity	0.60 @ 70°	0.91 @ 70°	N.A.
Specific Gravity ..	1.007 @ 70°	1.005 @ 70°	N.A.
pH	6.5	6.7	6.6
Calcium	1,124	1,124	4,946
Magnesium	477	614	14,186
Chlorides	6,000	4,000	198,000
Sulfates	Nil	Nil	Nil
Bicarbonates	214	214	153
Soluble Iron	Nil	Nil	75
-----	-----	-----	-----
-----	-----	-----	-----
-----	-----	-----	-----

Remarks:

Eric Jacobson
 Respectfully submitted

Analyst: Eric Jacobson - EIT

HALLIBURTON SERVICES

This report is for information only and the content is limited to the sample described. Halliburton makes no warranties, express or implied, as to the accuracy of the contents or results. Any user of the report agrees Halliburton shall not be liable.