

Submit 1 Copy To Appropriate District Office  
District I – (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II – (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III – (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV – (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Rec'd 05/20/2020 - NMOCD

Form C-103  
Revised July 18, 2013

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. <b>30-015-40189</b>
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator <b>WPX ENERGY PERMIAN, LLC</b>		6. State Oil & Gas Lease No. <b>36900</b>
3. Address of Operator 3500 ONE WILLIAMS CENTER MD 35 TULSA, OK 74172		7. Lease Name or Unit Agreement Name <b>RDX 16</b>
4. Well Location Unit Letter <b>L</b> : <b>2610</b> feet from the <b>SOUTH</b> line and <b>330</b> feet from the <b>WEST</b> line Section <b>16</b> Township <b>26S</b> Range <b>30E</b> NMPM <b>EDDY</b> County		8. Well Number <b>016</b>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <b>3,090' GR</b>		9. OGRID Number <b>246289</b>
		10. Pool name or Wildcat <b>BRUSHY DRAW; DELAWARE, EAST</b>

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	P AND A <input type="checkbox"/>
CLOSED-LOOP SYSTEM <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

Notify OCD 24 hrs. prior to any work done

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

7/19/2012 - Perfs @ 5590' - 7162'

WPX ENERGY PERMIAN, LLC respectfully requests to P&A the above mentioned well.

5540'

1. Set 5 1/2" CIBP @ 5735'. Circulate hole w/ MLF. Pressure test csg. Spot 30 sx cmt @ 5735-5460'. WOC & Tag.
2. Perf & Sqz 50 sx cmt @ 3528-3300'. WOC & Tag (9 5/8" Shoe & Delaware).
3. Perf & Sqz 50 sx cmt @ 920-700'. woe & Tag (13 3/8" Shoe).
4. Perf & Sqz 50 sx cmt @ 200' to surface.
5. Cut off well head, verify cmt to surface, weld on Dry Hole Marker.

Current and post P&A WBDs are attached.

Spud Date:

06/21/2012

Rig Release Date:

07/02/2012

\*\*\*\*SEE ATTACHED COA's\*\*\*\*

MUST BE PLUGGED BY 6/18/2021

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Caitlin O'Hair

TITLE

Regulatory Tech III

DATE

05/20/2020

Type or print name

Caitlin O'Hair

E-mail address:

caitlin.ohair@wpxenergy.com

PHONE:

539-573-3527

For State Use Only

APPROVED BY:

[Signature]


TITLE

Staff Manager

DATE

6/18/2020

Conditions of Approval (if any):

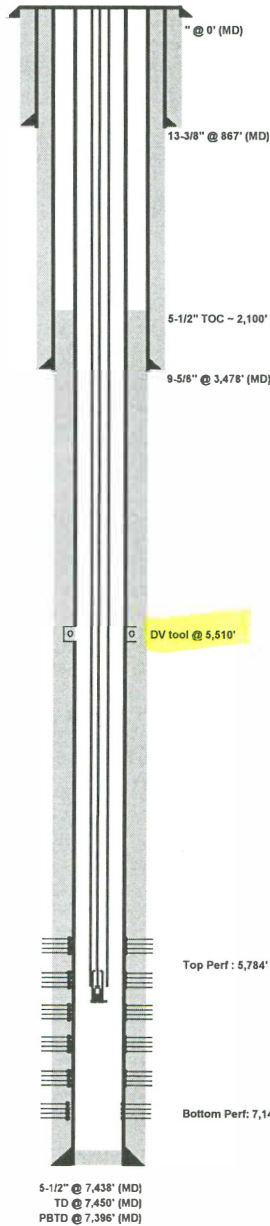

WELL:	RDX 18-16	SPUD DATE:	6/21/2012
COUNTY:	Eddy	TD:	7,450' MD (KB)
STATE:	New Mexico	TVD:	7,450' TVD (KB)
API:	30-015-40189	PBDT:	7,396' MD (KB)
LOCATION:	Sec. 16 - T26S - R30E	KB ELEVATION:	3,107.0' (17' KB)
FIELD / AREA:	Brushy Draw - Delaware East	GL ELEVATION:	3,090.0'
FORMATION:	Delaware	SURFACE LAT/LONG:	32.042261 / -103.893368

## CASING RECORD

SURFACE CASING	O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BITSZ.	SX CMT.	TOP CMT.	FC (top)	FS (top)
	13-3/8"	54.50#	J-55	LTC	0'	867'	21	17-1/2"	750	0'	-	-

\* Circ 128sxs to surface

INTERMEDIATE CASING	O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BITSZ.	SX CMT.	TOP CMT.	FC (top)	FS (top)
	9-5/8"	40.00#	J-55	LTC	0'	3,478'	83	12-1/4"	1,200	0'	-	-

\* Circ 353sxs to surface

PRODUCTION CASING	O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BITSZ.	SX CMT.	TOP CMT.	FC (top)	FS (top)
	5-1/2"	17.00#	N-80	LTC	0'	7,438'	177	8-3/4"	350 / 400	2,100'	-	-

\* TOC from CBL 7/10/2012

DV tool @ 5,510'

## PERFORATION RECORD

ZONE - Stage	TOP	BOTTOM	Gross Perfs	Net Perfs	Shots (50')
Stage #5 - Topper	5,784	5,811	27'	-	-
Stage #4 - Getty/Cougar	5,954	6,082	128'	-	-
Stage #2 - MJW/Castle	6,742	6,817	75'	-	-
Stage #1 - T62 Zone	6,936	7,149	213'	-	-

## TUBING DETAIL

172- 2 7/8 L-80 Jts  
1- 5 1/4 x 2 7/8 TAC  
23- 2 7/8 L-80 Jts  
1- Seat Nipple  
1- 2 7/8 x 4" Perf sub  
2- 2 7/8 Mud Jts  
1- 2 7/8 Bull Plug

TAC- 5,581'  
SN- 8,327'  
BP- 6,396'

EOT @ 6,396.00'

\* Actual design may be slightly modified by WPX Rep.

## ROD STRING DETAIL

Type	OD	Length	Rods	Type
PR	1.500"	26'		
1" PONY RODS	1.000"	16'		1 KD pony rods, 2', 6', & 8' w/ SHT Couplings
1" RODS	1.000"	1,825'	73	1 KD Rods w/ SHT Couplings
7/8" RODS	0.875"	2,150'	86	7/8 KD Rods w/ FST Couplings
3/4" RODS	0.750"	1,975'	79	3/4 KD Rods w/ FST Couplings
SINKER BARS	1.500"	250'	10	1 1/2 K-Bars w/ 11- Stab's w/ FST Couplings
PUMP	2.500"	24'		2 1/2 x 1 1/2 x 24' RHBC SVR
GAS ANCHOR	1.000"	20'		1 x 20' Gas Anchor

\* Projected detail, actual lengths may vary

Top Perf : 5,784' MD

Bottom Perf: 7,149' MD

32.0424309

-103.8938522

Date: 8/12/2019  
Updated: NLF  
CURRENT



## 4. Perf &amp; Sqz 50 sx cmt @ 200' to surface.

" @ 0' (MD)

WELL: RDX 16-16  
 COUNTY: Eddy  
 STATE: New Mexico  
 API: 30-015-40189  
 LOCATION: Sec. 16 - T26S - R30E  
 FIELD / AREA: Brushy Draw - Delaware East  
 FORMATION: Delaware

OPERATOR: WPX Energy  
 WI: 100%  
 NRI: 0%

SPUD DATE: 6/21/2012  
 TD: 7,450' MD (KB)  
 TVD: 7,396' MD (KB)  
 PBTD: 7,396' MD (KB)  
 KB ELEVATION: 3,107.0' (17' KB)  
 GL ELEVATION: 3,090.0'  
 SURFACE LAT/LONG: 32.042261 / -103.893368

13-3/8" @ 867' (MD)

## 3. Perf &amp; Sqz 50 sx cmt @ 920-700'. WOC &amp; Tag (13 3/8" Shoe)

## SURFACE CASING

O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BIT SZ.	SX CMT.	TOP CMT.
13-3/8"	54.50#	J-55	LTC	0'	867'	21	17-1/2"	750	0'

\* Circ 128sxs to surface

5-1/2" TOC ~ 2,100'

## 2. Perf &amp; Sqz 50 sx cmt @ 3528-3300'. WOC &amp; Tag (9 5/8" Shoe &amp; Delaware)

9-5/8" @ 3,478' (MD)

## INTERMEDIATE CASING

O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BIT SZ.	SX CMT.	TOP CMT.
9-5/8"	40.00#	J-55	LTC	0'	3,478'	83	12-1/4"	1,200	0'

\* Circ 353sxs to surface

DV tool @ 5,510'

## 1. Set 5 1/2" CIBP @ 5735'. Circulate hole w/ MLF. Pressure test csg. Spot 30 sx cmt @ 5735-5460'. WOC &amp; Tag.

Perfs @ 5784-7149'

## PRODUCTION CASING

O.D.	WT./FT.	GRADE	THD	TOP	BTM	NO. JTS.	BIT SZ.	SX CMT.	TOP CMT.
5-1/2"	17.00#	N-80	LTC	0'	7,438'	177	8-3/4"	350 / 400	2,100'

\* TOC from CBL 7/10/2012 DV tool @ 5,510'

5-1/2" @ 7,438' (MD)  
 TD @ 7,450' (MD)  
 PBTD @ 7,396' (MD)

Date: 8/12/2019  
 Updated: NLF  
 CURRENT

## **CONDITIONS FOR PLUGGING AND ABANDONMENT**

### **OCD - Southern District**

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, **Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs. Insure all bradenheads have been exposed, identified and valves are operational prior to rig up.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water **will not** be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
  - A) Fusselman
  - B) Devonian
  - C) Morrow
  - D) Wolfcamp
  - E) Bone Springs
  - F) Delaware
  - G) Any salt sections
  - H) Abo
  - I) Glorieta
  - J) Yates.
  - K) **Potash---** (In the R-111-P Area (Potash Mine Area), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

#### **DRY HOLE MARKER REQUIREMENTS**

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

**1. Operator name   2. Lease and Well Number   3. API Number   4. Unit Letter   5. Quarter Section (feet from the North, South, East or West)   6. Section, Township and Range   7. Plugging Date   8. County                      (SPECIAL CASES)-----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS**

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)

#### **SITE REMEDIATION DUE WITHIN ONE YEAR OF WELL PLUGGING COMPLETION**