


OIL CONSERVATION DIVISION

P. O. BOX 2083

SANTA FE, NEW MEXICO 87501

Form C-103  
Revised 10-1-

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

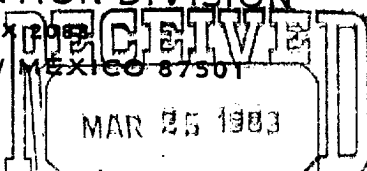

OIL CONSERVATION DIVISION  
SANTA FE

5a. Indicate Type of Lease

State  Fee

5. State Oil & Gas Lease No.

NA

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL  GAS WELL  OTHER-  
7. Unit Agreement Name  
NA

2. Name of Operator  
Triton Oil & Gas Corp.  
8. Farm or Lease Name  
Smith

3. Address of Operator  
4849 Greenville Avenue, 10th Floor, Dallas, Texas 75206  
9. Well No.  
1

4. Location of Well  
UNIT LETTER J 2308.73 FEET FROM THE South LINE AND 2309.71 FEET FROM  
10. Field and Pool, or Wildcat  
Wildcat

THE East LINE, SECTION 15 TOWNSHIP 11 N RANGE 33 E N.M.P.M.

15. Elevation (Show whether DF, RT, GR, etc.)  
3891.08'  
12. County  
Quay

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK  PLUG AND ABANDON  REMEDIAL WORK  ALTERING CASING   
 TEMPORARILY ABANDON  CHANGE PLANS  COMMENCE DRILLING OPNS.  PLUG AND ABANDONMENT   
 PULL OR ALTER CASING  OTHER  CASING TEST AND CEMENT JOBS   
 OTHER

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Commence Drilling Operations: This well spudded 5:00 P.M. on 12-28-82.

Casing & Cement Test: TD 800'. Casing run 1-7-83. Consisted of 800' of 5 1/2" 14# K-55 ST&C and set at 796'. Cemented with 220 sks, Class "H" with 2% CaCl<sub>2</sub>. Centralizers @ 775', 600', 450', 325', and 250'.

Plug and Abandon: 1-21-83, perf. 756'-762' with 1 9/16" Gun of 24 holes. 2-27-83 set 30' plug of Cal-Seal at 735'-765'. Perf. 674'-678', 4 shots/ft. 2-28-83 set 30' plug of Cal-Seal at 649'-679'. Perf. 411'-414', 4 shots/ft. 3-1-83 rig up CRC and set 30' plug of Cal-Seal at 385'-415'. Set 30' plug at surface. Well P & A.

8. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

TITLE Materials Coordinator DATE 3-17-83

APPROVED BY Carl [Signature] TITLE DISTRICT SUPERVISOR DATE 4/29/83