

GW - 1

REPORTS

YEAR(S):

1989

**REPORT ON SOIL VAPOR SURVEY,
WELL INSTALLATION, AND
HYDROCARBON RECOVERY SYSTEM
BLOOMFIELD REFINING COMPANY**

February 24, 1989

Prepared for:

**CHRIS HAWLEY
BLOOMFIELD REFINING COMPANY
P.O. Box 159
Bloomfield, New Mexico 87413**

Prepared by:

GEOSCIENCE CONSULTANTS, LTD.

**HEADQUARTERS
500 Copper Avenue, NW
Suite 200
Albuquerque, New Mexico 87102
(505) 842-0001
FAX (505) 842-0595**

WEST COAST REGIONAL OFFICE

**1400 Quail Street
Suite 140
Newport Beach, CA 92660
(714) 724-0536
FAX (714) 724-0538**

EASTERN REGIONAL OFFICE

**1109 Spring Street
Suite 706
Silver Spring, Maryland 20910
(301) 587-2088
FAX (301) 587-3625**

REPORT ON SOIL VAPOR SURVEY,
WELL INSTALLATION, AND
HYDROCARBON RECOVERY SYSTEM
BLOOMFIELD REFINING COMPANY

SUBMITTED BY:

Randall Hicks
GCL Program Manager

Susan Colarullo
GCL Project Director

DATE:

7/21/89

3/24/89



TABLE OF CONTENTS

1.0	EXECUTIVE SUMMARY	1
2.0	SOIL VAPOR SAMPLING	2
2.1	GOALS AND OBJECTIVES	2
2.2	TECHNICAL APPROACH	2
2.3	RESULTS AND CONCLUSIONS	6
3.0	INSTALLATION OF RECOVERY WELLS AND PIEZOMETERS	26
3.1	GOALS AND OBJECTIVES	26
3.2	TECHNICAL APPROACH	28
3.3	RESULTS AND CONCLUSIONS.	29
3.3.1	Lithology	29
3.3.2	Well Yield	31
3.3.3	Pre-Recovery Water Table and Saturated Thickness	31
3.3.4	Water Quality	31
4.0	INSTALLATION AND OPERATION OF HYDROCARBON RECOVERY SYSTEM	45
4.1	GOALS AND OBJECTIVES	45
4.2	TECHNICAL APPROACH	45
4.2.1	Installation of Hydrocarbon-Recovery Pumps	45
4.2.2	Operation and Maintenance of Hydrocarbon-Recovery Pumps	46
4.3	RESULTS AND CONCLUSIONS.	47
5.0	REFERENCES	50

LIST OF FIGURES

FIGURE 2-1	LOCATIONS OF SOIL VAPOR SAMPLING POINTS	3
FIGURE 2-2	BENZENE VAPOR CONCENTRATION (PPM)	9
FIGURE 2-3	BENZENE VAPOR LOG CONCENTRATION (LOG PPM)	10
FIGURE 2-4	TOLUENE VAPOR CONCENTRATION (PPM)	11
FIGURE 2-5	TOLUENE VAPOR LOG CONCENTRATION (LOG PPM)	12
FIGURE 2-6	ETHYLBENZENE VAPOR CONCENTRATION (PPM)	13
FIGURE 2-7	ETHYLBENZENE VAPOR LOG CONCENTRATION (LOG PPM)	14
FIGURE 2-8	XYLENE VAPOR CONCENTRATION (PPM)	15
FIGURE 2-9	XYLENE VAPOR LOG CONCENTRATION (LOG PPM)	16
FIGURE 2-10	PCE VAPOR CONCENTRATION (PPM)	17
FIGURE 2-11	PCE VAPOR LOG CONCENTRATION (LOG PPM)	18
FIGURE 2-12	TCE VAPOR CONCENTRATION (PPM)	19
FIGURE 2-13	TCE VAPOR LOG CONCENTRATION (LOG PPM)	20
FIGURE 3-1	BENZENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	35
FIGURE 3-2	ETHYLBENZENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	36
FIGURE 3-3	TOLUENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	37
FIGURE 3-4	M-XYLENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	38
FIGURE 3-5	O-XYLENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	39
FIGURE 3-6	P-XYLENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	40

FIGURE 3-7	1,2-DICHLOROETHENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	41
FIGURE 3-8	TRANS 1,2-DICHLOROETHENE CONCENTRATION IN GROUND WATER, SEPTEMBER 1988	42
FIGURE 3-9	PHENOL CONCENTRATION IN GROUND WATER, SEPTEMBER 1988 . .	43

LIST OF TABLES

TABLE 2-1	PHYSICAL PROPERTIES OF VOLATILE ORGANIC CONSTITUENTS OBSERVED AT BLOOMFIELD REFINING COMPANY	5
TABLE 2-2	BLOOMFIELD REFINING COMPANY SOIL VAPOR SURVEY RESULTS	8
TABLE 2-3	CONCENTRATIONS OF VOLATILE ORGANIC COMPOUNDS IN GROUND WATER AND SOIL VAPOR AT MONITOR WELL LOCATIONS	23
TABLE 3-1	WATER LEVEL AND PRODUCT THICKNESS AT RECOVERY WELLS AND PIEZOMETERS (FEET).	32
TABLE 3-2	BLOOMFIELD REFINING COMPANY GROUND WATER QUALITY	33

APPENDICES

APPENDIX A	GCL STANDARD OPERATING PROCEDURES FOR SOIL VAPOR SAMPLING AND ANALYSIS
APPENDIX B	LITHOLOGIC LOGS AND STRATIGRAPHIC SECTIONS

LIST OF PLATES

PLATE 1	WELL LOCATIONS
PLATE 2	SIMULATED STEADY-STATE HYDRAULIC HEAD DURING THREE-WELL RECOVERY (FEET)
PLATE 3	ELEVATION OF TOP OF NACIMIENTO BEDROCK (FEET MSL)
PLATE 4	PRE-RECOVERY WATER TABLE OBSERVED ON SEPTEMBER 9, 1988 (FEET)
PLATE 5	WATER TABLE OBSERVED FOLLOWING 12 DAYS OF RECOVERY (FEET)
PLATE 6	OBSERVED WATER-LEVEL DECLINE FOLLOWING 12 DAYS OF RECOVERY (FEET)
PLATE 7	WATER TABLE OBSERVED FOLLOWING 42 DAYS OF RECOVERY (FEET)
PLATE 8	OBSERVED WATER-LEVEL DECLINE FOLLOWING 42 DAYS OF RECOVERY (FEET)

1.0 EXECUTIVE SUMMARY

A soil vapor survey was conducted during the week of July 18, 1988 on U.S. Bureau of Land Management (BLM) property south of the Bloomfield Refining Company (BRC) facility in order to determine if solvents were present in ground water and to assess the extent of dissolved or floating petroleum product migration in the subsurface. Survey results suggest that a buried stream channel in the underlying Nacimiento Formation controls movement of volatile organic compounds (VOCs) in ground water beneath BLM land. Based on this information, installation of recovery wells on Bloomfield Refining Company property was expected to be sufficient to capture most of the dissolved and immiscible hydrocarbons in perched ground water beneath the refinery and some hydrocarbons from beneath BLM property.

Two recovery wells were installed on BRC property between August 29 and September 2, 1988. These wells, in addition to existing well MW-10, comprised the hydrocarbon recovery system. Based on a numerical ground-water flow model, these three wells were considered to be sufficient to capture hydrocarbons from beneath refinery property. Four piezometers were also installed to assess the hydraulic impacts of recovery operations on the perched alluvial aquifer. After 42 days of recovery, significant hydraulic capture of ground water and hydrocarbons was evident. Operation of the recovery system over longer periods of time is expected to further increase the extent and rate of hydraulic capture in the alluvial aquifer.

2.0 SOIL VAPOR SAMPLING

2.1 GOALS AND OBJECTIVES

A soil vapor survey was conducted during the week of July 18, 1988 on U.S. Bureau of Land Management (BLM) property in order to determine if halogenated hydrocarbons were present in ground water and to assess the extent of dissolved or floating petroleum product migration in the subsurface from beneath Bloomfield Refining Company (BRC) property. Soil vapor surveys have proven effective in identifying the extent of volatile organic compounds (VOCs) in ground water. The purpose of the survey was to assist in the identification of the source of hydrocarbons observed in ground water south of the refining facility and to better define the areal extent of these hydrocarbons. Results of the survey were also used to assist in determining the location of on-site ground water recovery wells.

2.2 TECHNICAL APPROACH

The survey was not conducted on refinery property due to significant chemical interference from normal refinery operations. However, soil vapor samples were collected at monitor well locations where concentrations of organic constituents in ground water were known. A grid initially constructed on 300-foot centers was used to perform the soil vapor survey on BLM property. The large distance between grid centers was chosen in order to avoid small-scale heterogeneities influencing vapor migration in the subsurface. The original grid, which extended southward from Sullivan Road and westward from the edge of the terminal area, was oriented ~~parallel~~ and perpendicular to the general direction of westward ground water flow. The grid spacing was continuously redefined on the basis of the vapor concentration observed at the most recently sampled grid point. A total of 25 points included 3 vapor samples collected on BRC property and 22 vapor samples collected on BLM land. Locations of the soil vapor sample points are shown in Figure 2-1.

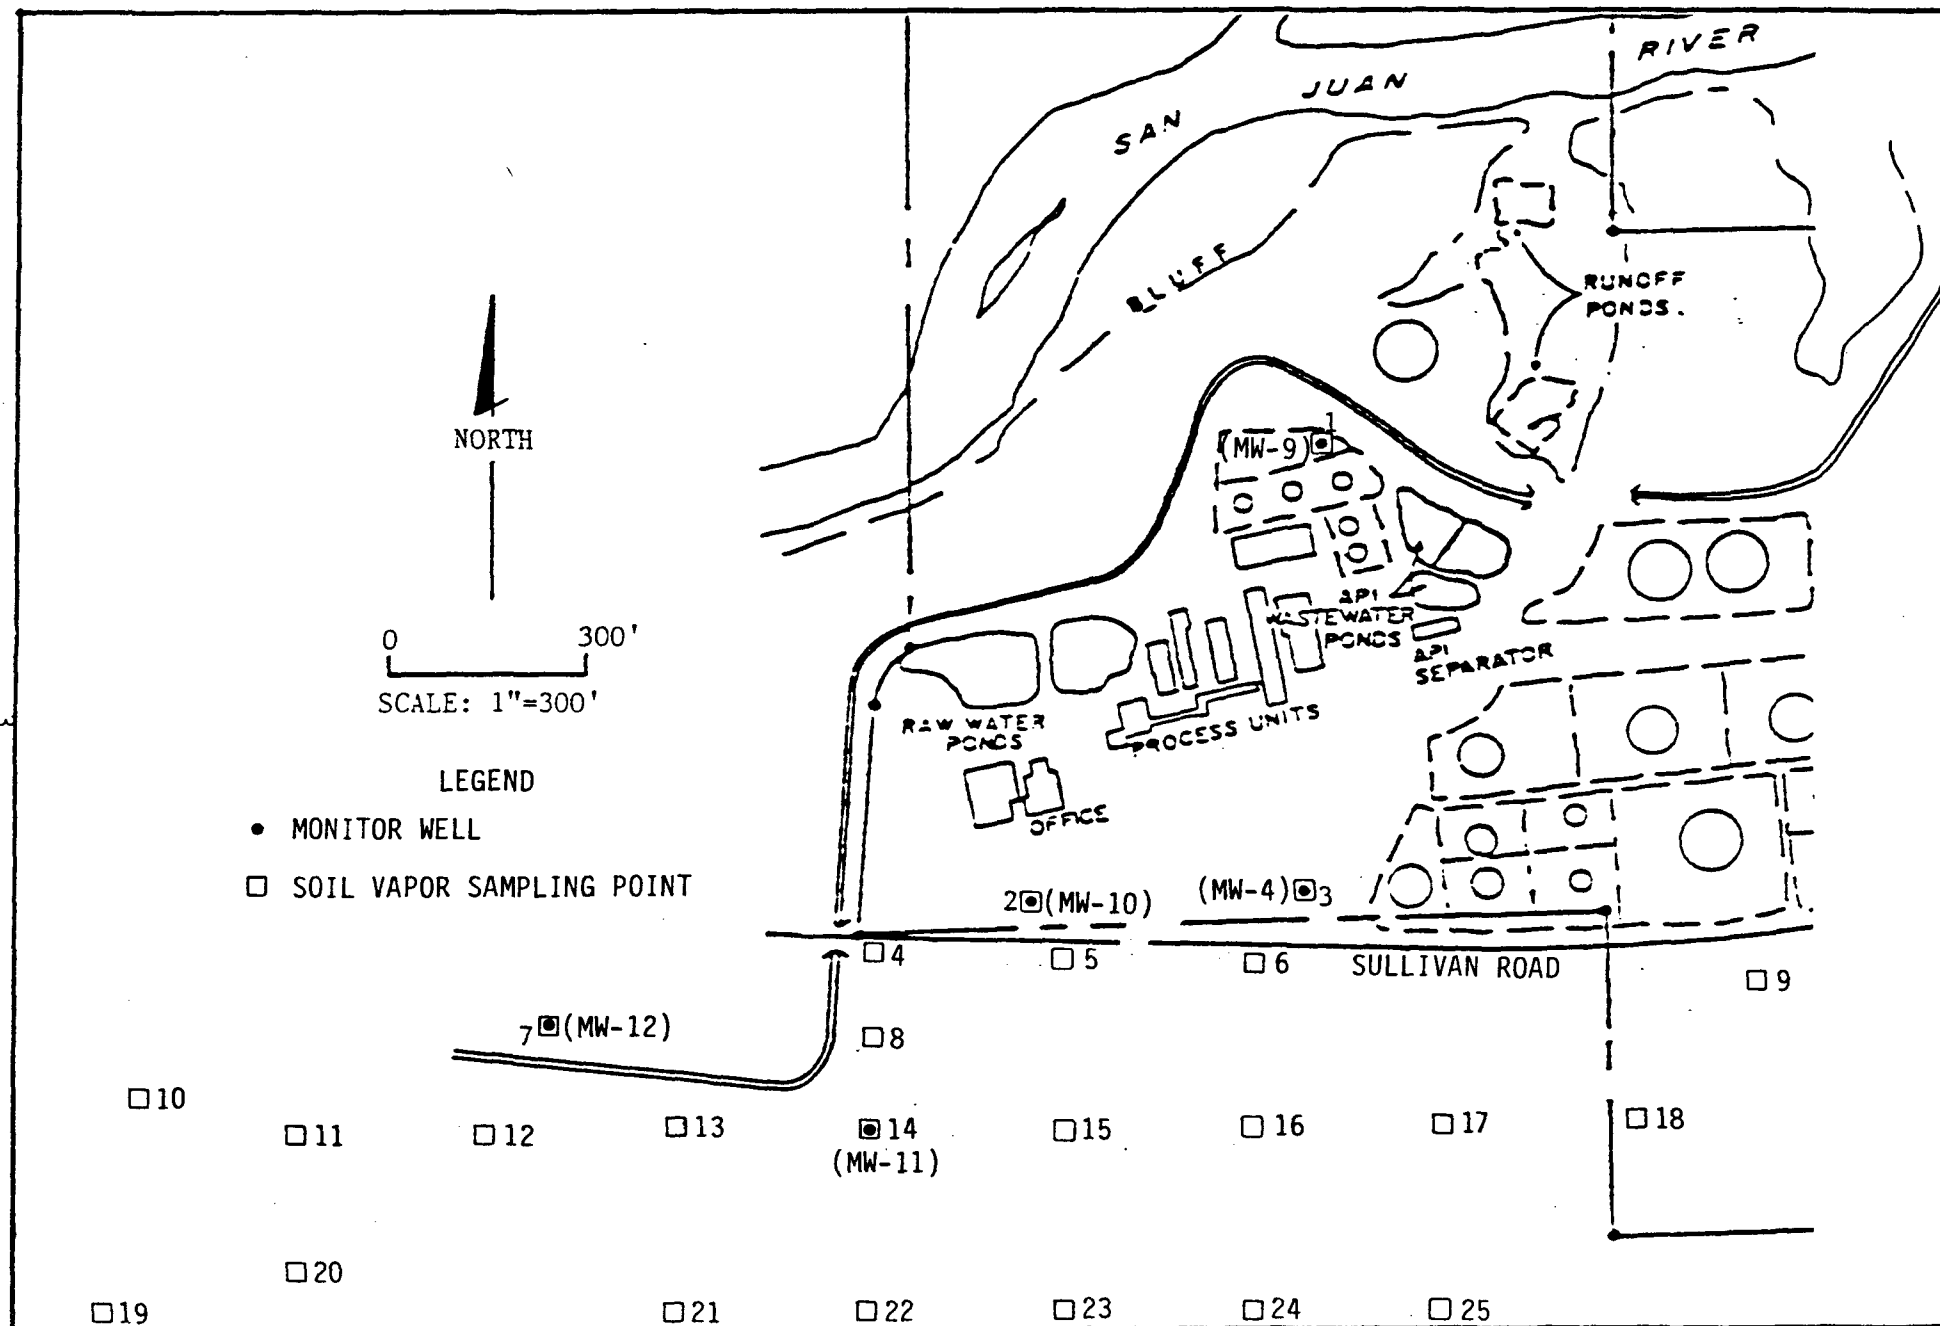


FIGURE 2-1
LOCATIONS OF SOIL VAPOR SAMPLING POINTS

Soil vapor sampling was performed pursuant to guidelines presented in the GCL Standard Operating Procedures for Soil Vapor Sampling and Analysis (Appendix A). Prior to sampling on the grid, soil vapor samples were obtained near monitor wells at which concentrations of VOCs were known. This permitted estimation of the degree of correlation between soil vapor concentrations and observed concentrations of VOCs in ground water.

The sampling system employed driven 3/4-inch diameter hollow steel probes and a Photovac 10S50 gas chromatograph (GC). Analysis of soil vapor grab samples extracted from the shallow subsurface at depths of 5 feet helped to identify the presence of VOCs in the soil and underlying ground water. Analyses made at each sample point consisted of:

- Benzene
- Toluene
- Ethylbenzene
- Xylenes
- Trichloroethylene (TCE)
- Tetrachloroethylene (PCE)

Table 2-1 lists the physical properties of these volatile organic compounds. All VOCs sampled during the soil vapor survey were characterized by Henry's law constants in excess of 5×10^{-4} atm·m³/mole and vapor pressures of at least 1 mmHg, and were therefore considered suitable for soil-vapor sampling (Marrin, 1988). Quality control of the analyses included daily calibrations, air blanks, equipment blanks, and retention time checks for all constituents of interest. Calibration standards, analyzed to $\pm 2\%$, were supplied by Scotty Specialty Gases. Based upon analysis of concentrations of "background" VOCs located 800 feet from the refinery, a significant level of aromatic or halogenated hydrocarbons was considered to exist if:

TABLE 2-1

PHYSICAL PROPERTIES OF VOLATILE ORGANIC
CONSTITUENTS OBSERVED AT BLOOMFIELD REFINING COMPANY

	Solubility in Water (20-25°C) (mg/l)	Vapor Pressure (14-32°C) (mmHg)	Henry's Law Constant (atm·m ³ /mole)	Log of Octanol/ Water Partition Coefficient
Benzene	1780-1800	95.2	5.55×10^{-3}	2.13
Toluene	535	28.7	5.93×10^{-3}	2.69
Ethylbenzene	206	7	6.44×10^{-3}	3.15
Xylenes	insoluble	10(0-Xylene)	6.12×10^{-3}	----
Tetrachloro- ethylene (PCE)	150	14	28.7×10^{-3}	2.88
Trichloroeth- ylene (TCE)	1100	57.9	11.7×10^{-3}	2.29
1,2-Dichloro- ethane (DCA)	6300-8300	61-200	$(1.10-5.32) \times 10^{-3}$	1.48
Phenol	67000	insignificant	1.3×10^{-6}	1.46

Source: U.S. EPA, 1981, Treatability Manual, Volume I. Treatability
Data, Office of Research and Development, Washington, D.C.

- Total hydrocarbons in soil vapor were found to exceed 50,000 $\mu\text{g/l}$ (50 ppm)
- Either benzene or toluene in soil vapor was found to exceed 1500 $\mu\text{g/l}$ (1.5 ppm)
- The concentration of PCE in soil vapor exceeded 10,000 $\mu\text{g/l}$ (10 ppm).

2.3 RESULTS AND CONCLUSIONS

Interpretation of soil vapor survey results should account for source location, soil moisture content, organic carbon content, and volatility and solubility of the VOC under investigation. The primary transport mechanism for VOCs in unsaturated soil is by upward diffusion from the underlying saturated zone through air- and gas-filled voids. The presence of soil moisture tends to inhibit transport of vapors by reducing the volume of open voids through which volatile organic vapors can diffuse, but has less influence on highly-volatile VOCs than on compounds characterized by low volatility. The presence of organic matter may also inhibit diffusion through physical sorption of VOCs. Silka (1988) has shown that sorption in soils containing as little as 0.1% organic carbon can act as a significant sink for VOC vapors. Since soil moisture and organic matter act as sinks for VOC vapors and inhibit free movement of vapors from the ground water to the overlying soil, use of soil vapor concentrations to define the extent of hydrocarbons dissolved in underlying ground water is especially well-suited to coarse-grained, freely-draining deposits that do not contain significant amounts of organic material.

As indicated by lithologic logs of boreholes recently drilled in the area, the upper 10 to 20 feet of deposits underlying the site are comprised of silt and clay. These fine-grained deposits tend to trap infiltrating moisture and thereby inhibit upward diffusion of organic vapor that partitions out of the underlying ground water. The deposits might include minor amounts of organic matter that can easily adsorb organic vapors. Since the shallow clay layer appears to extend continuously across the site north of Sullivan Road, the diffusion-

inhibiting effects of the clay would be expected to be uniform across refinery property. (Thus, it can be assumed that soil vapor concentrations observed north of Sullivan Road are reliable indicators of the extent of dissolved hydrocarbon plumes in the underlying ground water, especially when overall trends in the soil vapor plumes for a number of constituents are consistent.) The relative concentrations of soil vapors are also useful for identifying source areas where hydrocarbons are likely to have been released into the subsurface. Since the shallow clay layer appears to be absent from at least a portion of BLM property, soil vapor concentrations would be expected to be higher beneath BLM land for a given ground water concentration.

4 samples at
road, MW-9

Concentrations of benzene, toluene, ethylbenzene, total xylenes, tetrachloroethylene (PCE) and trichloroethylene (TCE) observed in the vapor samples are listed in Table 2-2. Plots of vapor concentrations and the logarithms of concentrations are shown in Figures 2-2 through 2-13. The distribution of log concentration is useful when vapor concentrations vary over several orders of magnitude because the logged concentration data are less subject to averaging during machine contouring than raw concentration data. The Golden Software "Surfer" graphics package was used to perform kriging of the data over a 1000-foot search radius, a procedure that tended to smooth the data with respect to space. X- and y-coordinates used for plotting were referenced to monitor well MW-11. Locations of the monitoring wells relative to the vapor sample points are approximate and can be more accurately defined by means of a topographic survey of well head locations.

The largest concentrations of benzene, toluene, total xylenes, and PCE were observed at sample point 1 (well MW-9). Although the area near well MW-9 is not considered to be the sole source of hydrocarbons, it appears to have been the site of significant hydrocarbon release during the history of the refinery. An air blank analysis was performed at point 1 because of the strong odor evident at this sample point. Results of the

TABLE 2-2

**BLOOMFIELD REFINING COMPANY
SOIL VAPOR SURVEY RESULTS**

Point or Sample	x(ft) ^a	y(ft) ^b	Concentration (ppm)					
			Benzene	Toluene	Ethylbenzene	Total Xylenes	PCE	TCE
1 (MW-9)	600	1070	2995	4655	ND	634	110	ND
2 (MW-10)	150	350	38.2	11.9	74.5	ND	ND	ND
3 (MW-4)	570	350	ND	710	102	20.6	78	ND
4	0	300	ND	1025	ND	10195	ND	ND
5	300	300	0.062	0.149	ND	0.071	0.011	ND
6	600	300	ND	0.041	ND	0.006	ND	0.086
7 (MW-12)	-610	150	ND	0.285	ND	ND	ND	ND
8	0	150	ND	1.95	ND	25.58	ND	6.49
9	1200	150	ND	0.448	0.349	0.442	0.513	0.380
10	-1200	0	ND	0.085	ND	0.038	ND	0.034
11	-900	0	ND	0.125	ND	0.430	ND	2.14
12	-600	0	ND	0.130	ND	0.037	ND	ND
13	-300	0	ND	0.100	ND	0.042	ND	0.037
14 (MW-11)	0	0	0.560	10.9	ND	9.70	ND	ND
15	300	0	0.230	1.24	ND	0.126	ND	ND
16	600	0	0.072	0.584	0.146	ND	ND	ND
17	900	0	ND	1.88	9.27	0.979	ND	23.8
18	1200	0	ND	0.143	ND	0.107	0.003	0.082
19	-1200	-300	ND	0.061	ND	0.028	0.002	0.003
20	-900	-200	ND	0.060	ND	0.033	0.004	0.072
21	-300	-300	ND	0.088	ND	0.127	ND	0.033
22	0	-300	ND	0.044	ND	0.016	ND	ND
23	300	-300	ND	0.925	ND	0.661	ND	ND
24	600	-300	ND	0.979	ND	0.310	ND	ND
25	900	-300	0.014	0.107	ND	0.055	0.006	0.067
Air Blank	-----	----	ND	0.049	0.008	0.091	ND	0.074
Soil Blank	-700	-600	0.016	0.547	ND	0.037	ND	ND

ND = not detected

a approximate distance east from well MW-11

b approximate distance north from well MW-11

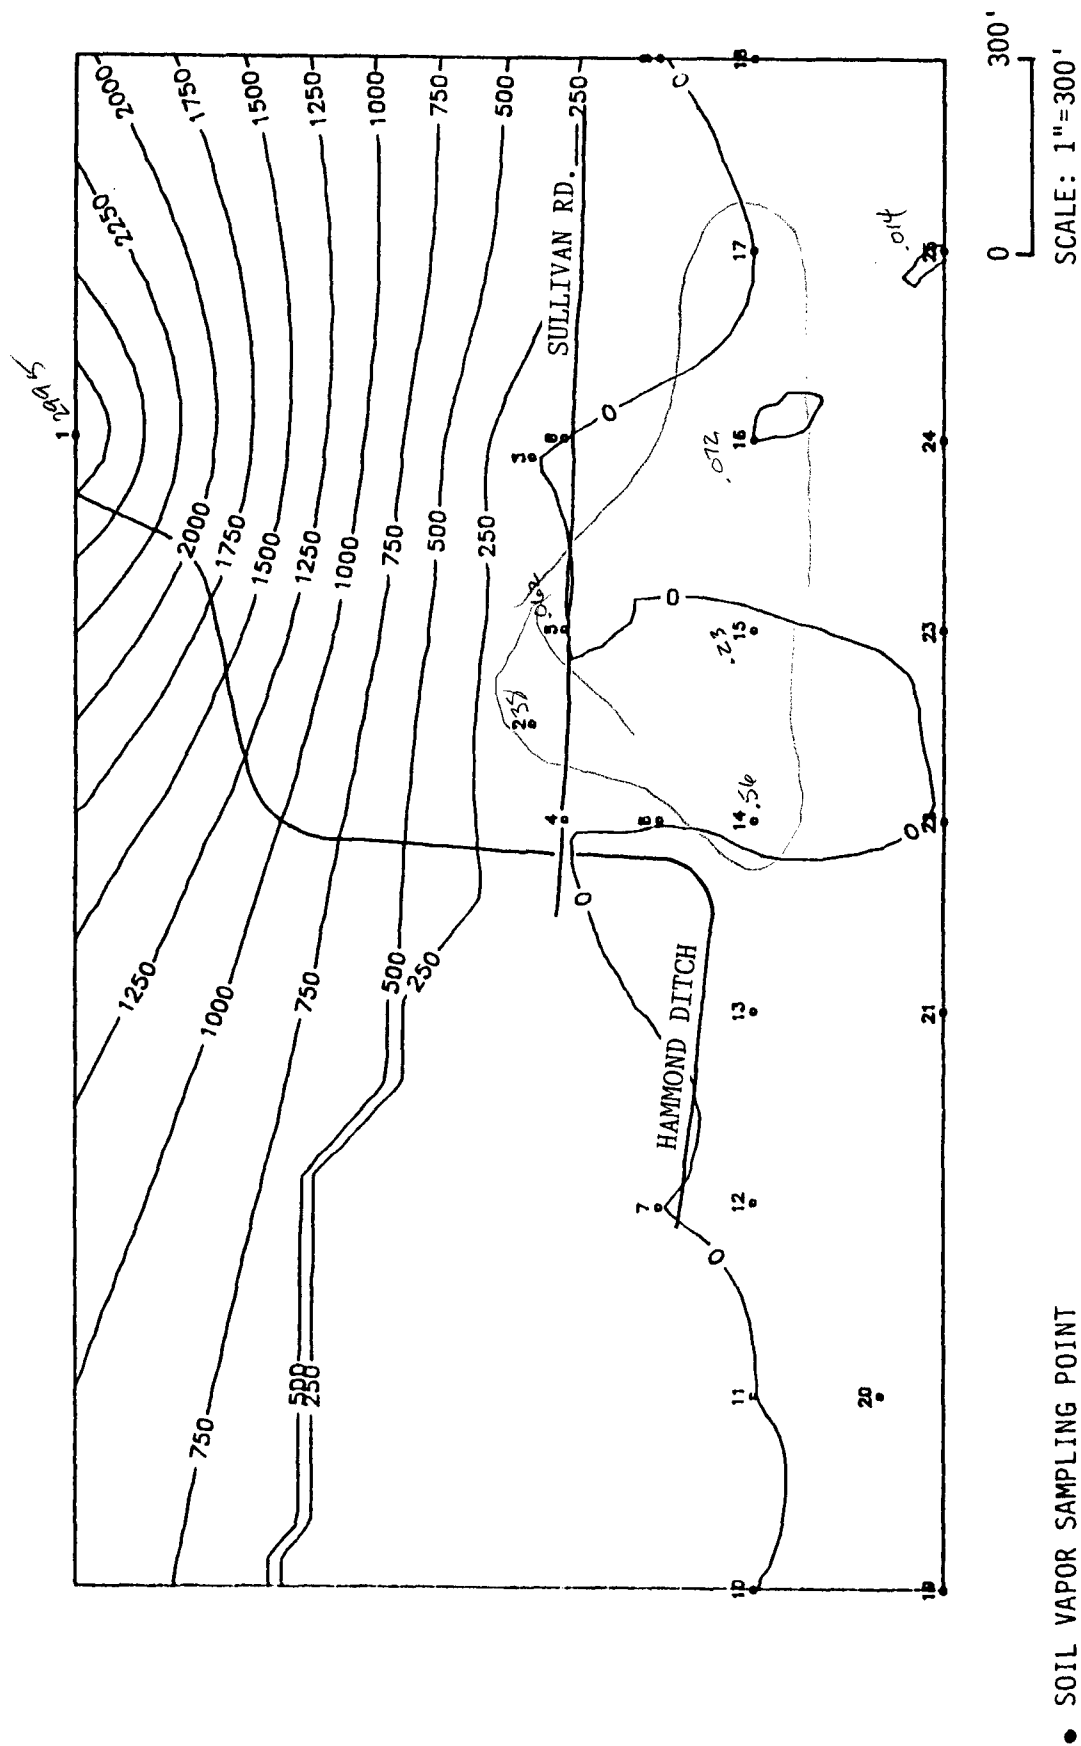


FIGURE 2-2
BENZENE VAPOR CONCENTRATION (ppm)

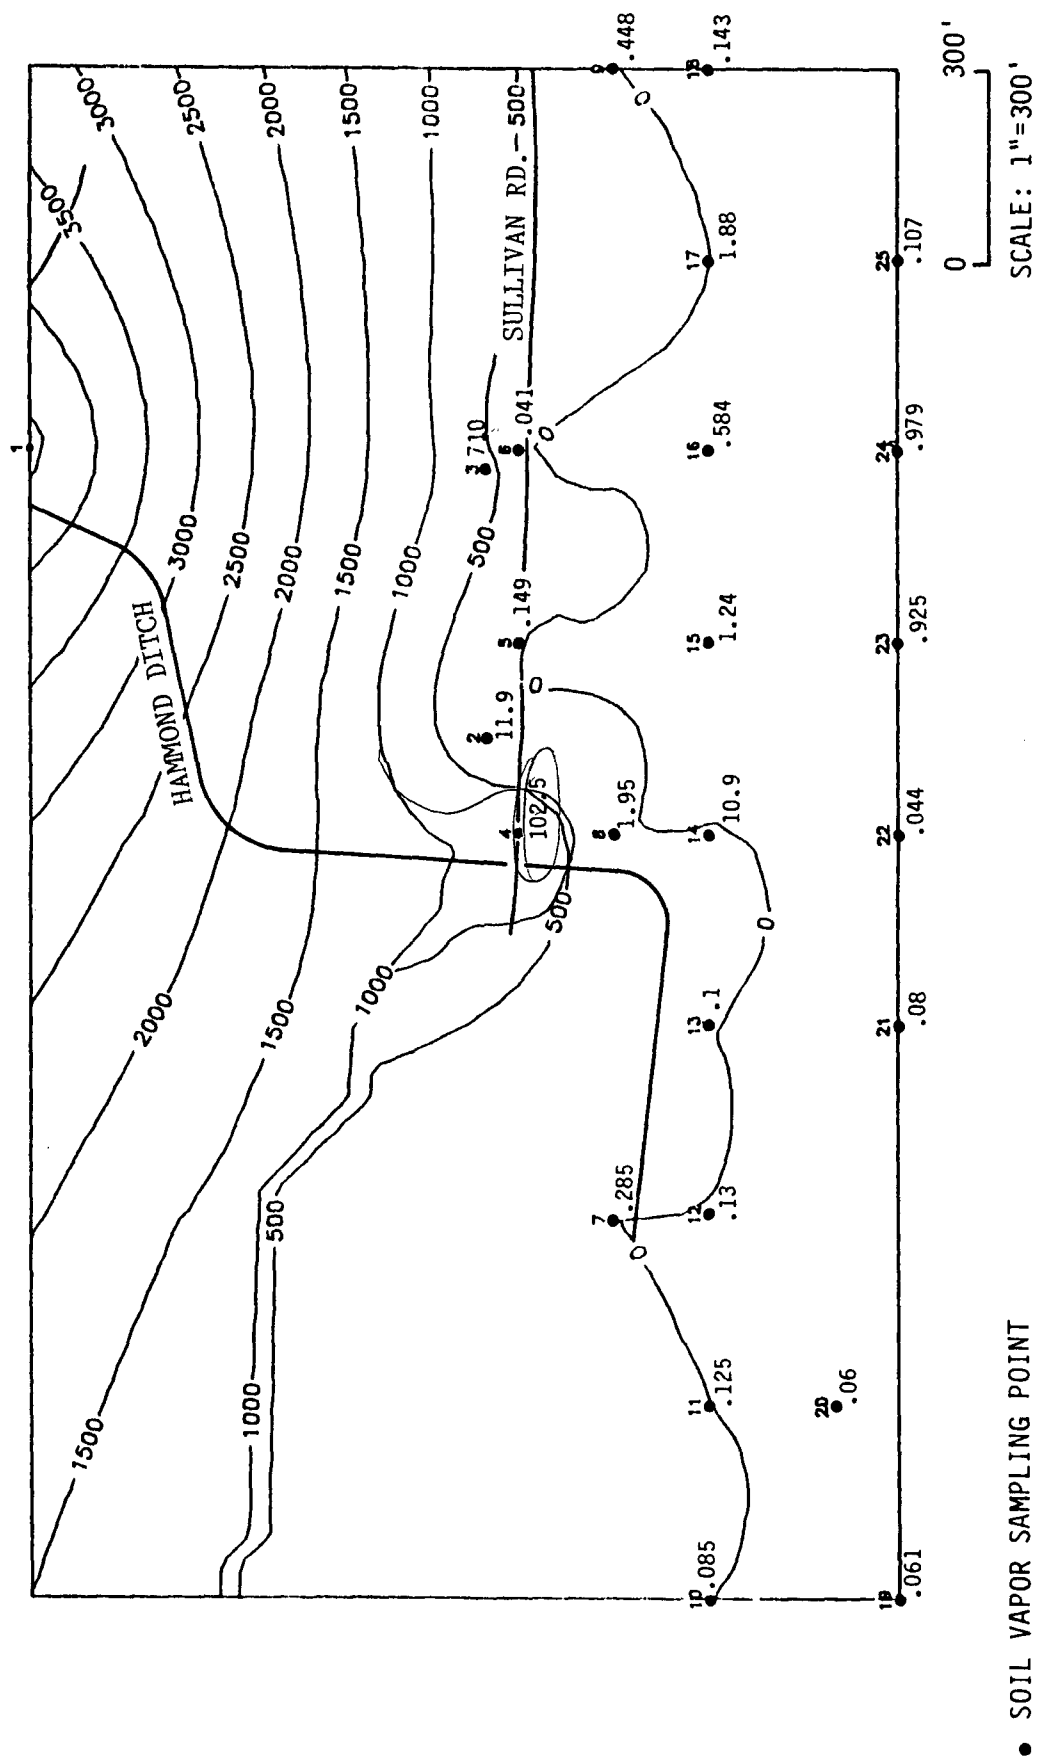


FIGURE 2-4
TOLUENE VAPOR CONCENTRATION (ppm)

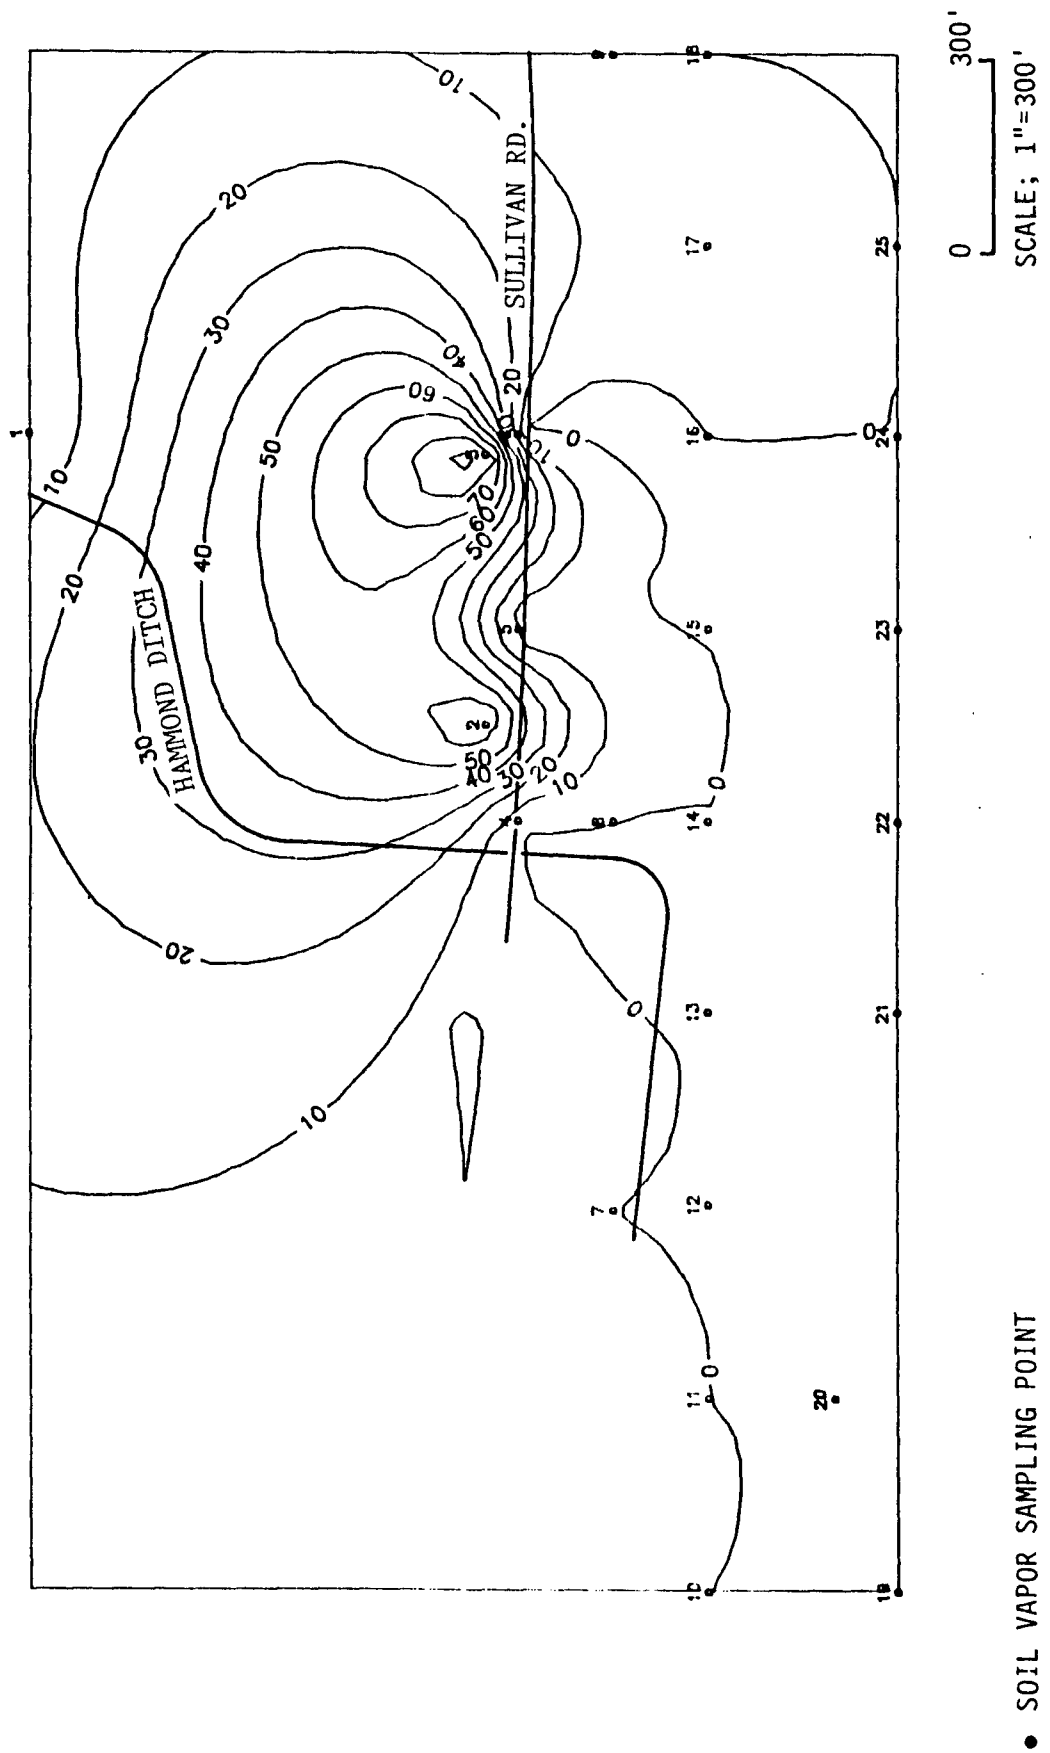


FIGURE 2-6
ETHYLBENZENE VAPOR CONCENTRATION (ppm)

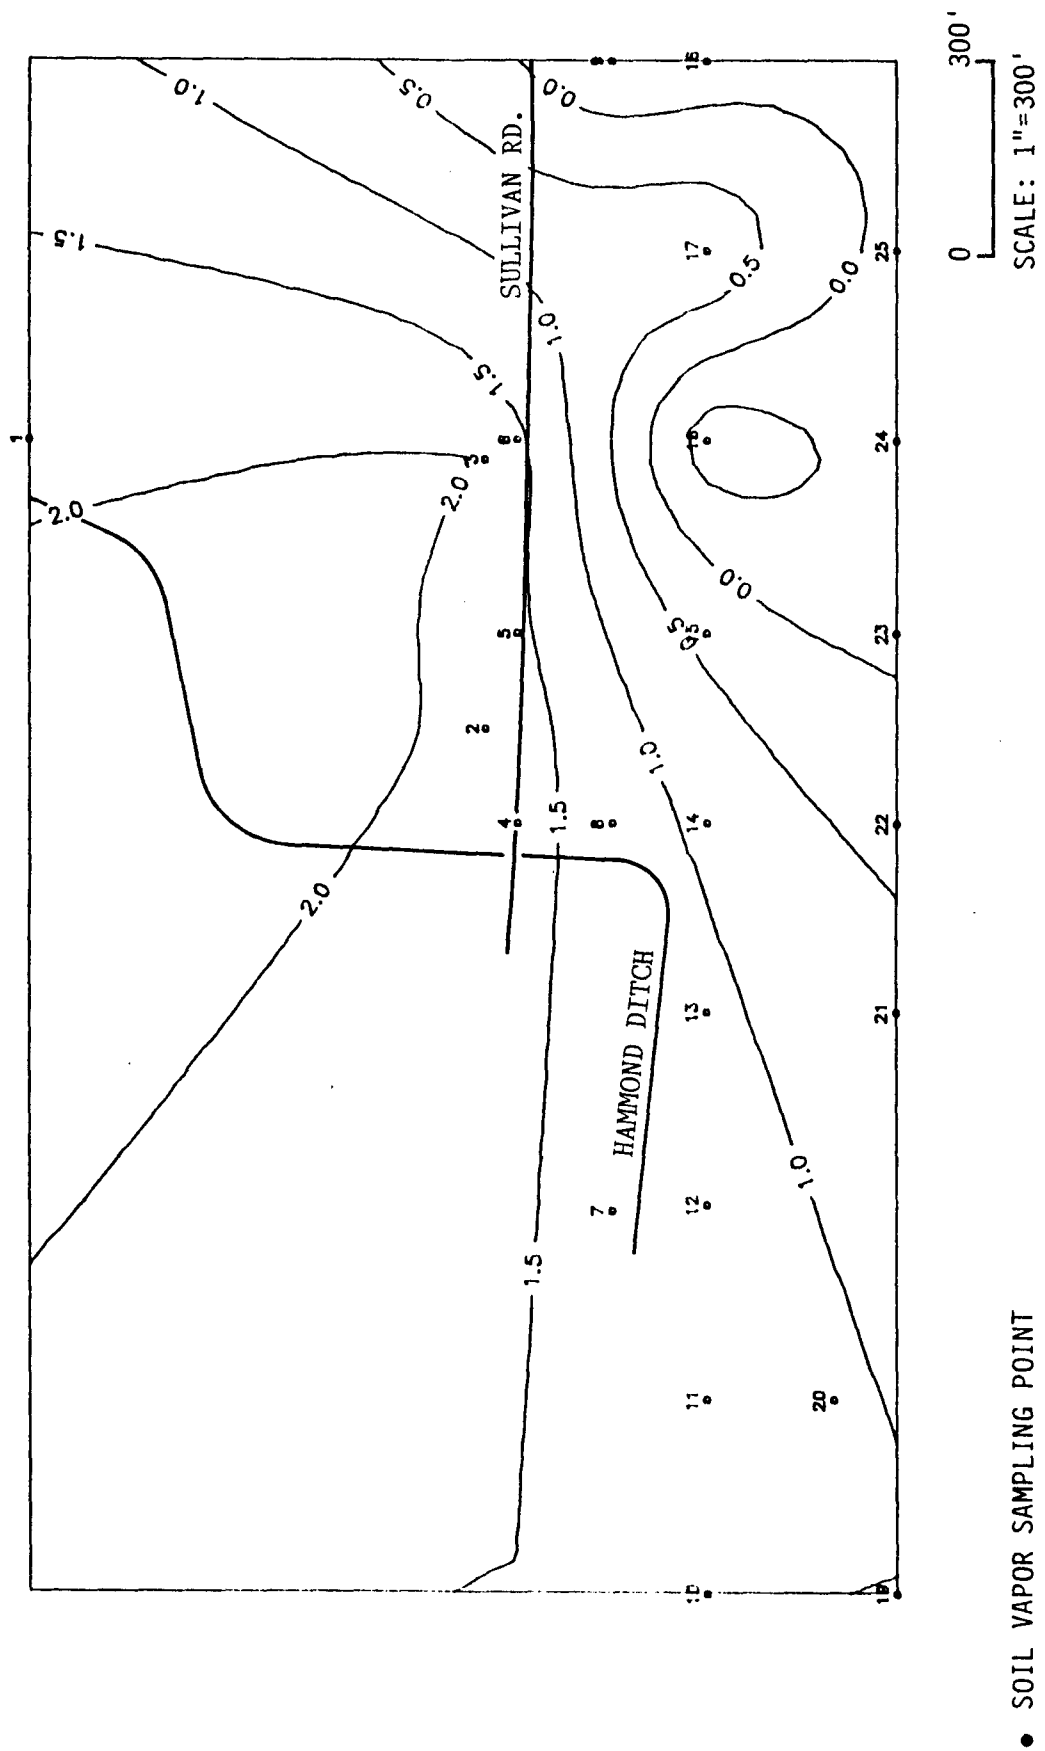


FIGURE 2-7
ETHYLBENZENE VAPOR LOG CONCENTRATION (LOG ppm)

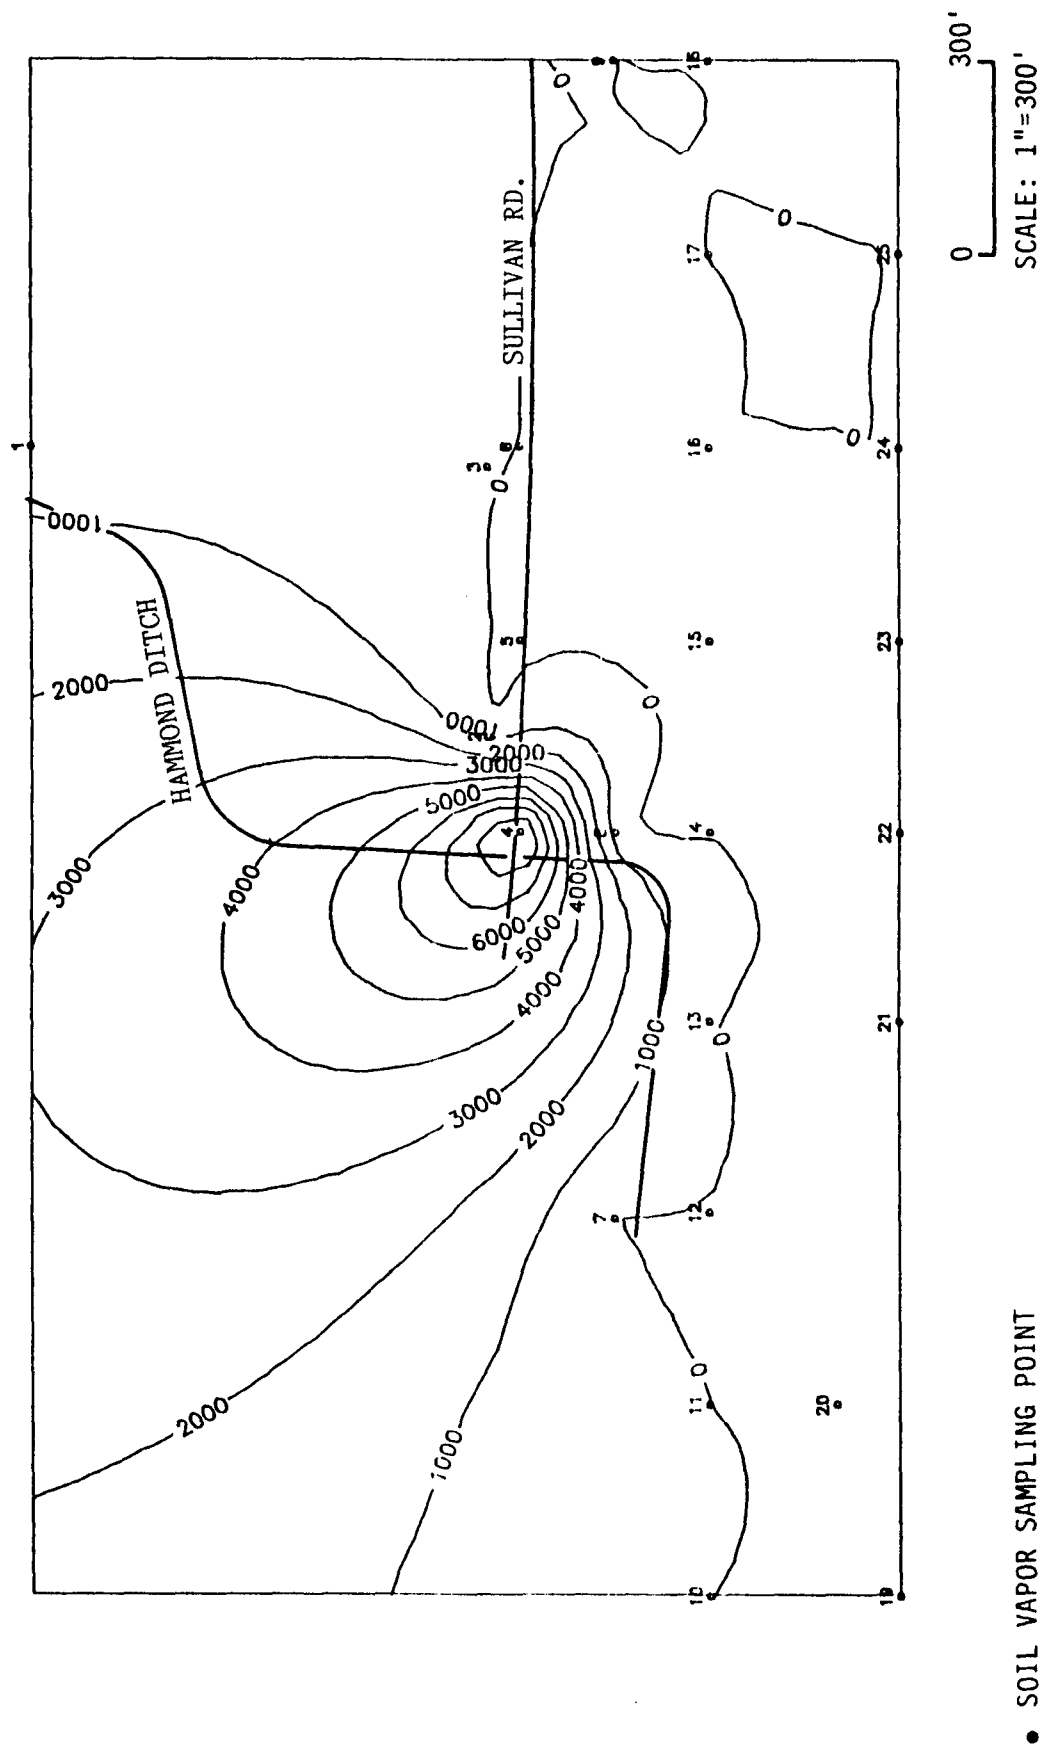


FIGURE 2-8
XYLENE VAPOR CONCENTRATION (ppm)


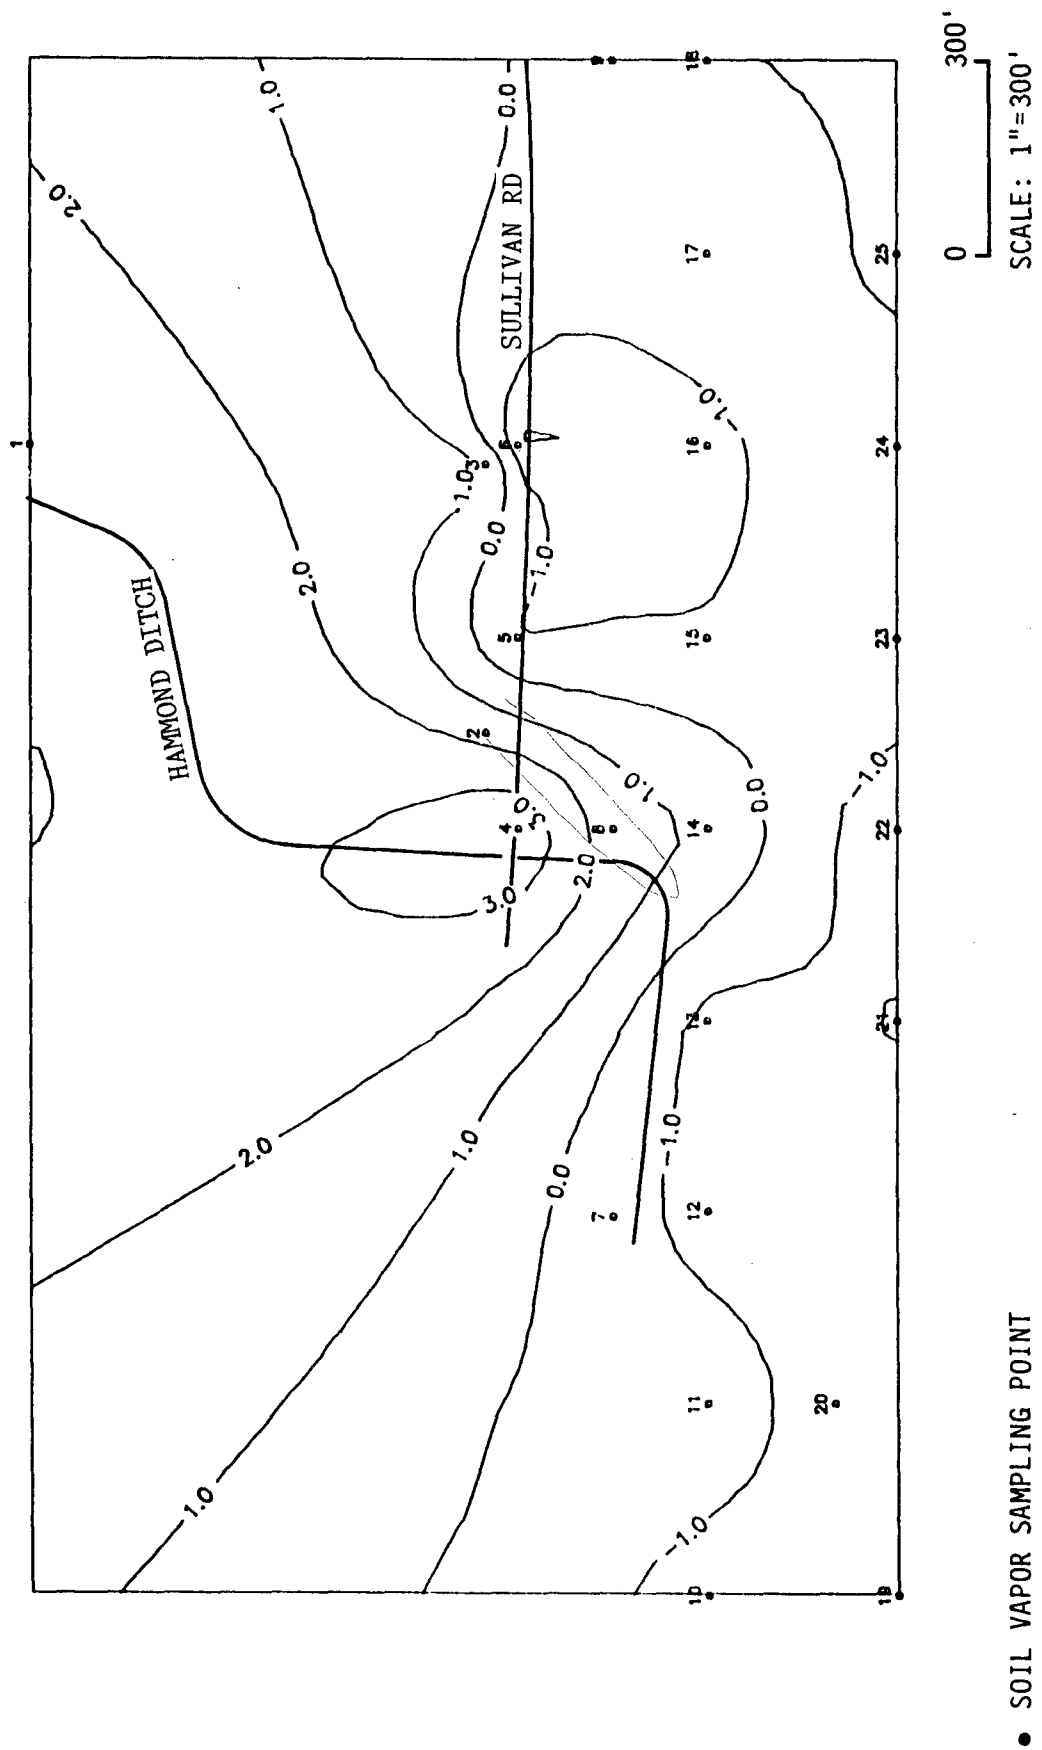


FIGURE 2-9
XYLENE VAPOR LOG CONCENTRATION (LOG ppm)

PCE VAPOR CONCENTRATION (PPM)

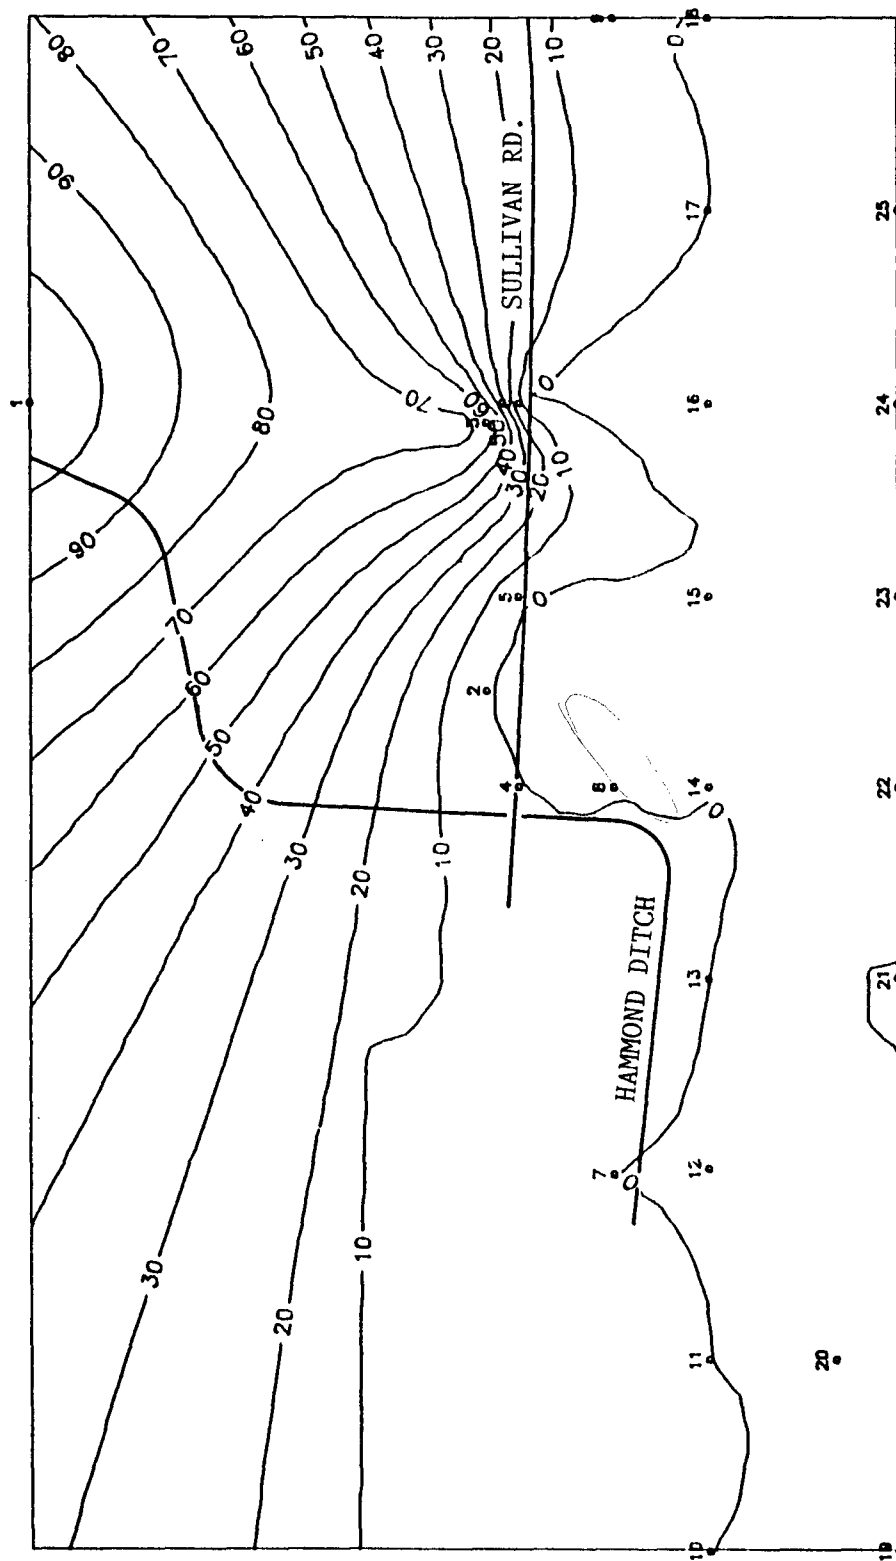

• SOIL VAPOR SAMPLING POINT

FIGURE 2-10
PCE VAPOR CONCENTRATION (ppm)

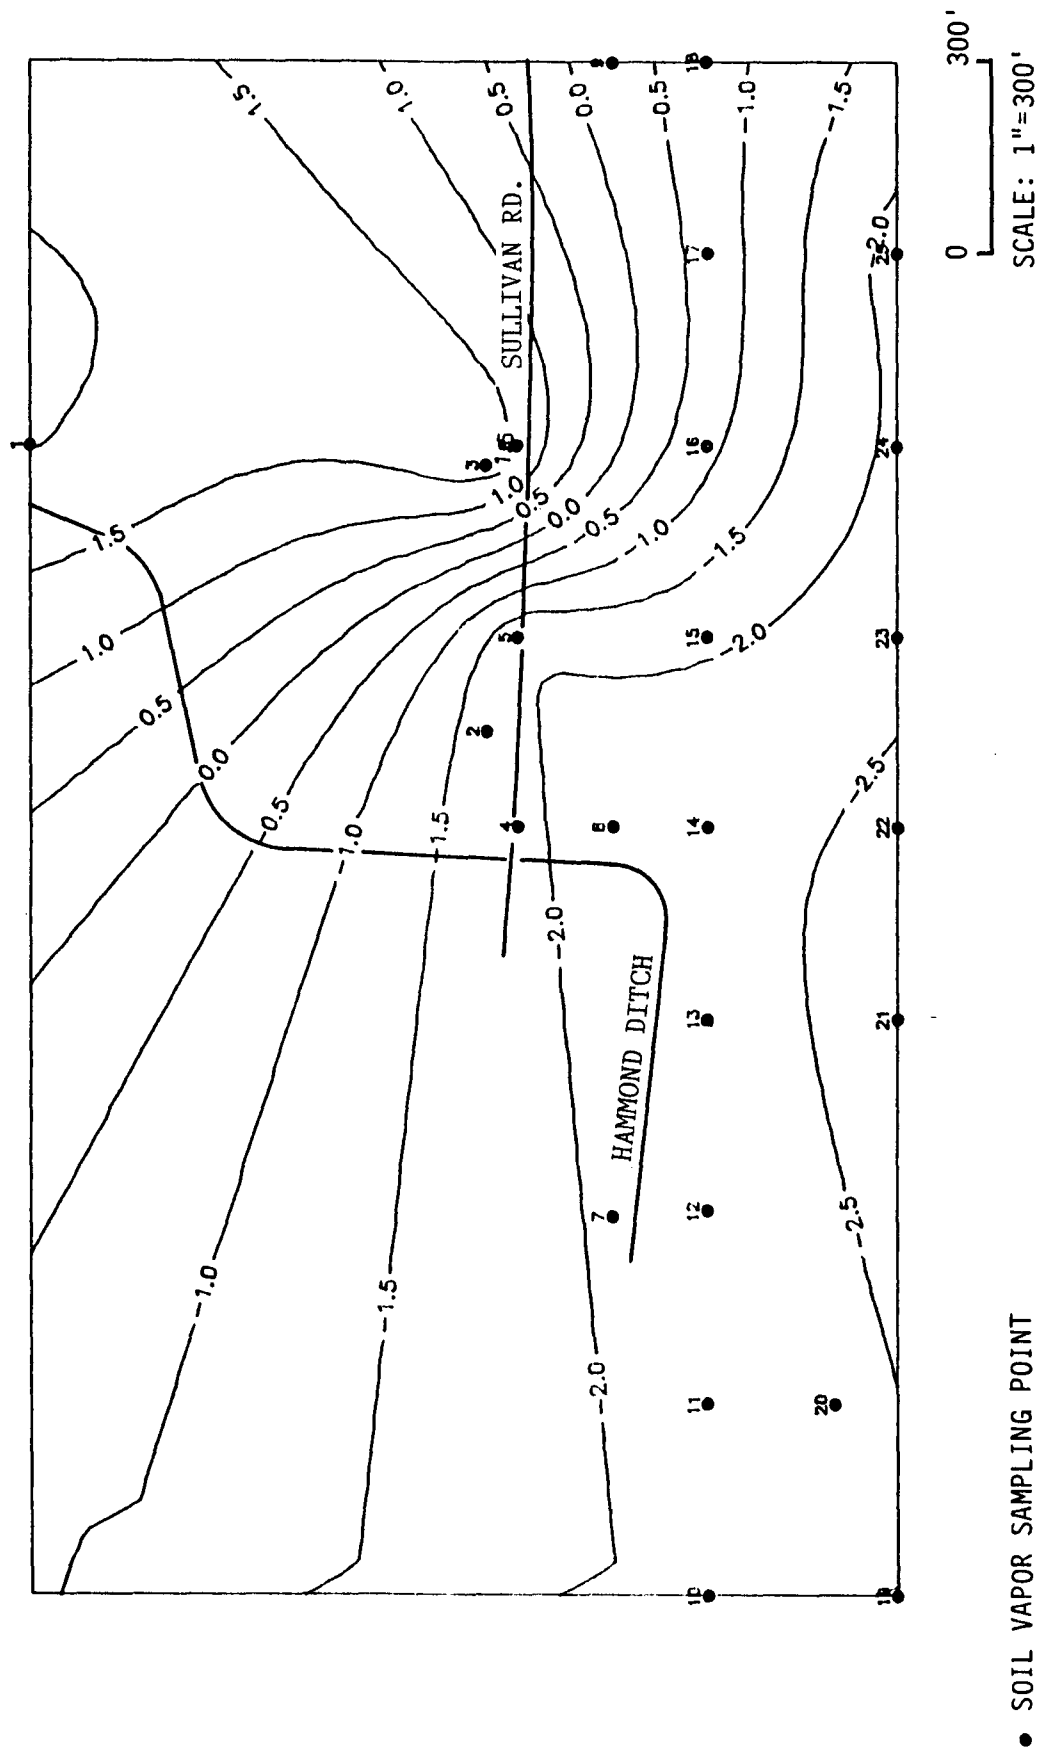


FIGURE 2-11
PCE VAPOR LOG CONCENTRATION (LOG ppm)

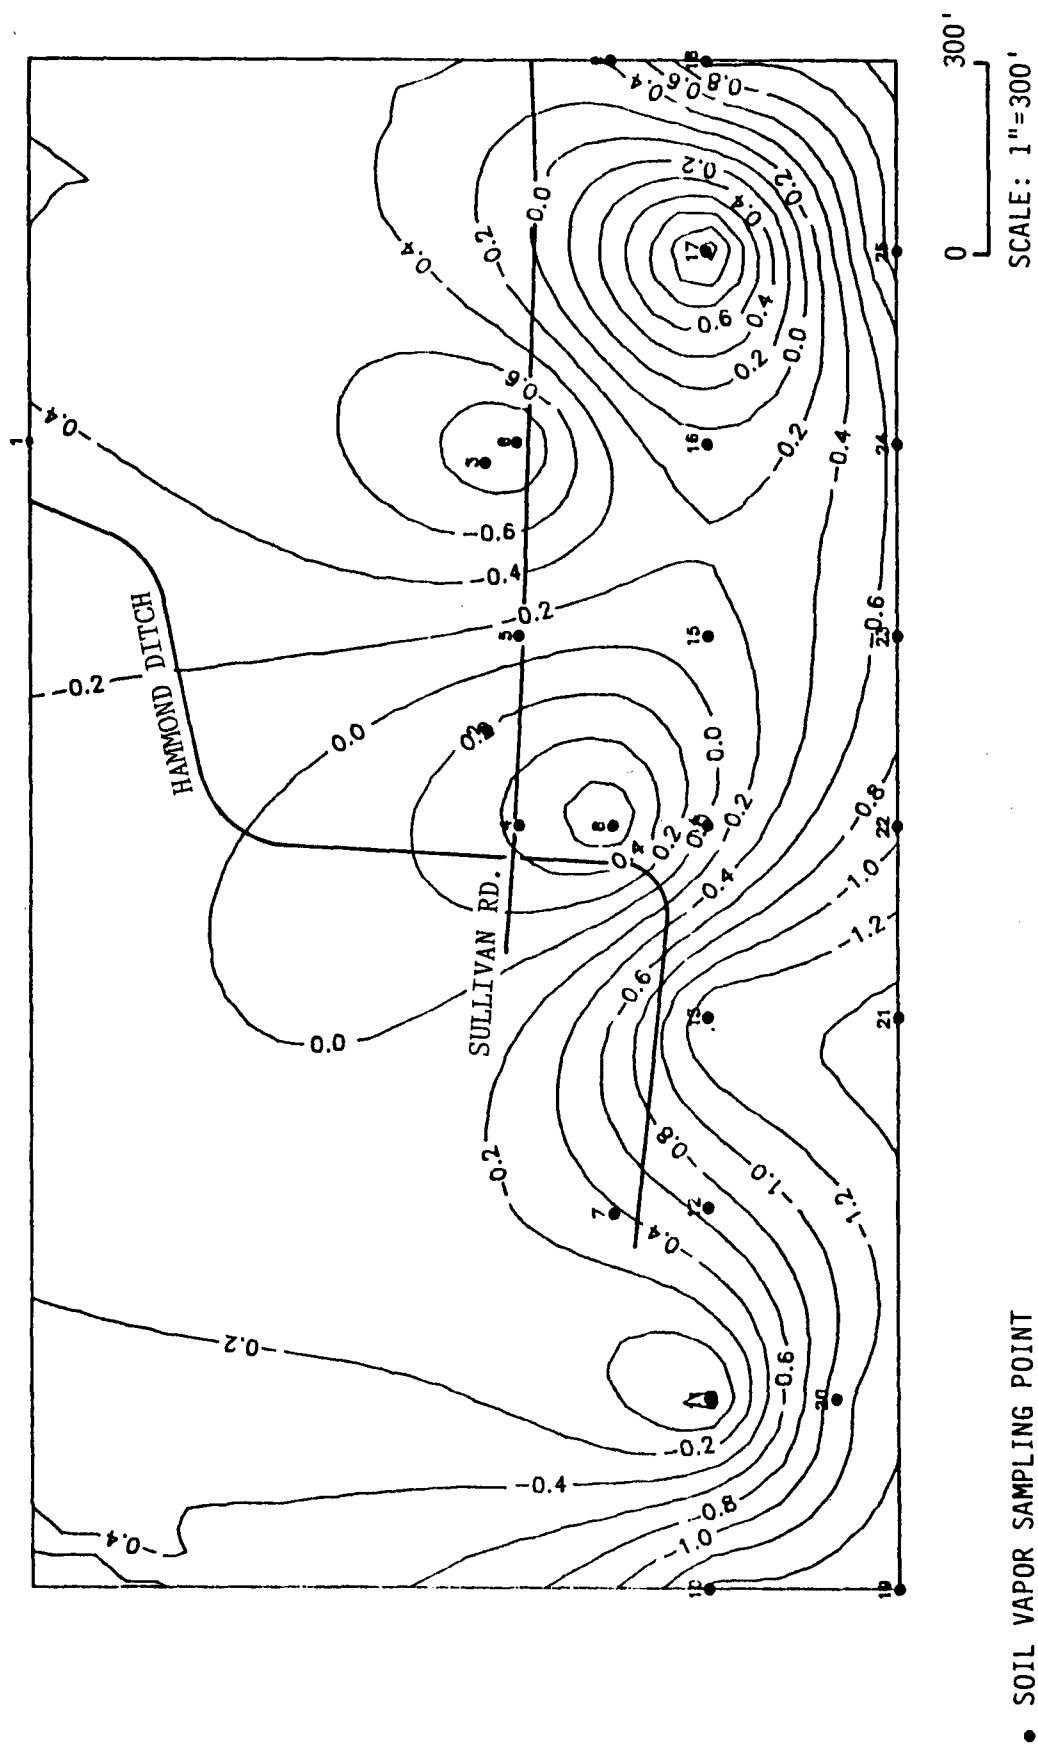


FIGURE 2-13
TCE VAPOR LOG CONCENTRATION (LOG ppm)

air blank analysis, which are presented in Table 2-2, indicate the presence of toluene, ethylbenzene, total xylenes, and TCE in the ambient air. However, the observed air concentrations are not sufficient to explain the high subsurface concentrations of these constituents beneath the site. It was assumed that the source of high vapor concentrations of these VOCs is hydrocarbons in ground water beneath the site or in the unsaturated zone overlying the water table.

77
not used at
refinery

data station
indicates more analysis
possibly secondary
TCE

Analysis of a soil blank sample collected on BLM land at a point 700 feet west and 600 feet south of well MW-11 indicated the presence of benzene, toluene, and xylenes at elevated concentrations in the subsurface (see Table 2-2). The location of the soil blank was outside of the area of hydraulic influence associated with the perched system underlying the site. Background concentrations of 0.02 ppm, 0.55 ppm, and 0.36 ppm for benzene, toluene, and xylenes were defined on the basis of these soil blank concentrations. The occurrence of elevated concentrations of VOCs outside of the area potentially impacted by BRC operations is attributed to the large amount of oil-field activity in the area and to the presence of a natural gas pipeline east and hydraulically-upgradient of the soil-blank sampling point.

Concentrations of VOCs in soil vapor depend on local geology, moisture conditions, the pH-redox environment in the subsurface, and the unique physical characteristics of the organic compound. The concentration distributions presented in Figures 2-2 to 2-13 suggest that hydrocarbons in the subsurface occur primarily beneath the site and do not extend more than a few hundred feet south of the refinery beneath BLM property. The tendency for vapor concentrations to decrease from north to south is related to the large concentrations observed at sample point 1 (MW-9) and the absence of data in an east-west direction through the center of the site, where samples were not collected because of chemical interference from normal refinery operations. In general, concentrations less than or of the same order of magnitude as background were observed west and south of well MW-11 and east of the sample point located 300 feet east of well MW-11. In the case of toluene, the sample collected at MW-11 was roughly

equal to background. The consistent tendency for VOCs in soil vapor to rapidly decrease to background levels west and south of MW-11 and east of the sample point located 300 feet east of MW-11 may be evidence that geologic controls influence the presence of soil vapor beneath BLM property.

*what geologic controls? paleogene channels missing at MW-11
— hydrologic controls, groundwater flow & Hammond Dutch hydro barrier prominent control*

Volatile organic vapor and ground water concentrations at locations where both sets of data were available between July and September, 1988 are listed in Table 2-3. Only toluene vapor concentrations exhibited a systematic relation to toluene ground water concentrations. Soil vapor and ground water concentrations of toluene showed strong correlation when the order of magnitude of the concentrations was considered. Toluene ground water concentrations in milligrams per liter of water were, with the exception of the concentration at MW-13, ^{ERW-3} two orders of magnitude smaller than vapor concentrations in microliters of gas per liter of air, suggesting that a general correlation exists between toluene dissolved in the ground water and toluene vapor in the overlying unsaturated zone. The distribution of toluene concentrations observed in ground water during September of 1988, in fact, shows peak concentrations at approximately the same locations as peak vapor concentrations previously observed during July of that year.

Given that toluene appears to act more like a conservative tracer than other aromatic hydrocarbons, the distribution of toluene vapor is probably representative of the distribution of dissolved toluene in the ground water and can be used to approximate the extent of dissolved aromatic hydrocarbons in the saturated subsurface in areas where ground water concentrations are not known. Assuming that this is true, the toluene soil vapor log distribution shown in Figure 2-5 suggests that local aromatic hydrocarbon concentration peaks occur near wells RW-3 (MW-10) and RW-2, the locations of which are shown in Plate 1. High ground-water concentrations of aromatic hydrocarbons have actually been observed in the vicinity of RW-2 and RW-3 and have also been observed near RW-1, immediately south of RW-3 in piezometer P-3, and near monitor well MW-11.

TABLE 2-3

CONCENTRATIONS OF VOLATILE ORGANIC COMPOUNDS IN
GROUND WATER AND SOIL VAPOR AT MONITOR WELL LOCATIONS

Soil Vapor Point(s)	Well I.D.	Benzene Concentration Water (mg/l) Vapor (ppm)	Toluene Concentration Water (mg/l) Vapor (ppm)	Ethylbenzene Concentration Water (mg/l) Vapor (ppm)
2	RW-3	10^0 12	10^3 0.062	0.00286 74.5
3	MW-4, P-2, RW-2 (average)	— 8.23	10^2 4.19	1.27 102
5	P-3	10^{-3} 19.4	10^2 0.00435	ND ND
14	MW-11	10^{-2} 44.4	10^2 0.840	0.063 ND
18	MW-13	0.00023	10^3 0.00024	0.00029 ND

(See Plate 1 for locations of RW and P wells)

Since there are no source areas at these locations, it is likely that these hydrocarbons originated near the process units or storage tanks and migrated west and southwest under the hydraulic gradients that prevail in the perched alluvial aquifer. Assuming an average hydraulic gradient of 1×10^{-5} *to west*, a hydraulic conductivity of 1.8×10^{-4} ft/sec from slug and pump tests performed near RW-3, and an ~~effective~~ ^{70% gravel} porosity of between ~~0.10~~ ^{to} 0.20, the average linear ground water velocity could range from 2.7 to 5.4×10^{-6} ft/sec. If dissolved aromatic hydrocarbons move primarily under advective transport mechanisms, hydrocarbons originating in the storage area and currently observed near RW-3 (MW-10) would have migrated through the western edge of the storage area under a predominantly westward flow direction between $4\frac{1}{2}$ and 9 years ago. Similarly, a release that is presently evident at RW-2 as a peak concentration may have originated from the western edge of the tank storage area between 2 and 4 years ago. Peak concentrations of aromatic hydrocarbons presently evident at RW-3 and P-3, as well as aromatic hydrocarbons observed near RW-1 and P-1, may have originated in the process area and migrated southwestward along a curvilinear flow path caused by southward flow from the northern reaches of Hammond Ditch. If this is the case, and if the hydraulic gradient increases to 0.04 under the influence of Ditch recharge, hydrocarbons currently arriving at RW-1 could have been released 4 to 8 years ago. Hydrocarbons presently at RW-3 and P-3 may have been released from the process area 5 to 10 years ago. *600 ft / 3.5 yrs to*

The absence of elevated concentrations of volatile organic constituents at soil vapor sample points located along Hammond Ditch, including a point at MW-12 where no organic constituents have previously been observed in the perched ground water, suggests that either flow in the Ditch is very effective in flushing out organic compounds that may have migrated through the alluvial ground water system beneath BLM land or that lateral recharge from the Ditch to the alluvial deposits is inhibiting the upward diffusion of vapor. The occurrence of below-detection levels of tetrachloroethylene (PCE) and trichloroethylene (TCE) at the soil blank location and the presence of large concentrations of these compounds near MW-4 and west of the terminal area is an indication *1400' / 8 yrs*

that PCE and TCE are limited to the subsurface directly beneath the site or near the site boundary. PCE and TCE were presumably released from solvents used for degreasing equipment in the terminal area or, perhaps, at off-site locations.

Given the limited extent of organic compounds in soil vapor underlying BLM property, recovery wells installed north of Sullivan Road will be probably be adequate for effective capture of organic constituents in the underlying ground water. The southern extent of the capture zones induced by operation of recovery wells north of Sullivan Road will be the determining factor when deciding the need for additional recovery of ground water near well MW-11, where soil vapor and elevated ground water concentrations of benzene, toluene and xylene have been detected. Hydraulic head and water quality data observed at piezometer P-3 located south of Sullivan Road will be used to estimate the effectiveness of the proposed recovery system with respect to capture of hydrocarbons currently present beneath BLM land.

3.0 INSTALLATION OF RECOVERY WELLS AND PIEZOMETERS

3.1 GOALS AND OBJECTIVES

The perched alluvial aquifer underlying the Bloomfield Refining Company is recharged along upstream reaches of Hammond Ditch and beneath the spray irrigation area in the southwestern part of the facility property, *southeastern* as evidenced by the peak water levels observed beneath the spray irrigation area and the addition of a westward ground water flow component along the Ditch. The aquifer is underlain by the Nacimiento Formation, which acts as a barrier to significant downward movement of ground water and dissolved hydrocarbons. Perched ground water containing hydrocarbons is, however, migrating laterally from the spray irrigation area and from the areas adjacent to upstream reaches of the Ditch towards BLM property and downstream western reaches of Hammond Ditch. A recovery strategy has been formulated to intercept ground water containing hydrocarbons that would otherwise migrate into the downstream reaches of the Ditch or beneath BLM property.

Due to the moderately-large hydraulic conductivity and 8-foot average saturated thickness of the alluvial aquifer, it was expected that broad, shallow cones of depression would develop during hydrocarbon recovery operations. Because of the anticipated shallow capture zones, at least two recovery wells, in addition to existing recovery well RW-3 (MW-10), were believed to be needed to ensure capture of all hydrocarbons originating from the site. A recovery well was installed near existing well MW-4, which was constructed with torch-slotted casing and was not considered suitable as a recovery well. Recent observations of hydrocarbon seepage into Hammond Ditch west of the process units suggest that a recovery well would be needed west of the office building and southwest of the raw water ponds. An additional recovery well was therefore installed east of Hammond Ditch and west of the office building to capture ground water that was not expected to be intercepted by up-gradient recovery well RW-3. The location of this well was selected based upon results of the numerical flow model previously developed to define a remedial-action strategy, and modified to reflect conditions during non-irrigation seasons when water from Hammond Ditch would not be

available to contain ground water on BRC property. A third well was installed west of the terminal area within the facility boundary to determine if aromatic or halogenated hydrocarbons observed under BLM land could have migrated from this area as a consequence of refinery pigging operations.

Simulated steady-state hydraulic head during recovery at the three recovery wells, shown in Plate 2, indicates that long-term recovery of 3, 1.5, and 1.5 gpm at wells RW-1, RW-2, and RW-3, respectively, should be sufficient to capture on-site hydrocarbons and a portion of hydrocarbons present on BLM property. In order to demonstrate that the recovery system is effectively capturing flow from the refinery, several piezometers were also installed. The locations of these piezometers were selected to provide hydraulic head data critical for assessing the hydraulic impacts of recovery well operation. A minimum of three piezometers was considered necessary to assess the effectiveness of the proposed recovery system north of Sullivan Road.

One piezometer was located between existing well RW-3 and the RW-2 well replacing well MW-4 in order to assess the well losses associated with recovery well operation. Since this piezometer is sufficiently far from recovery wells to not be significantly influenced by well losses, it should give a true indication of the depth of the hydraulic "trough" induced by pumping at the line of recovery wells north of Sullivan Road. A second piezometer, located south of Sullivan Road, was used to measure how effective the recovery system north of the Road is in capturing ground water from or preventing migration of ground water towards BLM land. A third piezometer was placed immediately west of the RW-1 recovery well located east of Hammond Ditch and west of the office building. Water level measurements obtained from this piezometer were used to determine whether the recovery well located between the Ditch and the office building is effective in capturing westward-moving ground water during non-irrigation periods when there is no water in the Ditch to help contain hydrocarbons on BRC property. Locations of all existing and new wells and piezometers are shown in Plate 1.

Installation of monitor/recovery wells and piezometers, in addition to supplying a means of remediating the ground water beneath the refinery, also made it possible to further assess the extent and magnitude of hydrocarbons in the perched alluvial aquifer underlying the site. Samples of ground water collected from the alluvial wells and piezometers were used to define the extent of the hydrocarbon plume in the alluvial aquifer and will also be critical for tracing changes in hydrocarbon concentrations induced by remedial clean-up operations. These samples, along with measurements of hydraulic head observed in the wells and piezometers, will make it possible to determine the need for additional recovery wells and to evaluate the effectiveness of the recovery strategy.

3.2 TECHNICAL APPROACH

Two monitor/recovery wells and four piezometers were drilled and installed by Beeman Brothers Drilling Company between August 20 and September 2, 1988 using an air-rotary casing-driver drill rig. The depth of the boreholes were selected by GCL's on-site geologist based on the depth to water observed in each borehole during drilling. A conventional rotary drill bit was advanced while cuttings were simultaneously blown upward and out of the borehole with compressed air. An in-line air filter ensured that hydrocarbons were not introduced into the borehole from the compressor during drilling operations. After a selected depth was reached with the rotary drill bit, 8-inch diameter steel casing was hammered into the borehole around the drill rods to the same depth as the drill bit using a hydraulic casing driver attached to the drill rig. This process was repeated until the target depth of each borehole was reached. Samples of the drill cuttings were collected at approximately 5 foot intervals and logged by the on-site geologist.

After the target depth of each borehole was attained and the temporary casing advanced to the total depth of the borehole, recovery of ground water was monitored until a static level could be estimated and a total depth for the well casing selected. Four-inch screen and well casing was then installed in the borehole through the temporary steel casing. The

top of the screen was set 5 feet above the static water level and the well. The filter pack and bentonite seal were inserted into the borehole through the annulus of the temporary casing as it was retrieved from the borehole. The borehole was grouted above the bentonite seal using a neat cement slurry with 5% bentonite. After the grouting was completed, a concrete pad was constructed, complete with locking guard pipe. Recovery-well completion diagrams are shown in Appendix B, Figures B-1 to B-3. The monitor/recovery wells were constructed with polyvinyl chloride (PVC) and stainless steel components, with the parts of the well casing that were in contact with ground water composed of stainless steel. Piezometers were similarly constructed using 4-inch PVC casing, with piezometer completion diagrams shown in Figures B-4 to B-7.

After the grout in the borehole cured, the wells were developed utilizing a 4-inch submersible pump. Wells with stainless steel screens were bailed prior to installation of the submersible pump. The wells were pumped until produced water was clear and free of sand. The developed water was stored in 55-gallon drums at each well head. After the water level in each well had recovered to static conditions, a water sample was collected and analyzed in the field for pH in order to identify potential invasion of the filter pack by emplaced grout.

Following installation and development of the recovery wells and piezometers, all wells and piezometers were sampled by Bloomfield Refinery Company personnel for New Mexico WQCC parameters.

3.3 RESULTS AND CONCLUSIONS

3.3.1 Lithology

Based on lithologic logs of the boreholes shown in Figures B-8 to B-14 (Appendix B), the subsurface geology is dominated by three lithologies: an uppermost clayey silt, a sandy gravel unit and the underlying Nacimiento shale of Early Tertiary age. As indicated in the stratigraphic sections presented in Figures B-15 and B-16 of Appendix B, the uppermost clayey silt is present throughout the site except between holes P-3 and MW-11, where this unit has probably been removed by erosion.

This unit ranges in thickness from 0 feet in P-3 and MW-11 to 27 feet in P-4. In boreholes located on refinery property, this unit is at least partly composed of fill dirt.

Underlying the uppermost silt are coarse-grained gravel and sand deposits of the ancestral San Juan River. This unit is poorly sorted; the gravel is moderately rounded and is up to two inches in diameter. In all boreholes drilled, the lowermost portion of the gravel unit was water-saturated and under unconfined conditions. The unit appeared to be lithologically homogeneous over the site and ranged in thickness from 14 feet to 18.5 feet. However, borehole P-4 showed some variation from the typical lithology of this unit. In this borehole, a distinctive, relatively well-sorted three-foot thick orange sand overlies the gravel unit. Additionally, a two-foot thick clay horizon was encountered near the base of gravel unit; this clay unit is underlain by typical San Juan gravels. Clay units were not encountered in other boreholes and are presumably restricted to the southeastern portion of the site. *Nacimienta description (sds)*

The lowermost unit encountered in the boreholes was the Nacimienta Shale of Paleocene age. This unit consists primarily of a fine-grained dusky yellow to olive-gray shale, and acts as an aquitard beneath the facility. Boreholes were drilled into this unit to accommodate the silt trap at the base of each well. Once again, borehole P-4 showed variation from the typical Nacimienta Formation in the project area. In this borehole, the Nacimienta consisted of weathered bluish well-sorted, fine-grained clayey sand. This sand unit was not encountered in other boreholes and is presumed to be of limited areal extent.

Plate 3 shows the structural contours of the Nacimienta Formation obtained from data collected by Engineering-Science (1986) and GCL. The contour map shows an overall decrease in the elevation of bedrock from southeast to northwest toward the San Juan River. There is some evidence that a buried stream channel, oriented N30°E and traversing both BRC and BLM land, occurs in the extreme southwestern part of the site. This stream channel may influence the distribution of VOCs in the subsurface *ERROR*

by inhibiting eastward or westward migration of organic compounds in this area, causing the observed "tongues" of soil vapor beneath BLM land evident in Figures 2-2, 2-5, 2-6, and 2-9.

3.3.2 Well Yield

Each well was developed following installation using a submersible pump. The largest yield was obtained from piezometer P-4, which was pumped for one hour at a rate of slightly less than 13.5 gallons/minute. Recovery wells RW-1 and RW-2 sustained rates of approximately 3 and 8 gpm, respectively. Based on a previous pump test performed at the refinery, the yield of well RW-3 was estimated to be 1.5 gpm.

3.3.3 Pre-Recovery Water Table and Saturated Thickness

Table 3-1 lists and Plate 4 shows the distribution of pre-recovery water levels observed at all existing and newly-installed wells on September 9, 1988. In the absence of ground water recovery, it is clear that ground water and dissolved contaminants migrate into Hammond Ditch and beneath BLM property. The three recovery wells are located in an area where up to 10 feet of initial saturated thickness was available for propagating recovery stresses into adjacent portions of the aquifer.

3.3.4 Water Quality

Table 3-2 lists the results of the BRC sampling effort. Neither TCE or PCE were above detection limits in any of the ground water samples. These VOCs have likely degraded to daughter-product DCE, a biological transformation can be completed within a matter of a few years (Vogel, 1987). Figures 3-1 to 3-9 show the areal distributions of aromatic and halogenated hydrocarbons in September, 1988. In general, the shape of each plume can be explained on the basis of hydrogeological conditions and physical properties of the associated VOC.

All contaminant plumes show a longitudinal axis oriented in a northeast-southwest direction parallel to the direction of ground-water flow, as indicated by water-table contours observed on September 9, 1988 and shown

*TCE or PCE
do not degrade?*

TABLE 3-1
WATER LEVEL AND PRODUCT THICKNESS AT
RECOVERY WELLS AND PIEZOMETERS (FEET)

<u>Well or Piezometer</u>	<u>Pre-Recovery (Sept. 9, 1988)</u>		<u>12-Day Recovery (Jan. 16, 1989)</u>		<u>42-Day Recovery (Feb. 15, 1989)</u>		
	<u>Water Level</u>	<u>Product Thickness</u>	<u>Water Level</u>	<u>Product Thickness</u>	<u>Water Level</u>	<u>Product Thickness</u>	
RW-1	5499.23	0 .79	5498.44	0	5497.51	0.17	.93
RW-2	5500.11	0	5498.46	0.21	5498.39	0.042	.07
RW-3	5499.06	0 1.97	5497.09	0	5496.51	0	.58
P-1	5499.09	0 .93	5498.16	0	5497.36	0.04	.8
P-2	5500.06	0	5499.25	0	5498.41	0	.84
P-3	5498.89	0 .79	5498.10	0	5496.62	0	1.48
P-4 (MW-13)	5500.51	0	5500.27	0	5499.07	0	1.2
MW-11	5497.59	0	5496.84	0	5496.37	0	.47

(.75)

5499.09

TABLE 3-2

**BLOOMFIELD REFINING COMPANY
GROUND WATER QUALITY**

<u>Parameter</u>	<u>Units</u>	<u>Detection Limit</u>	<u>New Mexico Standards 3-103 (A)</u>	<u>6-3-88 MW-4</u>	<u>9-9-88 RW-2</u>	<u>9-9-88 P-2</u>
Benzene	mg/l	0.0002	0.01	8.9	11.000	4.80
Ethylbenzene	mg/l	0.0002	0.75	--	2.900	0.900
Toluene	mg/l	0.0002	0.75	102.5 0.93	10.200	1.430
M-Xylene	mg/l	0.0002	0.62	--	17.700	4.500
O-Xylene	mg/l	0.0002	0.62	--	4.900	1.460
P-Xylene	mg/l	0.0002	0.62	--	6.200	1.570
1,2-Dichloroethane	mg/l	0.001	0.01	--	0.0016	ND
Trans 1,2-Dichloroethene	mg/l	0.001	--	--	ND	ND
Nitrate as N	mg/l	0.01	10.0	0.14	<0.01	--
Phenol	mg/l	0.001	0.005	0.069	0.13	--
Sulfate	mg/l	1	600.	3	<1	--
TDS	mg/l	10	1000	1820	1980	--

TABLE 3-2 (Continued)

Parameter	Units	Detection Limit	New Mexico Standards 3-103 (A)	9-9-88 RW-3	9-9-88 P-3	9-9-88 RW-1	9-9-88 P-1	9-9-88 MW-11	9-9-88 MW-13
Benzene	mg/l	0.0002	0.01	12.000	19.400	6.400	102.200	44.400	0.00023
Ethylbenzene	mg/l	0.0002	0.75	0.00286	ND	0.540	0.00143	0.063	0.00029
Toluene	mg/l	0.0002	0.75	0.062	0.00435	0.070	0.034	0.840	0.00024
M-Xylene	mg/l	0.0002	0.62	3.500	22.800	4.800	0.483	2.600	0.00065
O-Xylene	mg/l	0.0002	0.62	0.103	3.600	8.300	0.061	0.061	0.00056
P-Xylene	mg/l	0.0002	0.62	1.800	8.700	1.700	0.322	0.745	0.00035
1,2-Dichloroethane	mg/l	0.001	0.01	ND	ND	ND	ND	0.0022	0.0156
Trans 1,2-Dichloroethene	mg/l	0.001	--	ND	ND	ND	0.0015	ND	ND
Nitrate as N	mg/l	0.01	10.0	<0.01	--	<0.01	--	0.06	13.1
Phenol	mg/l	0.001	0.005	0.05	--	0.34	--	0.06	0.03
Sulfate	mg/l	1	600.	9.5	--	4.5	--	30.	728.
TDS	mg/l	10	1000	3250	--	3130	--	1900	3220

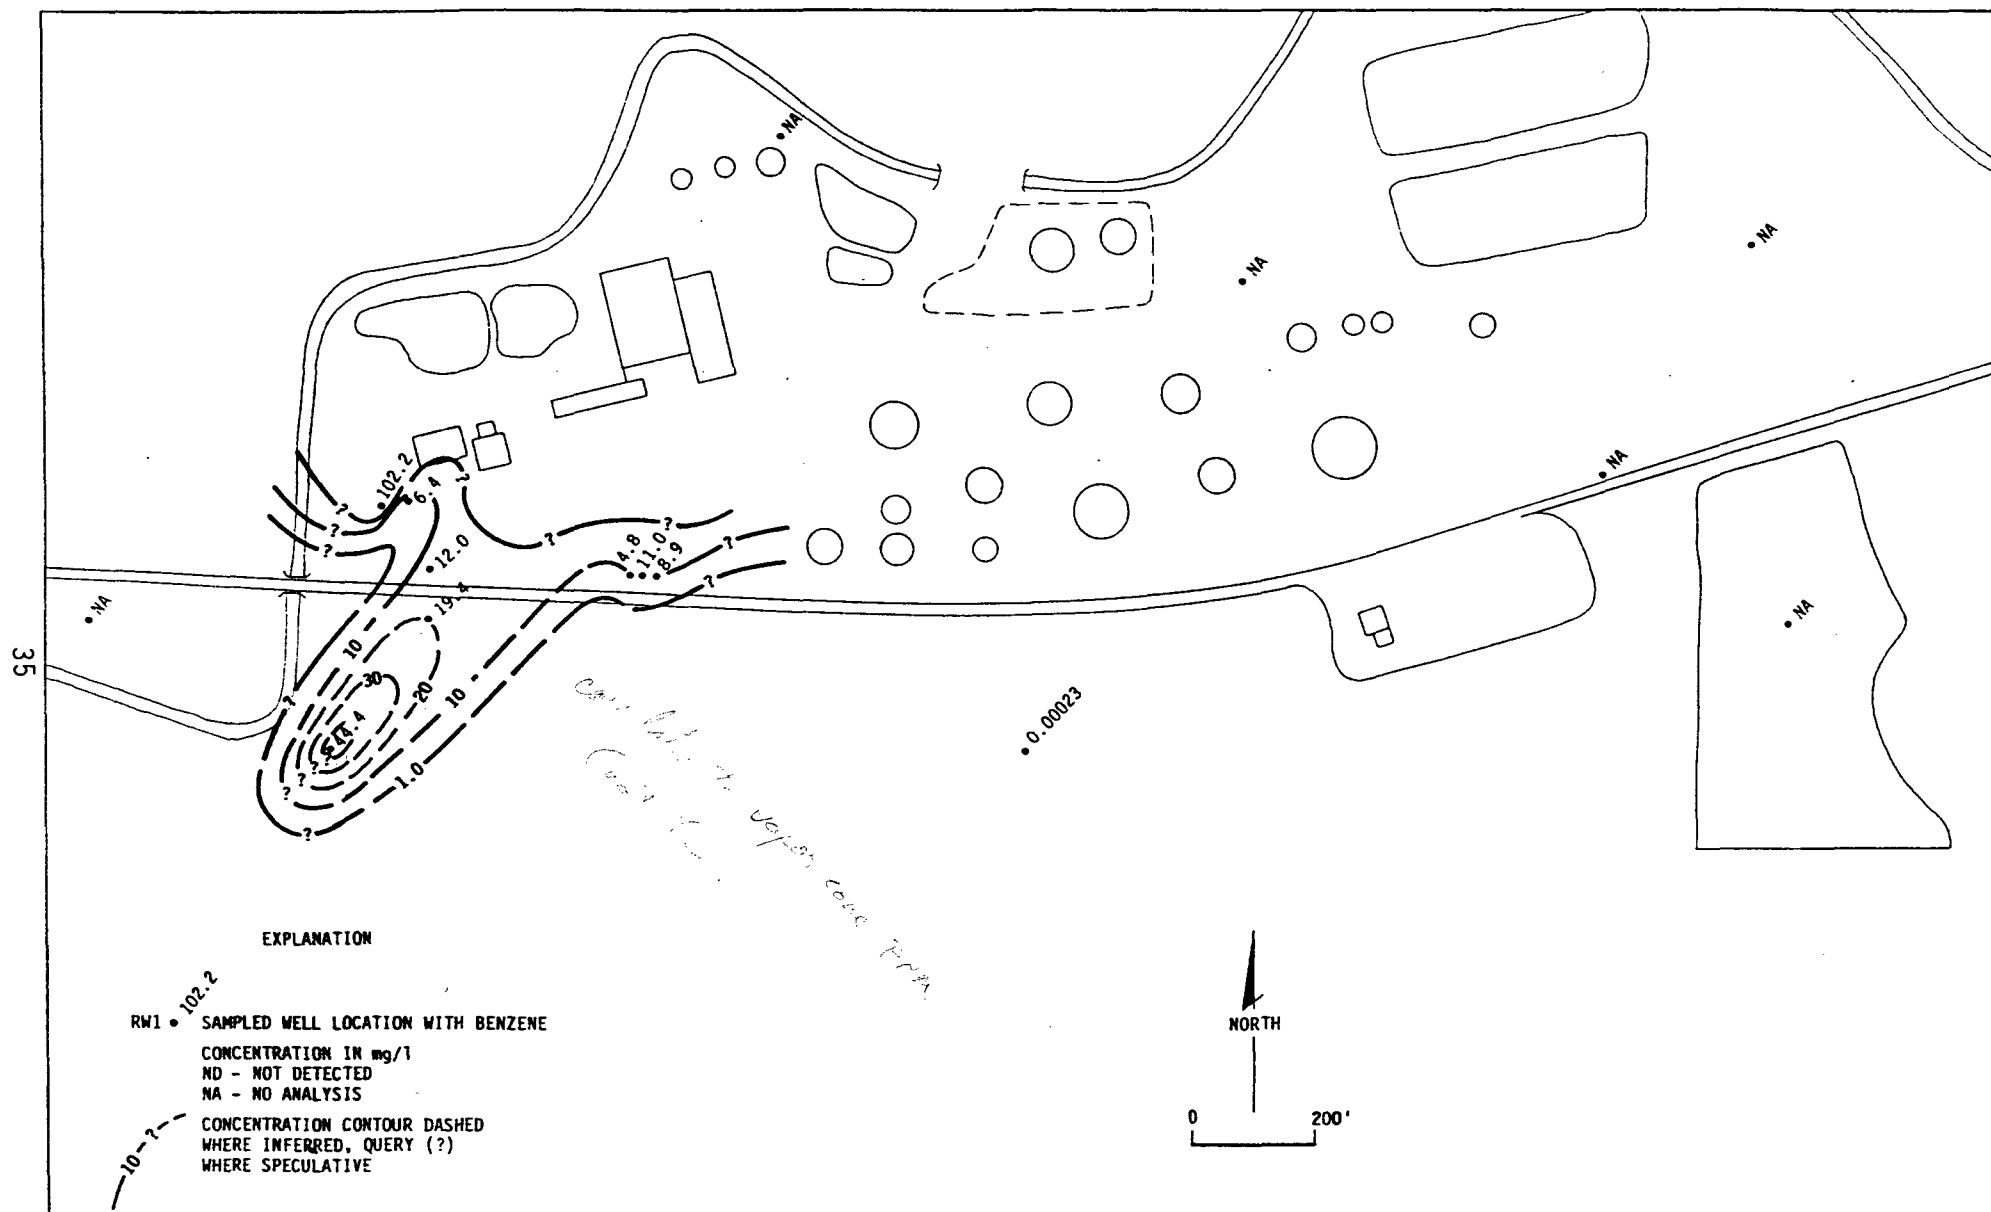


FIGURE 3-1
 BENZENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING COMPANY

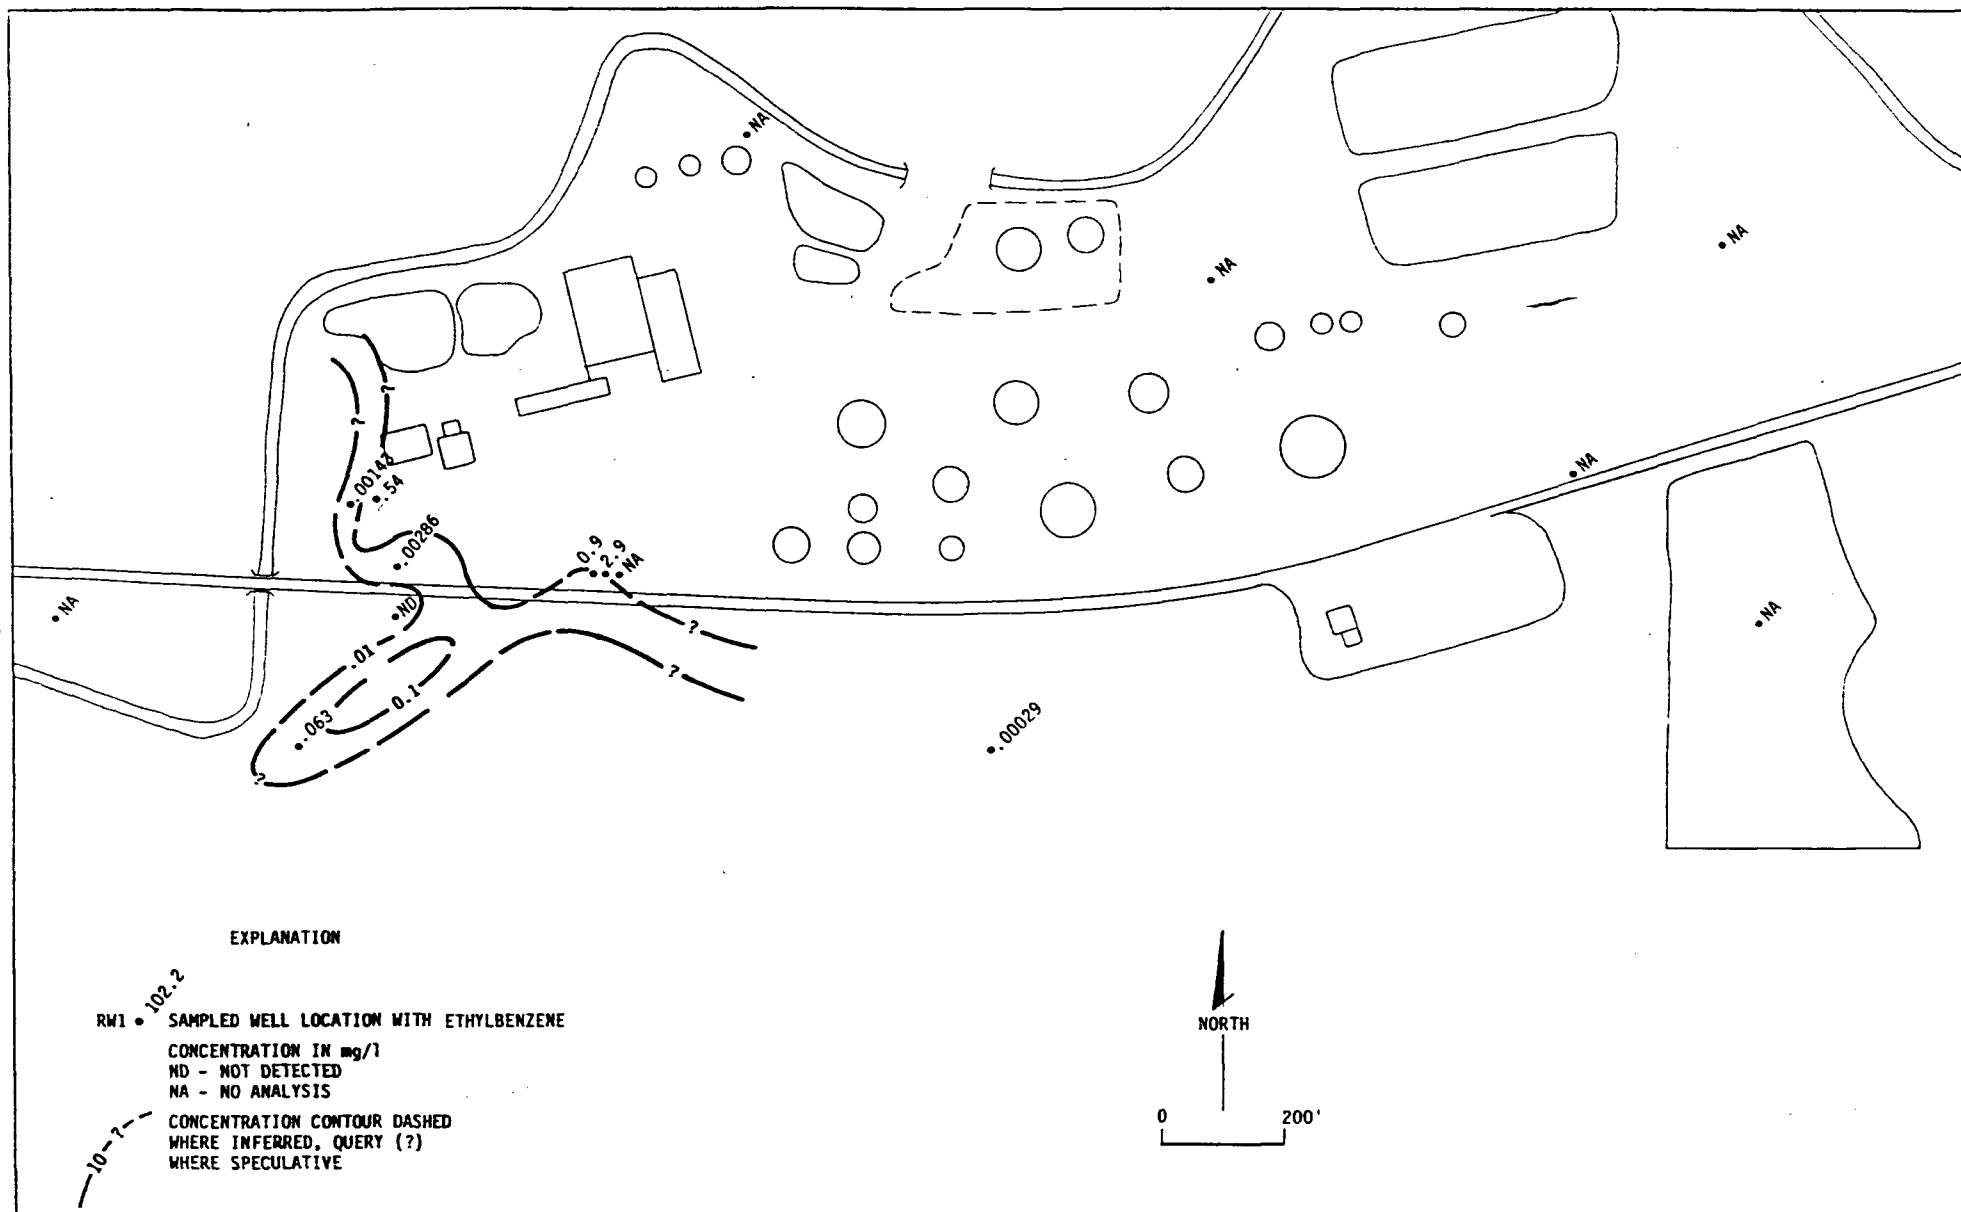


FIGURE 3-2

ETHYLBENZENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING COMPANY

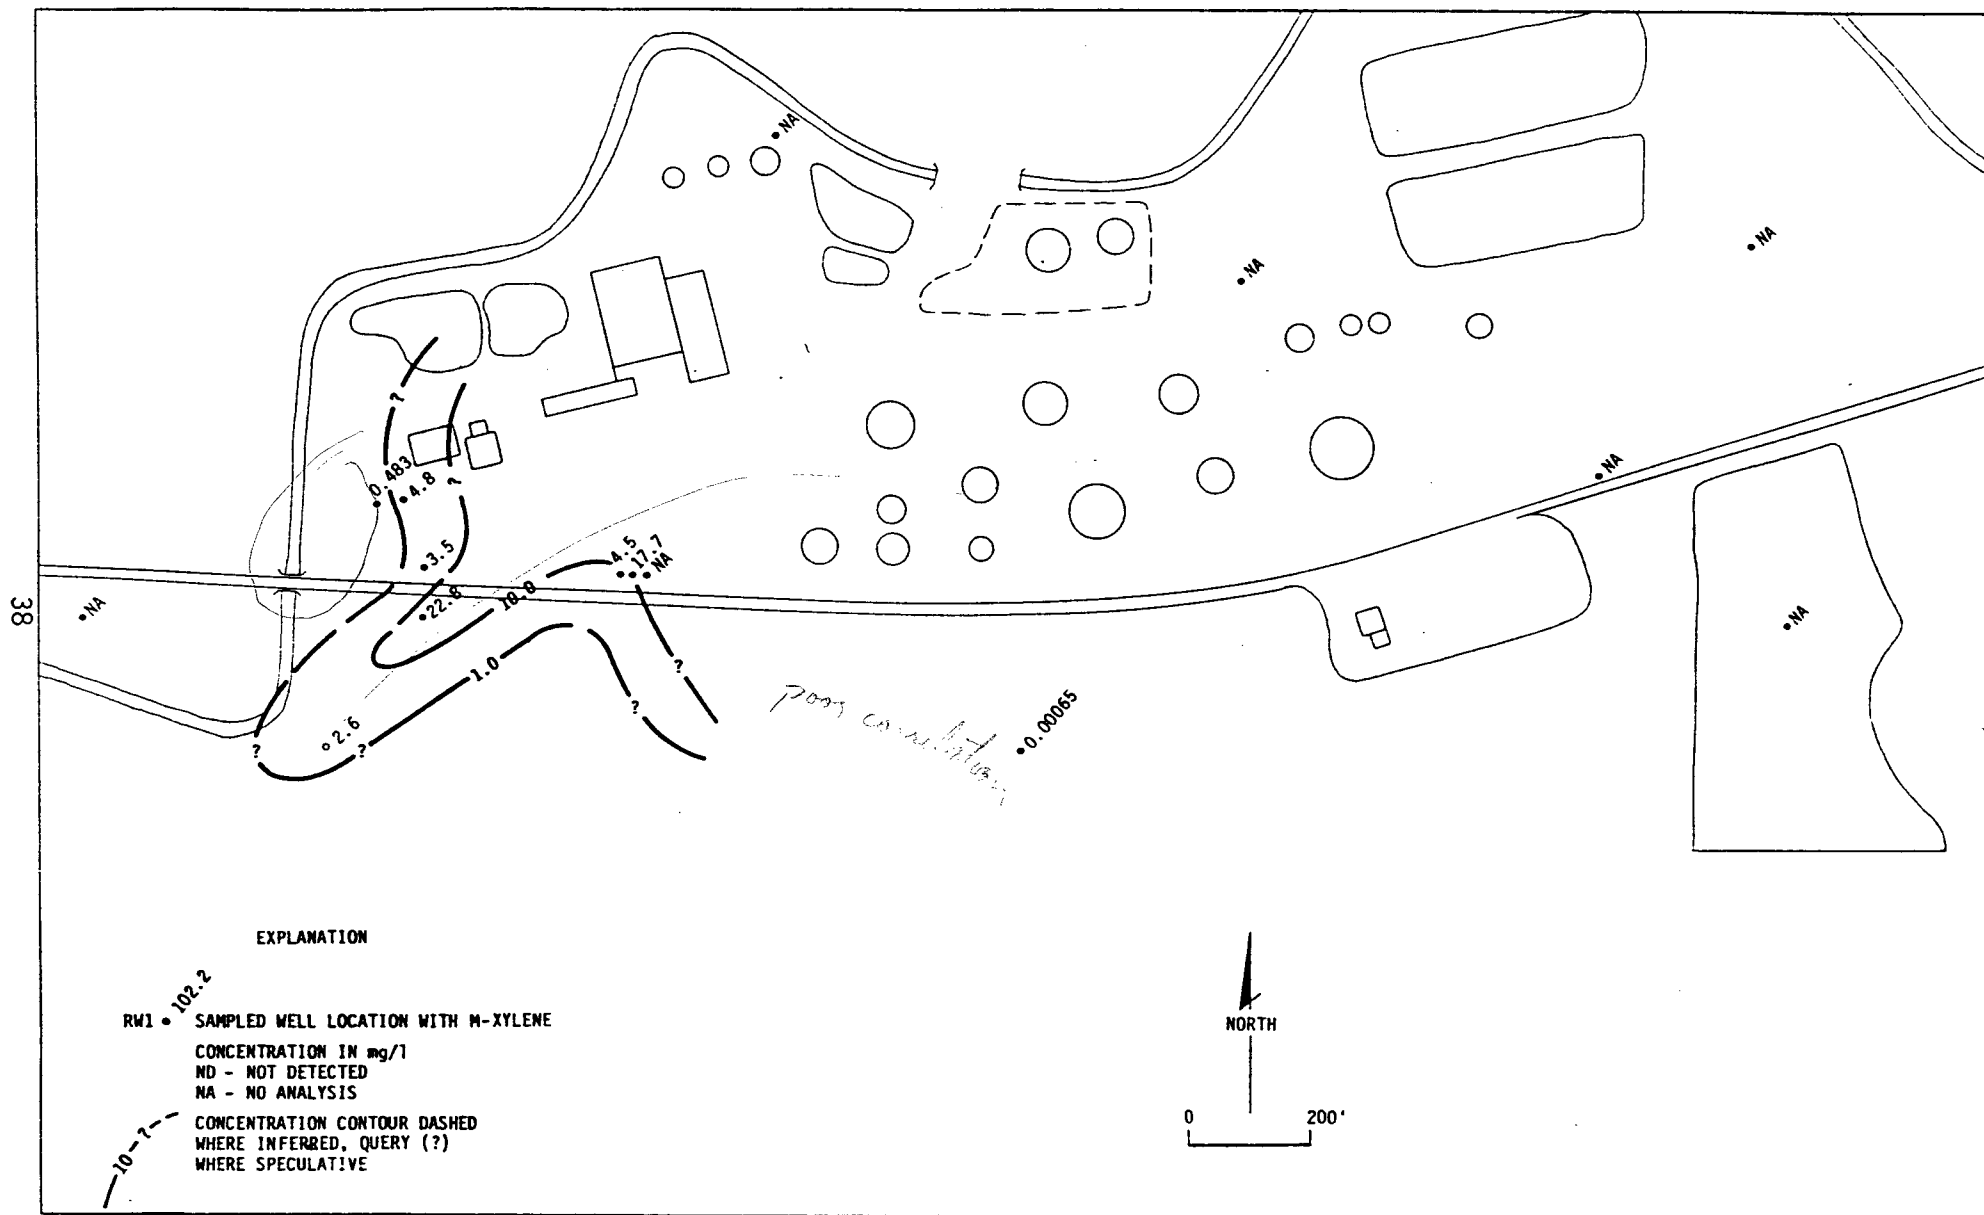


FIGURE 3-4

M-XYLENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING COMPANY

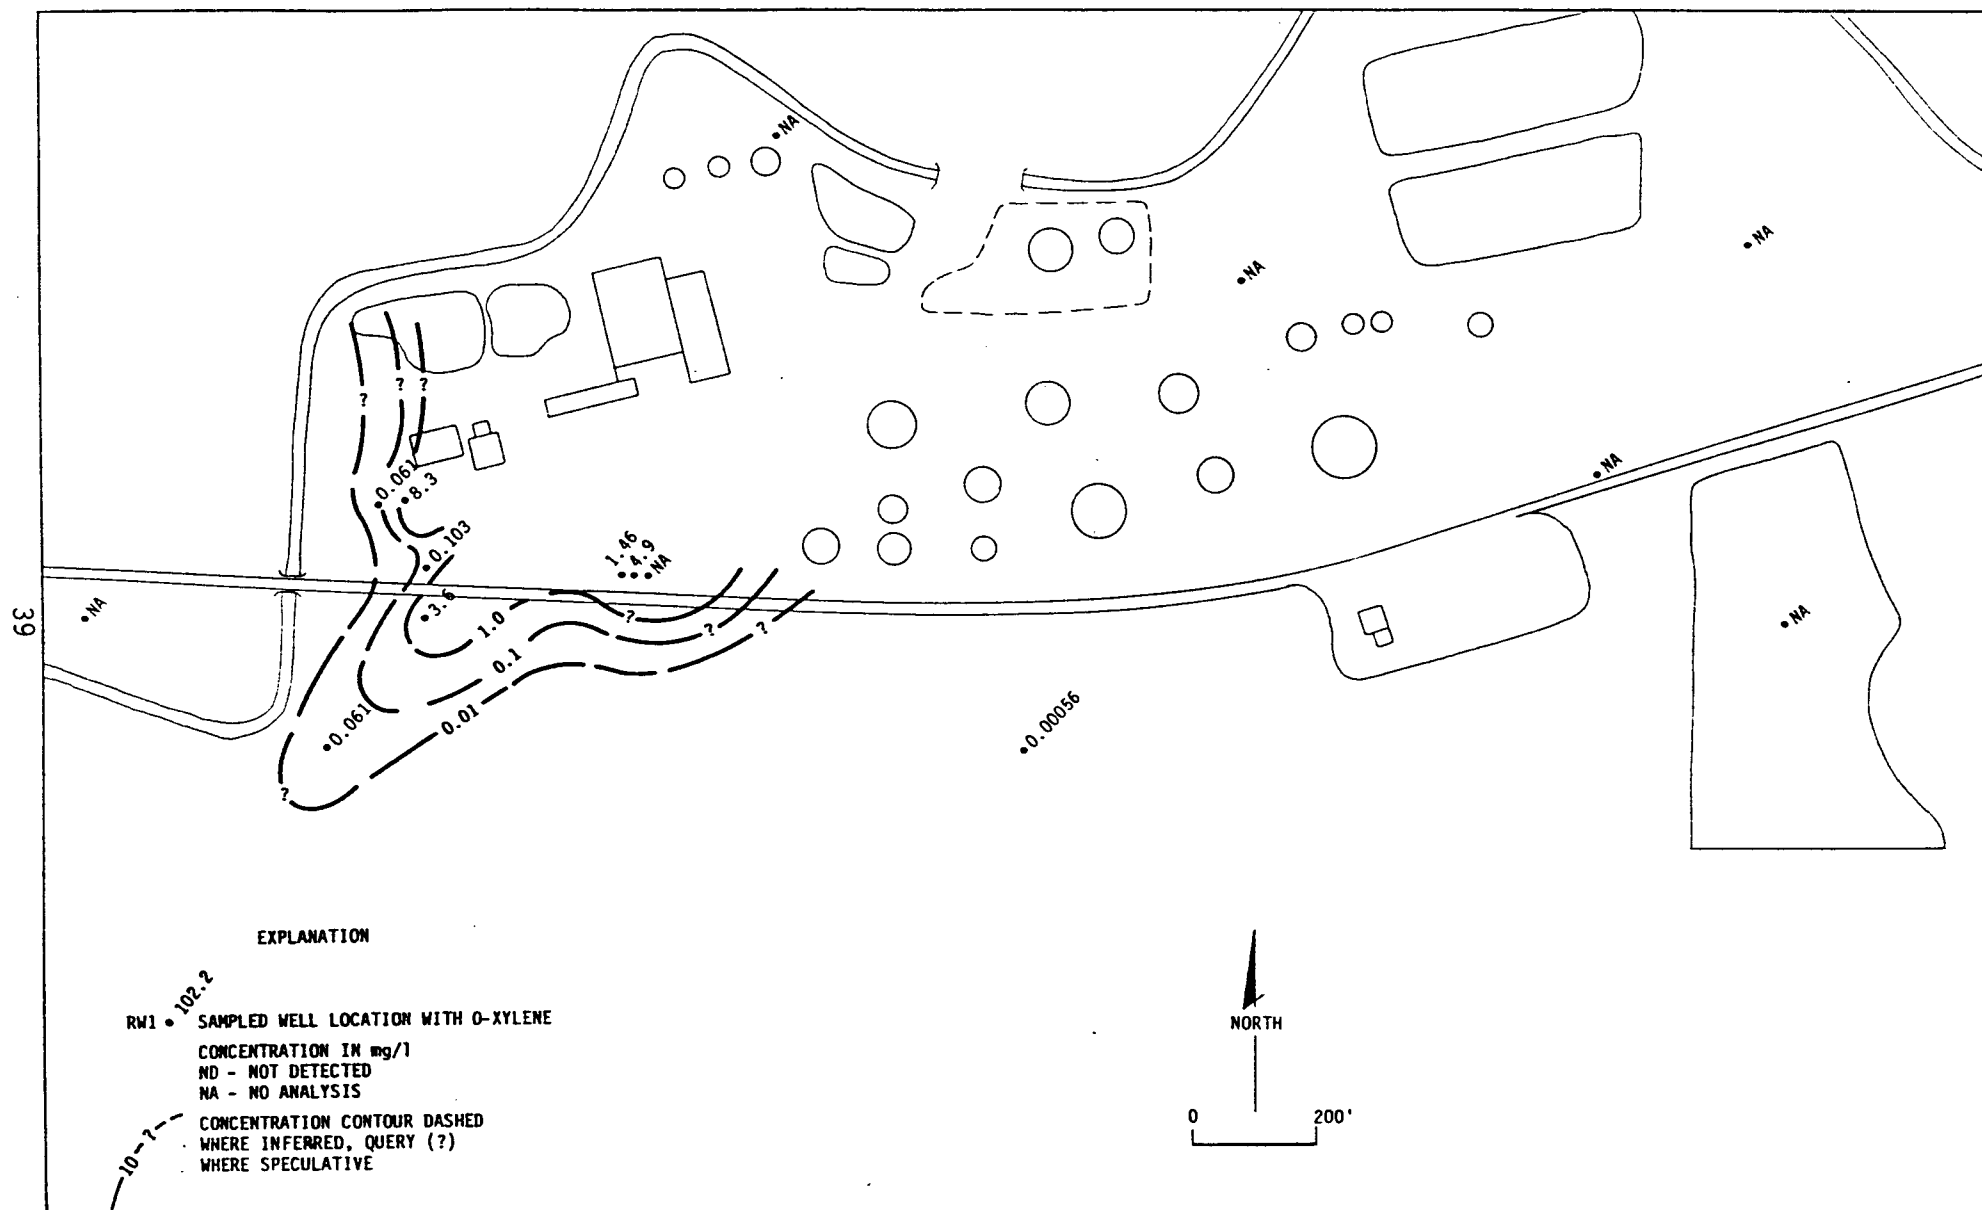


FIGURE 3-5

O-XYLENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING COMPANY

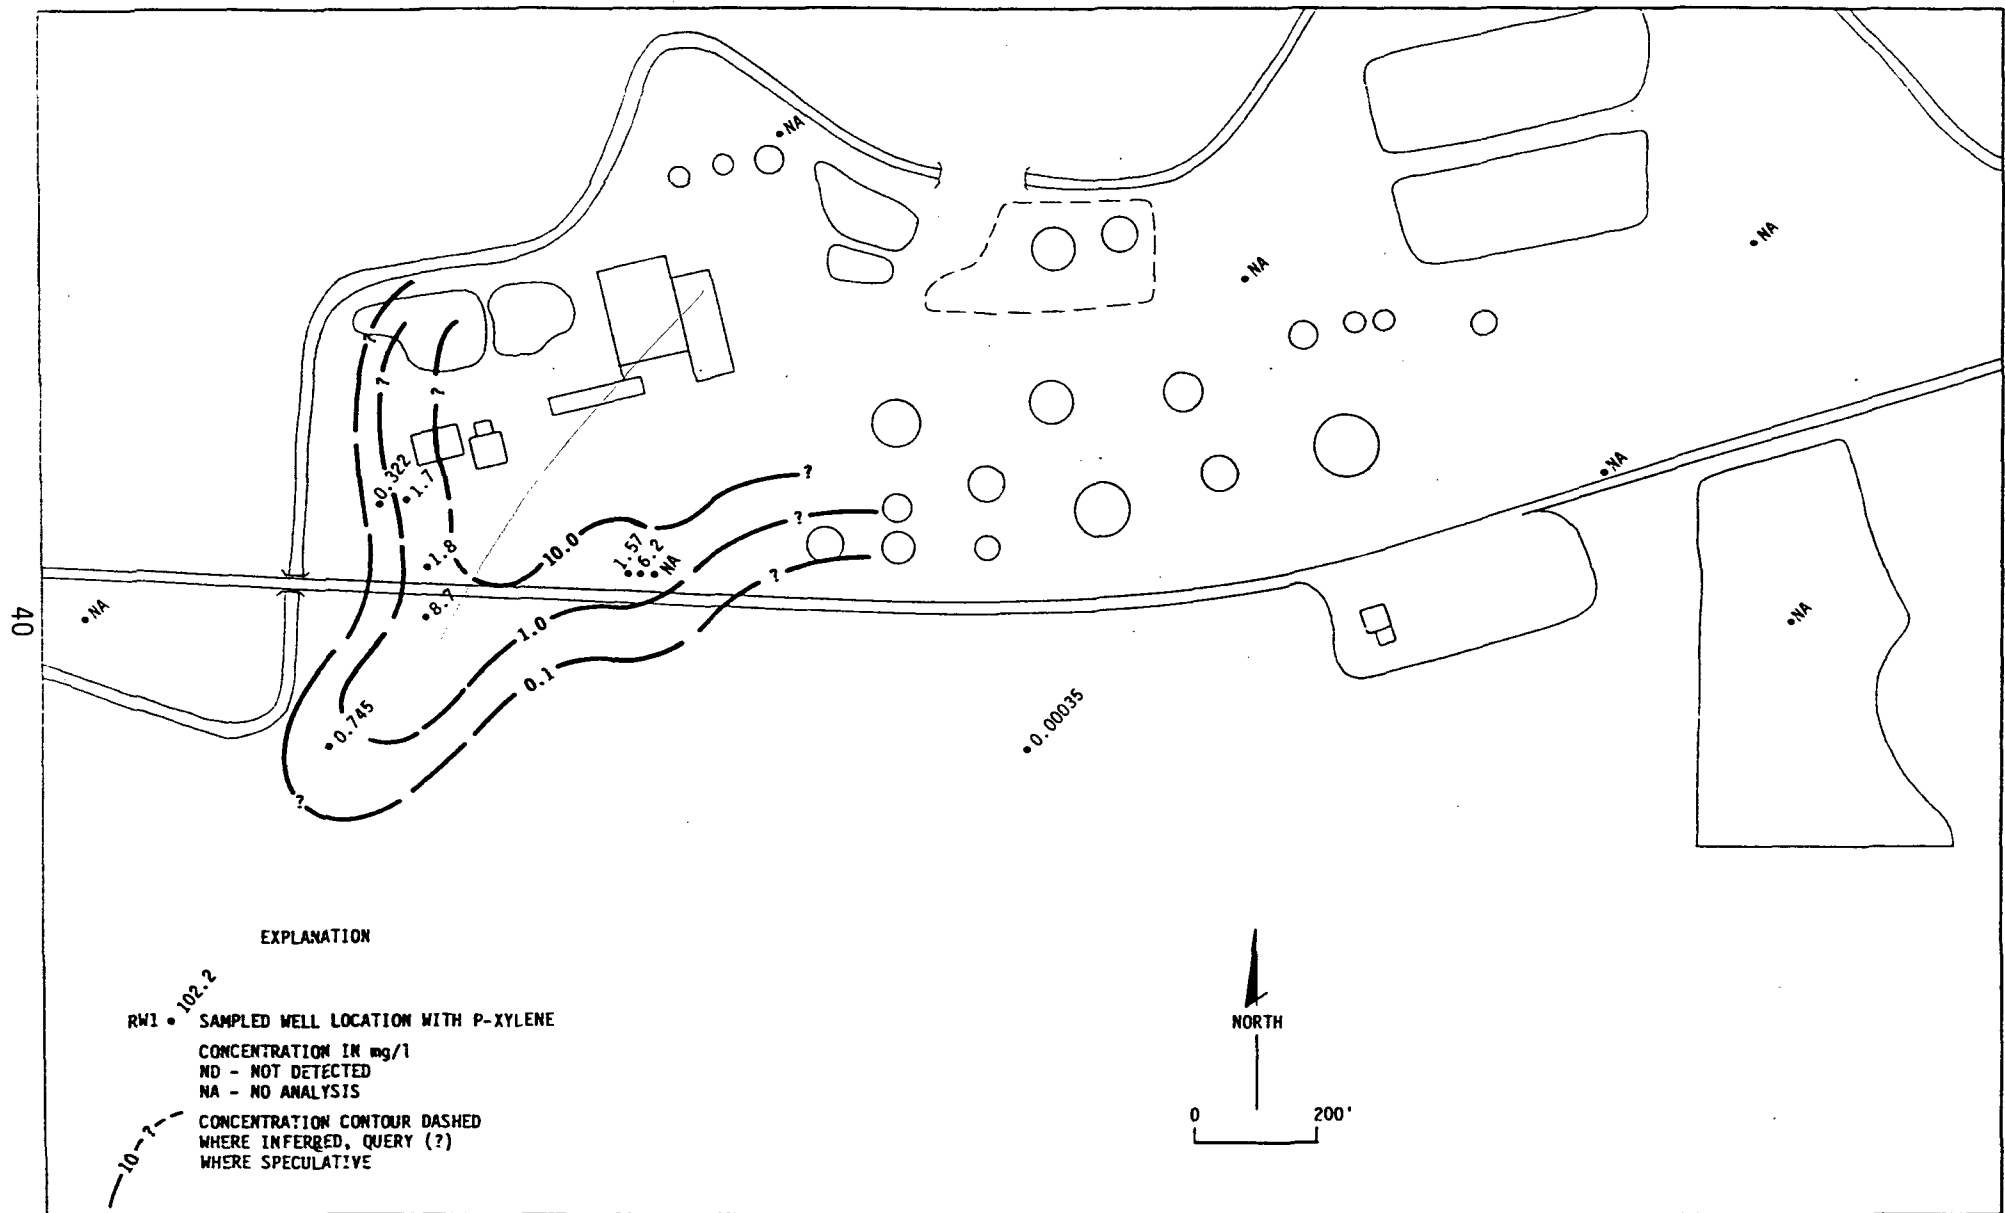


FIGURE 3-6

P-XYLENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING COMPANY

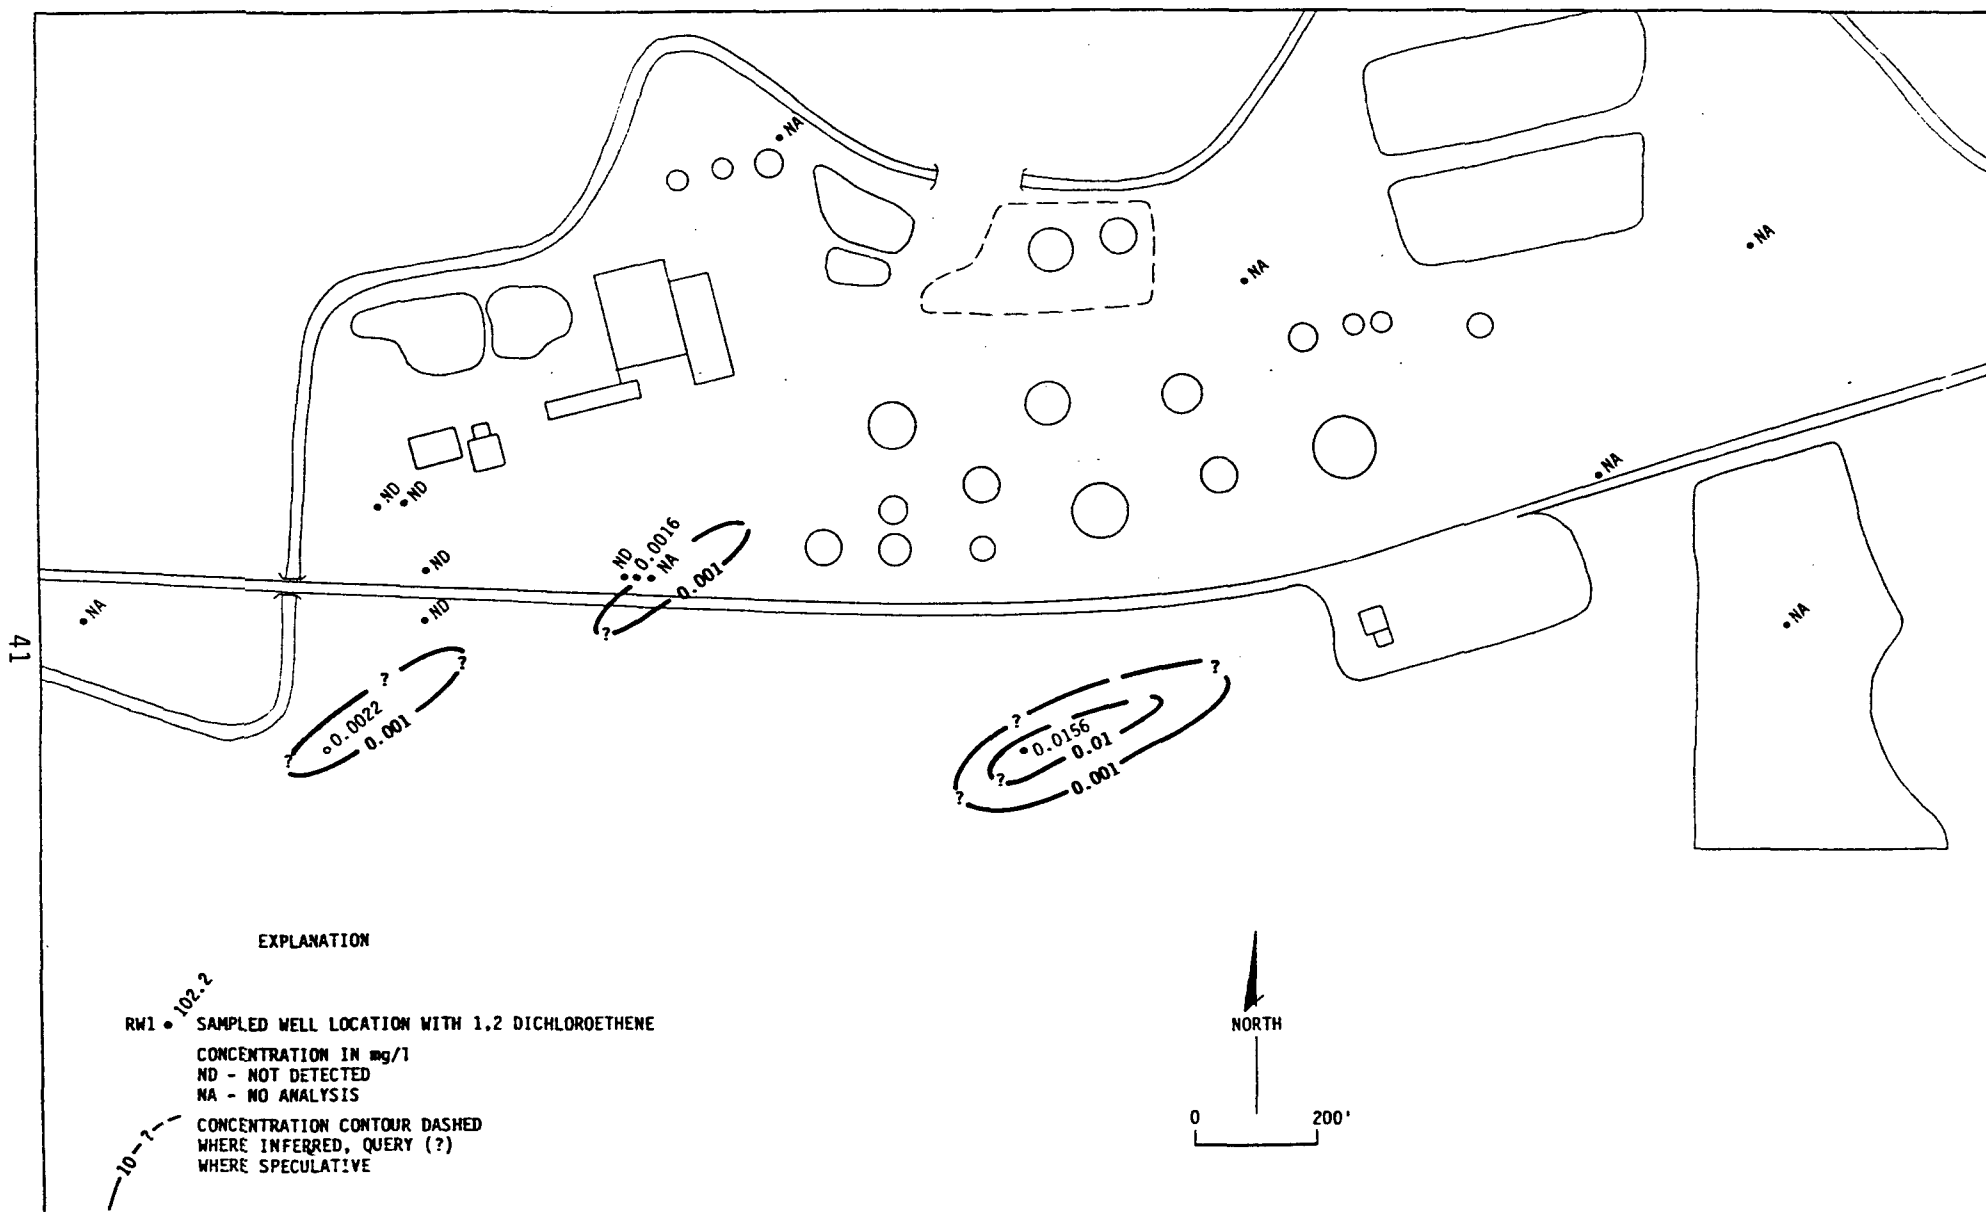


FIGURE 3-7

1,2 DICHLOROETHENE CONCENTRATION IN GROUND WATER SEPTEMBER 1988 BLOOMFIELD REFINING CO.

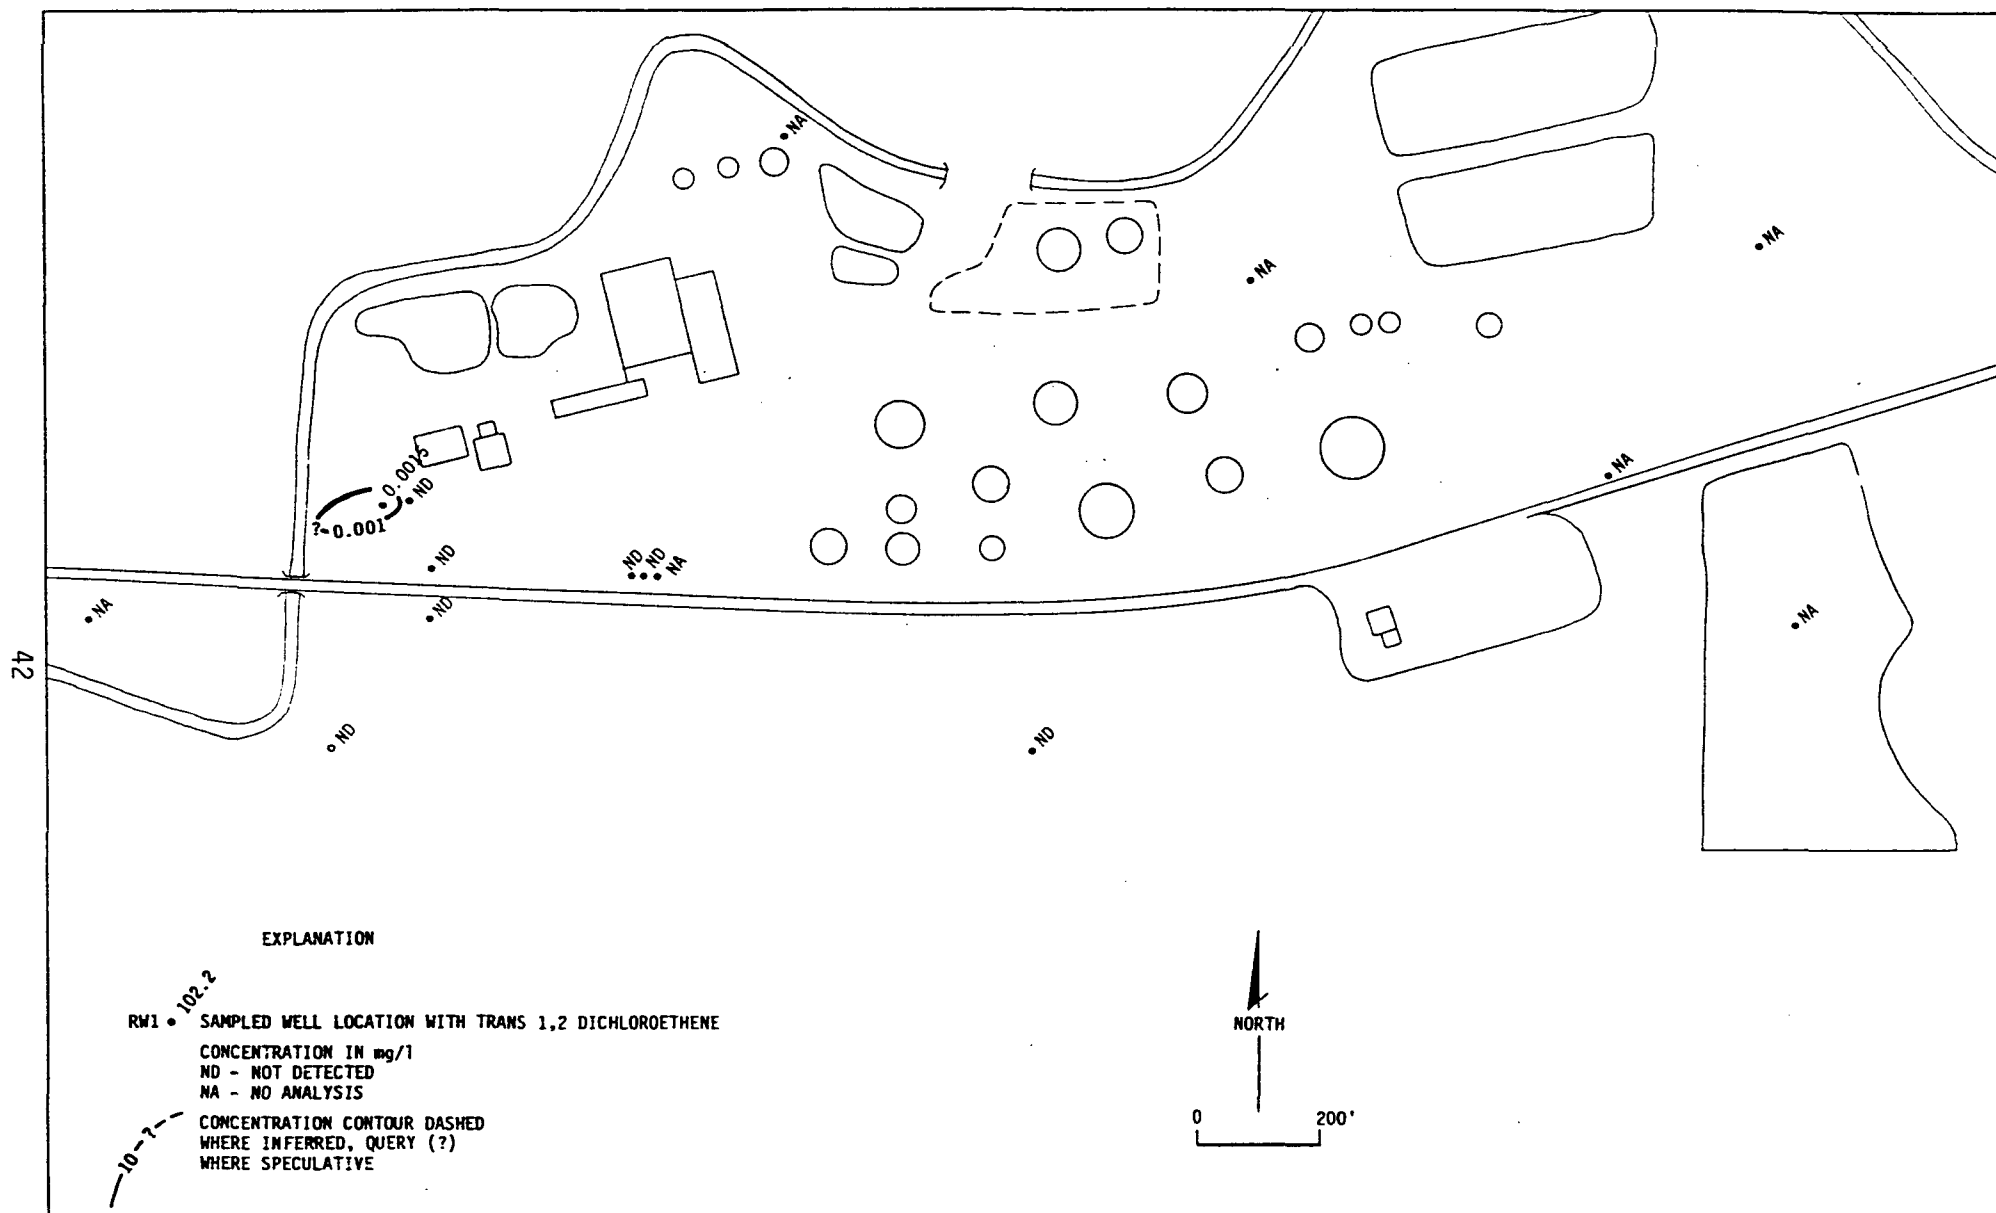


FIGURE 3-8

TRANS 1,2 DICHLOROETHENE CONCENTRATION IN GROUND WATER SEPT. 1988 BLOOMFIELD REFINING CO.

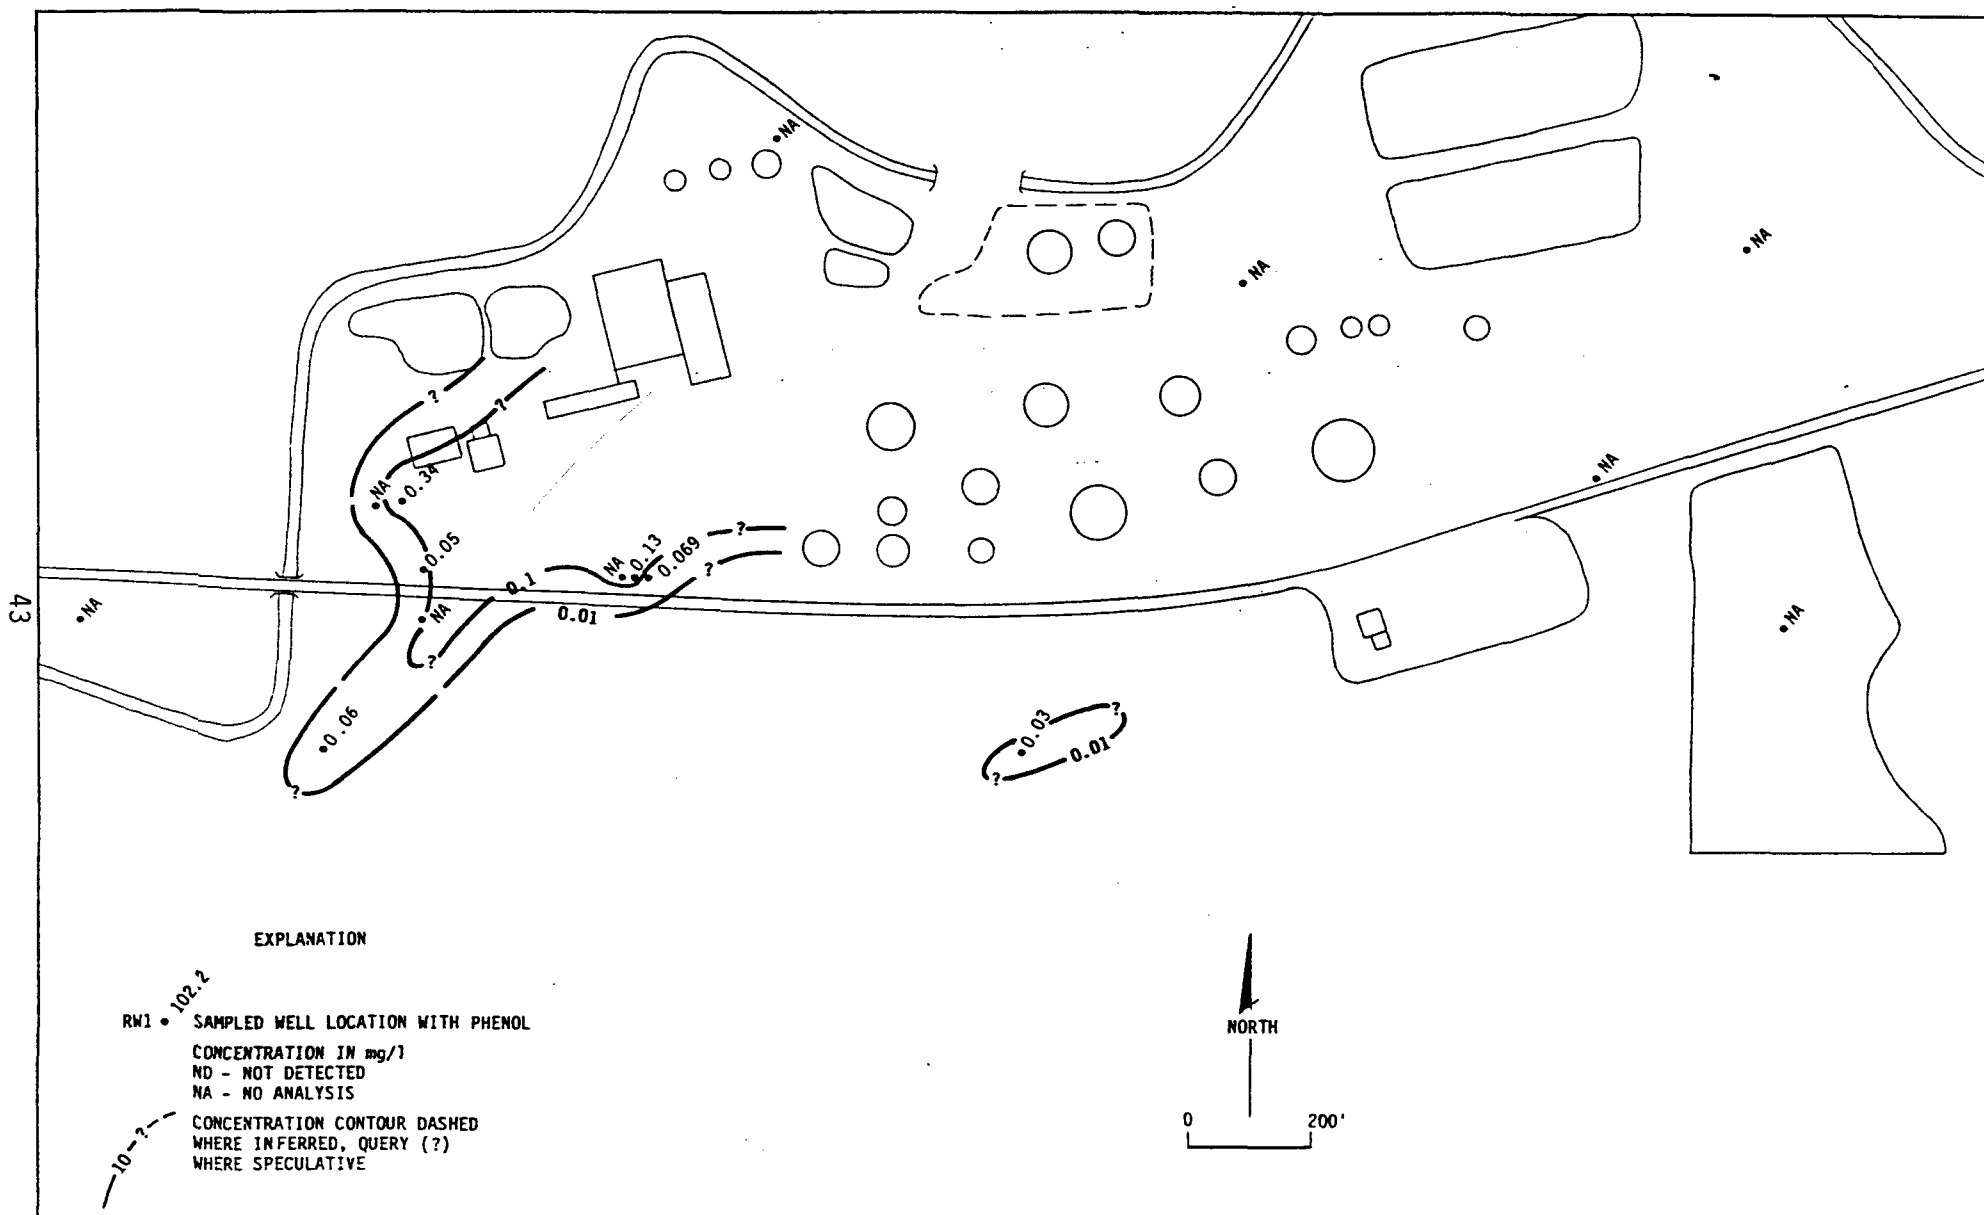


FIGURE 3-9
PHENOL CONCENTRATION IN GROUND WATER 1988 BLOOMFIELD REFINING COMPANY

in Plate 4. In most cases, maximum VOC concentrations occur along the southern boundary of the facility in piezometer P-3, suggesting either that hydrocarbon release from the unsaturated zone is ongoing or that previous releases from the tank storage area or process units have yet to migrate completely off the site. A few peak VOC concentrations occur at monitor well MW-11. These results tend to be supported by the soil vapor survey data, which indicate that hydrocarbons are generally confined to beneath the refinery site, with some hydrocarbons evident south of Sullivan Road on BLM property. The occurrence of VOCs in ground water beneath BLM property may be controlled by a buried stream channel located south of Sullivan Road. Structural contours of the Nacimiento Formation presented in Plate 3 substantiate the existence of a local bedrock depression in this area. *recheck NC elevations & where meas. from, TOC or GL*

NC relief may have controlled water flow before recharge from irrigation system in S.E.

Considering the small amount of precipitation that occurs in the area, it is likely that a portion of the hydrocarbons which were released several years ago have been retained in the unsaturated zone above the water table and act as an intermittent source of dissolved or immiscible hydrocarbons to the ground water during the late summer and early fall when rainfall is at a maximum. Regardless of whether the hydrocarbons have been entirely released to the saturated zone, the three-well recovery system is expected to intercept hydrocarbons that would otherwise migrate beneath off-site property.

4.0 INSTALLATION AND OPERATION OF HYDROCARBON RECOVERY SYSTEM

4.1 GOALS AND OBJECTIVES

The overall goal associated with operation of the hydrocarbon recovery system is capture and remediation of ground water in the perched alluvial system underlying the refinery. Remediation of ground-water quality is being implemented through operation of three hydrocarbon recovery wells and treatment of recovered water in the refinery wastewater treatment system. Wastewater treatment involves separation of immiscible petroleum product from ground water in API separator tanks, volatilization of remaining VOCs in evaporation ponds, and spray irrigation of the treated water to the land surface. This type of treatment was considered the most efficient and cost-effective method of removing dissolved and immiscible hydrocarbons from ground water. If concentrations of VOCs in treated wastewater exceed discharge plan requirements, an air-stripper may be used to further reduce levels of these volatile organic constituents.

4.2 TECHNICAL APPROACH

4.2.1 Installation of Hydrocarbon-Recovery Pumps

The pumps installed at the Bloomfield Refinery are air-operated skimmer pumps designed to remove floating product and ground water from the upper portion of the aquifer. Each pump is made primarily of stainless steel and is 3 feet long, with an outside diameter of 2-3/8 inches. It fills from the top by gravity in order to provide the skimming action. When a pump becomes full of liquid, a float switch inside the pump activates the pumping cycle and compressed air is applied to the pump, forcing the liquid to the surface. The pump then rests until it becomes full again and the pumping cycle repeated. In this manner, the pump can be set near the water surface to skim off hydrocarbons while withdrawing a relatively small amount of clean water.

The pump intakes were set several feet below the water table. Control boxes were installed on supports close to each well head. An air-supply hose of 1/4 inch inside diameter and a product return hose of 3/8 inch inside diameter were used to connect each pump to its control box and to

1400 1500

up to 79pm

the main discharge line. Both of these hoses are made of oil-resistant rubber. A check valve was included in the product line to prevent liquid from flowing back into the well and a flow indicator was provided for visual inspection of the operation.

Air is supplied to the recovery system from the refinery's central compressed-air system. An air filter was installed at each control box, which maintains air pressure at approximately 50 psi. Pumped liquids are discharged into a 10,000-gallon above-ground intermediate storage tank which can discharge to the refinery's wastewater treatment system at appropriate times. Air lines, product lines and electrical cable serving each control box are buried in a single trench approximately 2 feet deep. Both air lines and product lines were wrapped with electrical heat tape and insulated wherever they are exposed in order to protect the lines from freezing. *by hand*

A cycle counter was installed inside each control box for the purpose of determining the quantity of liquid pumped at each location. Each cycle produces approximately 1/2 gpm. Therefore, the number of gallons pumped equals 1/2 the number of cycles indicated on the counter. Operation of recovery pumps began on January 4, 1989.

4.2.2 Operation and Maintenance of Hydrocarbon-Recovery Pumps

The output per cycle from each pump should be measured periodically to verify the cycle capacity. The pump cycle is determined by the timer module located in the control box. The cycle is initiated by the float switch inside the pump and its duration is determined by the setting of the timer dial. The optimal setting is determined by gradually increasing the time until all liquid is ejected from the pump followed by a burst of air. It is recommended that air be allowed to follow the water in order to completely flush particulates through the discharge line. This prevents plugging of the lines with sediment and also reduces the potential for freezing of the lines.



The pumps should be inspected weekly and a log should be kept of weekly counter readings and other observations. The flow indicator should be inspected to make sure that liquid is flowing in only one direction. If liquid appears to flow back toward the well, the check valve at the well head must be cleaned or replaced.

4.3 RESULTS AND CONCLUSIONS

Table 3-1 lists water levels observed at the recovery wells and piezometers prior to the onset of recovery and following 12 and 42 days of recovery-well operation. Although no floating petroleum product was encountered in any of the wells or piezometers prior to recovery, operation of the recovery pumps caused development of depressions in the water table that tended to accumulate low-density product over time. In cases where a layer of floating petroleum product was encountered, water levels were corrected for confining pressures caused by the hydrocarbon layer by subtracting product thickness times the relative density of diesel fuel, assumed to be equal to 0.8, from measured depth to water. Only well RW-2 contained floating product after the first 12 days of recovery. The hydrocarbon recovery pump in well RW-1, which froze several days after the onset of pumping, was not operative until January 16, 1989. After 30 days of recovery at well RW-1, both well RW-1 and piezometer P-1 began to show evidence of floating product. Product thickness at well RW-2 decreased dramatically between the 12th and 42nd day of recovery, presumably due to flushing of product from the aquifer. Up to 2.6 feet of water-level decline was recorded at the recovery wells during the 42-day period ending on February 15, 1989.

Plate 5 shows the hydraulic impacts associated with operation of the hydrocarbon recovery system for 12 days. Recovery pumps in wells RW-2 and RW-3 were operating at average rates of 0.94 and 0.73 gpm, respectively, throughout this 12-day period. These rates were estimated on the basis of 32713 and 25367 recovery cycles at wells RW-2 and RW-3, with a recovery volume of 0.5 gal/cycle and a total elapsed recovery time of 17352 minutes. Comparison of the pre-recovery water table presented in Plate 4 with the 12-day recovery water table presented in Plate 5 shows



$$\frac{1440}{7.48}$$

$$r = \frac{.85}{2(8)(.25)}$$

$$Vel = .47 \text{ ft/day}$$

$$\frac{.5}{(2)(8)(.25)(.47)}$$

clear evidence that intermittent pumping of recovery wells RW-2 and RW-3 at average rates of 0.94 and 0.73 gpm during the first 12 days of recovery resulted in capture of some of the ground water that normally flows off-site to the west and southwest. A map of water-level decline obtained by subtracting water levels observed 12 days following recovery from water levels observed prior to recovery and shown in Plate 6 depicts the extent of hydraulic stress caused by operation of wells RW-2 and RW-3 for the 12-day period following onset of recovery.

The distribution of hydraulic head following 42 days of recovery at all three recovery wells is shown in Plate 7. Average pumping rates of 1.2, 0.50, and 0.42 gpm were estimated from a cumulative total of 103991, 60917, and 50251 cycles recorded at wells RW-1, RW-2, and RW-3 during the 60550 minutes comprising the 42-day period. Average rates of withdrawal at wells RW-2 and RW-3 during the entire 42-day recovery operation decreased relative to rates calculated for the first 12 days of recovery because residual hydraulic stresses from prior pumping help to maintain water levels at the pump intakes at lower discharge rates. Intermittent pumping of ground water at these average pumping rates throughout this period resulted in the development of an extensive capture zone around well RW-3 that obscured the localized depression near well RW-2 previously evident in Plate 5. The relatively large, deep cone of depression surrounding well RW-3 may be attributed to a small saturated thickness or hydraulic conductivity near this well. Recovery test data observed at this well suggest that hydraulic conductivity at RW-3 may be almost an order of magnitude smaller than conductivity estimated from slug tests performed at wells MW-1, MW-2, and MW-4 (GCL Site Investigation and Remedial Action Conceptual Design). The 42-day recovery water table appears to be minimally impacted by discharge at well RW-1 due to the large transmissivity near this well, as demonstrated by its large yield during development. Again, this could be due to the very broad cone of depression induced by operation of well RW-3, which tends to obscure less pronounced depressions in the water table. Plate 8 shows that water-level decline observed following 42 days of recovery is more

9.16
21.16
12

$$\frac{\text{gal}}{\text{day}} / \text{ft}^2 \times \frac{\frac{\text{ft}^3}{7.48 \text{ gal}} \times \frac{1 \text{ day}}{86400 \text{ sec}}}{\text{ft/sec}}$$

$$\frac{\text{gal/day}}{\text{ft}^2} \times \frac{1}{148 \times 76400} = \text{ft/sec}$$

$$\text{ft/sec} \times 646,272 = \frac{\text{gal/day}}{\text{ft}^2}$$

areally-extensive and of greater magnitude than drawdown observed after 12 days of recovery.

The drawdown caused by recovery-well pumping was much larger than would be expected on the basis of field-measured values of hydraulic conductivity and saturated thickness. Drawdown observed after 12 and 42 days at well MW-11 and piezometer P-3, which are both located approximately cross-gradient to recovery well RW-3, was analyzed according to the Theis equation using an average conductivity of 2×10^{-4} ft/sec and a transmissivity of 1.14×10^{-3} ft²/sec estimated from results of pump testing at well RW-3. The analysis indicates that estimated specific yield is much smaller than could be physically possible for the unconfined, coarse-grained aquifer. The analysis also indicates that calculated specific yield decreases dramatically over time, a highly unlikely situation for the relatively incompressible gravel comprising the aquifer. Alternatively, aquifer response can more realistically be explained by using a constant specific yield of 0.10 typical of the type of alluvial aquifer present beneath BRC property. The calculated transmissivity is smaller than the original estimate and decreases over time, suggesting that dewatering of the aquifer or the interception of lateral barriers caused by local bedrock highs, or some combination of the two conditions, may be responsible for the larger-than-anticipated hydraulic response of the aquifer. These conditions may be of particular importance south of well RW-3, where stresses propagating through the buried stream channel may be encountering adjacent bedrock as the buried channel becomes dewatered.

*129 gal/dy/ft²
1054 gal/dy/ft
based on 8" thick*

It appears that recovery well RW-3 will play an important role in capturing hydrocarbons from the alluvial aquifer. The extent and degree of capture at all recovery wells will continue to increase with time until steady-state conditions are attained.

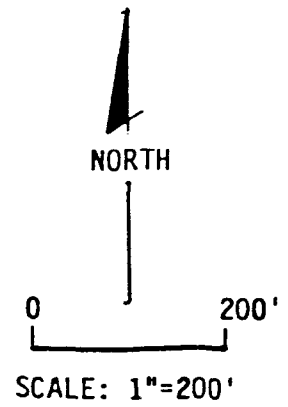
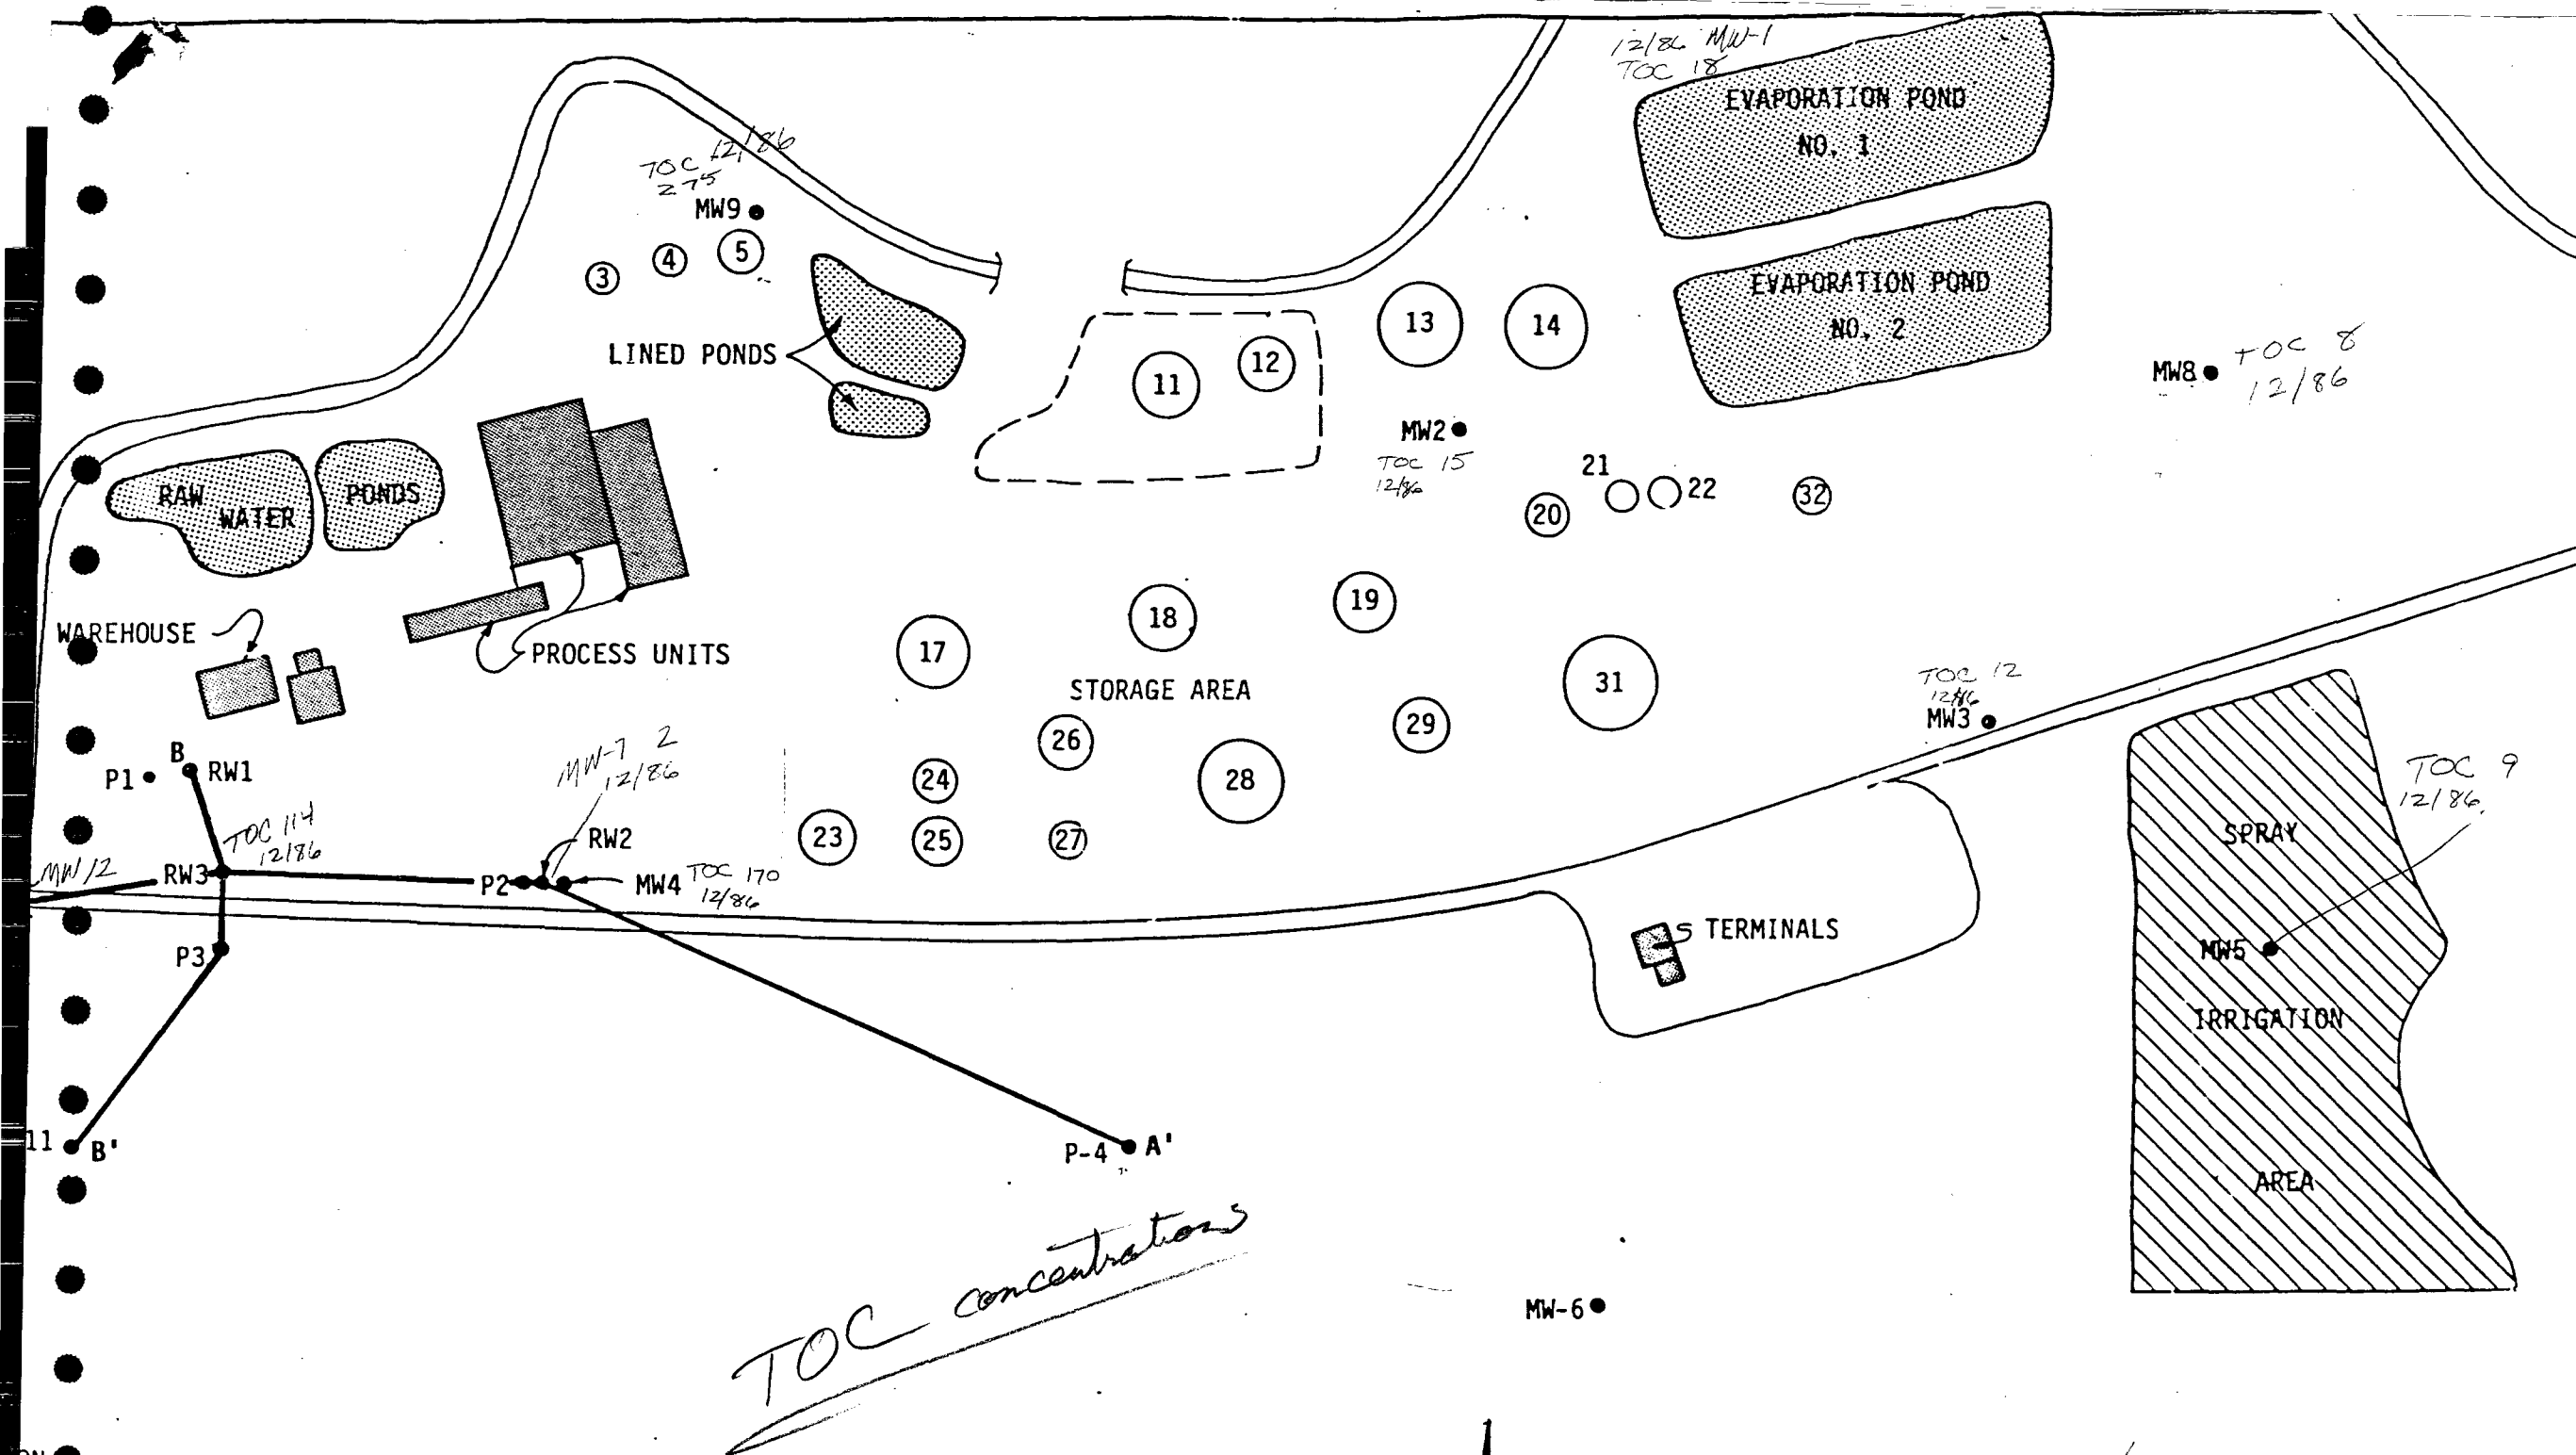


	PLATE 1 WELL LOCATIONS	
	CLIENT:	
	DATE:	
	DRAWN BY:	
	CHECKED BY:	
	SCALE:	

5.0 REFERENCES

Engineering-Science, 1986, 'A Final Report on Section 3013 Administrative Order Work Elements'.

Marrin, D.L., 1988, 'Soil-Gas Sampling and Misinterpretation', Groundwater Monitoring Review, Spring, p. 51-57.

Silka, L.R., 1988, 'Simulation of Vapor Transport Through the Unsaturated Zone - Interpretation of Soil-Gas Surveys', Groundwater Monitoring Review, Spring, p. 115-123.

Vogel, T.M., C.S. Criddle and P.L. McCarty, 1987, 'Transformations of Halogenated Aliphatic Compounds', Environmental Science and Technology, v. 2, n. 8, p. 722.

GARY\REM.RPT

APPENDIX A

**GCL STANDARD OPERATING PROCEDURES FOR SOIL
VAPOR SAMPLING AND ANALYSIS**

PROCEDURES FOR SOIL VAPOR SAMPLING AND ANALYSIS

1.0 PURPOSE

To describe and illustrate the methods and procedures used in sampling and analyzing shallow subsurface soil vapor for various contamination evaluations.

2.0 SCOPE

A shallow soil-vapor survey is commonly a rapid and cost-effective method for roughly delineating the areal extent of a known spill involving hydrocarbons or other volatile constituents. Shallow soil-vapor investigations are also used to determine the presence or absence of specific constituents in the subsurface at sites where spills or leaks are possible but have not been identified.

3.0 PROCEDURES

3.1 EQUIPMENT AND SUPPLIES

A. Necessary equipment at all sites will include:

- | | |
|--|----------------------------------|
| - Probes (3/4" I.D. steel pipe, schedule 20 or similar) | - Calculator |
| - Drive Points | - Internal tank filling adapter |
| - Adapters | - Vacuum pump (battery operated) |
| - Floor jack (2-ton capacity) | - Slide hammer |
| - Pipe clamp | - Duct tape |
| - Pipe wrenches | - Teflon tubing |
| - Pipe cutter | - Black inert rubber hose |
| - Pipe reamer | - Battery pack for GC |
| - Portable gas chromatograph (GC) (Photovac), syringes and other necessary GC supplies (kit) | - Zero-grade air cylinders |

B. Optional equipment and supplies needed at some sites:

- | | |
|------------------------------------|--|
| - Rotary hammer with bit | - Steam cleaner |
| - Extension cords | - Metal detector |
| - Generator | - Sand and asphalt or concrete patching material |
| - Brunton compass and tape measure | |

C. Safety Equipment for Persons Driving Probes:

- | | |
|-------------|--------------------|
| - Hard Hats | - Safety Glasses |
| - Coveralls | - Steel-toed Boots |
| - Gloves | |

- 3.2 Define the area to be surveyed. This may include an entire gas station, a large area of property, or as small as the area around a single tank.
- 3.3 Divide the survey area into a grid or other appropriate pattern, and number each location on the grid. Grid spacing may vary depending on the size of the survey area, site conditions and the level of detail required. 20 to 50 foot grid spacing is generally used for a survey at a service station. Note: One may want to number points as field work progresses, so expansion of the grid will be consistently numbered.
- 3.4 Be sure all sampling equipment, including probes, vacuum adapters, points, and slide hammer (inside and outside) is thoroughly steam cleaned prior to use.
- 3.5 Prior to soil sampling, an "air sample" of the ambient air should be analyzed with the GC. Be sure the air sample is collected a distance away from or upwind from any running vehicle or other source of hydrocarbon emissions (20-30 feet is sufficient).
- 3.6 Next, collect a "system blank" to be analyzed prior to sampling. The vacuum pump should be attached to a clean probe with point attached, via an adapter, and a sample collected. This will provide background data of ambient air passing through a probe.
- 3.7 If it is necessary to drill through concrete or asphalt, start the generator (make sure it is positioned downwind of probes) or plug an extension cord into an available electrical outlet. Locate the rotary hammer over the hole and drill through the concrete or asphalt to underlying soil. Remove drill.
- 3.8 Insert the drive point into base of probe. Tape point loosely with duct tape to probe (so it won't fall out during insertion into hole).
- 3.9 Remove lift plate (white) from floor jack, and place hole in lifting arm of the jack over the drilled hole.
- 3.10 Insert the probe through the hole in the jack's lifting arm, and into the drilled hole or the soil surface.
- 3.11 Place slide hammer over the top of the probe and drive to the target depth. Generally, a target depth of 5 feet is used, except for vertical profiles. Remove the slide hammer.
- 3.12 Promptly after driving the probe, place an adapter over it and connect it to the vacuum pump.
- 3.13 Place pipe clamp around probe at the lifting arm of the jack. Tighten clamp. Turn jack handle clockwise to activate hydraulics. Use jack to retract probe 1-3 inches immediately before sampling.

- 3.14 When the chemist is ready to take the sample, activate the vacuum pump. It is necessary to evacuate approximately 5 probe volumes of soil vapor prior to sampling. This can be approximated by the vacuum reading on the pump.

<u>VACUUM PUMP GAGE READING (Inches Hg)</u>	<u>EVACUATION TIME (Seconds)</u>
2 - 5	30
5 - 10	45
10 - 15	60
15 - 17	90

Note: Vacuum pressures above 17 in. Hg. suggest either a clogged probe, a very tight formation, or water. If there is a possibility of shallow ground water, be sure water is not evacuated and passed into the vacuum pump. Above 17 in. Hg. the pump will not collect a good soil vapor sample and the problem should be investigated.

- 3.15 After the evacuation time is satisfied, insert a clean syringe (equipped with a mini-ert valve) through the flexible latex (self-sealing) tubing at the top of the adapter. Flush the syringe 3 times with the soil vapor while the evacuation pump is running. Turn the evacuation pump off and immediately withdraw a 2cc sample and close the mini-ert valve on the syringe.
- 3.16 Analyze the sample by gas chromatography. This task will be performed by a person experienced in GC operations.
- 3.17 With the pipe clamp still tightened around the probe, extract the probe. The jack can be reset by turning the handle counterclockwise. This will allow the lifting arm to drop, and the pipe clamp can be loosened and lowered.
- 3.18 After extraction, the used probe and adaptor should be set aside in a designated area so as to prevent confusion with clean probes or adapters.
- 3.19 For each soil vapor point, record in log book the following items:

SITE LOCATION		WEATHER		JOB #			
<u>TIME</u>	<u>POINT #</u>	<u>DEPTH</u>	<u>VACUUM</u>	<u>EVAC TIME</u>	<u>REMARKS</u>		
<u>Example</u> 10:00	# 5	5'	3" Hg	30 Sec.			
10:30	# 7	5'	18" Hg	-	Probe clogged removed, cleaned redrove to 6'		

3.20 Steam clean all probes and adapters prior to re-use.

3.21 After QA/QC of field data, results should be submitted to Data Management for processing and mapping.

Prepared By: _____

Reviewed By: _____

SOP\SOILGAS.SNS

APPENDIX B
LITHOLOGIC LOGS AND STRATIGRAPHIC SECTIONS

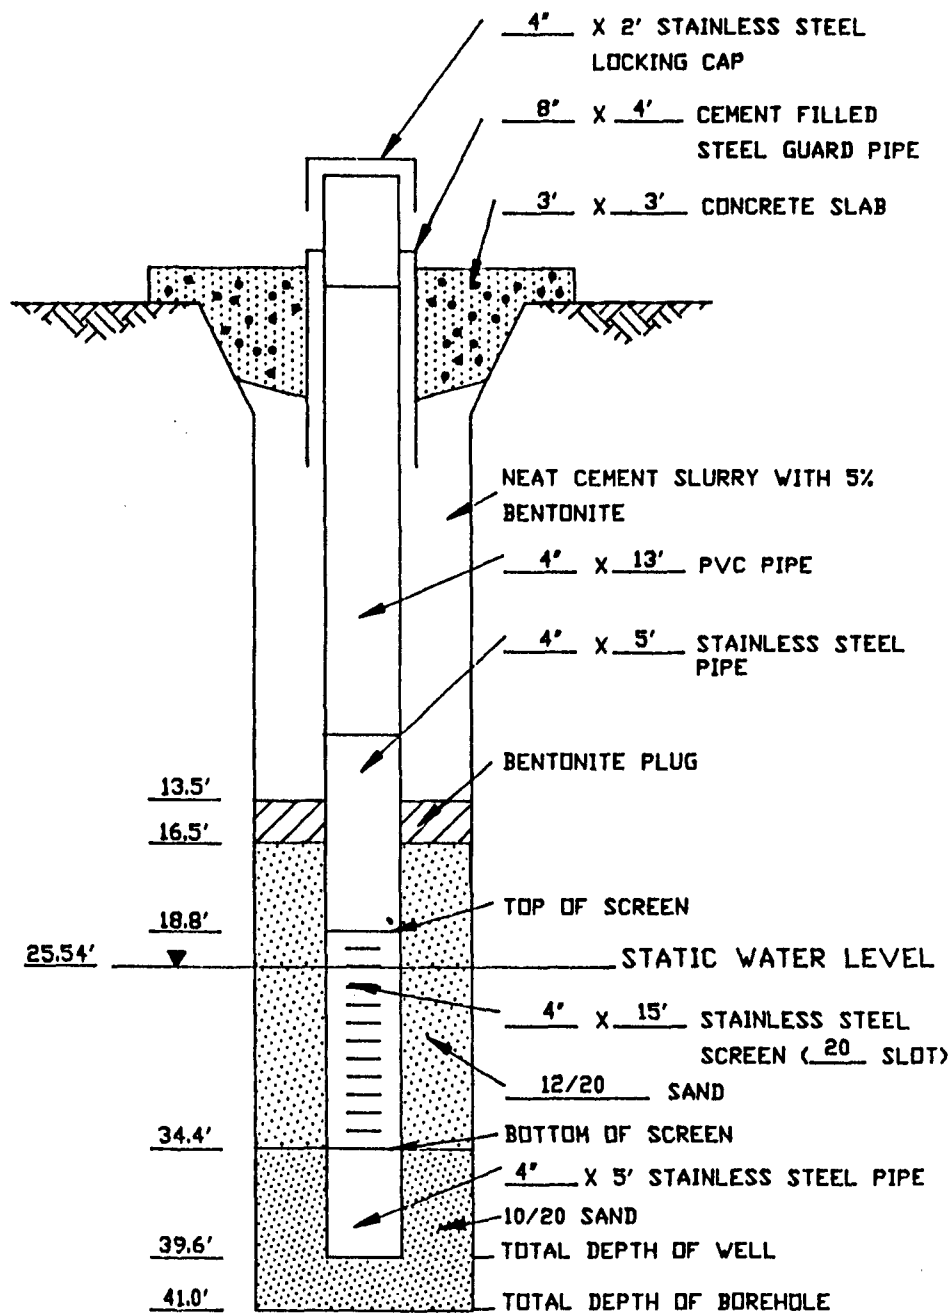


FIGURE B-1

COMPLETION DIAGRAM
RECOVERY WELL RV-1

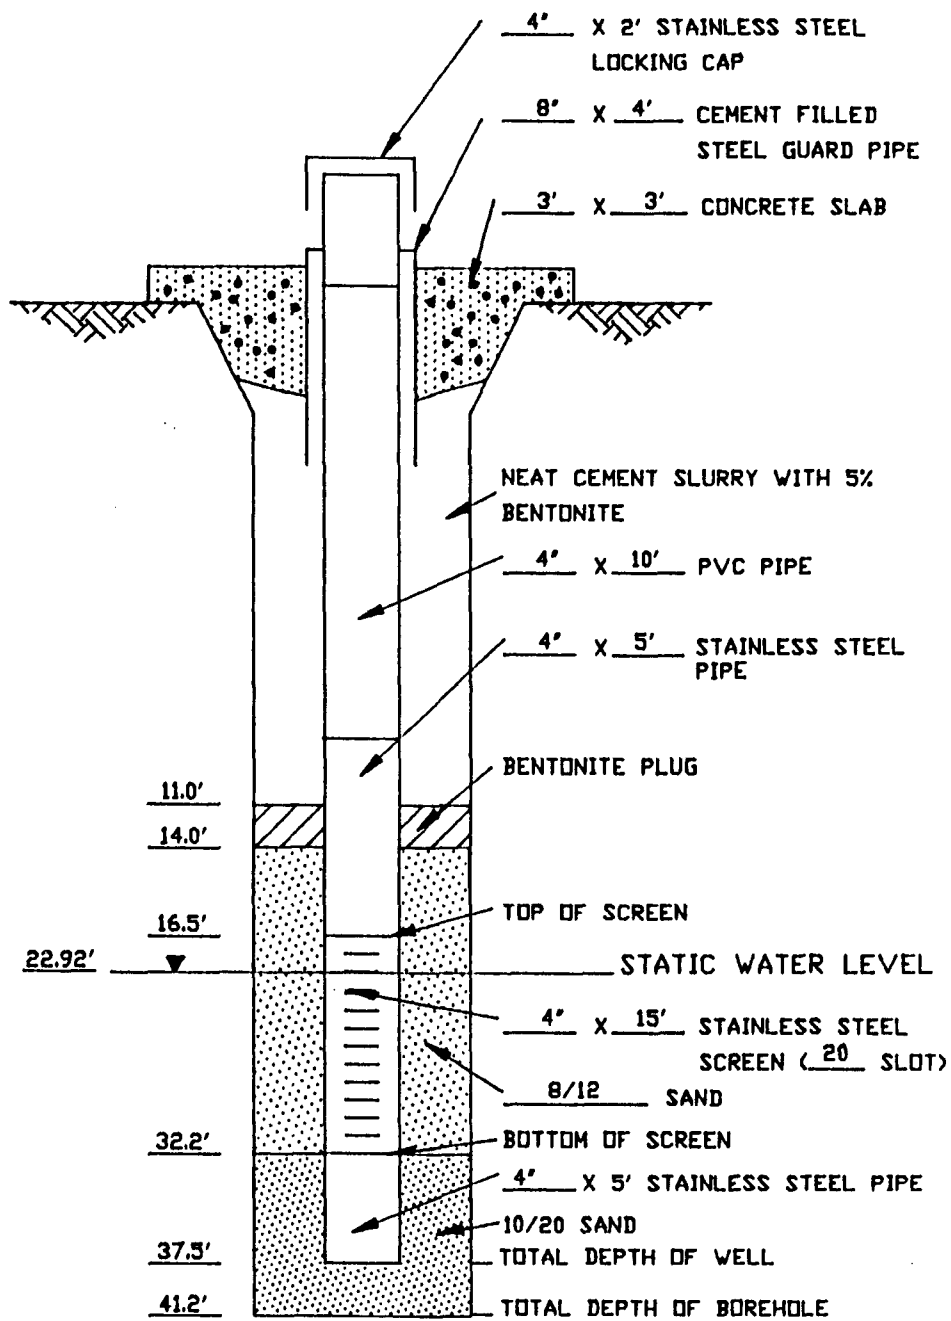


FIGURE B-2
COMPLETION DIAGRAM
RECOVERY WELL RW-2

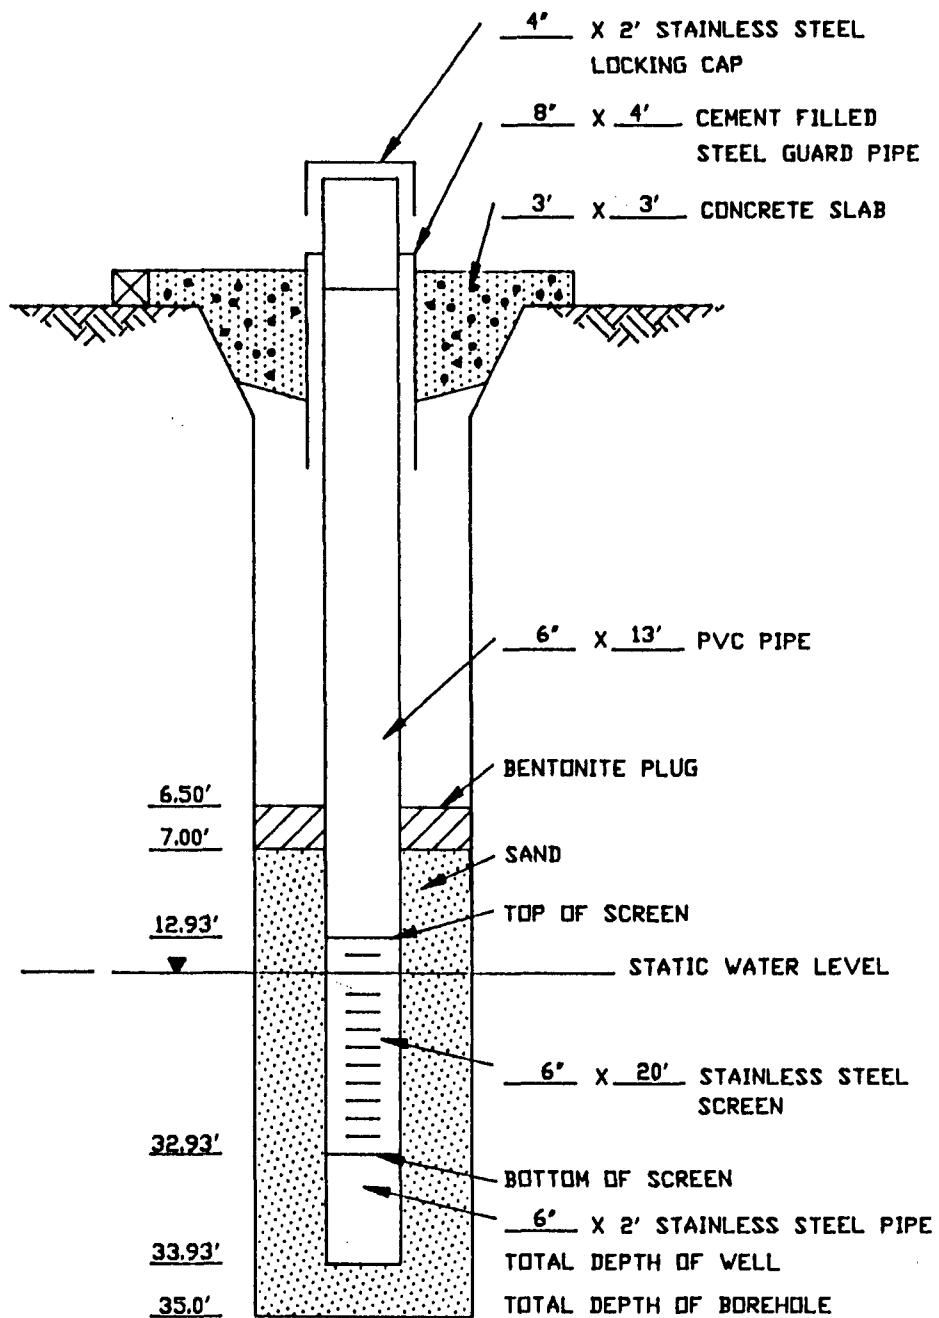


FIGURE B-3

COMPLETION DIAGRAM
RECOVERY WELL MW-10 (RW-3)
(RECONSTRUCTED FROM VERBAL DESCRIPTION
SUPPLIED BY ENGINEERING-SCIENCE, 1987)

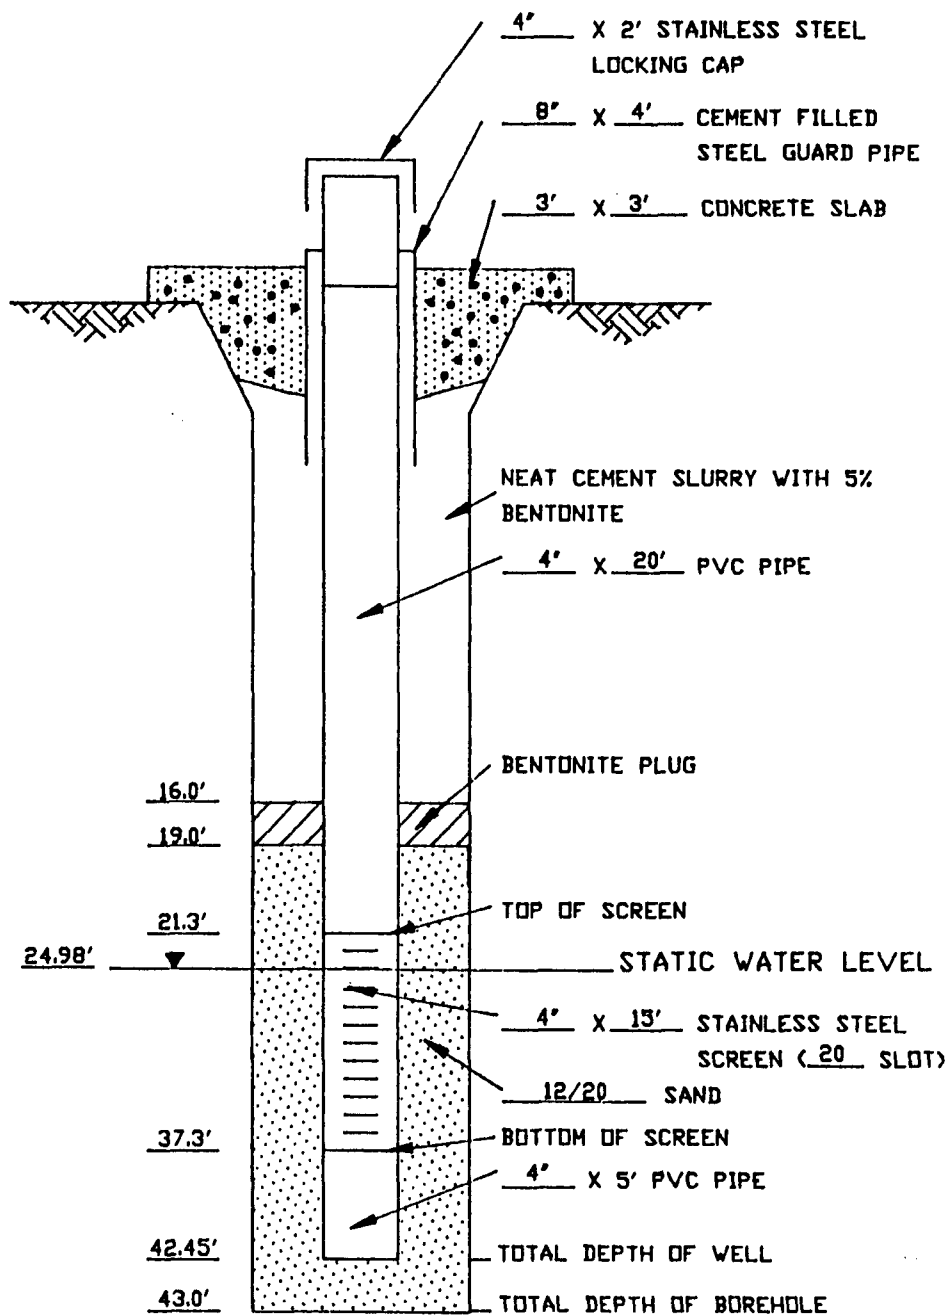


FIGURE B-4
COMPLETION DIAGRAM
PIEZOMETER P-1

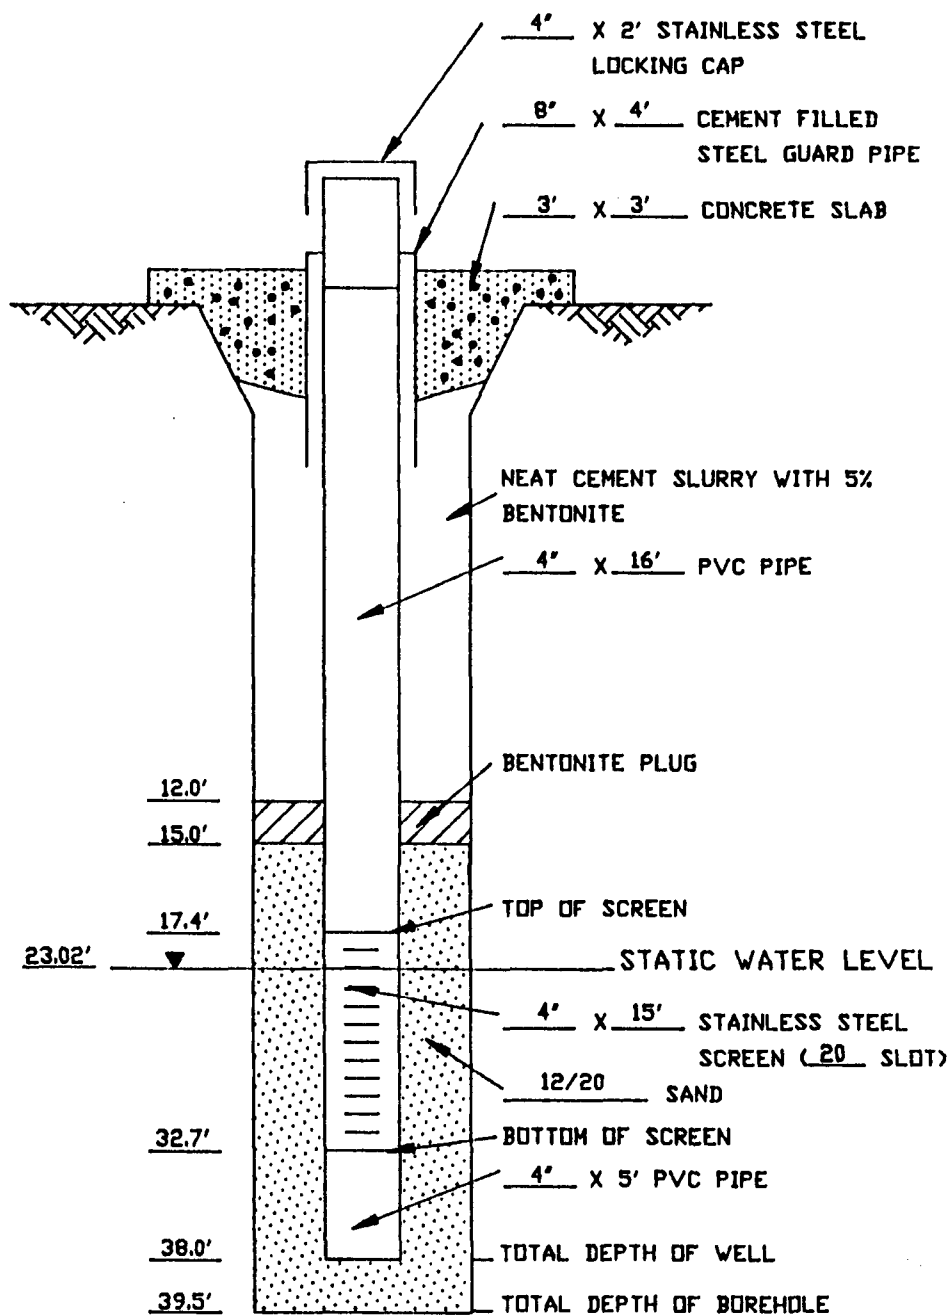


FIGURE B-5

COMPLETION DIAGRAM
PIEZOMETER P-2

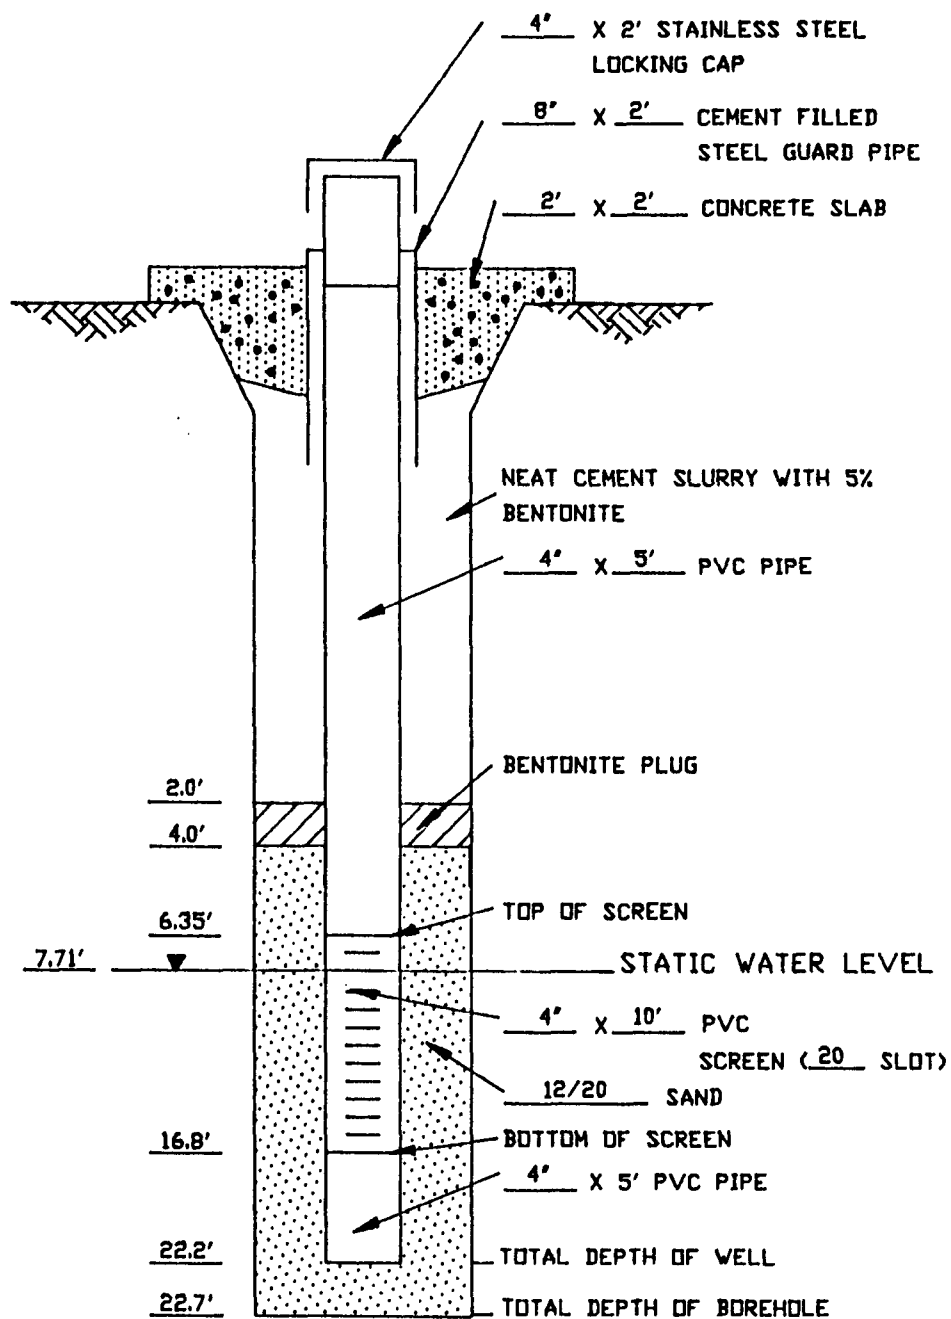


FIGURE B-6
COMPLETION DIAGRAM
PIEZOMETER P-3

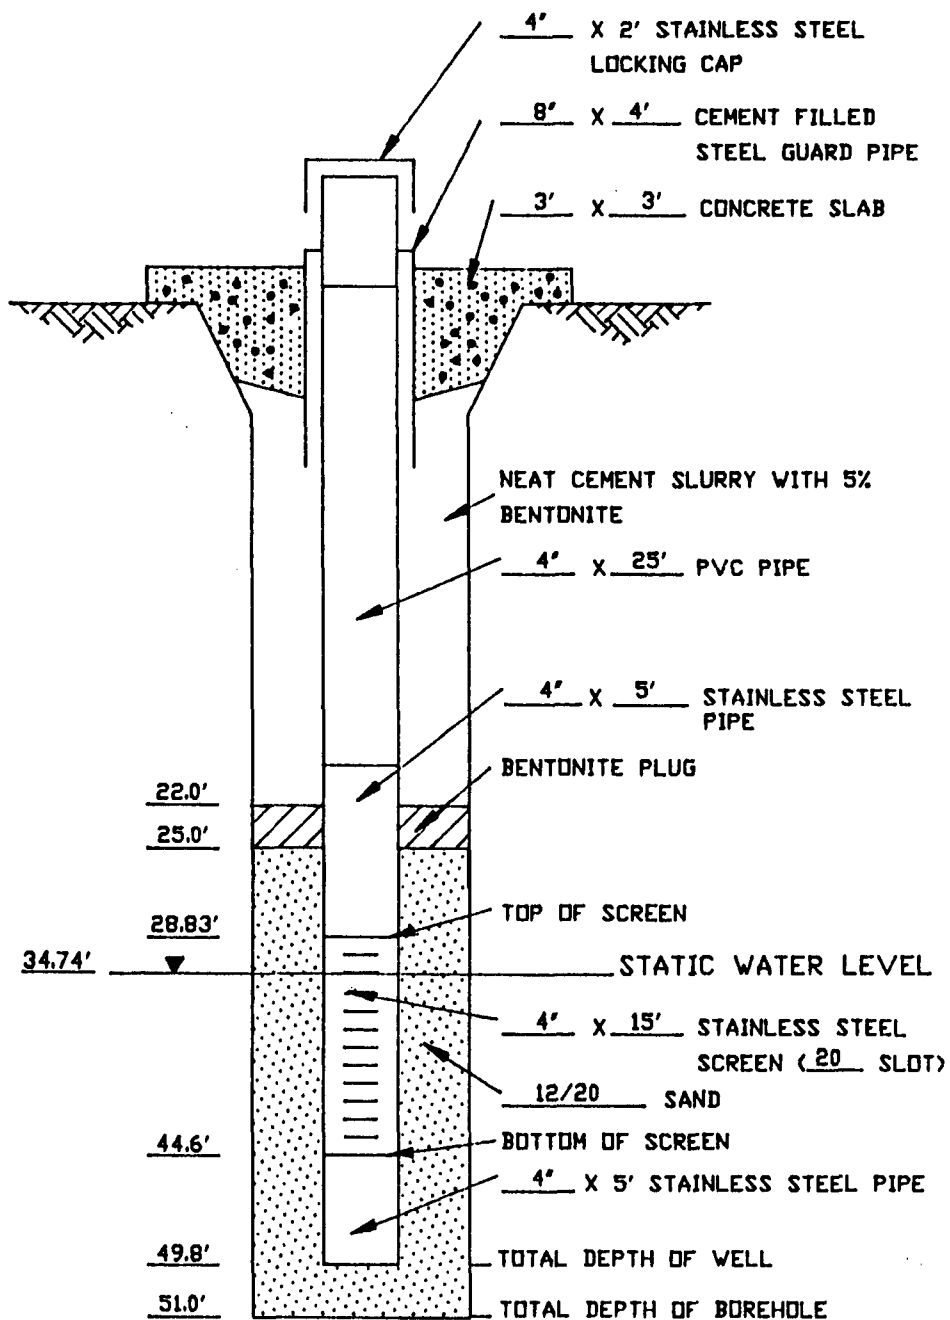


FIGURE B-7

COMPLETION DIAGRAM
PIEZOMETER P-4


FIGURE B-8

LITHOLOGIC LOG (SOIL)

RECOVERY WELL RW-1

Page 1 of 1

LOCATION MAP:

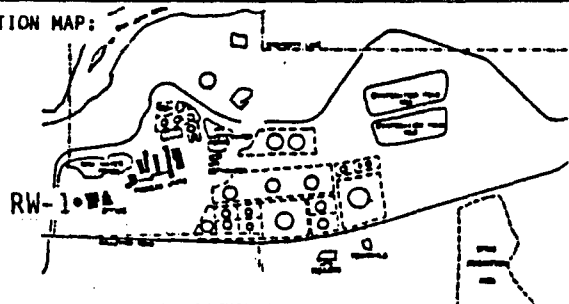

SITE ID: BRC LOCATION ID: RW-1
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): 5525.92
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 30 August 1988 DATE COMPLETED: 31 August 1988
 FIELD REP.: W.S. Dubyk
 COMMENTS: Static on September 2, 1988; 26.65 from TOC.

_____ 1/4 _____ 1/4 _____ 1/4 _____ 1/4 S _____ T _____ R _____

LOCATION DESCRIPTION:

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5			1642		0'-18' <u>Silt and Sand</u> - Dark yellowish brown (10 YR 4/2) to grayish brown (5 YR 3/2). Minor to strong hydrocarbon odor.
10			1646		
15			1710		
20			1720		18'-34' <u>Sand and Gravel</u> - Medium dark gray (N4). Sand is medium to very coarse grained, subangular to subrounded. Gravel is subrounded to well rounded, to 2" diameter. Strong hydrocarbon odor.
25			1725		
30			1730		
35			1738		34'-41' <u>Shale - Nacimiento Formation</u> - Dusky yellow (5 YR 6/4) to light olive gray (5 Y 6/1) shale.
40			1758		
45					
50					
		T.D. 41'			


FIGURE B-9

LITHOLOGIC LOG (SOIL)

RECOVERY WELL RW-2

Page 1 of 1

LOCATION MAP:

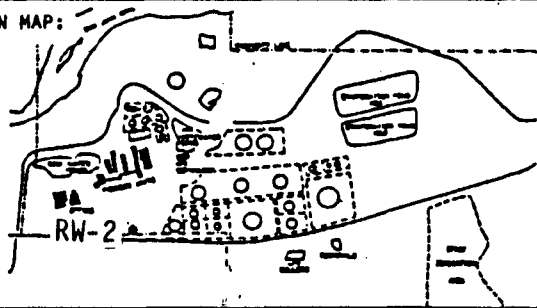

SITE ID: BRC LOCATION ID: RW-2
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): 5523.48
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 29 August 1988 DATE COMPLETED: 29 August 1988
 FIELD REP.: W.S. DUBYK
 COMMENTS: Static on September 2, 1988; 23.42 from TOC.

_____ 1/4 _____ 1/4 _____ 1/4 _____ 1/4 S _____ T _____ R _____

LOCATION DESCRIPTION:

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5			0948		0'-10' <u>Silt and Clay</u> - Medium dark gray (N4) to brownish gray (5 YR 4/1). Slightly effervescent in HCl. Faint hydrocarbon odor.
10			0953		10'-15' <u>Sand and Silt</u> - Moderate brown (5 YR 4/4), very fine grained and well sorted.
15			0958		15'-32' <u>Sand and Gravel</u> - Olive gray (5 Y 4/1) to brownish gray (5 YR 4/1). Sand is medium to very coarse grained, subangular to subrounded. Gravel is subangular to well rounded, to 2" diameter. Noticeable hydrocarbon odor below 25'.
20			1024		
25			1029		
30			1033		
35			1050		
40			1100		
45		T.D. 41.2'			32'-41.2' <u>Shale - Nacimiento Formation</u> - Dusky yellow (5 Y 6/4) to olive gray (5 Y 3/2).
50					


FIGURE B-10

LITHOLOGIC LOG (SOIL)

RECOVERY WELL MW-10 (RW-3)

Page 1 of 1

LOCATION MAP:

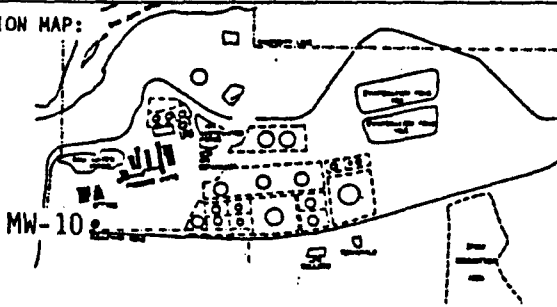

SITE ID: BRC LOCATION ID: MW-10 (RW-3)
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): -5516
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Auger
 DRILLING CONTR.: Earl & Sons, Inc.
 DATE STARTED: 4 March 1986 DATE COMPLETED: 4 March 1986
 FIELD REP.: Engineering-Science, Inc.
 COMMENTS: _____

_____ 1/4 _____ 1/4 _____ 1/4 _____ 1/4 S _____ T _____ R _____

LOCATION DESCRIPTION: _____

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
					0'-5' <u>Topsoil, Roadbase, Sandy Clay</u>
5					5'-10' <u>Silty, Sandy Clay</u>
10					10'-15' <u>Cobbles and Pebbles</u>
15					15'-20' <u>Gravel, Cobbles, and Pebbles</u>
20					20'-30' <u>Green Clay; Nacimiento Formation</u>
25					30'-35' <u>Nacimiento Formation</u> - Yellow-green to blue-gray.
30					
35					
40					
45					
50					

T.D. 35'


FIGURE B-11

LITHOLOGIC LOG (SOIL)

PIEZOMETER P-1

Page 1 of 1

LOCATION MAP:

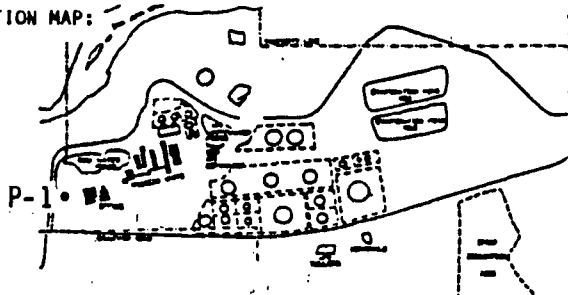

SITE ID: BRC LOCATION ID: P-1
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): 5524.62
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 30 August 1988 DATE COMPLETED: 30 August 1988
 FIELD REP.: W.S. Dubyk
 COMMENTS: This well replaced by P-1a on August 31, 1988.

LOCATION DESCRIPTION:

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5			1135		0'-20' <u>Silt and Clay</u> - Dark yellowish brown (10 YR 4/2) to grayish brown (5 YR 3/2). Weak hydrocarbon odor.
10			1140		
15			1145		
20			1200		20'-36.5' <u>Sand and Gravel</u> - Dark gray (N3) to grayish black (N2). Sand is fine to very coarse grained, subangular to rounded. Gravel is subangular to well rounded, to 2" diameter. Very strong to intense hydrocarbon odor.
25			1205		
30			1210		
35			1220		
40			1225 1240		36.5'-42.0' <u>Shale - Nacimiento Formation</u> - Dusky yellow (5 Y 6/4) to olive gray (5 Y 3/2) shale.
45		T.D. 42'			
50					


FIGURE B-12

LITHOLOGIC LOG (SOIL)

PIEZOMETER P-2

Page 1 of 1

LOCATION MAP:

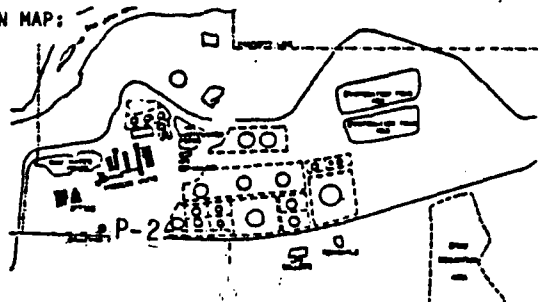

SITE ID: BRC LOCATION ID: P-2
 SITE COORDINATES (ft.):
 N E
 GROUND ELEVATION (ft. MSL): 5523.73
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 29 August 1988 DATE COMPLETED: 29 August 1988
 FIELD REP.: W.S. Dobyk
 COMMENTS: This well replaced by P-2a. Static on September 2, 1988; 23.75 from TOC.

LOCATION DESCRIPTION:

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5			1650		0'-13' <u>Silty and Clay</u> - Dark gray (N3) to grayish black (N2) to dark yellowish brown (10 YR 4/2). Intense hydrocarbon odor.
10			1656		
15			1710		13'-31.5' <u>Sand and Gravel</u> - Moderate yellowish brown (10 YR 5/4) to medium gray (N5). Sand is medium to very coarse grained, subangular to subrounded. Gravel is subangular to well rounded, to 2" diameter. Strong hydrocarbon odor below 25'.
20			1720		
25			1730		
30			1734		
35			1752		
40		T.D. 39.5'	1808		31.5'-39.5' <u>Shale - Macimiento Formation</u> - Dusky yellow (5 Y 6/4) to olive gray (5 Y 3/2).
45					
50					


FIGURE B-13

LITHOLOGIC LOG (SOIL)

PIEZOMETER P-3

Page 1 of 1

LOCATION MAP:

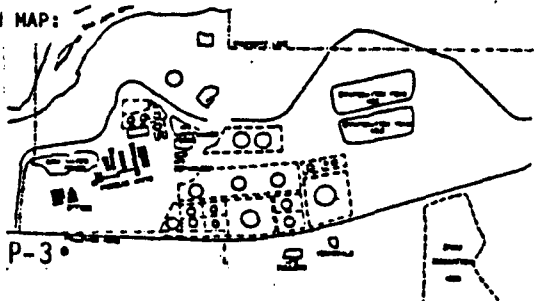

SITE ID: BRC LOCATION ID: P-3
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): 5507.20
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 1 September 1988 DATE COMPLETED: 1 September 1988
 FIELD REP.: W.S. Dubyk
 COMMENTS: Static on September 2, 1988; 8.30' from TOC.

____ 1/4 ____ 1/4 ____ 1/4 ____ 1/4 S ____ T ____ R ____

LOCATION DESCRIPTION:

Depth	Visual %	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5	100	Sand and Gravel	0902		0'-14' Sand and Gravel - Medium gray (N5) to dark gray (N3). Sand is medium to coarse grained, subangular to subrounded. Gravel is subrounded to rounded, to 2" diameter. Strong hydrocarbon odor.
10	100	Sand and Gravel	0913		
15	100	Shale	0920		14'-22.7' Shale: Nacimiento Formation - Dusky yellow (5 YR 6/4) to light olive gray (5 Y 6/1) shale.
20	100	Shale	0925		
25	100	T.D. 22.7'	1000		
30	100				
35	100				
40	100				
45	100				
50	100				

5506.4 GFD
 14.0
 5520.4


FIGURE B-14

LITHOLOGIC LOG (SOIL)

PIEZOMETER P-4

Page 1 of 1

LOCATION MAP:

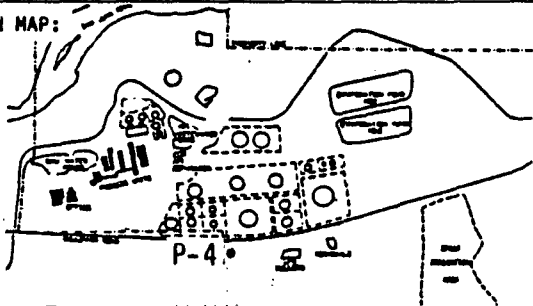


SITE ID: BRC LOCATION ID: P-4 (MW-13)
 SITE COORDINATES (ft.): _____
 N _____ E _____
 GROUND ELEVATION (ft. MSL): 5538.42
 STATE: New Mexico COUNTY: San Juan
 DRILLING METHOD: Casing Driver
 DRILLING CONTR.: Beeman Brothers
 DATE STARTED: 2 September 1988 DATE COMPLETED: 3 September 1988
 FIELD REP.: W.S. Dobyk
 COMMENTS: Static on September 9, 1988: 37.91' from TOC.

____ 1/4 ____ 1/4 ____ 1/4 ____ 1/4 S ____ T ____ R ____

LOCATION DESCRIPTION:


Depth	Visual X	Lith	Drilling Time Scale:	Sample Type and Interval	Lithologic Description
5					0'-27' <u>Silt and Clay</u> - Moderate brown (5 YR 4/4) to light brown (5 YR 5/6).
10					
15					
20					
25			1233		
30					27'-30' <u>Sand</u> - Very pale or (5 YR 8/2) fine to coarse grained, angular to subangular predominantly quartz.
35					30'-40' <u>Gravel and Sand</u> - Light gray (N7). Sand is medium to coarse grained, subrounded to rounded. Gravel is subangular to rounded, up to 3" diameter.
40			1415		41'-43' <u>Clay</u> - Pale olive (10 Y 6/2), plastic.
45			1420		43'-45' <u>Gravel and Sand</u> - As above.
50			1455		45'-51' <u>Sand; Nacimiento Formation</u> - light bluish grey (5B7/1) Fine grained, silty.
		T.D. 51'			

5535.12
 45
 5490.12

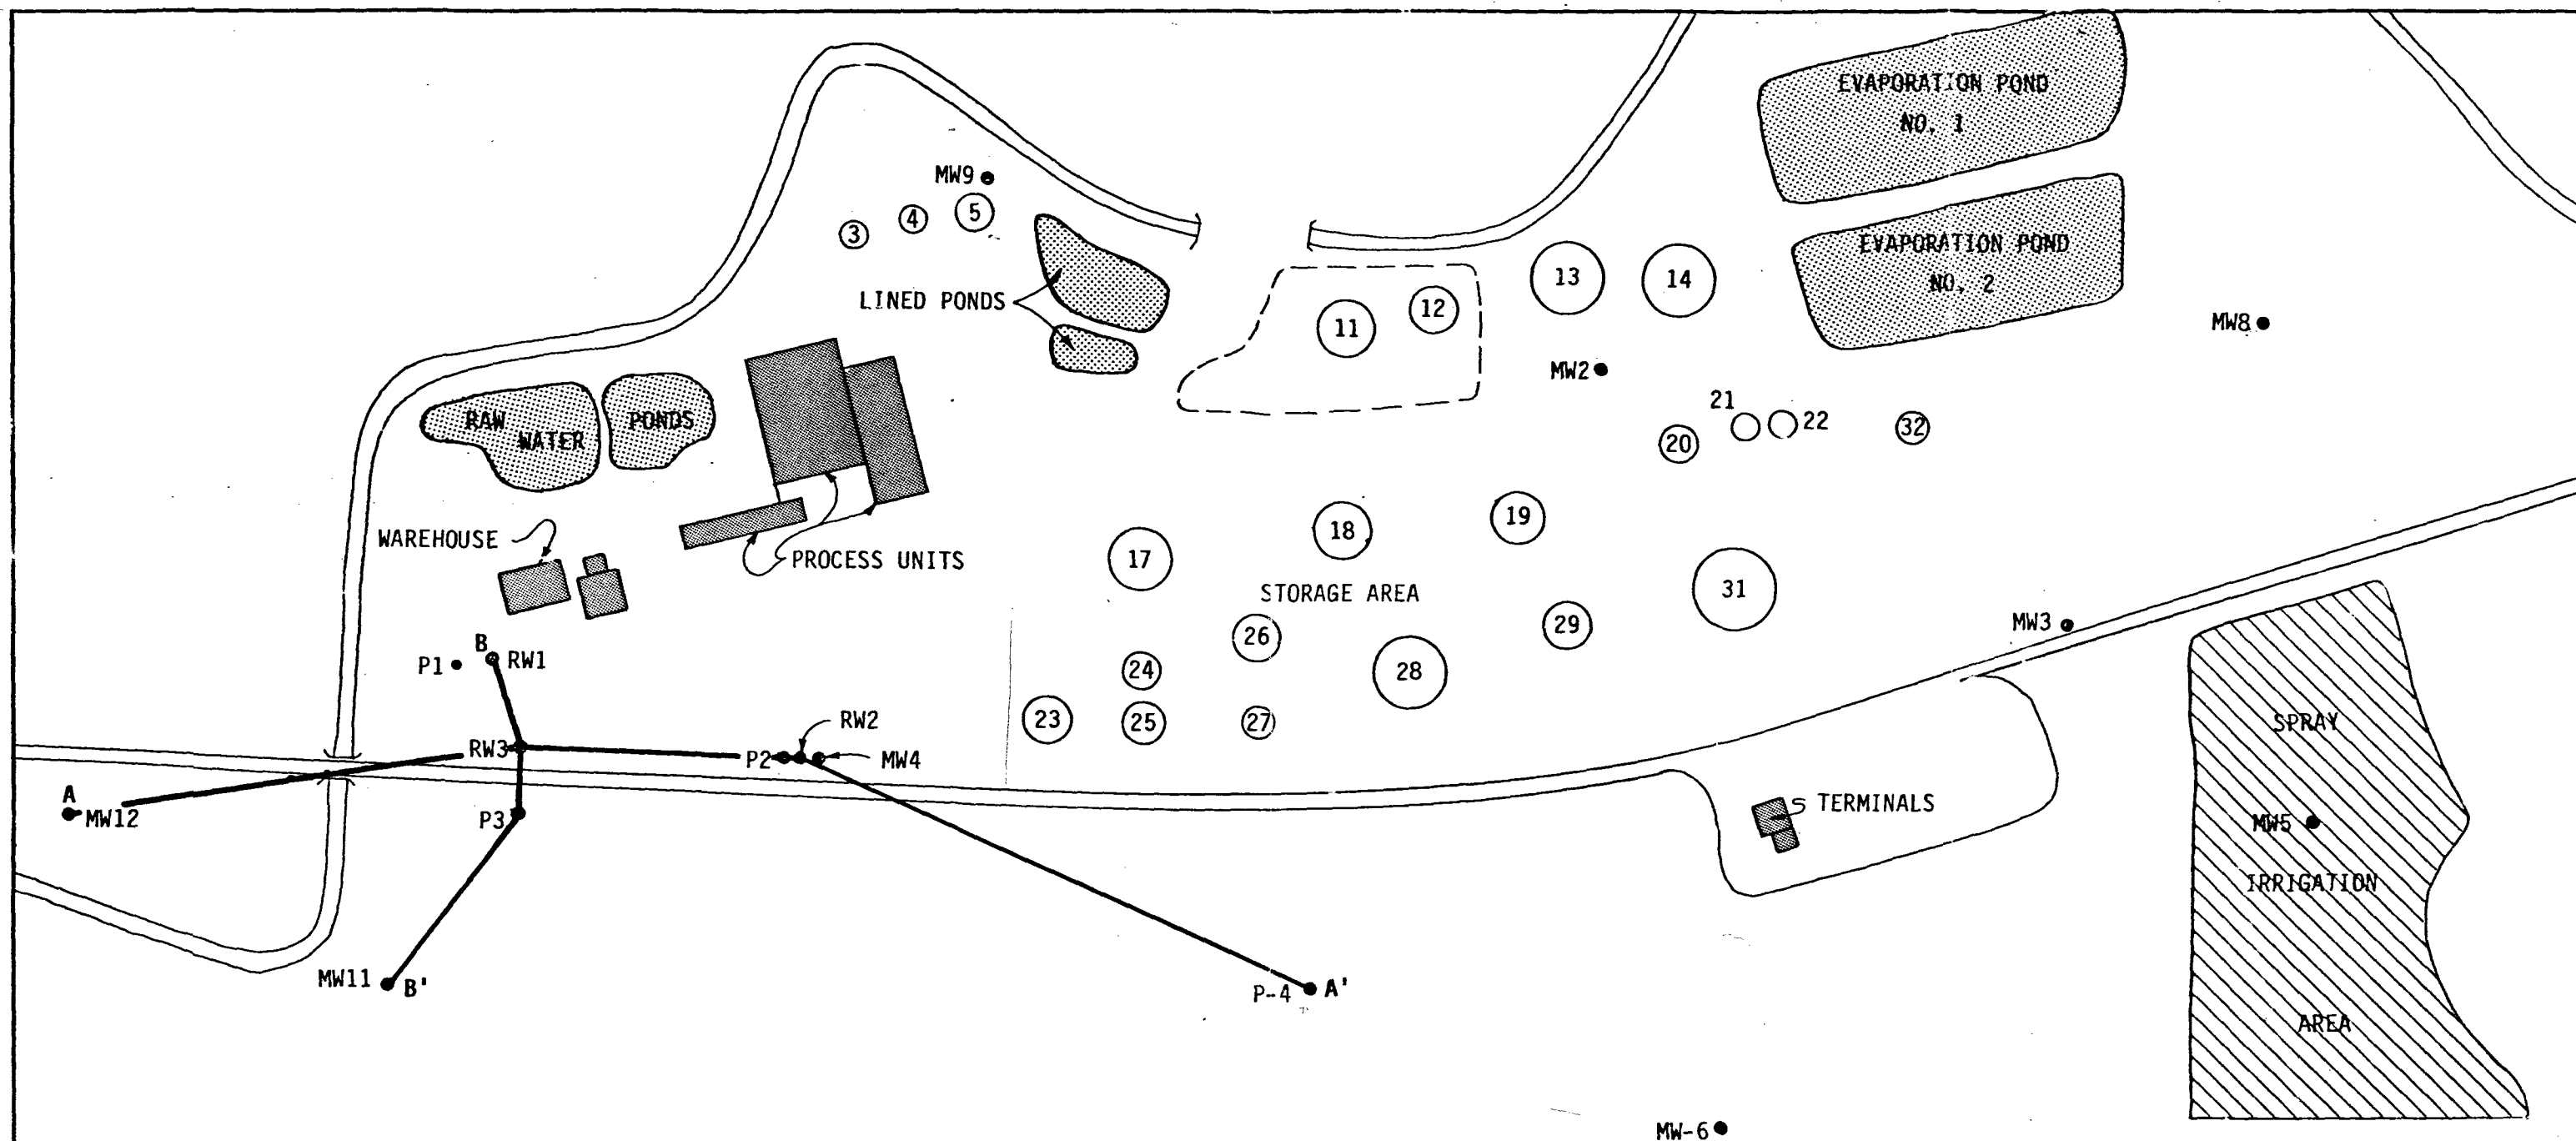

EXPLANATION

- RW1 - RECOVERY WELL
- P1 - PIEZOMETER WELL
- MW9 - MONITOR WELL LOCATION
- A,A' B,B' - CROSS SECTION LOCATIONS

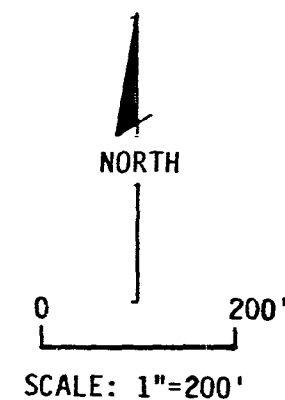

	<p>PLATE 1</p> <p>WELL LOCATIONS</p>	
	CLIENT:	
	DATE:	
	DRAWN BY:	
	CHECKED BY:	
	SCALE:	



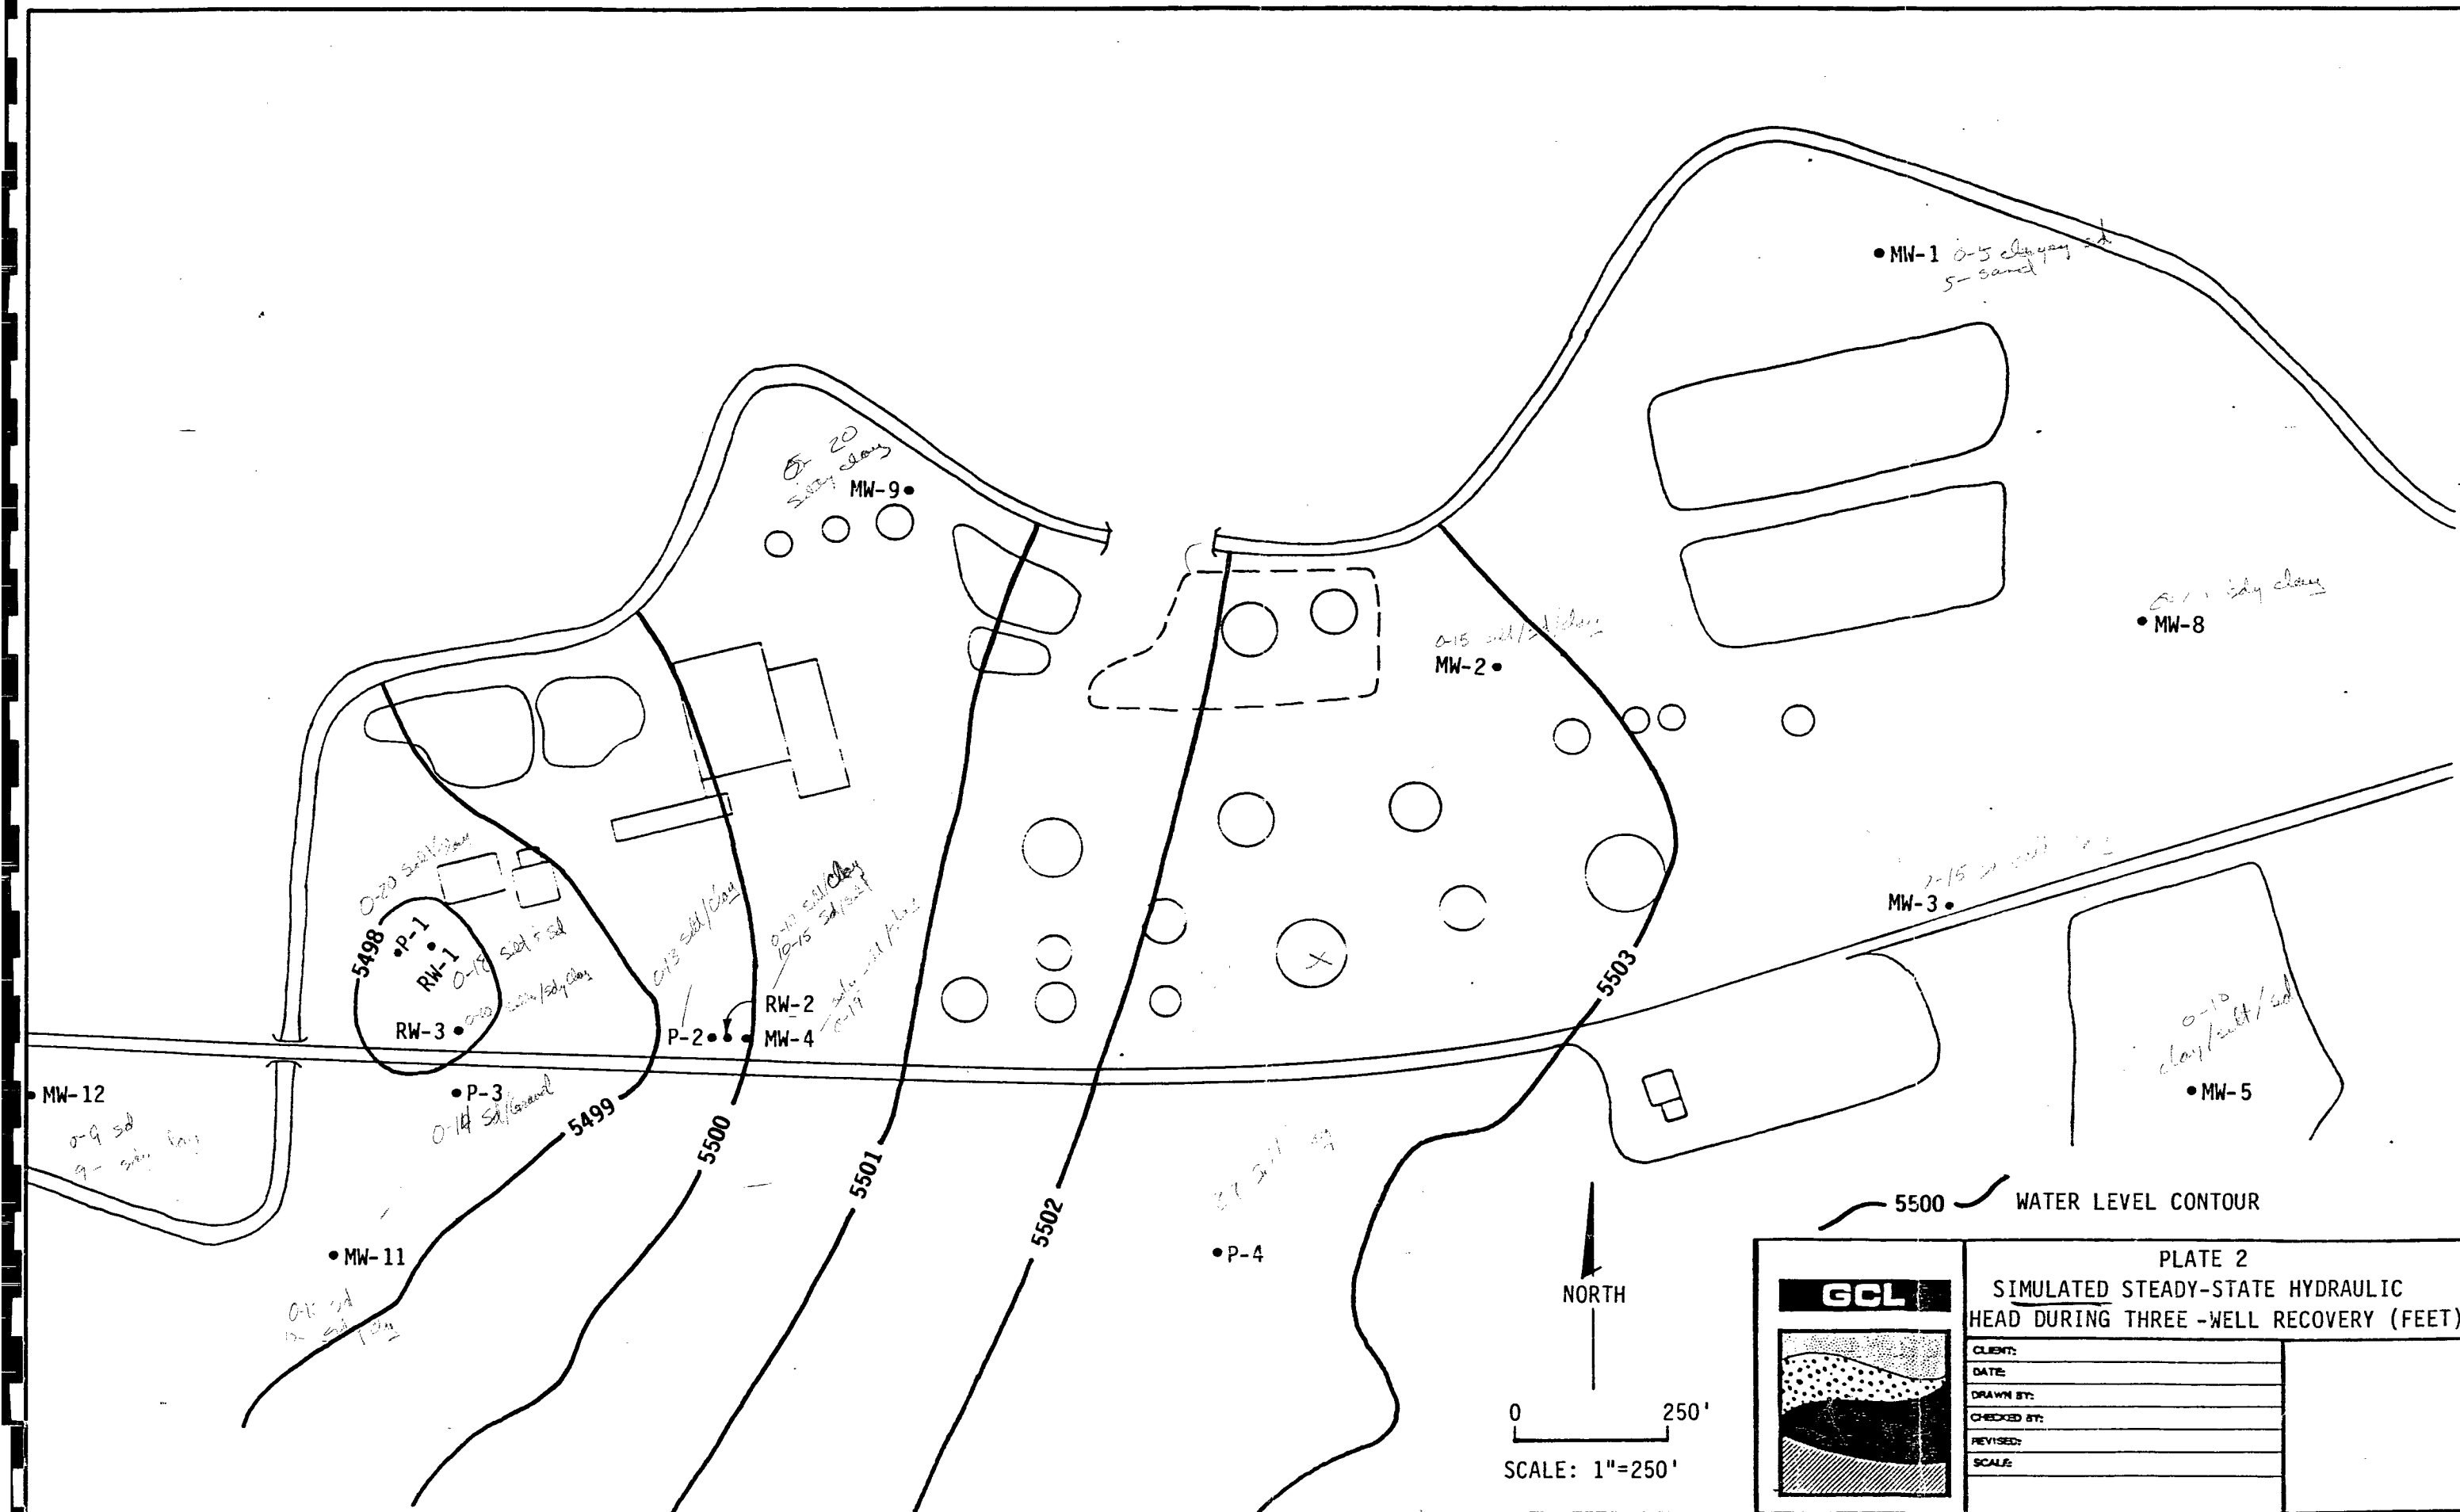



PLATE 2	
SIMULATED STEADY-STATE HYDRAULIC HEAD DURING THREE -WELL RECOVERY (FEET)	
CLIENT:	
DATE:	
DRAWN BY:	
CHECKED BY:	
REVISED:	
SCALE:	

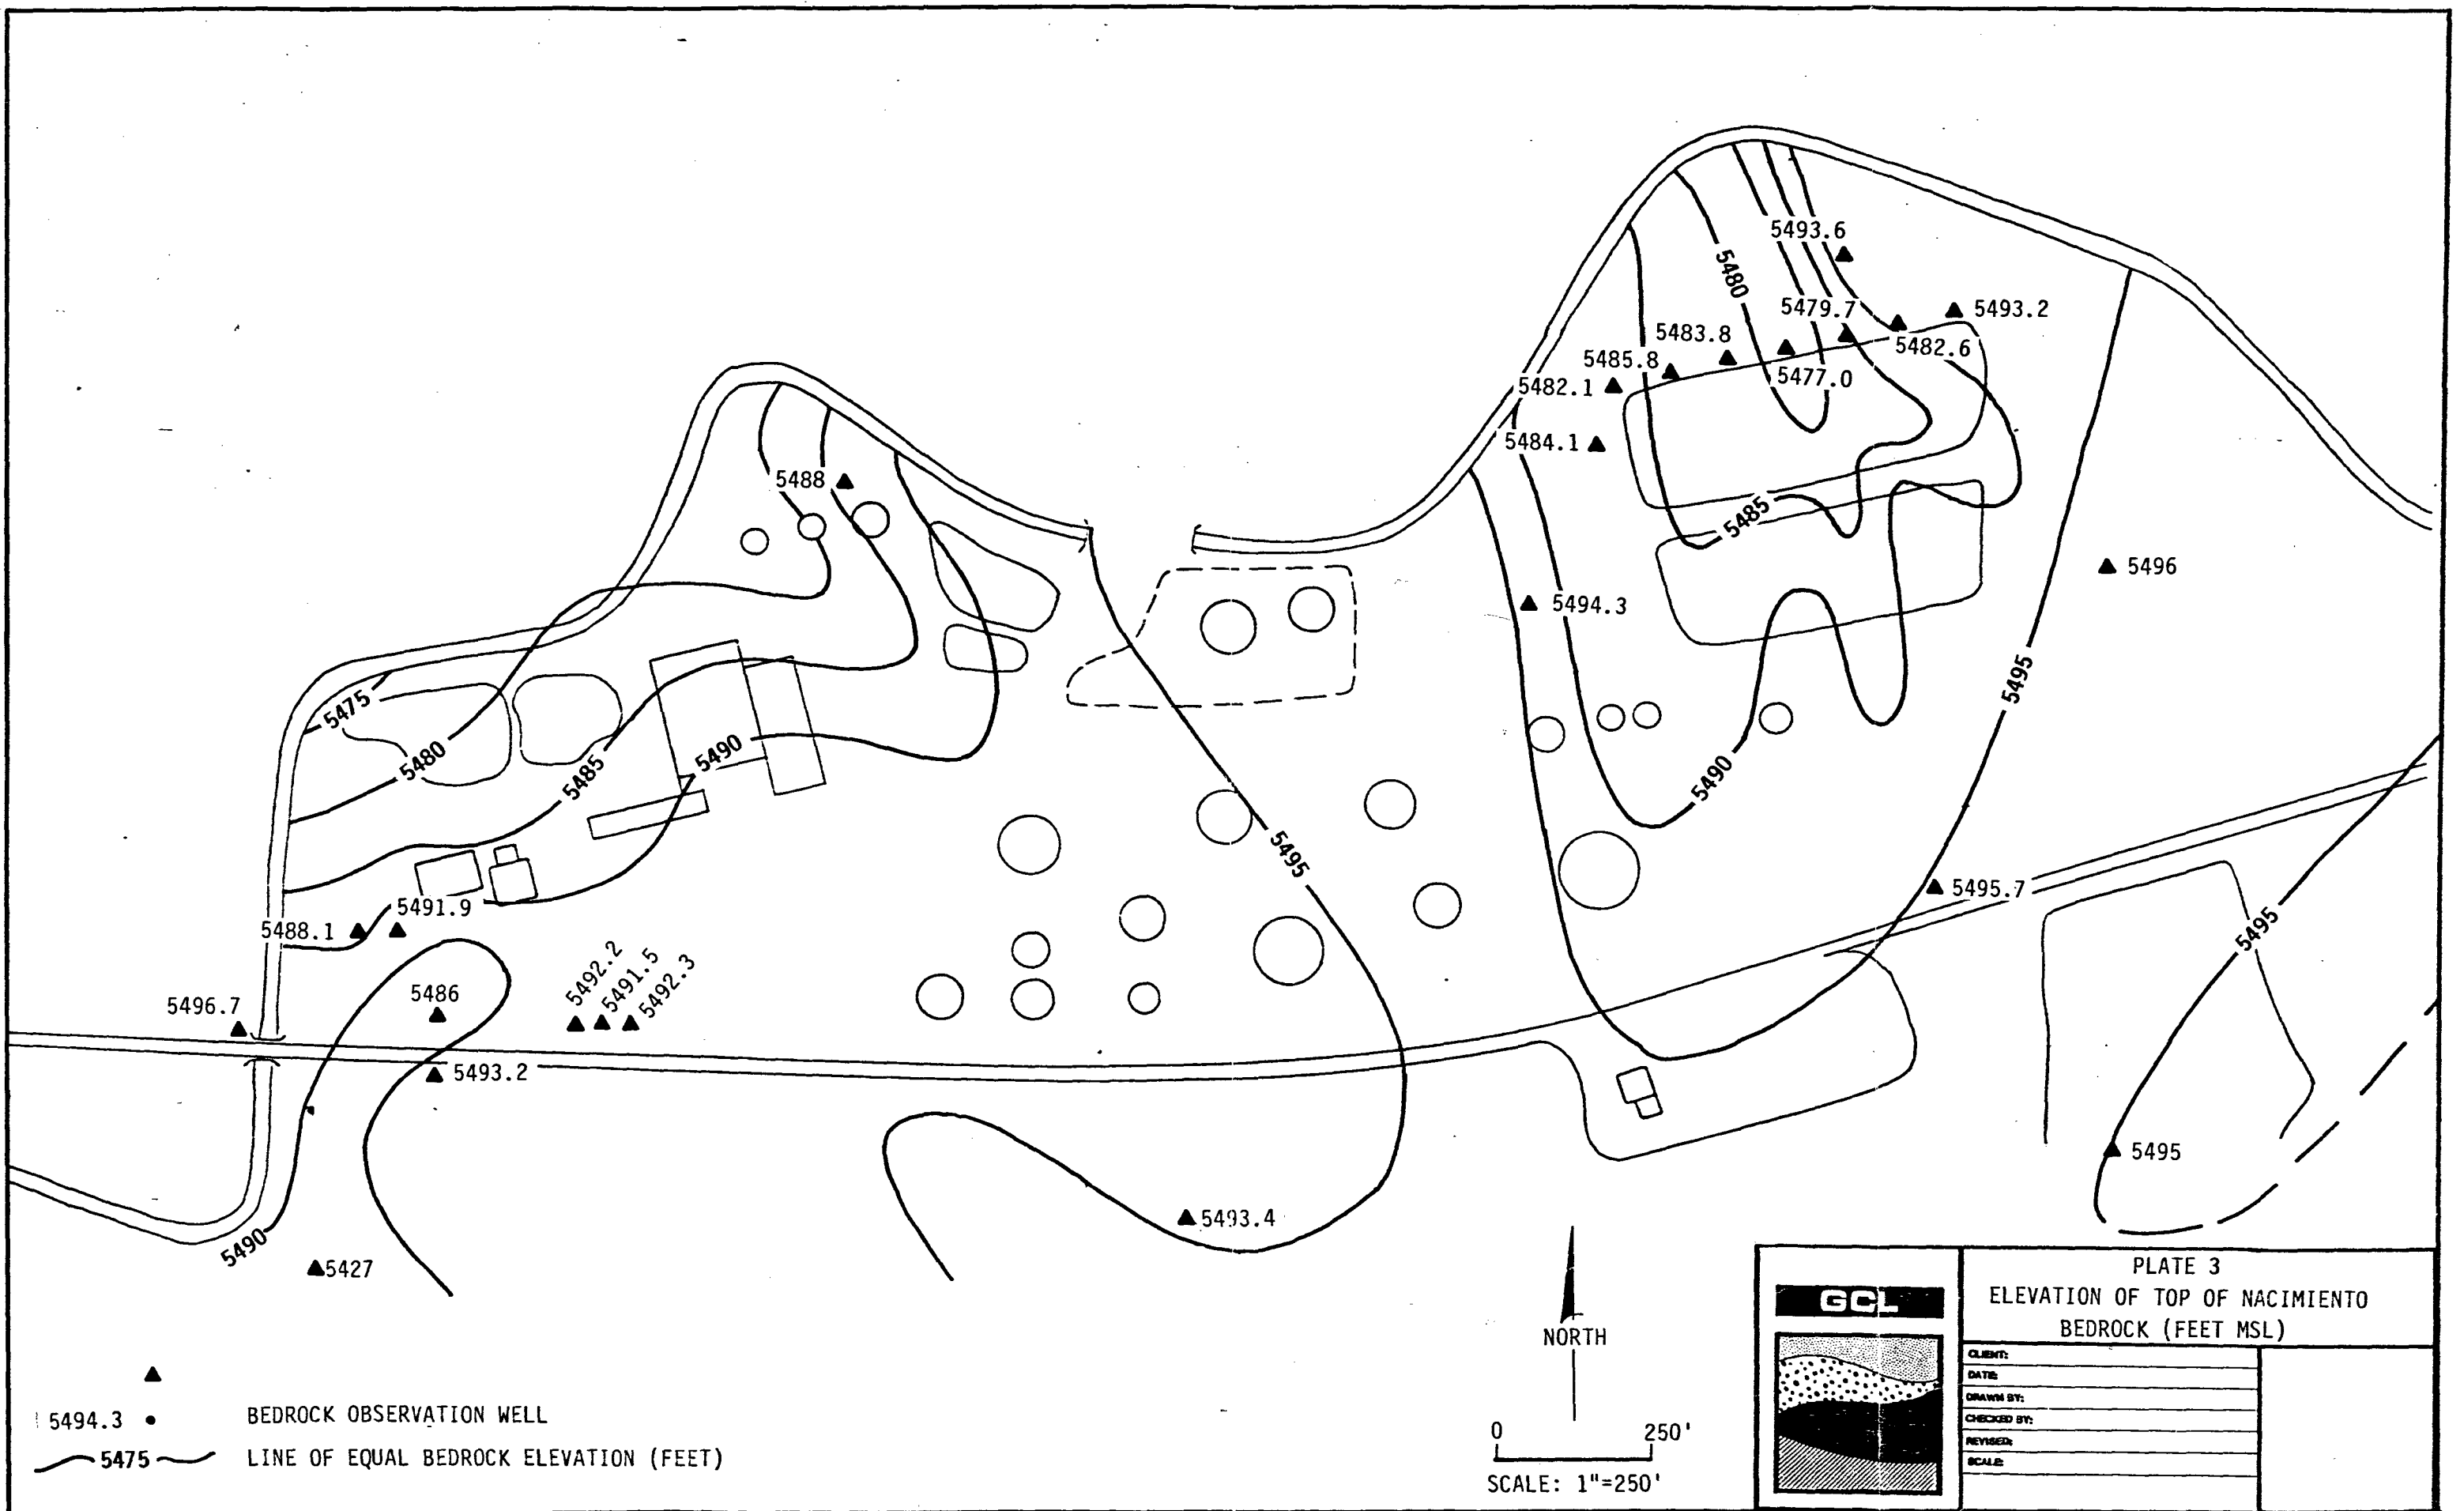

GCL		PLATE 3 ELEVATION OF TOP OF NACIMIENTO BEDROCK (FEET MSL)	
CLIENT:			
DATE:			
DRAWN BY:			
CHECKED BY:			
REVISED:			
SCALE:			

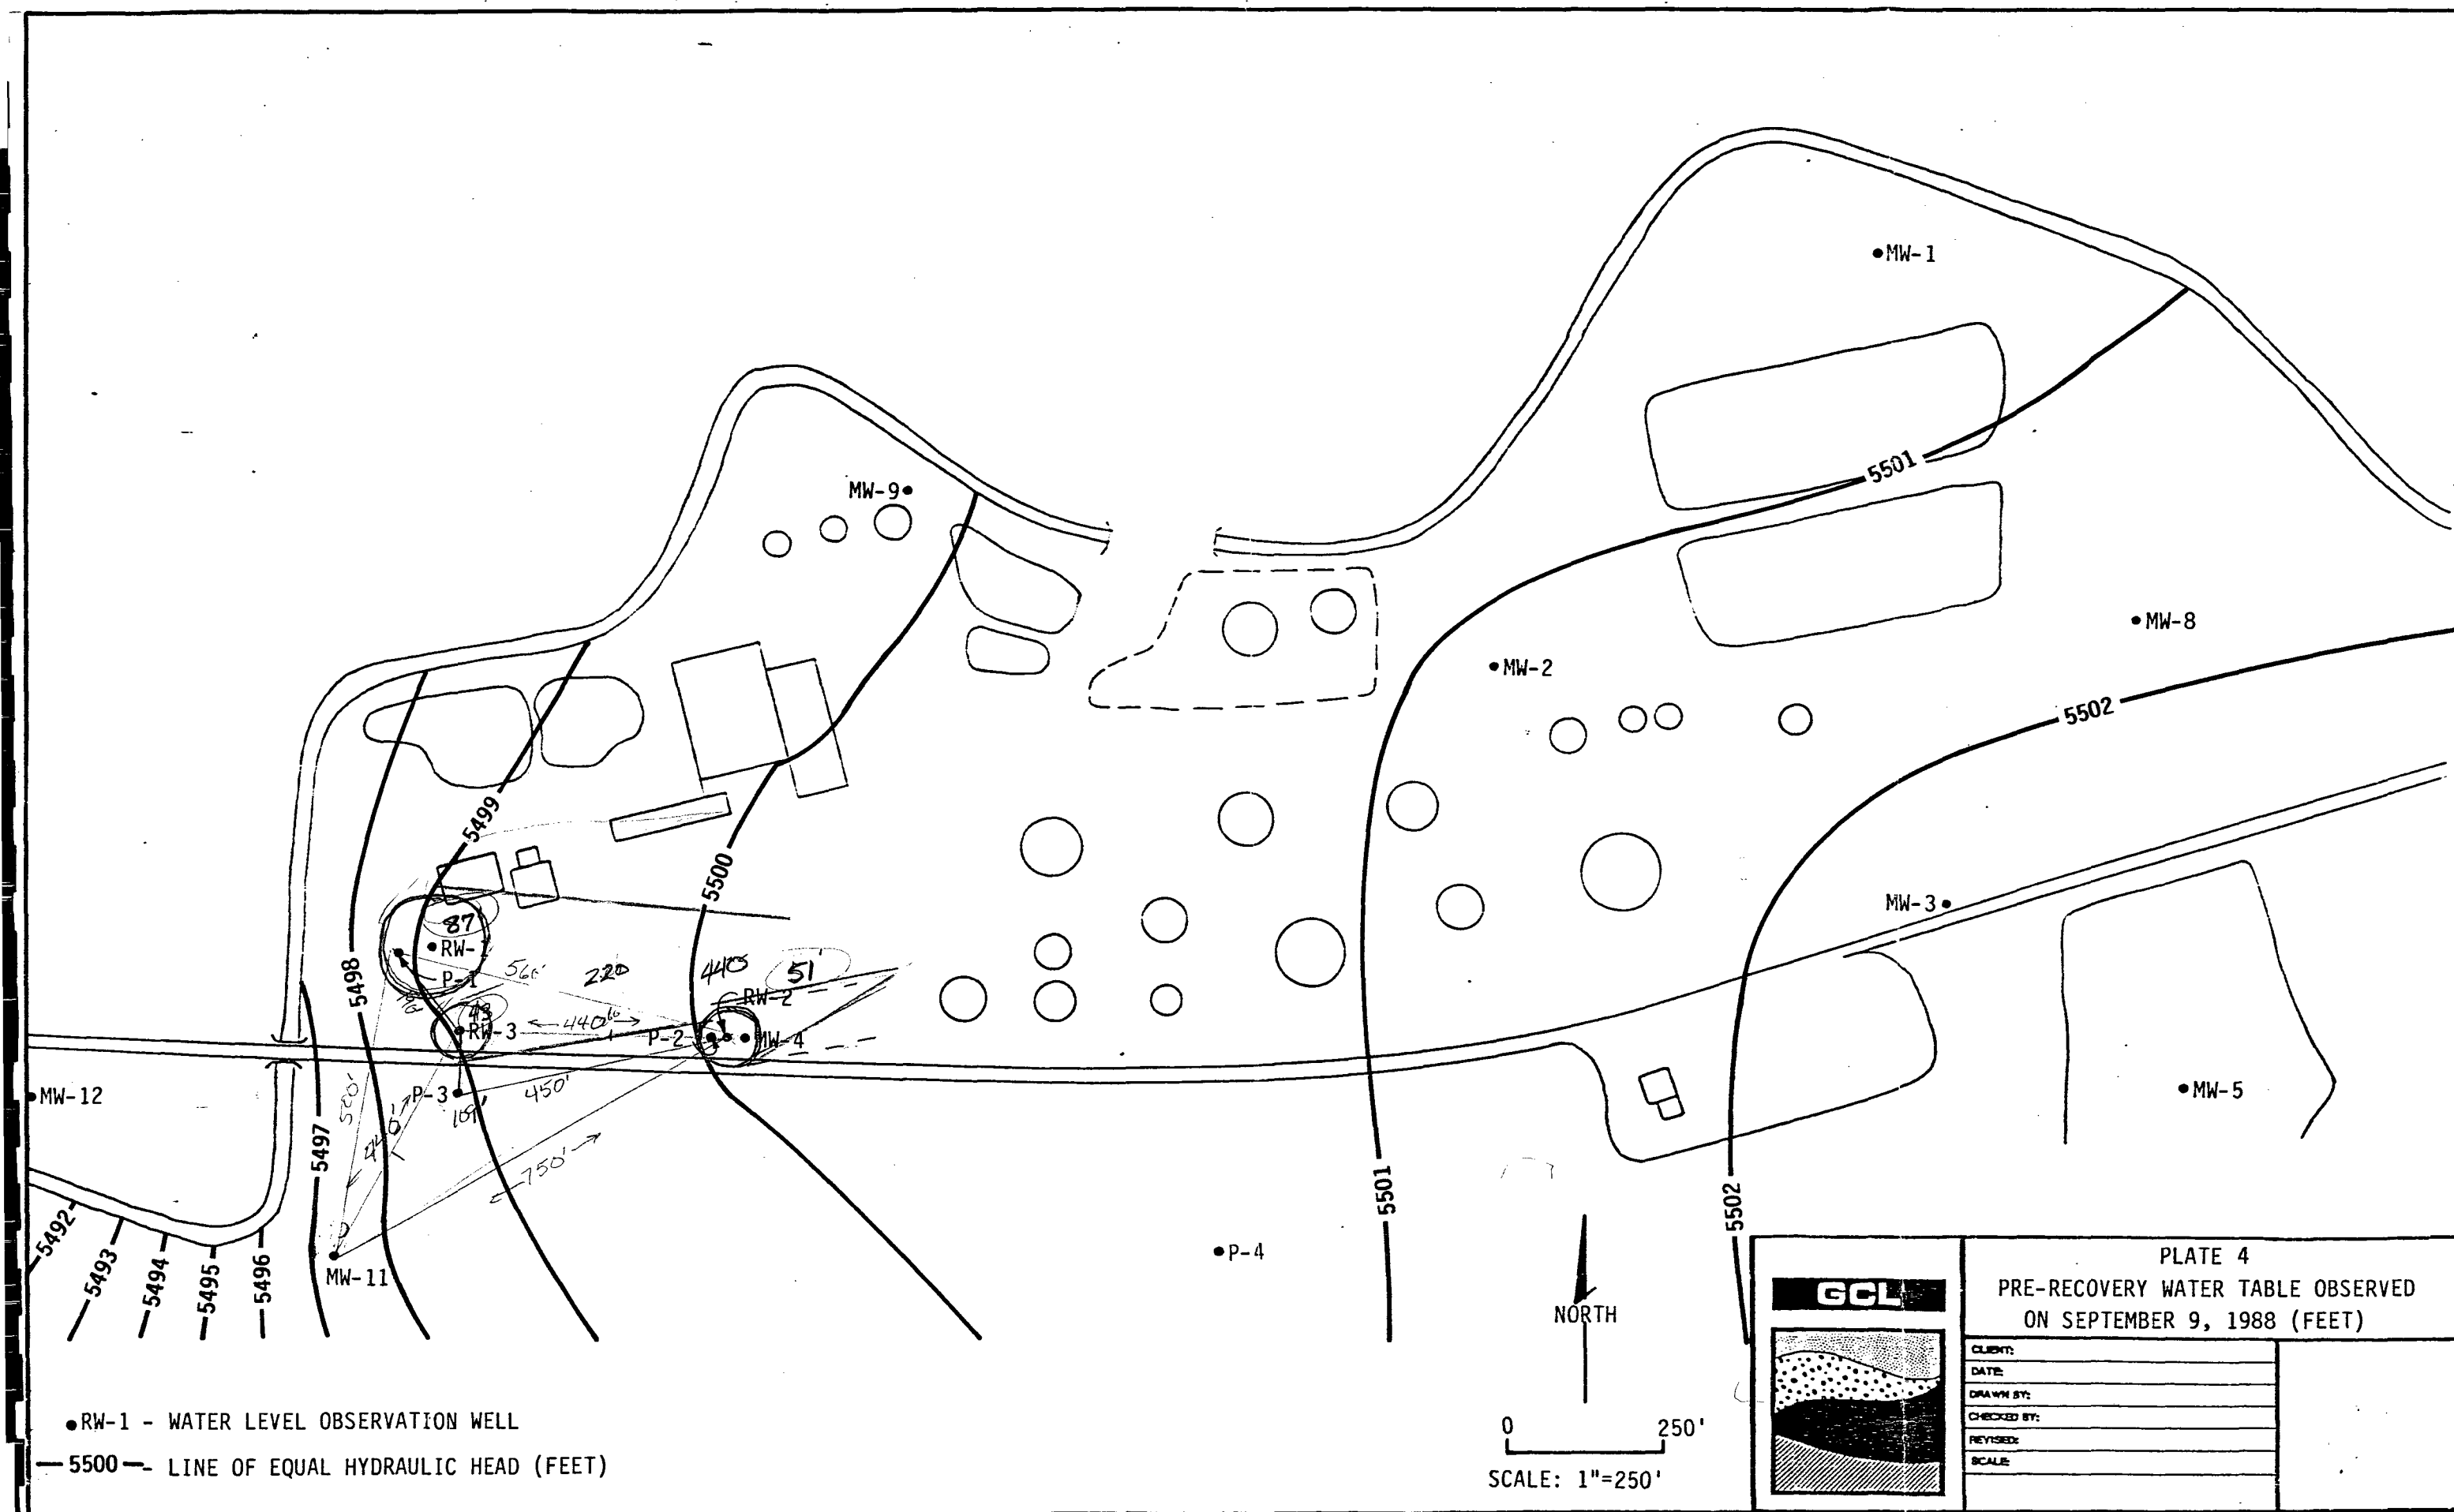

Possible water table map
 using data from data provided
 data not provided for several holes & contours
 assumed from 9/9/89 (bad assumption)
 very little capture zone

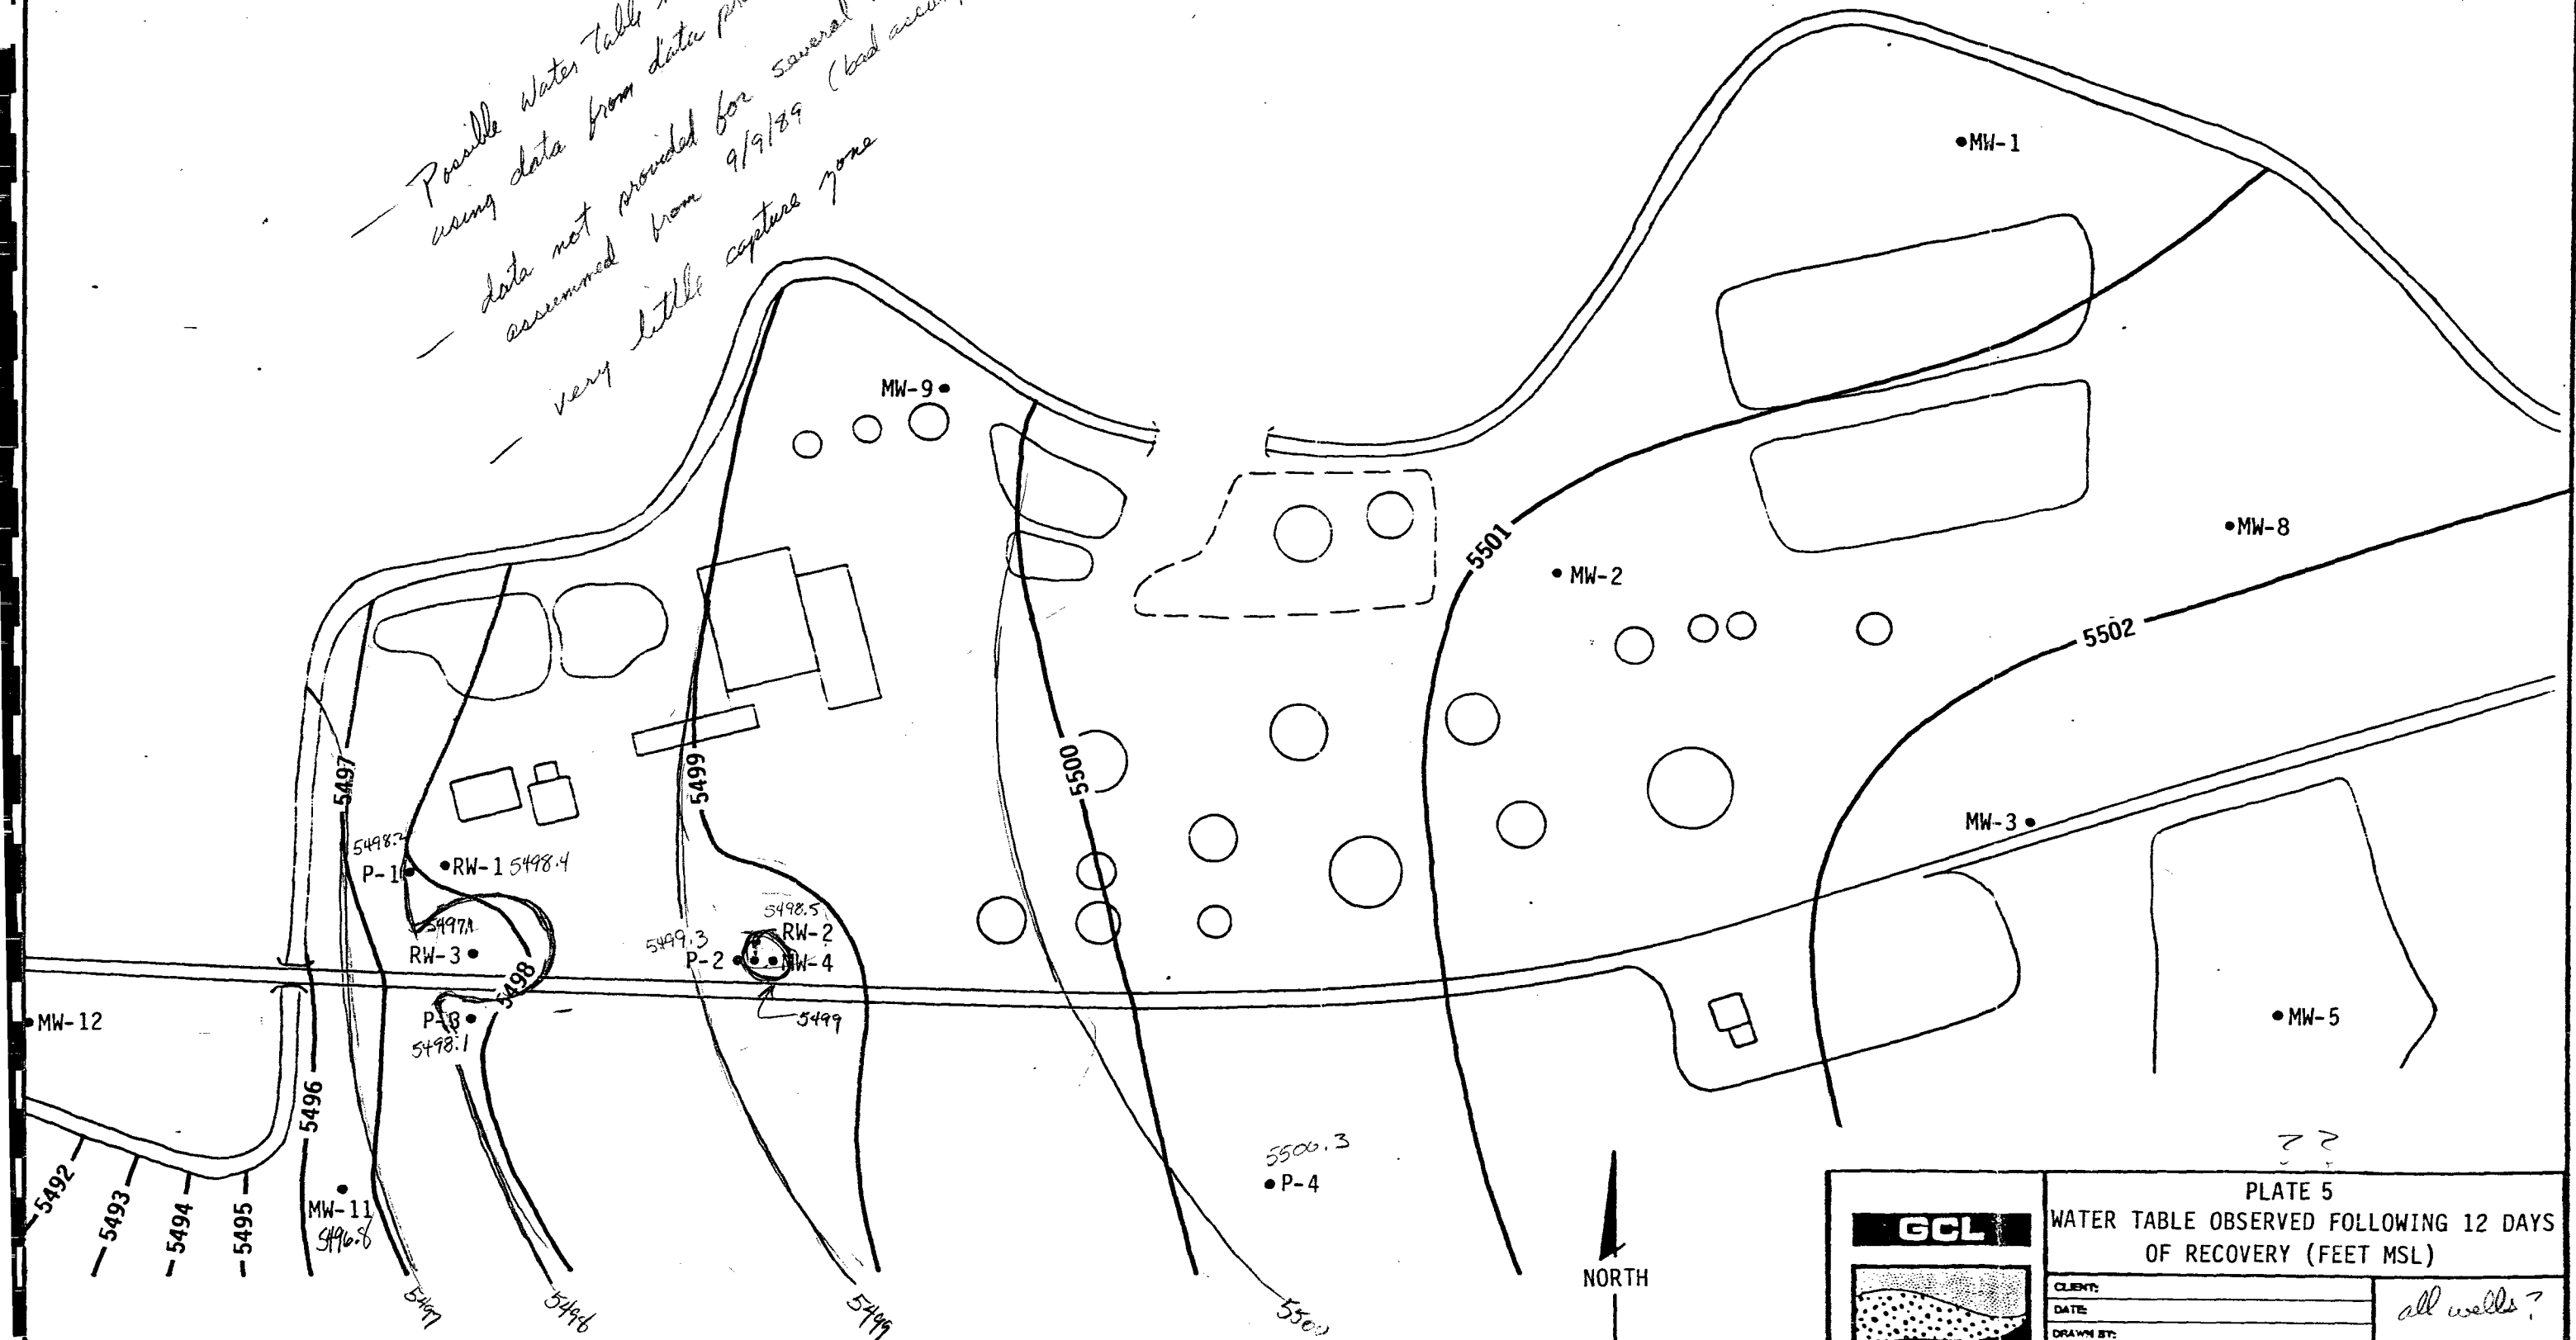

• RW-1 - WATER LEVEL OBSERVATION WELL
 — 5495 — - LINE OF EQUAL HYDRAULIC HEAD (FEET)


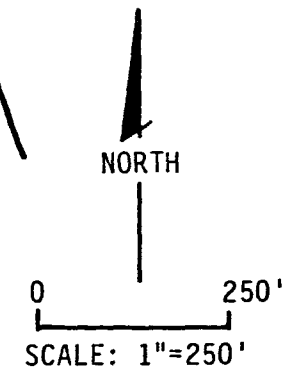


	PLATE 5 WATER TABLE OBSERVED FOLLOWING 12 DAYS OF RECOVERY (FEET MSL)	
	CLIENT:	<i>all wells? just RW-3, RW-2</i>
	DATE:	
	DRAWN BY:	
	CHECKED BY:	
REVISED:		
SCALE:		

are values for decline
 are taken from difference between
 water table values measured in 9/9/88
 values taken 1/28/89 — additional
 decline occurs as water discharges into Hammond
 ditch after irrigation season over

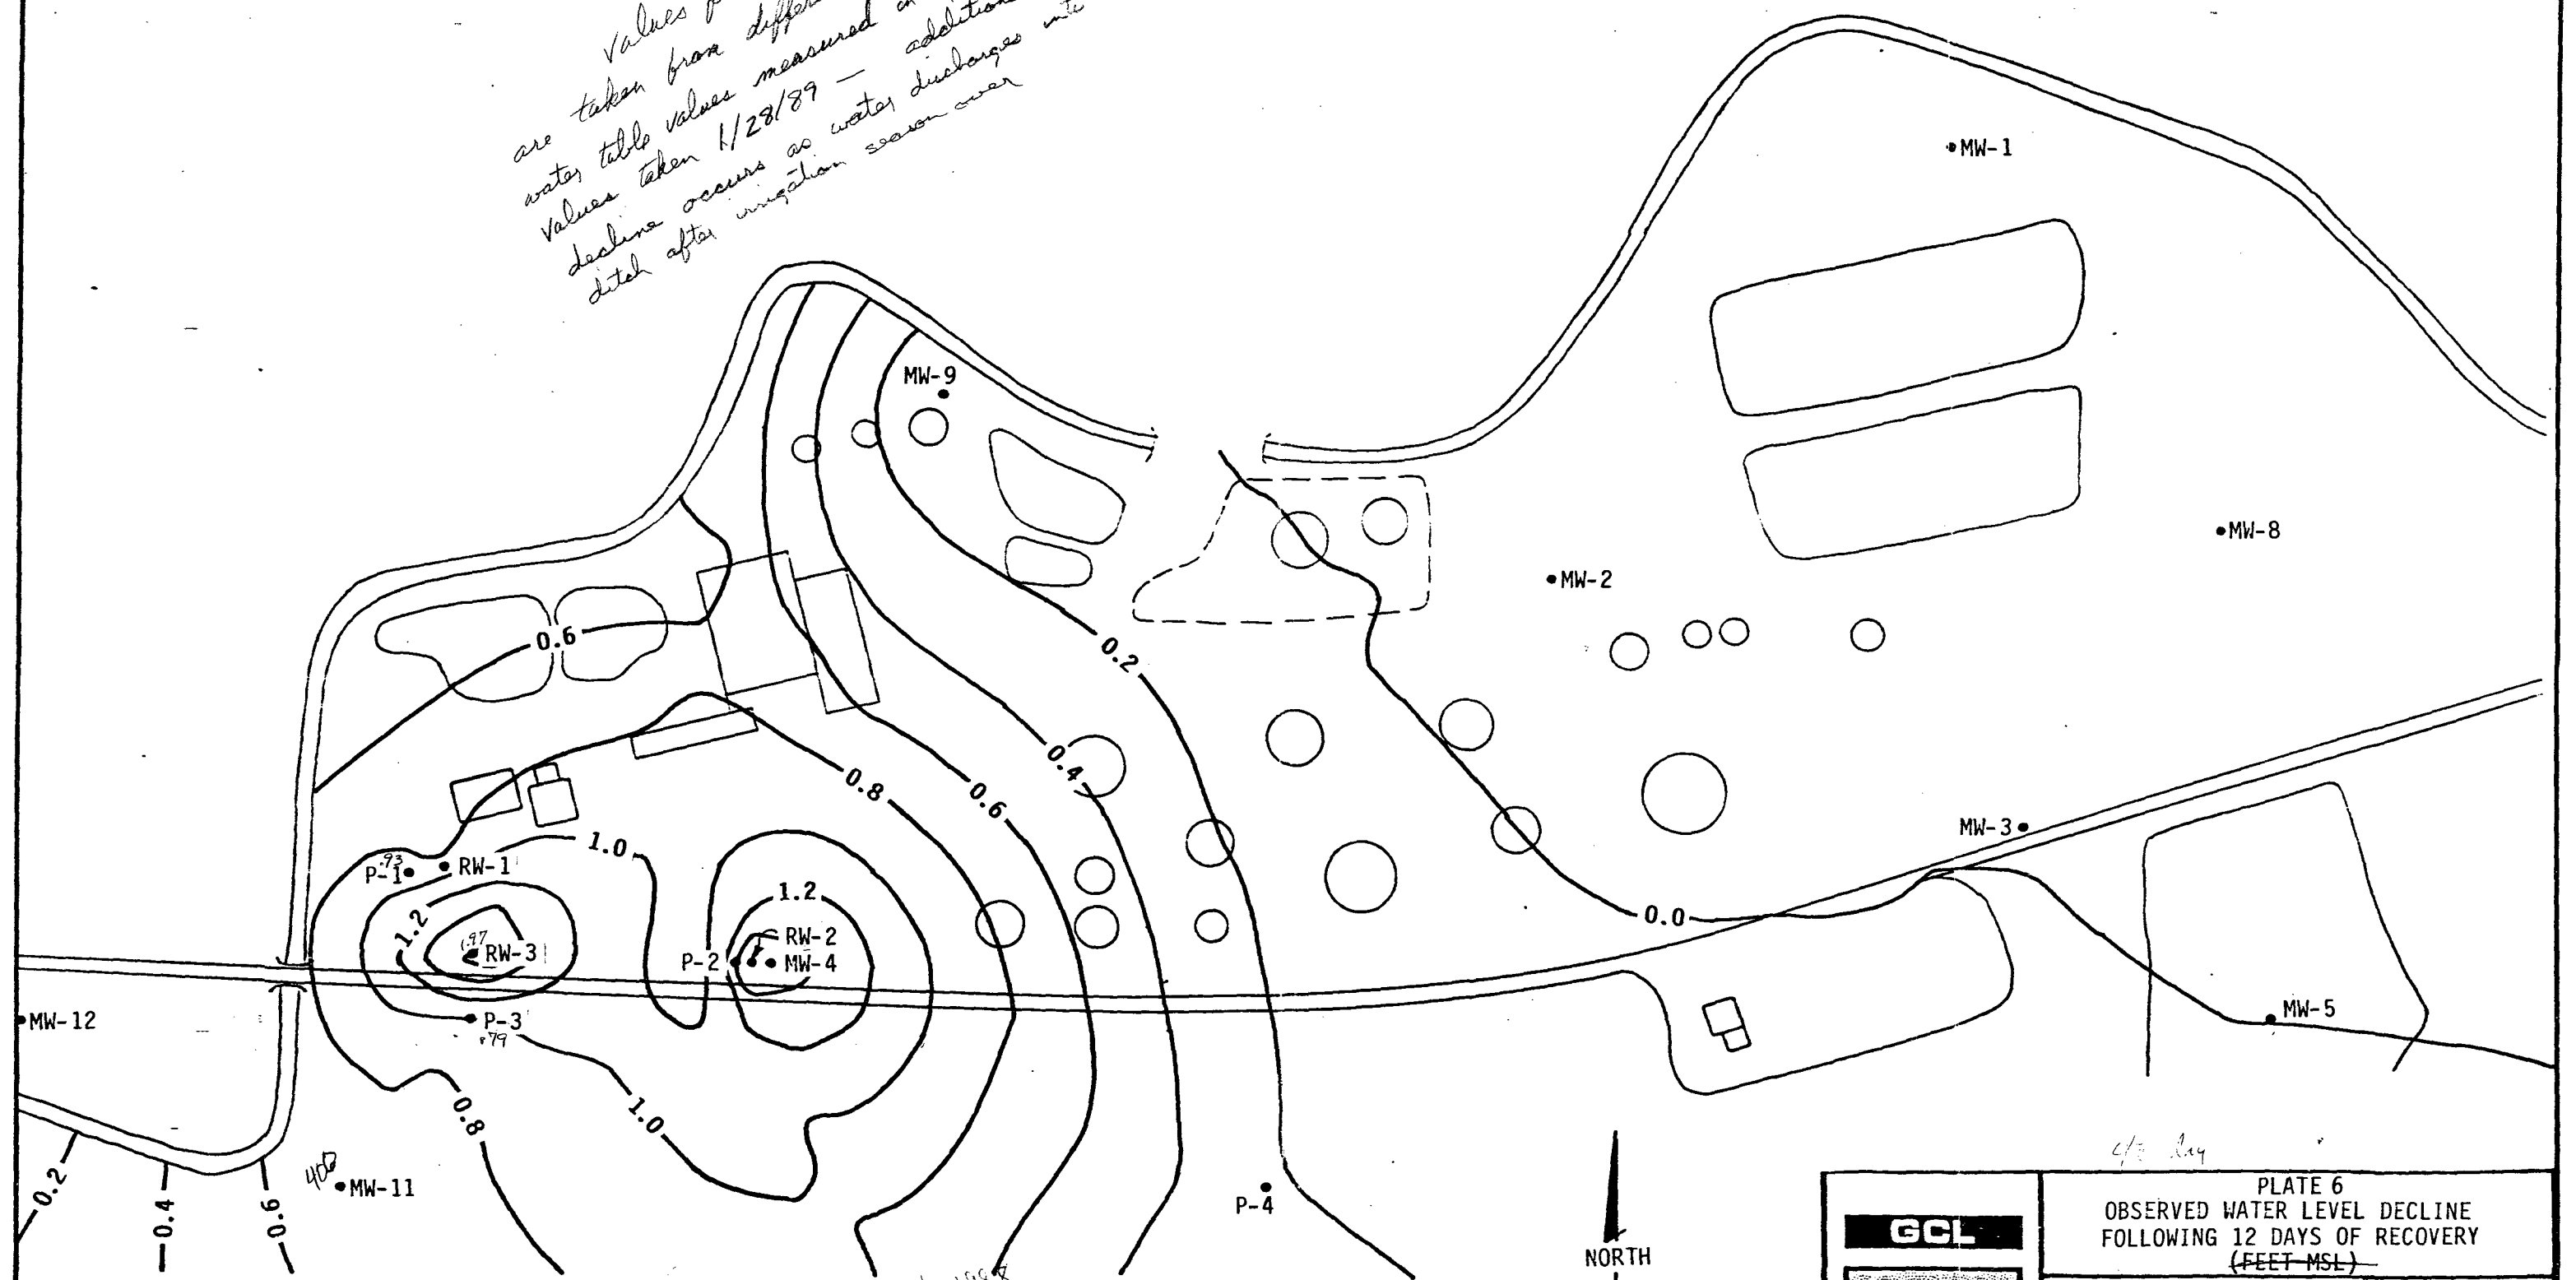

• RW-1 - WATER LEVEL OBSERVATION WELL
 — 1.0 — - LINE OF EQUAL WATER LEVEL DECLINE (FEET)


-42 at MW-4 1988



0 250'
 SCALE: 1"=250'



PLATE 6 OBSERVED WATER LEVEL DECLINE FOLLOWING 12 DAYS OF RECOVERY (FEET MSL)	
CLIENT:	
DATE:	
DRAWN BY:	
CHECKED BY:	
REVISED:	
SCALE:	
from RW-3 & RW-2	

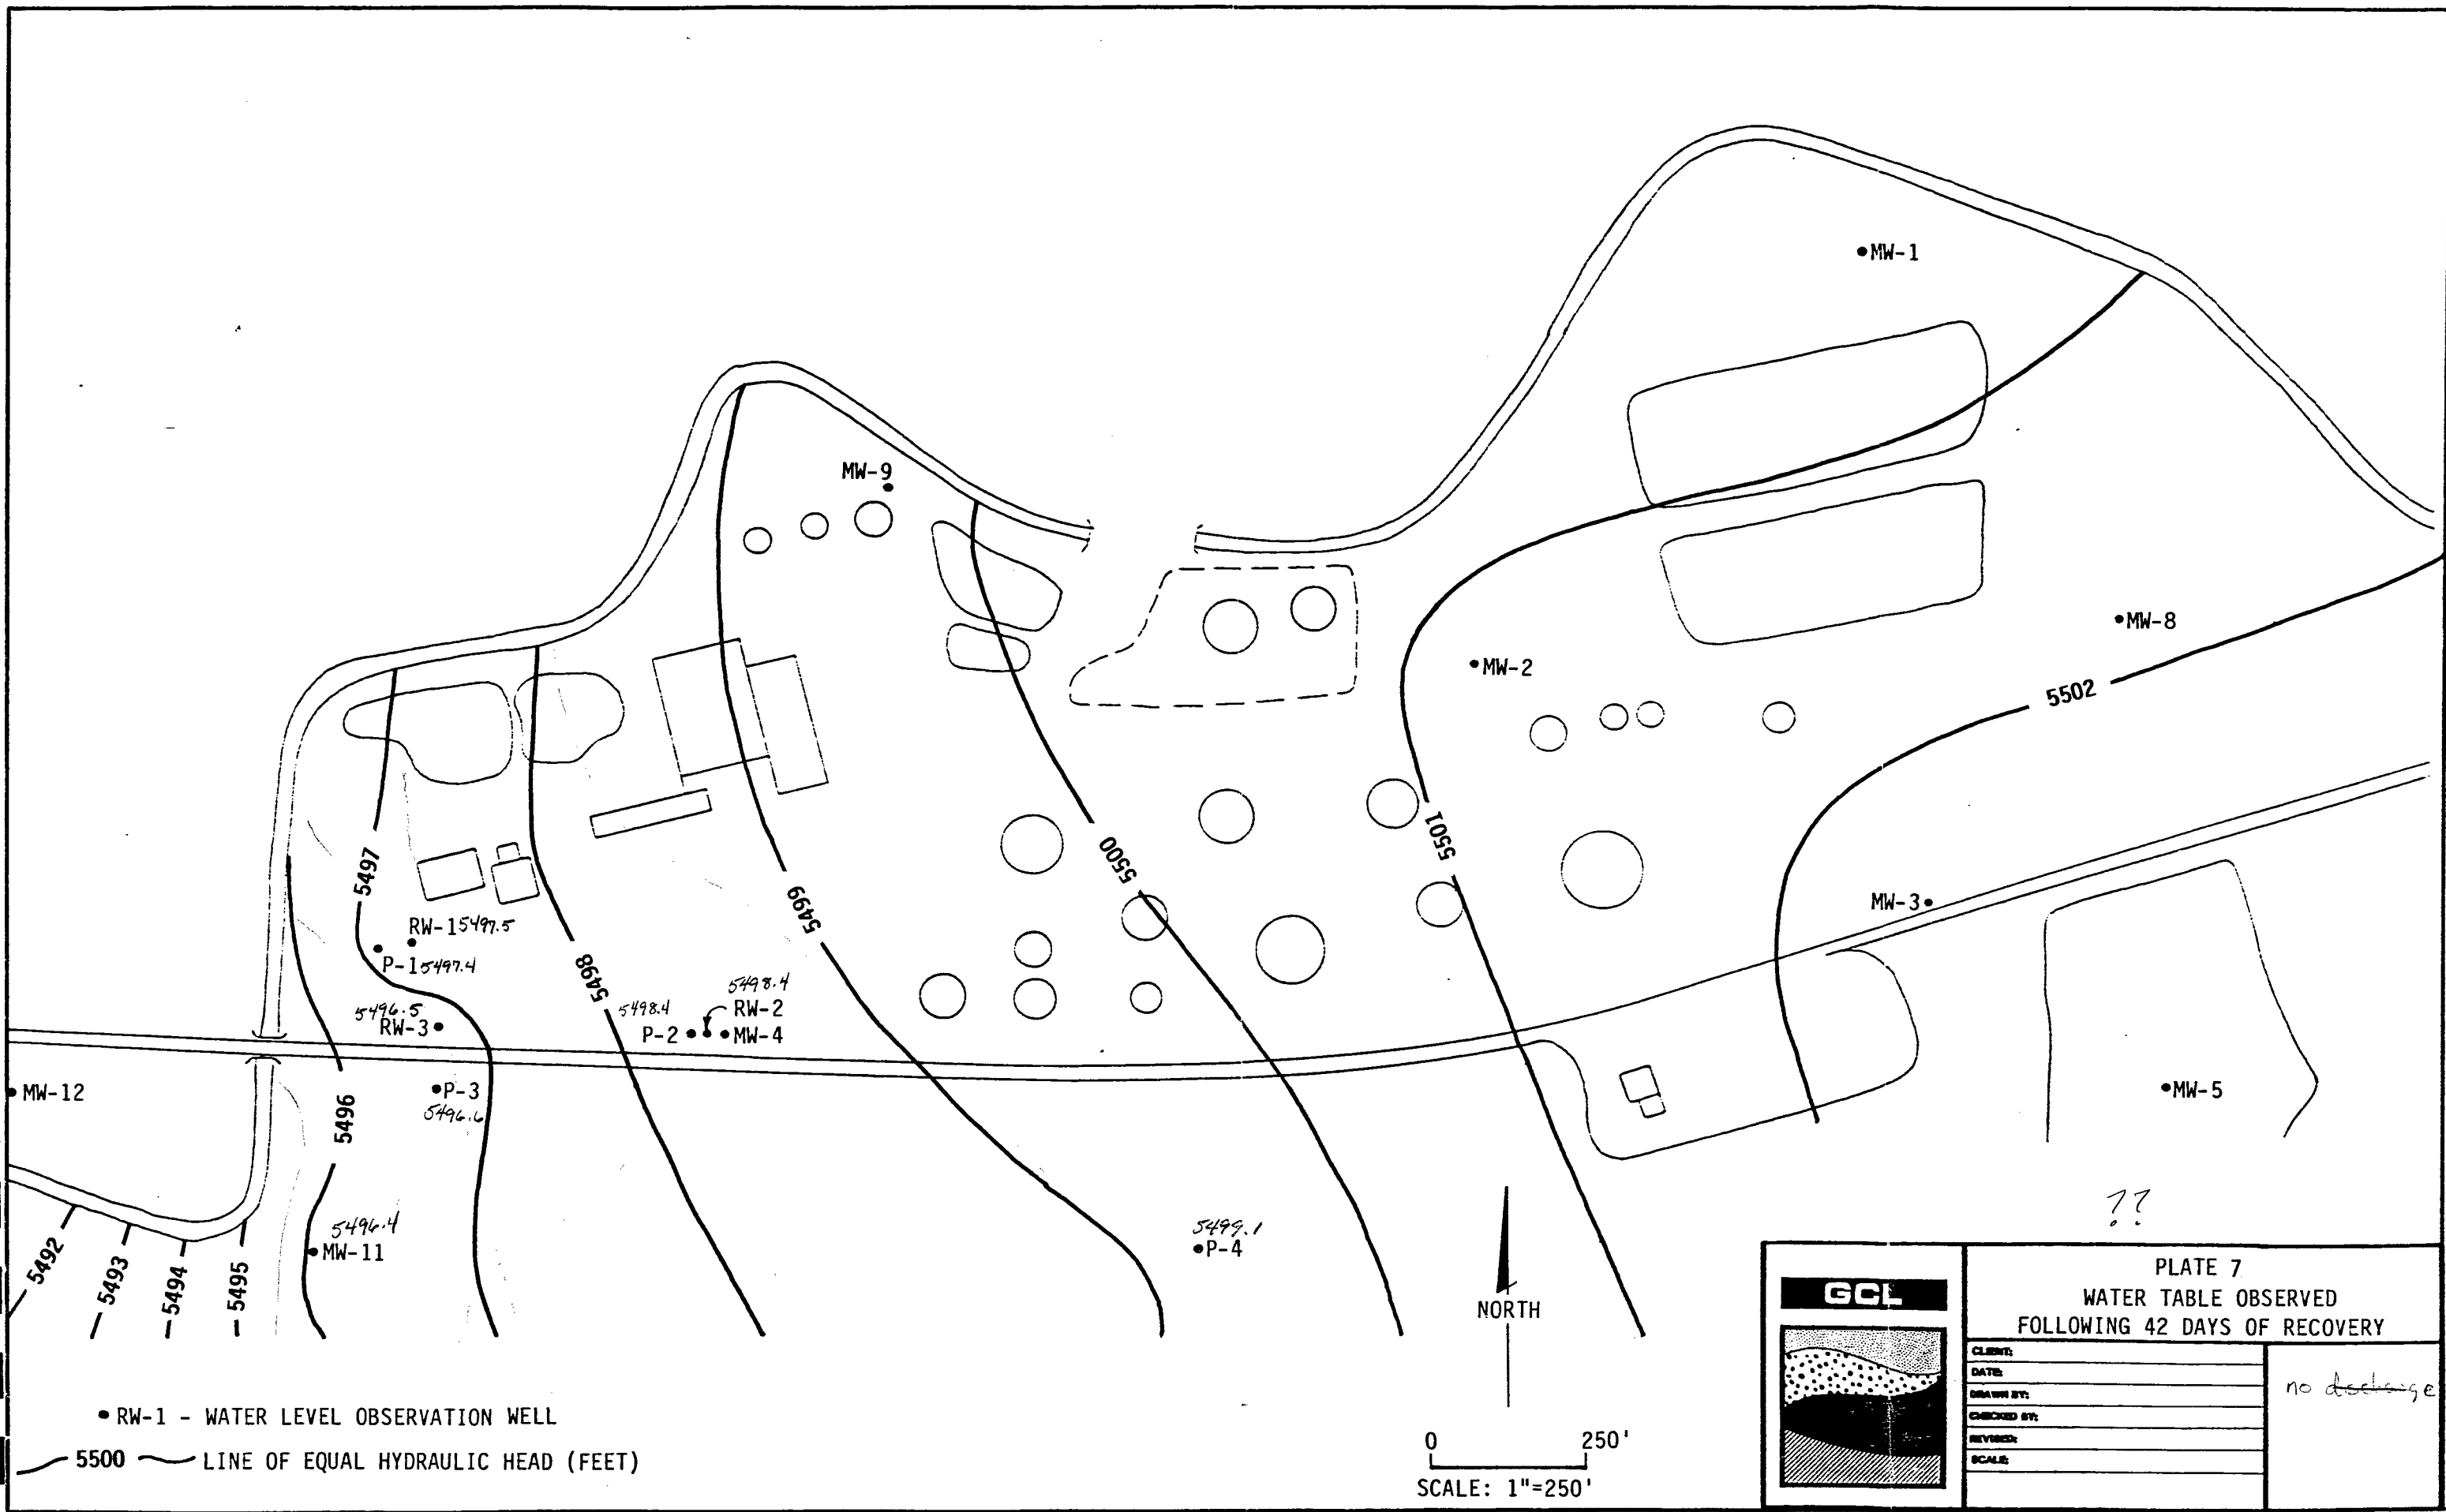





PLATE 7
WATER TABLE OBSERVED
FOLLOWING 42 DAYS OF RECOVERY

CLIENT:	
DATE:	
DRAWN BY:	
CHECKED BY:	
REVIEWED:	
SCALE:	

no discharge

additional 30 day drawdown
 difference btwn day 12 & day 48
 after pumping begins - includes drainage from entire aquifer to Hammond Ditch

recognise that major drawdown occurs
 shortly after pumping begins

Re-do
 we diff. Vm
 wL @ day 12
 wL @ day 42

Jan 16 - Feb 15

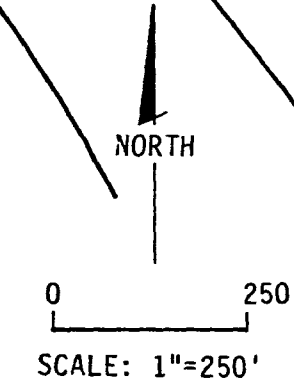
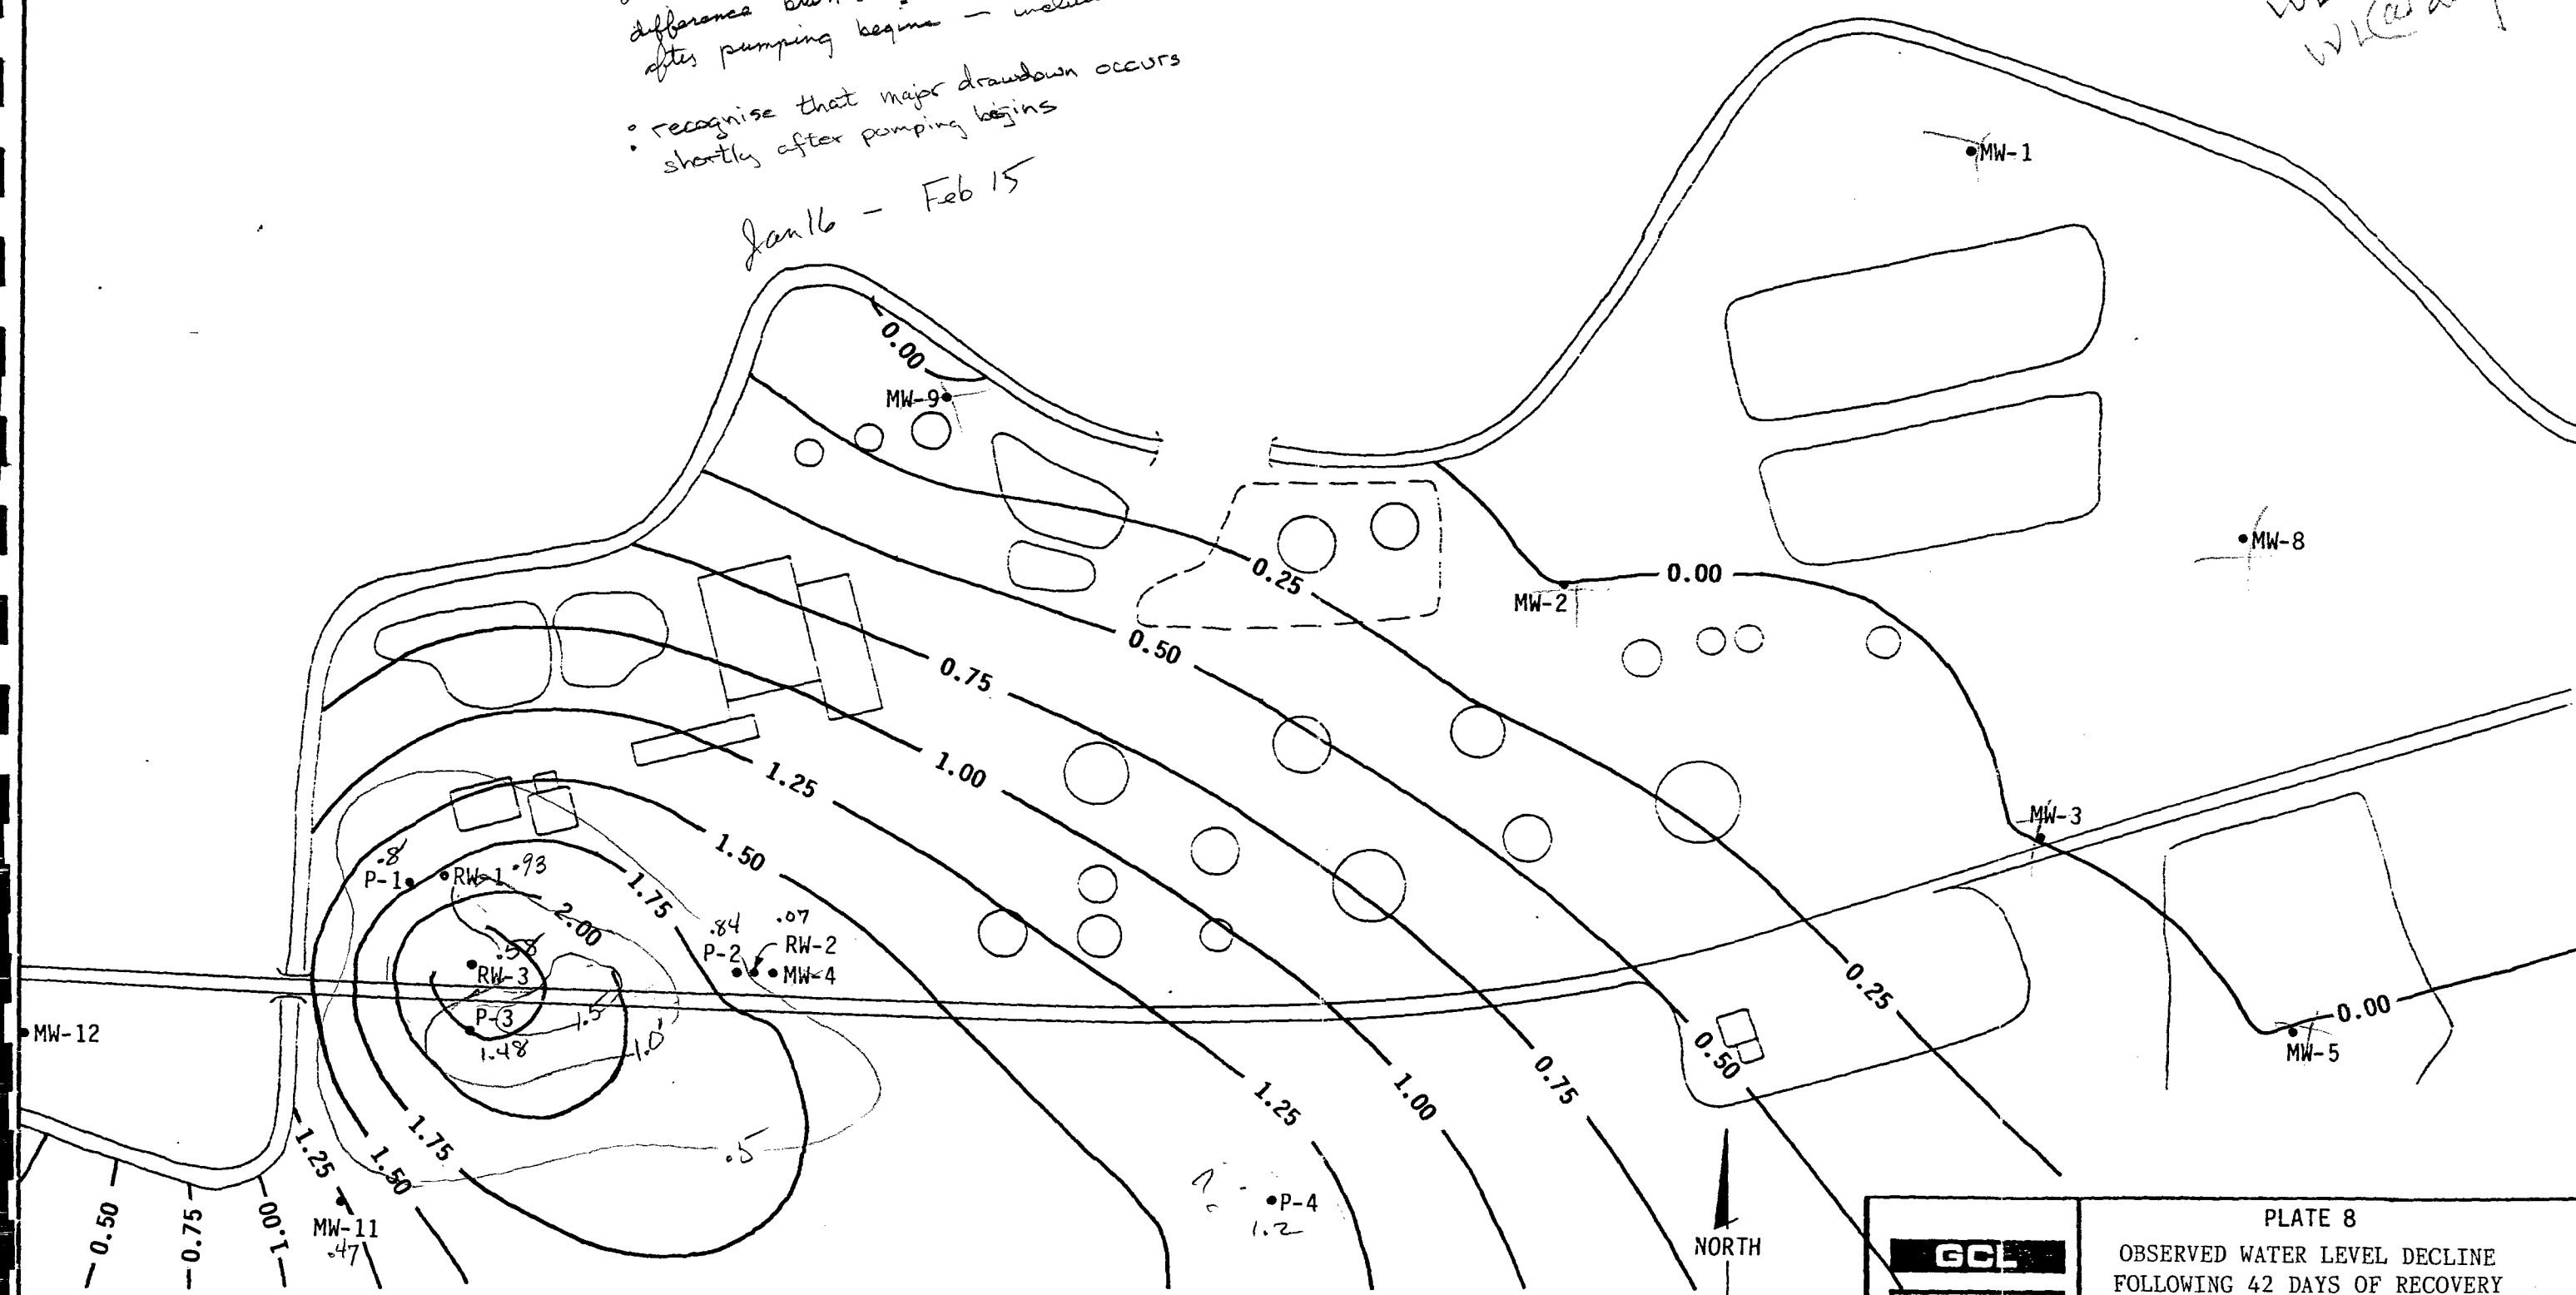


		PLATE 8 OBSERVED WATER LEVEL DECLINE FOLLOWING 42 DAYS OF RECOVERY	
		CLIENT: _____ DATE: _____ DRAWN BY: _____ CHECKED BY: _____ REVIEWED: _____ SCALE: _____	
		from RW-3	

• RW-1 - WATER LEVEL OBSERVATION WELL
 ~ 5500 ~ LINE OF EQUAL DRAWDOWN (FEET)