

GW - 196

**GENERAL
CORRESPONDENCE**

YEAR(S):

2007-1995



January 2, 2007

6381 North Main Street
Roswell, NM 88201

505.625.8022 Fax: 505.627.8172

Larry Campbell
Division Environmental Specialist

UPS Conformation No. 1Z 875 525 03 4558 2231

Mr. Brad Jones
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87504

Re: Notification of Closure and Request to Cancel Discharge Plan GW-196,
Transwestern Pipeline Company, Santa Fe Bilbrey Compressor Station

Dear Mr. Jones:

By this letter, Transwestern Pipeline Company is providing notification to the Oil Conservation Division that the above referenced facility has been permanently shut down and all above ground appurtenances have been removed from the site. Therefore, Transwestern is requesting that Discharge Plan GW-196 be cancelled and that the OCD update all records to reflect this request.

Should your agency require additional information concerning this notification, contact the undersigned at our Roswell Technical Operations office at (505) 625-8022.

Sincerely,

A handwritten signature in cursive script that reads "Larry Campbell".

Larry Campbell
Division Environmental Specialist

xc: file

Transwestern Pipeline Company
TECHNICAL OPERATIONS
6381 North Main • Roswell, New Mexico 88201

October 5, 1995

Mr. Mark Ashley
Oil Conservation Division
2040 South Pacheco
Santa Fe, New Mexico 87505

Re: Discharge Plan Application, Santa Fe Bilbrey Compressor Station

Dear Mr. Ashley:

In response to the Oil conservation Division's (OCD) request for additional information for the above referenced facility, attached find analytical sampling results for the following waste stream:

Used Engine Oil

There was no oily waste water to be collected at the facility, and therefore, samples could not be collected. Additionally, the only other stream which is collected at this location is the pipeline liquids stream, and it is exempt. Each of the above streams are collected into dedicated tanks with secondary containment surpassing the OCD's requirement of 130%.

Should you require any additional information concerning approval of the submitted discharge application, contact our Roswell Technical Operations at (505) 625-8022.

Sincerely,



Larry Campbell
Division Environmental Specialist

xc: Dave Owen
Carlsbad Team
file

TERRA LABORATORIES, LTD.
2525 SOUTH SHORE BLVD, SUITE 100 LEAGUE CITY, TX 77573
713/334-5052 FAX 713/334-3116

LAB ANALYSIS REPORT

Report Date: SEPT 28 1995

Page # 1

TRANSWESTERN PIPELINE-CARLSBAD NEW MEXIC
621 S. Main
Carlsbad , NM 88220
Attn: Youngblood, Shane
Sample Number: 95005171
Project Name:

Reviewed by:DKP

Job Number:
Date Collected:09/10/95
Time Collected:0000
Sample Type: GRAB

Sample ID: 052 SANTA FE BILBERY USED OIL

Date Received: 09/14/95

| Test Code | Analyte | Result | Units | Method | Analyst |
|-----------|---------------------------------|------------|--------|---------|---------|
| PCBOX'D | Waste Dilution (D/T) | 09/21 1100 | init. | 6-3580A | SAK |
| PCBO'D | PCB Analysis (Date/Time) | 09/23 0908 | init. | 1-D4059 | SAK |
| PCB10160 | Aroclor-1016 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12210 | Aroclor-1221 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12320 | Aroclor-1232 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12420 | Aroclor-1242 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12480 | Aroclor-1248 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12540 | Aroclor-1254 | < 2 | mg/kg | 1-D4059 | SAK |
| PCB12600 | Aroclor-1260 | < 2 | mg/kg | 1-D4059 | SAK |
| DCBPo | DCBP (surr) | 80. | % | 40-110 | SAK |
| TCMXo | TCMX (surr) | 91. | % | 25-140 | SAK |
| TOX'D | TOX Analysis (Date/Time) | 09/25 1300 | init. | | TMG |
| TOX'S | Total Organic Halogen | < 200 | mg/kg | 6-9020A | TMG |
| FLSHPT'D | Flashpoint Analysis (Date/Time) | 09/28 1400 | init. | | DPP |
| PMFLSHPT | Flashpoint, Pensky-Marten | 203 | deg. F | 6-1010 | DPP |
| DICPS'D | ICP Acid Digest. (D/T) | 09/21 1430 | init. | 6-3050 | RR |
| ICP'S1'D | ICP1 Analysis (Date/Time) | 09/22 0939 | init. | 6-6010 | EMJ |
| AsICPs | Arsenic | < 5.4 | mg/kg | 6-6010 | EMJ |
| CdICPs | Cadmium | < 0.33 | mg/kg | 6-6010 | EMJ |
| CrICPs | Chromium | < 0.33 | mg/kg | 6-6010 | EMJ |

TERRA LABORATORIES, LTD.

2525 SOUTH SHORE BLVD, SUITE 100 LEAGUE CITY, TX 77573
713/334-5052 FAX 713/334-3116

LAB ANALYSIS REPORT

Report Date: SEPT 28 1995

Page # 2

TRANSWESTERN PIPELINE-CARLSBAD NEW MEXIC

Reviewed by:DKP

621 S. Main

Carlsbad , NM

88220

Attn: Youngblood, Shane

Job Number:

Date Collected:09/10/95

Sample Number: 95005171

Time Collected:0000

Project Name:

Sample Type: GRAB

Sample ID: 052 SANTA FE BILBERY USED OIL

Date Received: 09/14/95

| Test Code | Analyte | Result | Units | Method | Analyst |
|-----------|---------|--------|-------|--------|---------|
| PbICPs | Lead | 1.2 | mg/kg | 6-6010 | EMJ |

COMMENTS:

FOOTNOTES: MI - Surrogate recovery is not reportable due to matrix interferences
Dil.Fx.- Minimum dilution required to allow acceptable quantitation
ppm = mg/L(Liquid), mg/kg(Solid) ppb = ug/L(Liquid), ug/kg(Solid)
init = date & time initiated B=found in blank J=>mdl< reporting limit

Preparation and Analysis Method References:

1. ASTM: American Society for Testing and Materials, 1984.
 2. EPA-600/4-79-020, Methods for Chemical Analysis of Water and Wastes, 1978 (revised 1983).
 3. EPA-600/4-82-057, Methods for Organic Chemical Analysis of Municipal & Industrial Wastewater, 1982.
 4. HACH: Test Methods, accepted by EPA in November, 1983.
 5. SM: Standard Methods for the Examination of Water and Wastewater, 18th edition.
 6. SW: SW-846, Test Methods for Evaluation of Solid Waste, Third edition. Update I, July 1992.
- L: EPA/SW references followed by L refer to accepted minor modifications made to the methods for use with Lachat QuikChem 8000 Autoanalyzer.

TERRA LABORATORIES LTD.

2525 South Shore Blvd.

League City, Texas 77573

(713) 334-552

Fax: (713) 334-3116

CHAIN OF CUSTODY

| REPORT TO: | | REF TO: | |
|------------------|-----------------------------|-----------------|-----------------------|
| COMPANY | TRANSWESTERN PIPELINE | COMPANY | TRANSWESTERN PIPELINE |
| ADDRESS | 621 S. MAIN | ADDRESS | 638 N. MAIN |
| CITY | ARLSBAD | CITY | ROSWELL |
| STATE | N.M. | STATE | N.M. |
| ZIP | 88220 | ZIP | 88201 |
| ATTN | S. Youngblood | ATTN | LARRY CAMPBELL |
| Client Comments: | 805-885858 FAX 805-885-1702 | Project Name: | |
| | | P.O. # | 6258022 |
| | | Release # | |
| | | Turnaround Time | |

| ANALYSES REQUESTED | | TERRA SAMPLE NO. | |
|--------------------|-----------|------------------|---------------------------|
| DATE | 24HR TIME | MATRIX | DESCRIPTION |
| 9-10-95 | | Liquid | 050 MON. TUR. PIPELINE LQ |
| | | Liquid | 051 MON. TUR. PIPELINE LQ |
| | | Oil | 052 SANTA FE BILBERY USED |
| | | Oil | 053 TEXAS BILBERY USED |
| | | Oil | 054 MON. TUR. USED OIL |
| | | Liquid | 055 WT-1 OILY WASTE WATER |
| | | Solid | 056 WT-1 OILY WASTE WATER |
| | | Solid | 057 WT-1 OIL FILTERS |
| | | Solid | 058 WT-1 OIL FILTERS |
| | | Oil | 059 USED PARTS WASHING |

| Collected by | Date | Time | Received by | Date | Time |
|---------------|---------|------|---------------|---------|------|
| S. Youngblood | 9-13-95 | | R. Youngblood | 9-14-95 | 1020 |
| S. Youngblood | 9-13-95 | 1425 | R. Youngblood | 9-13-95 | 1425 |

| Collected by | Date | Time | Received by | Date | Time |
|---------------|---------|------|---------------|---------|------|
| S. Youngblood | 9-13-95 | | R. Youngblood | 9-14-95 | 1020 |
| S. Youngblood | 9-13-95 | 1425 | R. Youngblood | 9-13-95 | 1425 |

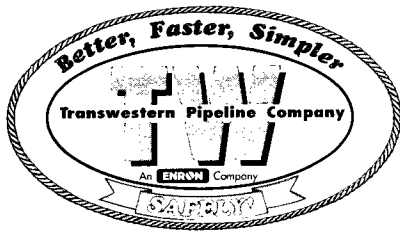
Used oil to include:
Pb, Tox, FPT-Pb,
Total As, Cd, Cr, Pb

Used oil (1)
USED OIL (1)
FLASHPANT
VOLATILES
SEMI VOLATILES

100 Temp
9-14-95

* Samples were received with handspace

Samples will be aliquoted into vials 9-14-95



Phone (505) 623-2761
FAX (505) 625-8060

Transwestern Pipeline Company
TECHNICAL OPERATIONS
P. O. Box 1717 • Roswell, New Mexico 88202-1717

May 9, 1994

Mr. Roger Anderson
New Mexico Oil Conservation Division
2040 South Pacheco
Santa Fe, New Mexico 87504

RECEIVED
MAY 12 1995
Environmental Bureau
Oil Conservation Division

Re: Discharge Plan Application Transwestern Pipeline Company, Santa Fe Bilbrey Compressor

GW 195

Dear Mr. Anderson:

Enclosed find three (3) copies of a discharge plan application for the above referenced facility. This document is being presented to your agency on behalf of Transwestern Pipeline Company, pursuant to Section 3-106 of the New Mexico Water Quality Control Commission Regulations.

If you require any additional information or clarification concerning this discharge plan application, please contact our Roswell Technical Operations at (505) 625-8022.

Sincerely,

Larry Campbell
Division Environmental Specialist

xc: Greg McIlwain w/o attachments
Rich Jolly "
Merlyn Coffman "
file

I. GENERAL INFORMATION

A. Discharger/Legally Responsible Party

Name: Transwestern Pipeline Company
Attn: Merlyn Coffman, Team Leader

Mailing Address: Transwestern Pipeline Company
6381 North Main Street
Roswell, New Mexico 88201
(505) 625-8022

B. Local Representative or Contact Person

Larry Campbell, Division Environmental Specialist

C. Location of Discharge

Legal Description: Township 22 South, Range 32 East, Section 4, Lea County
UTM Zone 13
UTHM 624.530
UTVM 3587.310

A state of New Mexico USGS map of the immediate site vicinity and a plot plan showing location of the compressor station layout and equipment are presented in APPENDIX A.

Note: All onsite routine operational discharges are directed to sumps or above-ground tanks with subsequent transfer offsite for appropriate disposal and/or recycling. This activity is conducted by an appropriate disposal company. No onsite discharges of any liquid or solid are intentionally performed at this location. All waste streams at this facility are segregated and directed into dedicated tanks.

D. Type of Natural Gas Operation

This field compressor station provides compression for the transmission of natural gas in the collected from producing wells in the area. Once compressed at the facility, the natural gas is transported and taken into the 24" mainline system and is delivered to Transwestern's Wt-1 Compressor station located approximately 35 miles east of Carlsbad, New Mexico.

E. Copies

Three copies of the discharge plan application are enclosed.

F. Affirmation

I hereby certify that I am familiar with the information contained in and submitted with the application that such information is true, accurate and complete to the best of my knowledge and belief.

Sincerely,



Larry Campbell
Division Environmental Specialist

II. PLANT FACILITIES

A. Sources and quantities of effluent and plant fluids. For each source, primary quality type (e.g., high TDS water, hydrocarbons, washwater, sewage), estimated quantities, and major additives, if any are provided.

1. Scrubbers. The incoming gas stream to this facility contains liquids in the form of natural gas pipeline liquids, or condensate. These entrained liquids are then removed by the operation of the onsite inlet scrubbers. These liquids are then transferred for collection in a 65 bbl. pipeline liquids tank and transferred to the pipeline liquids tank. The volume of pipeline liquids collected on a daily basis is determined by operation of the onsite engine and the flow through volumes of the gas into the facility. However, as a general rule, approximately [(??)] gallons/day of pipeline liquids are collected by this system.

2. Engine cooling water. The antifreeze/water solution used to cool the engine is stored onsite in a 750 gallon tank.

3. Domestic Sewage. All domestic waste is placed into portable containers and is transferred offsite for disposal.

4. Engine Wash Down Water and Floor Drains: Wastewater collected from cleaning and washdown operations are directed to a small recessed sump in the concrete containment area. This liquid is then removed from the facility in a commercial transport vehicle for recycling. Only non hazardous biodegradable solvents are used at the facility. The liquids stored in this tank are periodically tested for characterization (APPENDIX B) prior to being removed by a wastewater hauler for proper disposal or recycling. Rain water and or snow melt which collects in the containment areas, is also handled with the washdown water. There are no other waste streams which presently enter this system. Truck washing operations are not performed at this facility.

5. Waste Engines Oils: Lubrication oil changeouts from the one onsite engine occur during repair or maintenance periods. During periods when this activity occurs, the used oil is removed and transferred to a 500 gallon tank. Prior to removal from this facility, oil samples are collected and analyzed from the tank for proper recycling or recovered as boiler fuel makeup.

Chemical materials used in support activities at this location in excess of 55 gallons may include: gear and engine oil, methanol, biodegradable soap and solvent, steam cleaner degreaser. These chemicals are stored in the concrete secondary containments onsite.

B: Quality Characteristics

Presented below are the characteristics of the individual waste streams which are generated on site. All waste streams have been separated and are segregated into dedicated sumps and tanks.

1. Pipeline Liquids: The natural gas pipeline liquids/condensate annual sampling results are presented in APPENDIX C. This material is marketed for burner fuel or recycled into a fuel product.
2. Used Engine Oil: Prior to removal from the facility for recycling, this material is sampled as per 40 CFR 266.
3. Oily Wastewater. The liquids comprising this stream are periodically sampled (APPENDIX D) and are removed from the facility by a local commercial transporter, and appropriately recycled as burner fuel.

C. Transfer and Storage of Fluids and Effluent

1. Water and wastewater plan schematics are not applicable as there is no individual water treatment units onsite. Liquid wastes are not discharged onsite. All liquids and liquid wastes are temporarily stored in sumps and tanks until they are transferred offsite for recycling and/or disposal.
2. Potential surface and groundwater contaminants, which may be discharged within the compressor station would be associated with sumps, above ground storage tanks and connecting ground pipes. Sumps and tanks are visually inspected periodically. All tanks have been engineered to be visually inspected for tank leakage and contained in concrete secondary containment of capacities which equal 150%. This surpasses the OCD requirement for 130 % containment storage.
 - a. Pipeline liquids tank - 65 bbl. capacity , steel walled; contains liquids received from the scrubber. Liquids are tested periodically and removed from the tank at scheduled intervals for offsite recycling.
 - c. Oil storage tank - 750 gallon capacity, containing Citgo Pacemaker 840
3. Underground wastewater pipes, their age and specification are: All underground piping materials area constructed of 0.25 inch schedule 80 grade B seamless steel.
 - a. All underground pipes are designed and constructed according to Transwestern's specifications. They are made of coated steel and connected to the facility rectifier system for corrosion control. The existing underground pipes were installed in 1994.

D. Spill/Leak Prevention and Housekeeping Procedures

1. SPCC Plan: Procedures addressing spill containment and cleanup, including proposed schedule for OCD notification of spills will be described in the facility's Spill Prevention Control and Countermeasures (SPCC) plan. This document is permanently filed onsite at the facility. The following contractors are presently used for disposal of the following liquid waste streams:

Pipeline liquids and rainwater collected in containment areas:

Enron Oil Trading and Transportation (EOTT)
P.O. Box 2297
Midland, Texas 79702
(915) 687-0783

Oily wastewater:

Mesa Oil Co.
4701 Broadway SE
Albuquerque, New Mexico 87105
(505) 877-8855

Used lubrication and gear oil:

Mesa Oil Co.
4701 Broadway SE
Albuquerque, New Mexico 87105
(505) 877-8855

Used Oil filters:

Waste Management of Southeast New Mexico
2608 Lovington Highway
Hobbs, New Mexico 88240
(505) 392-6571

Other solid waste:

Waste Management of Southeast New Mexico
2608 Lovington Highway
Hobbs, New Mexico
(505) 392-6571

2. Housekeeping: Precipitation and runoff is directed from the station facility. All chemicals and products are contained in concrete secondary containment. Containments have also been constructed around the engine.

3. Leak Detection: All aboveground tank systems are visually inspected monthly to detect leaks and ensure tank integrity. Visual sump inspections are performed annually.

4. Water Well System: There is no domestic well system onsite. Water used at the facility is brought in plastic bottles for use.

IV. SITE CHARACTERISTICS

a. Site Features

The approximate 0.10 acre site has approximately 0 feet of relief across the extent of the property. Permanent features which are present on the site include: the engine and tank and containments.

The closest existing residential development is the town of Loving, New Mexico located 26 miles to the southwest east of the facility.

1. Geology: The Texaco Bilbrey Compressor Station is located in southern Lea County, in section 4, T. 22 S., R. 32 E. This area lies within the High Plains subdivision of the Great Plains Physiographic Province. The facility is located on the north side of the Antelope Ridge area. West of the site is a west-facing scarp called The Divide. The Antelope Ridge area consists of a relatively flat, sand covered, surface underlain by consolidated caliche. West of The Divide sand dunes rest unconformably on Triassic rocks.

This region in southern Lea County is within the Delaware basin of the Permian Basin and is underlain by a thick (more than 17,000 feet) stratigraphic sequence containing units ranging in age from Paleozoic through Quaternary. Table 1 shows the units of significance and their general character:

Table 1. Stratigraphic Units in Southern Lea County, New Mexico (1)

| Geologic Age | Geologic Unit | General Character |
|-----------------------------|-----------------------|--|
| (Quaternary) Recent | Sand | Dune sand, unconsolidated stabilized to drifting, semiconsolidated at depth; fine to medium-grained. |
| (Quaternary) Pleistocene | Alluvium | Channel and lake deposits; alternating thickbedded calcareous silt, fine sand, and clay; thickest in San Simon Swale; less than 100 feet thick in most places. |
| (Tertiary) Pliocene | Ogallala Formation | Semiconsolidated fine-grained calcareous sand capped with thick layer of caliche; contains some clay, silt, and gravel. |
| (Triassic) Dockum group | Chinle Formation | Claystone, red and green; minor fine-grained sandstones and siltstones; underlies all of eastern part of southern Lea County area; thins westward; absent in extreme west. |
| (Triassic) Dockum group | Santa Rosa Sandstone | Sandstone, chiefly red but locally white, gray, or greenish-gray; fine- to coarse-grained; exposed in extreme west; underlies Cenozoic rocks in western part of area, and is present at depth in eastern part. |

The Antelope Ridge area is covered by a stable dune sand cover a few feet thick. The underlying surface is comprised of the hard caliche of the Ogallala or Quaternary Alluvium sediments. The thickness of the flat lying formations (mainly the Ogallala) are dependent on the irregular erosional surface cut into the Triassic rocks. Thickness of the Ogallala ranges from a few feet to more than 100 feet.

Beneath the terrestrial sediments of the Ogallala and Quaternary Alluvium is the Dockum Group of Triassic age. The Dockum Group is mainly a sequence of red beds that is divided into the Chinle Formation and the Santa Rosa Sandstone. The uppermost Chinle Group ranges in thickness from zero to 1,270 feet. It is missing in the western portion of the county where erosion has removed it. The Santa Rosa Sandstone ranges in thickness from 140 to more than 300 feet. In the western portion of the county these Triassic rocks generally dip toward the southeast or east.

Potable ground water is found in the Dockum Group, the Ogallala Formation, and the Quaternary Alluvium. The Santa Rosa Sandstone is the principal aquifer in the western third of the county. This unit is recharged by precipitation on the sand dunes directly overlying the sandstone, precipitation and runoff on to out crops, and ground water flow down through the overlying Ogallala and alluvium. Wells completed in the Dockum Group generally have low because of the low permeability of the formations.

The Ogallala Formation generally produces higher yields and better quality water. In the Grama Ridge area the Ogallala Formation is present but is unsaturated in most areas. If present, ground water is limited to the basal few feet of the formation. Ground water is also produced from Quaternary fill in Triassic surface depressions.

Ground water flow in the Triassic rocks appears to be away from recharge areas, which in this area is to the south and southeast. Ground water flow in the Ogallala Formation follows the surface contour of the Triassic rocks. The only water well in the same township and range as the Compressor Station is located in the southwest quadrant of Section 14. The well, producing from the Santa Rosa Sandstone, measured ground water level at 378 feet below ground surface.

2. Soils: Refer to Geology Section.

3. Vegetation: The vegetation of the area is typical for the climate and site aspect present at the facility. The potential plant community on this unit is short and mid grasses and shrubs.

A. Hydrologic features

1. Bodies of Water: There are no none permanent bodies of water located within one mile of the facility.

2. Depth to Groundwater: Refer to Geology section.

3. Water Chemistry: There is no Potable water for the facility.

B. Flood Protection

1. Flood Potential: There is no known record or indication of flooding onsite.

2. Flood Protection: Secondary containments have been constructed to retain all rainwater collected in tank areas. There have been no onsite hydrocarbon releases to the adjacent undisturbed soils.

V ADDITIONAL INFORMATION

To be supplied upon request from the Oil Conservation Division.

References

1. Geology and Ground Water Conditions in Southern Lea County, New Mexico, by A. Nicholson, Jr. and A. Clebsch Jr., 1961, 123p.
2. Mineral and Water Resources of New Mexico, compiled in cooperation with U. S. Geological Survey, State Engineer of New Mexico, New Mexico Oil Conservation Commission, and U.S. Bureau of Mines, 1965, reprinted 1982, 437 p.

Santa Fe Bilbrey Compressor Discharge Plan
Page 8

3. Roadside Geology of New Mexico, by Halka Chronic, 5th printing 1992, 255 p.
4. New Mexico State Engineers Office, Roswell, New Mexico.

NOTICE OF PUBLICATION
STATE OF NEW MEXICO
ENERGY, MINERALS & NATURAL
RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division/2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-195) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Texaco Bittery Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-196) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Santa Fe Bittery Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-197) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Monument Tubular Compressor Station located Section 8, Township 21 South, Range 34 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 422 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

Any interested person may obtain further information from the Oil Conservation Division and may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan application may be viewed at the above address between 8:00 a.m. and 4:00 p.m. Monday thru Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and a public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 19th day of May, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION
s/ WILLIAM J. LEMAY, Director
June 2, 1995.

STATE OF NEW MEXICO

County of Bernalillo

SS

Bill Tafoya being duly sworn declares and says that he is Classified Advertising manager of The Albuquerque Journal, and that this newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Session Laws of 1937, and that payment therefore has been made of assessed as court cost; that the notice, copy of which is hereto attached, was published in said paper in the regular daily edition, for 1 times, the first publication being of the 2nd day of June, 1995, and the subsequent consecutive publications on _____, 1995

Bill Tafoya

Sworn and subscribed to before me, a notary Public in and for the County of Bernalillo and State of New Mexico, this 21st day of June 1995

PRICE

\$ 46.09

Statement to come at end of month.



STATE OF NEW MEXICO
My Commission Expires 5-20-98

Melgar Garcia

CLA-22-A (R-1/93) ACCOUNT NUMBER C80932

OK MA

RECEIVED

RECEIVED

NOTICE OF PUBLICATION

MAY 26 1995

5484
USFWS - NMESOOIL CONSERVATION DIVISION
RECEIVED

'95 JUN 8 52

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-195) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Texaco Bilbrey Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-196) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Santa Fe Bilbrey Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-197) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Monument Turbine Compressor Station located Section 6, Township 21 South, Range 34 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge measures between 63 and 137 feet with a total dissolved solids concentration of approximately 422 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

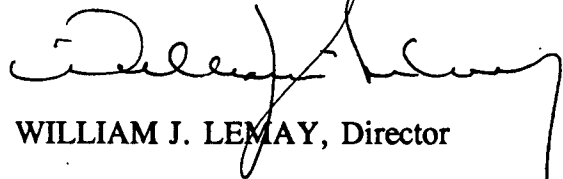
Any interested person may obtain further information from the Oil Conservation Division and

may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan applications may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 19th day of May, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION


WILLIAM J. LEMAY, Director

SEAL

NO EFFECT FINDING

The described action will have no effect on listed species,
~~and does not impact on critical habitat.~~

Date May 30, 1995

Consultation # GW950CD1

Approved by 

U.S. FISH and WILDLIFE SERVICE
NEW MEXICO ECOLOGICAL SERVICES FIELD OFFICE
ALBUQUERQUE, NEW MEXICO

NOTICE OF PUBLICATION

STATE OF NEW MEXICO ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT OIL CONSERVATION DIVISION

Notice is hereby given that pursuant to the New Mexico Water Quality Control Commission Regulations, the following discharge plan applications have been submitted to the Director of the Oil Conservation Division, 2040 South Pacheco, Santa Fe, New Mexico 87505, Telephone (505) 827-7131:

(GW-195) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Texaco Bilbrey Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-196) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Santa Fe Bilbrey Compressor Station located Section 4, Township 22 South, Range 32 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge is at a depth of approximately 378 feet with a total dissolved solids concentration of approximately 800 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

(GW-197) - Transwestern Pipeline Company, Larry Campbell, P.O. Box 1717, Roswell, New Mexico 88202-1717, has submitted a discharge plan application for their Monument Turbine Compressor Station located Section 6, Township 21 South, Range 34 East, NMPM, Lea County, New Mexico. All wastes generated will be stored in closed top above ground storage tanks prior to offsite disposal or recycling at an OCD approved site. Ground water most likely to be affected in the event of an accidental discharge measures between 63 and 137 feet with a total dissolved solids concentration of approximately 422 mg/l. The discharge plan addresses how spills, leaks, and other accidental discharges to the surface will be managed.

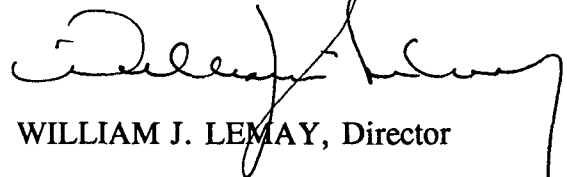
Any interested person may obtain further information from the Oil Conservation Division and

may submit written comments to the Director of the Oil Conservation Division at the address given above. The discharge plan applications may be viewed at the above address between 8:00 a.m. and 4:00 p.m., Monday thru Friday. Prior to ruling on any proposed discharge plan or its modification, the Director of the Oil Conservation Division shall allow at least thirty (30) days after the date of publication of this notice during which comments may be submitted to him and public hearing may be requested by any interested person. Request for public hearing shall set forth the reasons why a hearing shall be held. A hearing will be held if the director determines that there is significant public interest.

If no hearing is held, the Director will approve or disapprove the plan based on the information available. If a public hearing is held, the Director will approve the plan based on the information in the plan and information presented at the hearing.

GIVEN under the Seal of New Mexico Oil Conservation Commission at Santa Fe, New Mexico, on this 19th day of May, 1995.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

A handwritten signature in dark ink, appearing to read "William J. Lemay", is written over the printed name. The signature is fluid and cursive, with a long horizontal stroke extending to the right.

WILLIAM J. LEMAY, Director

SEAL