



Luke Welch
Project Manager

Upstream Business Unit
Environmental Management
Company
1400 Smith Street
Room 07069B
Houston, Texas 77002
Tel 713-372-0292
Luke.Welch@chevron.com

RECEIVED

By OCD District 1 at 8:22 am, Jun 08, 2015

December 19, 2014

Dr. Tomas Oberding
Environmental Specialist
New Mexico Oil Conservation Division
1625 N. French Dr.
Hobbs, New Mexico 88240

Re : Chevron Special Projects – NM State AN 5 (RP# 3254)

Dear Dr. Oberding,

Please find enclosed for your records, a copy of the final report documenting the assessment activities at the New Mexico State AN No. 5 (RP # 3254).

The report was prepared by Arcadis US, Inc. (Arcadis) on behalf of Chevron Environmental Management Company (CEMC) to document remedial activities performed for CEMC at the above referenced site. Please note in the report, Arcadis states the depth to groundwater is less than 100 feet, however this information was obtained from NMOSE records dating back over twenty years ago. Chevron has several environmental projects in the immediate vicinity and has measured groundwater depths in the last year ranging from 120 – 140 feet below grade surface..

The assessment activities identified several locations with soil impacts at levels of regulatory concern. To address these issues, CEMC proposes to conduct further remedial activities where practical, given the limitations of buried and overhead lines. Should you have any questions regarding the content of the report, please do not hesitate to contact me by phone at 713-372-0292 or via e-mail at luke.welch@chevron.com.

Sincerely,

Luke Welch
Environmental Project Manager

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised August 8, 2011

Submit 1 Copy to appropriate District Office in
accordance with 19.15.29 NMAC.

Release Notification and Corrective Action

OPERATOR

☐ Initial Report ☒ Final Report

Name of Company: CHEVRON U.S.A. Inc.	Contact: Luke Welch
Address: 56 Texas Camp Road, Lovington NM 88260	Telephone No.: Office: (713) 372-0292 Mobile: (832) 627-9171
Facility Name: State AN 5	Facility Type: Producing Well

Surface Owner:	Mineral Owner:	API No.
----------------	----------------	---------

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County
J	7	18S	35E					Lea

Latitude 32.76148806° Longitude -103.45995590°

NATURE OF RELEASE

Type of Release: Crude Oil and produced water	Volume of Release: 5.7 bbls oil and 82 bbls produced water	Volume Recovered: ~65 bbls
Source of Release: Battery	Date and Hour of Occurrence: 7/29/11 10:20 AM	Date and Hour of Discovery: 7/29/11 11:00 AM
Was Immediate Notice Given? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom? Mr. Leking via email	
By Whom? Kim Klahsen	Date and Hour:	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*
N/A

Describe Cause of Problem and Remedial Action Taken.*

A poly flow line parted on the weld and released fluid to the ground surface. Field team isolated the battery to ensure spill was minimized.

Describe Area Affected and Cleanup Action Taken.*

Approximately 65 bbls of total fluid were recovered with a vacuum truck and visually impacted soils were excavated to a depth of two feet bgs and sent off for disposal.

Six discrete soil confirmation samples were collected from the base of the excavation. These samples indicated the presence of chlorides at concentrations of regulatory concern.

In response to the sampling results, an additional site assessment was conducted to confirm the extent of soil impacts. Results of the additional assessment activities are provided in the attached report.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

Signature: <u>Luke Welch</u>		<u>OIL CONSERVATION DIVISION</u>	
Printed Name: Luke Welch		Approved by Environmental Specialist: <u>Bradford Billings</u>	
Title: Project Manager		Approval Date: 12/2/2019	Expiration Date:
E-mail Address: LWelch@chevron.com		Conditions of Approval:	Attached <input type="checkbox"/>
Date: <u>11-19-14</u> Phone: (713) 372-0292			

* Attach Additional Sheets If Necessary



Mr. Luke Welch
Project Manager
Chevron Environmental Management Company
1400 Smith Street, Room 07069B
Houston, Texas 77002

Subject:

Site Assessment Report
State AN 5
Lea County, New Mexico

Dear Mr. Welch:

On behalf of Chevron Environmental Management Company (CEMC), ARCADIS U.S., Inc. (ARCADIS) prepared this Site Assessment Report (report) to document cleanup actions and soil sampling activities performed at State AN 5, located in Lea County, New Mexico (site; Figure 1). These activities were conducted in response to a release of approximately 87.7 barrels (bbls) of produced water and oil that occurred on July 29, 2011.

To evaluate the potential impacts related to this release, ARCADIS developed a Site Conceptual Model (SCM; Attachment 1). Based on the SCM, potential impacts to groundwater are not considered possible due to the following:

- Response activities included removal of liquids and impacted surface soil.
- Local conditions include low rainfall and high evapotranspiration, which minimize potential infiltration.
- The presence of a caliche layer impedes the vertical migration of liquids.
- Groundwater is encountered at significant depth (91 feet below ground surface [bgs]).
- Geochemical modeling using the United States Environmental Protection Agency (USEPA) Multimedia Exposure Assessment Model (MULTIMED) Version 2.0 (USEPA 1996) indicates that a significantly larger release would be necessary to cause an exceedance of regulatory criteria in groundwater.

Imagine the result

ARCADIS U.S., Inc.
2929 Briarpark Drive
Suite 300
Houston
Texas 77042
Tel 713 953 4800
Fax 713 977 4620
www.arcadis-us.com

ENVIRONMENT

Date:
December 2, 2014

Contact:
Jonathan Olsen

Phone:
713.953.4874

Email:
Jonathan.Olsen@arcadis-us.com

Our ref:
B0048609.0000

This report describes spill response activities for the July 29, 2011 release and follow-up soil assessment activities conducted on May 6, 2013.

Background Information

This section summarizes the site location and description, as well as the regional setting including geology, hydrogeology, nearby drinking water wells, surface water, and climate.

Site Location and Description

The site is located within the Chevron-operated Vacuum Unit, approximately 14 miles southwest of Lovington, New Mexico. New Mexico Highway 238 is located approximately 1 mile east of the site.

The site is located in the western edge of the Permian Basin, a 75,000-square-mile area in west Texas and New Mexico that is populated by numerous oil and gas production wells. In New Mexico, the Permian Basin extends to Roosevelt County to the north and Chaves County to the west. Lovington (the closest town) is located approximately 14 miles northeast of the site and the closest agricultural area is 8 miles southeast of the site.

The site is located northeast of the State AN 5 wellhead. The release described in the following sections occurred in the field northeast of the wellhead. A photo log of the site is included as Attachment 2.

Nearby Water Wells and Surface Water

Based on satellite imagery, no surface-water bodies were identified within 2 miles of the site (GoogleEarth 2014). In May 2013, ARCADIS field verified that no surface-water bodies are located within 1,000 feet of the site.

In September 2014, ARCADIS reviewed information obtained from the New Mexico Office of the State Engineer (NMOSE) online database (NMOSE 2011), which indicates that no water-supply wells are located within 1,000 feet of the site. The NMOSE online database identified 306 water-supply wells within a 5-mile radius of the site (NMOSE 2011). A petroleum-industry-related water-supply well, located approximately 1,400 feet southeast (i.e., hydraulically downgradient) of the site, was identified as the closest designated-use well to the site.

Climate

Monthly average temperatures near the site vary from a minimum of 27.9 degrees Fahrenheit (°F) in January to a maximum of 93.9°F in July (Western Regional Climate Center [WRCC] Hobbs, New Mexico [294026] weather station). Total average precipitation recorded for the area of the site from the available WRCC period of record between 1912 and 2013 was approximately 15.75 inches per year (WRCC 2014a).

Due to the arid climate, the site experiences low precipitation and high evapotranspiration rates. The total average evapotranspiration from the available WRCC period of record between 1914 and 2005 was approximately 87.68 inches per year (WRCC 2014b).

Regional Geology and Hydrogeology

The site elevation is approximately 4,970 feet above mean sea level. The site is located in the Querecho Plains immediately west of the Mescalero Ridge, which demarcates the western boundary of the (Miocene to Pliocene) High Plains Ogallala Formation (Reeves 1972). A rapid drop in elevation of 200 to 250 feet occurs west of the northwest-trending Mescalero Ridge. East of the ridge, the Ogallala Formation is predominantly composed of unconsolidated alluvial fan deposits of sand and gravel near the base, overlain by interbedded sand and clay in the upper portion (Seni 1980). Repeated depositional events on the High Plains surface beginning approximately 7 million years ago, followed by aerial exposure, generated a thick sequence of caliche horizons that are competent enough to act as a cliff for the expression of Mescalero Ridge. These hard caliche deposits form the upper portion of the stratigraphic sequence. In the site area, the Ogallala Formation is underlain by red beds of the Upper Triassic-age Dockum Group. The nearest area where the Ogallala is underlain by the Cretaceous-age Trinity Group is approximately 55 miles to the northwest (Fallin 1988).

The Querecho Plain is 80 percent covered by a moderately stable dune field (Reeves 1972) that is deposited on top of Triassic Dockum red beds. The red bed surface, which is 400,000 to 500,000 years old, is relatively flat with minor erosional incisions and a 3- to 13-foot-thick near-surface caliche layer (Bachman 1980). Deposition of sand and the formation of the dune field began 60,000 years ago, with additional development beginning 9,000 years ago (Hall 2002). The surface and interior of these dunes do not contain caliche; however, a 1-foot layer of caliche is common at the bottom of the dunes at the contact with the red bed surface. Groundwater in the

area is in the Dockum Group at a depth of approximately 100 feet bgs (Summers 1972).

Water-supply wells located on the southern High Plains east of Mescalero Ridge in central Lea County and near the site, as discussed in the Nearby Water Wells and Surface Water section of this report, are completed in the High Plains Aquifer (HPA). The HPA consists primarily of the Ogallala Formation, and in localized areas, alluvial sediment of Quaternary age. Near the site, the HPA is present directly above the Triassic-age Dockum Group, which occurs at a depth of approximately 140 feet bgs (Ash 1963, Fahlquist 2003, Nativ 1988, Nicholson and Clebsch 1961, Tillery 2008). The regional groundwater flow direction is to the east-southeast (Tillery 2008).

Groundwater near the site is encountered at a depth of approximately 91 feet bgs (NMOSE 2014; Attachment 3).

Initial Release Response Activities

A release of approximately 82 bbls of produced water and 5.7 bbls of oil occurred at the site on July 29, 2011 due to a poly flow line failure. Chevron personnel from the Mid-Continent Business Unit (MCBU) stopped the release and recovered approximately 65 bbls of fluids using a vacuum truck. Chevron MCBU personnel excavated visually impacted soil in the area to a depth of approximately 2 feet bgs and collected six discrete confirmation soil samples from the base of the excavation on October 12, 2011. Information regarding the disposal of the excavated soil was not provided to ARCADIS.

Pursuant to New Mexico Oil Conservation Division (NMOCD) requirements (NMOCD 1993), David Pagano and Kim Klahsen (Chevron MCBU) submitted a Notification of Release and Correction (Form C-141) detailing the location, volume of release, and initial and planned cleanup efforts taken for the site. The original and updated C-141 forms are included as Attachment 4.

Confirmation Soil Sampling

Six discrete confirmation soil samples were collected from the base of the excavation on October 12, 2011. As reported in the laboratory analytical report (Attachment 5), soil sample containers were transported on ice, under chain of custody procedures to Cardinal Laboratories Environmental Analytical Services for the following analyses:

- Benzene, toluene, ethylbenzene, and total xylenes (BTEX) by USEPA Method 8021B

- Total petroleum hydrocarbons as gasoline range organics (TPH-GRO) and total petroleum hydrocarbons as diesel range organics (TPH-DRO) by USEPA Method 8015M
- Chloride by USEPA Method SM4500Cl-B.

Confirmation soil sample results are presented in Table 1. The complete laboratory analytical results with chain of custody documentation are included in Attachment 5.

Data Evaluation Approach

Chevron MCBU personnel compared data from the six October 2011 confirmation soil samples to regulatory criteria to provide context for the concentrations of analytes detected and to evaluate if additional sampling was necessary. The regulatory criteria selected are based on potential receptors near the site and consist of the following:

- NMOCD risk-based soil remediation action levels (SRALs) for benzene, total BTEX, and total petroleum hydrocarbons (TPH) for leaks, spills, and releases (NMOCD 1993). SRALs were calculated using the NMOCD criteria presented in the tables below.

Criteria	Site-Specific Result	Ranking Score
Depth to groundwater	50 to 99 feet	10
Wellhead protection area	No	0
Distance to surface-water body	>1,000 feet	0
Total Ranking Score		10

SRALs	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH (mg/kg)
	10	50	1,000

Note:
mg/kg = milligrams per kilogram

- New Mexico Administrative Code (NMAC) closure criteria for soil beneath belowgrade tanks, drying pads associated with closed-loop systems, and pits where contents have been removed (NMAC 2009).

Criteria	Site-Specific Result	Chloride (mg/kg)
Depth below bottom of pit to groundwater	50 to 100 feet	500

Confirmation Soil Sample Results

The analytical results for BTEX, TPH-GRO, TPH-DRO, and chloride for the six discrete confirmation soil samples collected in October 2011 are provided in Table 1 and summarized below:

- Benzene and BTEX were not detected above the laboratory reporting limits (LRLs) or above the SRALs of 10 and 50 mg/kg, respectively.
- TPH-GRO was not detected above LRLs. TPH-DRO was detected in two of the six confirmation samples (AN5 SS #2 at 254 mg/kg and AN5 SS #3 at 11.54 mg/kg).
- TPH (TPH-DRO and TPH-GRO) was detected in two of the six samples (AN5 SS #2 at 254 mg/kg and AN5 SS #3 at 11.54 mg/kg). TPH was not detected above the SRAL of 1,000 mg/kg in the six discrete confirmation samples.
- Chloride was detected in all six confirmation samples, at concentrations ranging from 512 mg/kg (AN5 SS #1) to 17,000 mg/kg (AN5 SS #2). Chloride was detected above the NMAC closure criterion of 500 mg/kg in all six confirmation soil samples.

The complete laboratory analytical results with chain of custody documentation are included in Attachment 5. Chloride concentrations in all of the confirmation soil samples collected were above the regulatory criteria, which prompted additional site assessment activities.

Site Assessment Activities

In May 2013, ARCADIS conducted site assessment activities to characterize the lateral and vertical extents of potential soil impacts at the site. Soil boring locations were selected based on the results of confirmation soil sampling completed at the site in October 2011, locations of pipelines and other equipment at the site, and the extent of the release as documented by Chevron MCBU personnel during the initial response activities. The site assessment activities and results are discussed below.

Pre-Field Activities

Prior to initiating field activities, ARCADIS updated the site-specific Health and Safety Plan in accordance with state and federal requirements. Prior to initiating drilling activities, underground utilities and other potential subsurface obstructions near the proposed boring locations were located and marked. A New Mexico One Call ticket was issued for the site, and a private third-party utility locator cleared all proposed boring locations for potential on- and off-site utilities that were not otherwise identified. Finally, ARCADIS staff conducted a visual inspection of the site to identify potential utility lines. Boring locations were flagged during the utility locate and coordinates were recorded using a Trimble® global positioning unit with differential capability.

Soil Sampling

To evaluate the extent of potential impacts to soil at the site, ARCADIS advanced 12 soil borings (STATE AN005-1, STATE AN005-2, STATE AN005-3, STATE AN005-4, STATE AN005-5, STATE AN005-6, STATE AN005-7, STATE AN005-8, STATE AN005-9, STATE AN005-12, STATE AN005-13, and STATE AN005-15) on May 6 and 7, 2013. Soil sample locations are shown on Figure 2.

Prior to conducting drilling activities, each boring location was cleared for subsurface utilities with an air knife. The air knife could not be advanced more than 2 to 3 inches bgs due to the presence of a thick caliche layer. Each soil boring was then advanced to a total depth of approximately 25 feet bgs using air rotary drilling equipment.

Soil was continuously logged for stratigraphic characteristics. The soil samples were field screened for the presence of volatile organic compounds using a photo ionization detector (PID) in combination with visual and olfactory screening methods for evidence of petroleum hydrocarbons. The PID used during this investigation was calibrated daily with fresh air and isobutylene gas. Field personnel recorded PID readings, soil types, and other pertinent geologic data on the boring logs (Attachment 6). No staining or elevated PID readings were observed.

Lithologic data indicate that the subsurface material primarily consists of caliche (soil carbonate) profiles including "caprock," nodular, and sandy caliche layers from approximately 0 to 25 feet bgs (Attachment 6).

Soil Assessment Sampling

Six soil samples were collected from each boring location (for a total of 72 soil samples) beginning at a depth of 2 feet bgs (the approximate depth of the soil excavation in the initial release response activities) and continuing at 5-foot intervals from 5 to 25 feet bgs.

The assessment soil samples were retained in clean, laboratory-supplied glass jars, labeled, placed in an ice-chilled cooler, and submitted under appropriate chain of custody protocols to TestAmerica Laboratories.

Soil samples collected from boring locations STATE AN005-12, STATE AN005-13, and STATE AN005-15 were placed on hold pending analytical results from the other sample locations. Based on the analytical results, three soil samples were analyzed: one from boring location STATE AN005-12 at 2 feet bgs, one from STATE AN005-13 at 2 feet bgs, and one from STATE AN005-15 from 10 feet bgs. A total of 57 of the 72 soil assessment samples collected were analyzed.

Soil Assessment Sample Analysis

Soil samples collected from each boring were analyzed for chloride by USEPA Method 9056.

Boring Abandonment

Following sampling, the boreholes were filled with soil cuttings from the total depth to ground surface. The ground surface was restored to match the surrounding conditions.

Soil Assessment Comparison Criteria

To support site closure, ARCADIS developed a site-specific soil screening level (SSL) for chloride, by simulating unsaturated zone flow, transport, and saturated zone mixing of chloride using the MULTIMED model Version 2.0 (USEPA 1996). The NMAC chloride standard for domestic water supply of 250 milligrams per liter (NMAC 2001) was used to estimate a maximum allowable concentration of chloride in soil that would not leach to groundwater above the standard. The NMAC chloride standard is consistent with the National Secondary Drinking Water Standard for chloride, addressing taste and odor concerns (USEPA 2010).

Conservative site-specific input parameters were used in the MULTIMED (USEPA 1996) simulations compared to actual site and release conditions. Specifically:

- Modeled source lengths and areas modeled are generally significantly larger than the actual chloride-impacted soil areas.
- Chloride-impacted soil was modeled as having a uniform chloride concentration for the entire volume (i.e., area x depth) of specified soil.
- A reduction in chloride concentrations in subsurface soil due to soil chemical transformation or adsorption mechanisms was not included in the model calculations.

Based on the depth to groundwater and the aerial and vertical extents of each of the MULTIMED (USEPA 1996) simulations, with these conservative site-specific input parameters, modeled peak chloride concentrations will reach groundwater in approximately 540 to 860 years.

The Chloride MULTIMED Simulated Soil Screening Levels for the Protection of Groundwater memo is included as Attachment 7. The site-specific SSL was calculated using the input parameters presented in the table below.

Site-Specific Input Parameters	
Source length (m)	45
Source area (m ²)	2,000
Source depth (m)	0 to 1
Depth to groundwater (m)	20
Chloride SSL (mg/kg)	38,800

Notes:

m = meter

m² = square meter

Soil Assessment Sample Results

The analytical results for chloride for the 57 soil assessment samples are provided in Table 1 and summarized below. Laboratory analytical results with chain of custody documentation are provided in Attachment 5.

Chloride was detected in 49 of the 57 soil samples, at concentrations ranging from 32 to 3,480 mg/kg (see Table 1). Chloride concentrations were not detected above the site-specific SSL of 38,800 mg/kg.

Summary and Conclusions

A release of approximately 87.7 bbls of produced water and oil occurred at the site on July 29, 2011 due to the failure of a surface flow line. Chevron MCBU personnel stopped the release and recovered approximately 65 bbls of fluids using a vacuum truck. Visually impacted soil was excavated to a depth of approximately 2 feet bgs and six discrete confirmation soil samples were collected from the base of the excavation in October 2011. All six confirmation soil samples had chloride concentrations above regulatory criteria, which prompted an additional investigation.

In May 2013, additional soil samples were collected to assess soil impacts within the observed aerial extent of the release. Soil samples collected during the May 2013 assessment had chloride concentrations below the site-specific SSL, which was calculated using the MULTIMED model (USEPA 1996).

All 57 soil assessment samples collected in May 2013 had chloride concentrations below the site-specific SSL and only three of the 57 soil assessment samples had chloride concentrations above 1,000 mg/kg (Table 1). Due to the location of this release along the pipeline corridor, remedial activities to address the minor exceedances above 1,000 mg/kg are not recommended due to health and safety concerns. Chloride concentrations in soil samples were delineated to 250 mg/kg. Chloride impacts in soil potentially associated with the release were delineated.

Potential migration of the remaining chloride to groundwater is not expected due to low precipitation (WRCC 2014a), high evapotranspiration rates (WRCC 2014b), and fine-grained nature of caliche layers present beneath the site. MULTIMED model results demonstrate that the remaining soil concentrations associated with the release do not pose a significant risk to groundwater resources or other receptors.

Soil data presented in this report support a conclusion that impacted soil associated with the July 29, 2011 release at the site poses no significant threat to groundwater resources or other receptors. ARCADIS recommends that CEMC submit a request to the NMOCD that no further investigations or additional cleanup actions need to be performed at the site and that the NMOCD grant No Further Action status to the site.

If you have any questions or comments regarding the information presented in this report, please contact Jonathan Olsen at 713.953.4874 or at

Jonathan.Olsen@arcadis-us.com, or Kathleen Abbott at 925.296.7827 or at
Kathleen.Abbott@arcadis-us.com.

Sincerely,

ARCADIS U.S., Inc.



Jonathan Olsen
Certified Project Manager



Kathleen M. Abbott, PG
Program Manager

Enclosures:

Table 1	Soil Sampling Analytical Results
Figure 1	Site Location Map – State AN 5
Figure 2	Release and Soil Boring Locations – State AN 5

Attachments:

Attachment 1	Site Conceptual Model
Attachment 2	Photo Log
Attachment 3	New Mexico Office of the State Engineer – Depth to Water
Attachment 4	Release Notification and Corrective Action (C-141 Form)
Attachment 5	Laboratory Analytical Reports
Attachment 6	Boring Logs (May 2013)
Attachment 7	Chloride Multimedia Exposure Assessment Model Simulated Soil Screening Levels for the Protection of Groundwater Memo

References:

Ash, S.R. 1963. Ground-water conditions in northern Lea County, New Mexico. New Mexico Bureau of Mines and Mineral Resources, Atlas HA-62.

Bachman, George O. 1980. Regional Geology and Cenozoic History of Pecos Region, Southeastern New Mexico, US Dept. of Interior Geological Survey, Open File Report 80-1099, 120 pp.

Fahlquist, L. 2003. Ground-water quality of the southern High Plains Aquifer, Texas and New Mexico, 2001. U. S. Geological Survey Open-File Report 03-345, 69 p.

- Fallin, J.A. Tony. 1988. Hydrogeology of Lower Cretaceous Strata Under the Southern High Plains of New Mexico, New Mexico Geology, Vol. 10, No. 1, pp. 6-9, February 1988.
- Google Earth. 2014. Lovington, New Mexico, 32_46_57.76N, 103_29_26.55W, elev 3913 feet, Google Earth Imagery. February 13.
- Hall, Stephen A. 2002. Field Guide to the Geomorphology of the Mescalero Sands, Southeastern New Mexico, Report Submitted to the State of New Mexico Historic Preservation Division and New Mexico Bureau of Land Management, Project No. 35-00-15334.11. October 2002.
- Nativ, R. 1988. Hydrogeology and hydrochemistry of the Ogallala aquifer, Southern High Plains, Texas Panhandle and eastern New Mexico: The University of Texas at Austin, Bureau of Economic Geology Report of Investigations no. 177, 64 p.
- New Mexico Administrative Code. 2001. Title 20, Chapter 6 of the New Mexico Administrative Code for Environmental Protection, Water Quality, Ground and Surface Water Protection, 20.6.2.3103 NMAC. January.
- New Mexico Administrative Code. 2009. Title 19, Chapter 15 of the New Mexico Administrative Code concerning pits, closed-loop systems, below grade tanks and sumps, and other alternative methods, 19.15.17 NMAC. July.
- New Mexico Office of the State Engineer. 2011. Water Information, Maps and Data, Geospatial Data, OSE Well Data, http://www.ose.state.nm.us/water_info_data.html, July.
- New Mexico Office of the State Engineer. 2014. New Mexico Water Rights Reporting System, <http://nmwrrs.ose.state.nm.us/nmwrrs/waterColumn.html>, May.
- New Mexico Oil Conservation Division. 1993. Guidelines for Remediation of Leaks, Spills and Releases. August 13.
- Nicholson, A., Jr., and A. Clebsch, Jr. 1961. Geology and Ground-Water Conditions in Southern Lea County, New Mexico. ERMS 241583. Ground-Water Report 6. Socorro, NM: New Mexico Bureau of Mines and Mineral Resources.
- Reeves, C.C. Jr. 1972. Tertiary-Quaternary stratigraphy and geomorphology of West Texas and southeastern New Mexico: New Mexico Geological Society, Guidebook 23, p. 108-117.

- Seni, S.J. 1980. Sand-body geometry and depositional systems, Ogallala Formation, Texas. University of Texas, Bureau of Economic Geology, Report of Investigations No.105, 40 p.
- Summers, W.K. 1972. Geology and Regional Hydrology of the Pecos River Basin, New Mexico, New Mexico Bureau of Geology and Mineral Resources, Open File Report No. 37, 393 pp. June 1972.
- Tillery, A. 2008. Current (2004-07) conditions and changes in ground-water levels from predevelopment to 2007, Southern High Plains Aquifer, Southeast New Mexico-Lea County Underground Water Basin. U.S. Geological Survey, Scientific Investigations Map 3044.
- United States Environmental Protection Agency. 1996. Multimedia Exposure Assessment Model for exposure assessment, MULTIMED 2.0 Beta. October.
- United States Environmental Protection Agency. 2010. List of Contaminants and their Maximum Contaminant Levels, List of National Secondary Drinking Water Regulations. Online at: <http://water.epa.gov/drink/contaminants/#List>, July 1.
- Western Regional Climate Center. 2014a. Hobbs, New Mexico (294026) weather station. <http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?nm4026>. Viewed on May 5.
- Western Regional Climate Center. 2014b. Artesia, New Mexico, monthly average pan evaporation. http://www.wrcc.dri.edu/htmlfiles/westevap.final.html#NEW_MEXICO. Viewed on May 6.

Table

Table 1
Soil Sampling Analytical Results

Site Assessment Report
State AN 5
Lea County, New Mexico

Boring Location ID	Sample Date	Sample Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH-GRO (mg/kg)	TPH-DRO (mg/kg)	Chloride (mg/kg)	% Moisture
SRALs ^(a)			10	---	---	---	50	1,000	---	---	---
NMAC Closure Criteria ^(b)			---	---	---	---	---	---	---	500	---
MULTIMED Site-Specific SSL ^(c)			---	---	---	---	---	---	---	38,800	---
AN5 SS #1	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	<10.0	512	--
AN5 SS #2	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	254	17,000	--
AN5 SS #3	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	11.2	14,200	--
AN5 SS #4	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	<10.0	9,600	--
AN5 SS #5	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	<10.0	1,580	--
AN5 SS #6	10/12/2011	0	<0.050	<0.050	<0.050	<0.150	--	<10.0	<10.0	9,800	--
STATE AN005 - 1	5/6/2013	2	--	--	--	--	--	--	--	656	5.1
	5/6/2013	5	--	--	--	--	--	--	--	1,940	9.2
	5/6/2013	10	--	--	--	--	--	--	--	1,460	10.6
	5/6/2013	15	--	--	--	--	--	--	--	192	2.6
	5/6/2013	20	--	--	--	--	--	--	--	96	1.7
	5/6/2013	25	--	--	--	--	--	--	--	96	2.8
STATE AN005 - 2	5/6/2013	2	--	--	--	--	--	--	--	384	5.5
	5/6/2013	5	--	--	--	--	--	--	--	32	8.3
	5/6/2013	10	--	--	--	--	--	--	--	32	3.2
	5/6/2013	15	--	--	--	--	--	--	--	32	6.3
	5/6/2013	20	--	--	--	--	--	--	--	<16	5.2
	5/6/2013	25	--	--	--	--	--	--	--	<16	8.6
STATE AN005 - 3	5/7/2013	2	--	--	--	--	--	--	--	96	5.6
	5/7/2013	5	--	--	--	--	--	--	--	48	4.0
	5/7/2013	10	--	--	--	--	--	--	--	176	5.0
	5/7/2013	15	--	--	--	--	--	--	--	48	5.2
	5/7/2013	20	--	--	--	--	--	--	--	32	5.4
	5/7/2013	25	--	--	--	--	--	--	--	32	4.2
STATE AN005 - 4	5/7/2013	2	--	--	--	--	--	--	--	240	6.4
	5/7/2013	5	--	--	--	--	--	--	--	272	6.3
	5/7/2013	10	--	--	--	--	--	--	--	32	6.7
	5/7/2013	15	--	--	--	--	--	--	--	32	4.3
	5/7/2013	20	--	--	--	--	--	--	--	32	3.0
	5/7/2013	25	--	--	--	--	--	--	--	32	3.3
STATE AN005 - 5	5/6/2013	2	--	--	--	--	--	--	--	32	2.3
	5/6/2013	5	--	--	--	--	--	--	--	<16	7.8
	5/6/2013	10	--	--	--	--	--	--	--	<16	11.3
	5/6/2013	15	--	--	--	--	--	--	--	32	8.3
	5/6/2013	20	--	--	--	--	--	--	--	<16	2.9
	5/6/2013	25	--	--	--	--	--	--	--	<16	2.5
STATE AN005 - 6	5/6/2013	2	--	--	--	--	--	--	--	848	4.3
	5/6/2013	5	--	--	--	--	--	--	--	32	6.3
	5/6/2013	10	--	--	--	--	--	--	--	32	6.1
	5/6/2013	15	--	--	--	--	--	--	--	32	5.2
	5/6/2013	20	--	--	--	--	--	--	--	32	3.3
	5/6/2013	25	--	--	--	--	--	--	--	<16	2.8
STATE AN005 - 7	5/6/2013	2	--	--	--	--	--	--	--	176	4.6
	5/6/2013	5	--	--	--	--	--	--	--	32	3.8
	5/6/2013	10	--	--	--	--	--	--	--	32	4.5
	5/6/2013	15	--	--	--	--	--	--	--	128	3.0
	5/6/2013	20	--	--	--	--	--	--	--	32	5.7
	5/6/2013	25	--	--	--	--	--	--	--	<16	4.8

Boring Location ID	Sample Date	Sample Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH-GRO (mg/kg)	TPH-DRO (mg/kg)	Chloride (mg/kg)	% Moisture
SRALs ^(a)			10	---	---	---	50	1,000		---	---
NMAC Closure Criteria ^(b)			---	---	---	---	---	---	---	500	---
MULTIMED Site-Specific SSL ^(c)			---	---	---	---	---	---	---	38,800	---
STATE AN005 - 8	5/6/2013	2	--	--	--	--	--	--	--	192	5.6
	5/6/2013	5	--	--	--	--	--	--	--	304	13.9
	5/6/2013	10	--	--	--	--	--	--	--	3,480	11.5
	5/6/2013	15	--	--	--	--	--	--	--	80	4.3
	5/6/2013	20	--	--	--	--	--	--	--	64	3.8
	5/6/2013	25	--	--	--	--	--	--	--	32	3.9
STATE AN005 - 9	5/6/2013	2	--	--	--	--	--	--	--	80	3.1
	5/6/2013	5	--	--	--	--	--	--	--	48	5.4
	5/6/2013	10	--	--	--	--	--	--	--	64	7.2
	5/6/2013	15	--	--	--	--	--	--	--	48	2.6
	5/6/2013	20	--	--	--	--	--	--	--	32	3.1
	5/6/2013	25	--	--	--	--	--	--	--	32	2.8
STATE AN005 - 12	5/7/2013	2	--	--	--	--	--	--	--	128	--
STATE AN005 - 13	5/6/2013	2	--	--	--	--	--	--	--	32	--
STATE AN005 - 15	5/7/2013	10	--	--	--	--	--	--	--	160	--

Notes:

%	Percent
mg/kg	Miligram(s) per kilogram
<	Analyte was not detected above the specified method reporting limit
--	Not Analyzed/Not Listed
bgs	Below ground surface
BTEX	Benzene, toluene, ethylbenzene, and total xylenes
MULTIMED	Multimedia Exposure Assessment Model
NMAC	New Mexico Administrative Code
TPH-GRO	Total Petroleum Hydrocarbons as Gasoline Range Organics
TPH-DRO	Total Petroleum Hydrocarbons as Diesel Range Organics
SRAL	Soil remediation action level
SSL	Soil screening level

(a) SRALs, for leaks, spills, and releases, New Mexico Oil Conservation Division, August 1993


(b) Title 19, Chapter 15 of the NMAC concerning pits, closed-loop systems, below grade tanks and sumps, and other alternative methods, 19.15.17 NMAC, July :

(c) MULTIMED exposure assessment, 2.0 Beta, United States Environmental Protection Agency, October 1996

Figures

 SITE LOCATION

1. AERIAL PHOTOGRAPH FROM GOOGLE EARTH PRO.




VACUUM/LOVINGTON FUNCTIONAL MANAGEMENT
TEAM UNITS
LEA COUNTY, NEW MEXICO
SITE ASSESSMENT REPORT

**SITE LOCATION MAP
STATE AN 5**



FIGURE 1

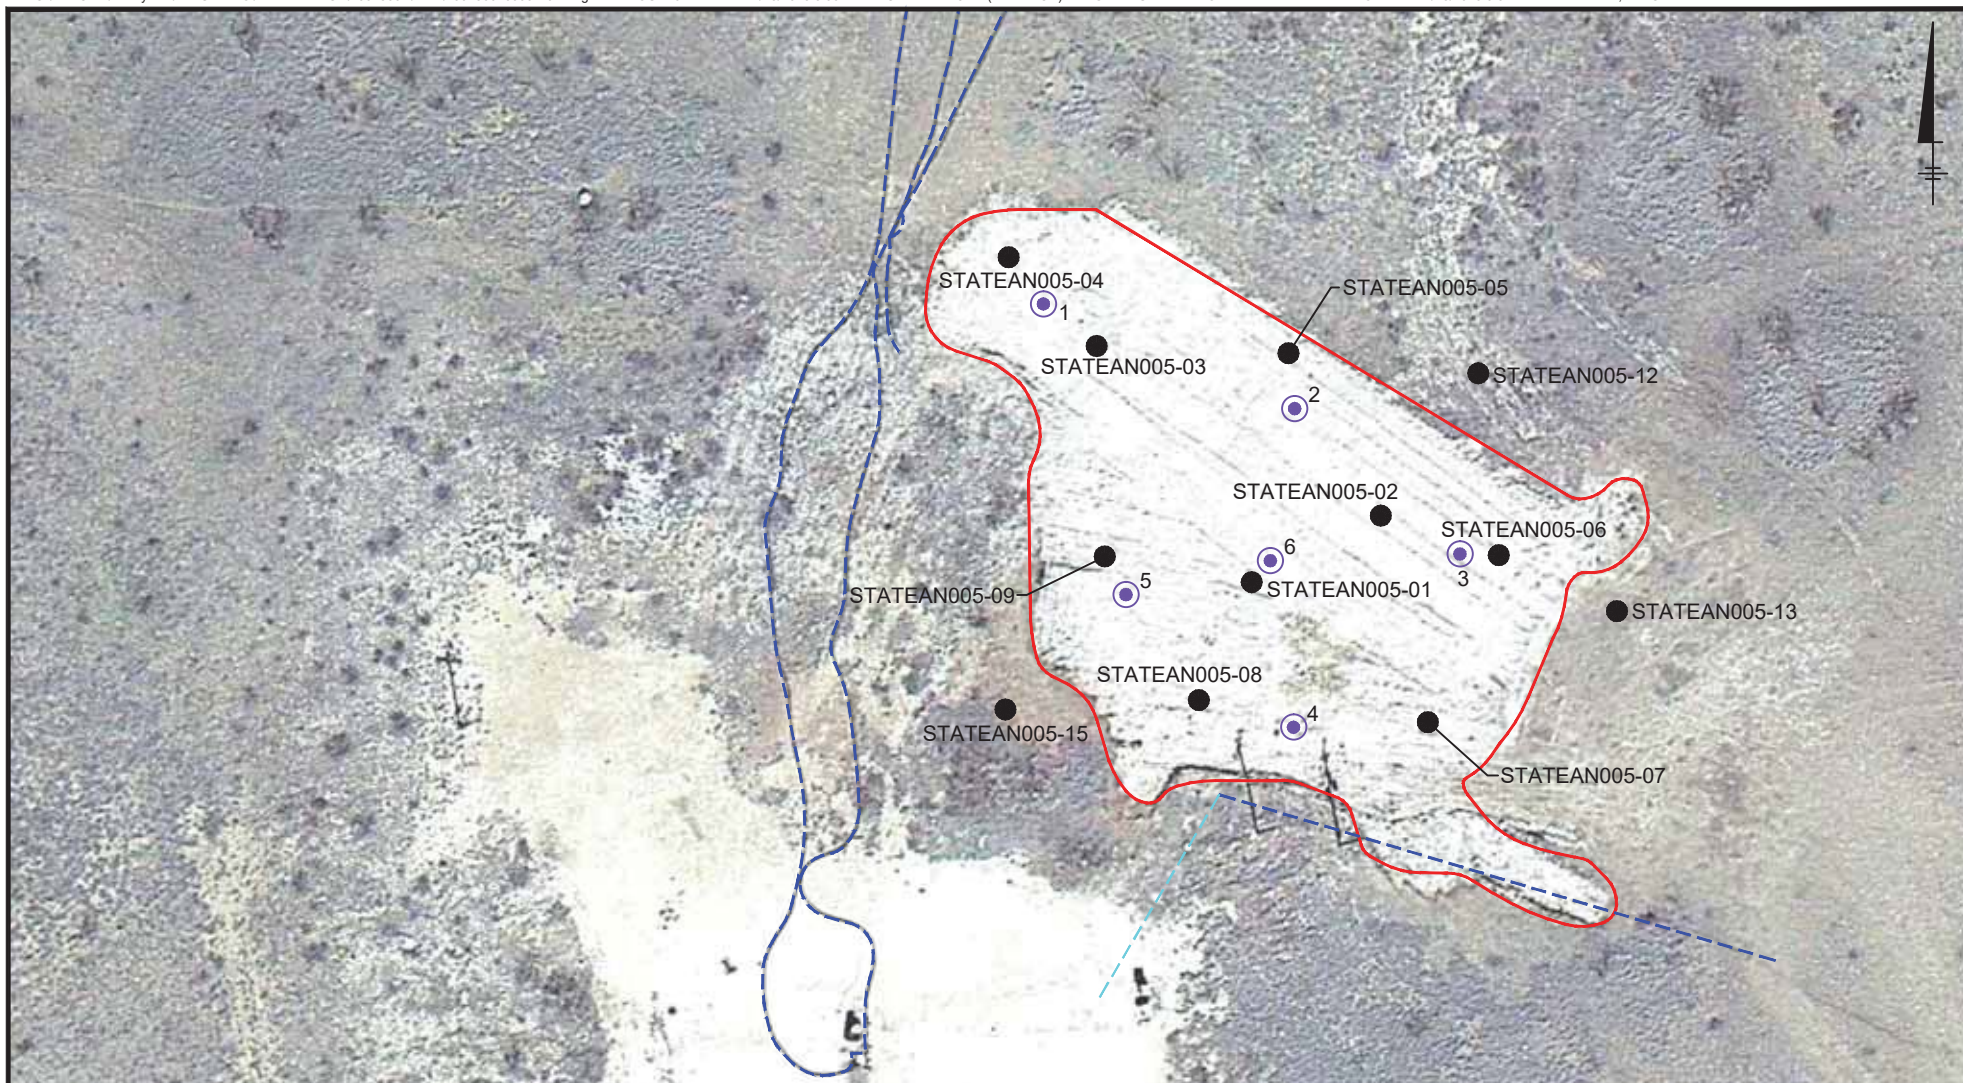


LEGEND:

- MAY 2013 ASSESSMENT SOIL SAMPLING LOCATION
- ¹○ OCTOBER 2011 CONFIRMATION SOIL SAMPLING LOCATION
- - - - - POTENTIAL UNDERGROUND UTILITY LINE NOT DETECTED BY THIRD PARTY SURVEYOR
- — — — — ABOVE GROUND UTILITY LINE
- — — — — APPROXIMATE EXTENT OF SPILL

NOTES:

1. AERIAL PHOTOGRAPH FROM GOOGLE EARTH PRO.
2. COORDINATES FOR ALL MAY 2013 SAMPLE LOCATIONS WERE COLLECTED USING A SUB-METER TRIMBLE GPS UNIT.
3. UTILITIES WERE IDENTIFIED USING GROUND PENETRATING RADAR, RADIO FREQUENCY SURVEY OR VISUAL MEANS.



VACUUM/LOVINGTON FUNCTIONAL MANAGEMENT
TEAM UNITS
LEA COUNTY, NEW MEXICO
SITE ASSESSMENT REPORT

RELEASE AND SOIL BORING LOCATIONS STATE AN 5




FIGURE

2




Attachment 1


Site Conceptual Model

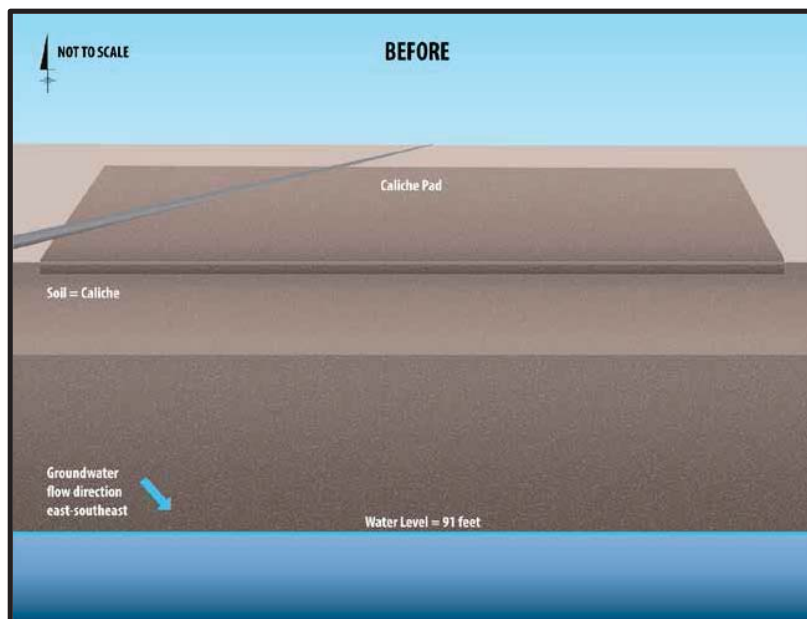

The site is located in the western edge of the Permian Basin with Lovington (the closest town) located approximately 14 miles northeast of the site. Due to the arid climate, the site experiences low precipitation and high evapotranspiration rates. According to information obtained from the NMOSE online database, groundwater near the site is encountered at a depth of approximately 91 feet bgs.

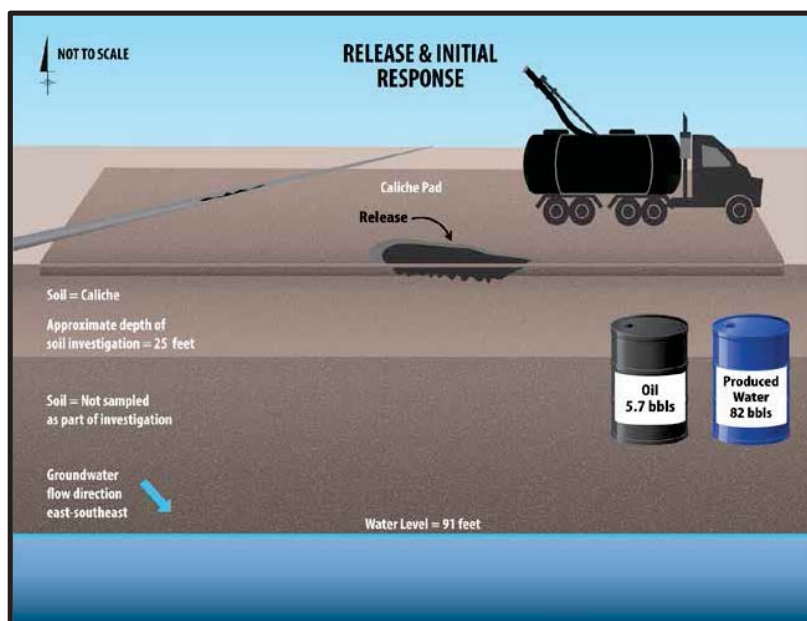

A release of approximately 82 bbls of produced water and 5.7 bbls of oil occurred at the site on July 29, 2011 due to the failure of a surface flow line. Chevron personnel from the Mid-Continent Business Unit (MCBU) stopped the release and recovered approximately 65 bbls of fluids using a vacuum truck. Chevron MCBU personnel excavated visually impacted soil in the area to a depth of approximately 2 feet bgs and collected six discrete confirmation soil samples from the base of the excavation on October 12, 2011. After collecting the soil samples, the excavated area was reportedly backfilled with imported soil. Analyte concentrations in one or more confirmation soil samples were above regulatory criteria, which prompted additional site assessment activities.

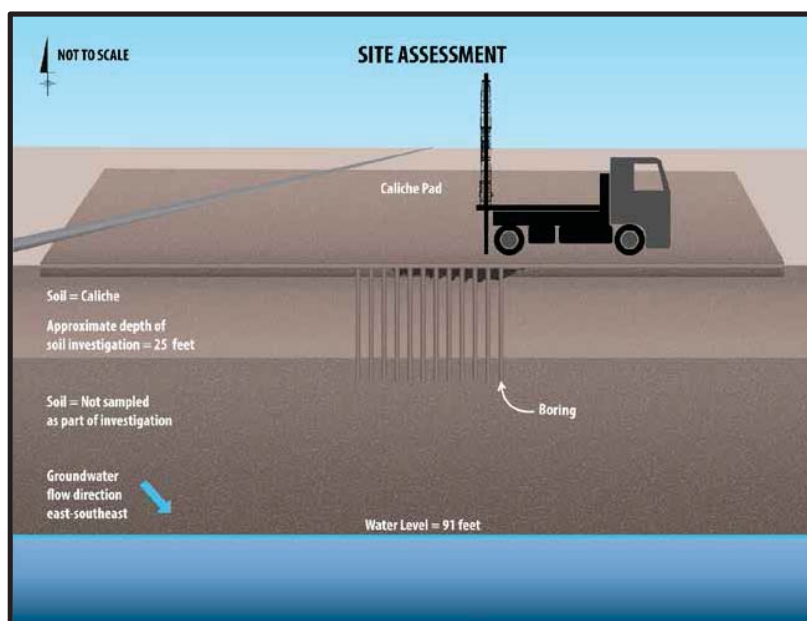

In May 2013, ARCADIS conducted site assessment activities to characterize the lateral and vertical extents of soil impacts at the site. Soil boring locations were selected based on the results of confirmation soil sampling completed at the site in October 2011, locations of pipelines and other equipment at the site, and the extent of the release as documented by Chevron MCBU personnel during the initial response activities. Analyte concentrations in samples collected during the 2013 assessment were reported below site-specific criteria. Site assessment activities demonstrate that remaining soil concentrations associated with the release do not pose significant risk to groundwater resources or other receptors.

VACUUM/LOVINGTON FUNCTIONAL MANAGEMENT TEAM UNITS
LEA COUNTY, NEW MEXICO
SITE ASSESSMENT REPORT

**Site Conceptual Model
State AN 5**



FIGURE
1



Attachment 2

Photolog



Photograph 1 – State AN 5 release area; Facing Northeast



Photograph 2 – State AN 5 release area; Facing North



Photograph 3 – State AN 5
release area; Facing
Northwest



Attachment 3

New Mexico Office of the State
Engineer – Depth to Water



New Mexico Office of the State Engineer

Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced, O=orphaned, C=the file is closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	POD Sub-Code	basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Distance	Depth Well	Depth Water	Water Column
L 04975	L	LE		2	2	3	07	18S	35E	640688	3625837*	247	152	105	47
L 02349	R	L	LE	3	1	4	07	18S	35E	640891	3625641*	257	207	85	122
L 02349 POD2	L	LE		4	1	4	07	18S	35E	641091	3625641*	302	214	85	129
L 04794	L	LE				4	07	18S	35E	641200	3625540*	447	150	95	55
L 04906	L	LE				3	07	18S	35E	640415	3625532*	629	155	87	68
L 04931 X	L	LE		1	3		07	18S	35E	640208	3625735*	737	212	105	107
L 04778	L	LE		2	1		07	18S	35E	640575	3626545*	738	150	75	75
L 04777	L	LE		1	2	2	07	18S	35E	641279	3626653*	834	145	85	60
L 05172	L	LE			3	3	07	18S	35E	640214	3625331*	910	161	85	76
L 04796	L	LE		4	4	3	06	18S	35E	640667	3626847*	986	150	95	55
L 02350	L	LE		4	1	3	08	18S	35E	641897	3625650*	999	216	105	111

Average Depth to Water: **91 feet**

Minimum Depth: **75 feet**

Maximum Depth: **105 feet**

Record Count: 11

Basin/County Search:

County: Lea

UTMNAD83 Radius Search (in meters):

Easting (X): 640928.17

Northing (Y): 3625895.86

Radius: 1000

*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.



Attachment 4

Release Notification and Corrective
Action (C-141 Form)

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised March 17, 1999

Submit 2 Copies to appropriate
District Office in accordance
with Rule 116 on back
side of form

Release Notification and Corrective Action

OPERATOR

Initial Report ☒ Final Report

Name of Company CHEVRON	Contact David Pagano/ Kim Klahsen 432-894-3298
Address 56 Texas Camp Road, Lovington NM 88260	Telephone No. <input type="checkbox"/> Office: 575-396-4414 ext 222 Cellular: 432-894-3298
Facility Name: State AN 5	Facility Type: Producing Well

Surface Owner:	Mineral Owner	Lease No.
----------------	---------------	-----------

LOCATION OF RELEASE-API

Longitude: degrees minutes seconds Latitude: degrees minutes seconds

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County
J	7	18 S	35 E					<input type="checkbox"/> Lea

NATURE OF RELEASE- Chlorides= ~40,000 ppm

Latitude= 32.76148806; Long. = -103.45995590

Type of Release Crude Oil and produced water	Volume of Release 5.7 Bbbls Oil and 82 Bbbls produced water	Volume Recovered~ 65 bbls
Source of Release : Battery	Date and Hour of Occurrence 7/29/11 @ 10:20 a.m.	Date and Hour of Discovery <input type="checkbox"/> 7/29/11 @ 11:00 a.m.
Was Immediate Notice Given? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Not Required	If YES, To Whom? Mr. Leking by E- Mail	
By Whom? / Kim Klahsen		
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*

A poly flow line parted on the weld and released fluid to the ground surface. Approximately 65 bbls of total fluid were recovered with a vacuum truck. The soil will be evaluated to determine the extent of remediation.

Describe Area Affected and Cleanup Action Taken.*

Isolated battery to ensure spill was minimized. Clean up.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

Signature:	OIL CONSERVATION DIVISION		
Printed Name: Kim Klahsen	Approved by <input type="checkbox"/> District Supervisor:		
Title: Safety Specialist	Approval Date:	Expiration Date:	
Date: August 2, 2011 Phone: 432-4894-3298	Conditions of Approval:		Attached <input type="checkbox"/>

* Attach Additional Sheets If Necessary

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised August 8, 2011

Submit 1 Copy to appropriate District Office in
accordance with 19.15.29 NMAC.

Release Notification and Corrective Action

OPERATOR

☐ Initial Report ☒ Final Report

Name of Company: CHEVRON U.S.A. Inc.	Contact: Luke Welch
Address: 56 Texas Camp Road, Lovington NM 88260	Telephone No.: Office: (713) 372-0292 Mobile: (832) 627-9171
Facility Name: State AN 5	Facility Type: Producing Well

Surface Owner:	Mineral Owner:	API No.
----------------	----------------	---------

LOCATION OF RELEASE

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County
J	7	18S	35E					Lea

Latitude 32.76148806° Longitude -103.45995590°

NATURE OF RELEASE

Type of Release: Crude Oil and produced water	Volume of Release: 5.7 bbls oil and 82 bbls produced water	Volume Recovered: ~65 bbls
Source of Release: Battery	Date and Hour of Occurrence: 7/29/11 10:20 AM	Date and Hour of Discovery: 7/29/11 11:00 AM
Was Immediate Notice Given? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom? Mr. Leking via email	
By Whom? Kim Klahsen	Date and Hour:	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.*
N/A

Describe Cause of Problem and Remedial Action Taken.*

A poly flow line parted on the weld and released fluid to the ground surface. Field team isolated the battery to ensure spill was minimized.

Describe Area Affected and Cleanup Action Taken.*

Approximately 65 bbls of total fluid were recovered with a vacuum truck and visually impacted soils were excavated to a depth of two feet bgs and sent off for disposal.

Six discrete soil confirmation samples were collected from the base of the excavation. These samples indicated the presence of chlorides at concentrations of regulatory concern.

In response to the sampling results, an additional site assessment was conducted to confirm the extent of soil impacts. Results of the additional assessment activities are provided in the attached report.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

Signature: <u>Luke Welch</u>		<u>OIL CONSERVATION DIVISION</u>	
Printed Name: Luke Welch		Approved by Environmental Specialist:	
Title: Project Manager	Approval Date:	Expiration Date:	
E-mail Address: LWelch@chevron.com	Conditions of Approval:		Attached <input type="checkbox"/>
Date: <u>11-19-14</u>	Phone: (713) 372-0292		

* Attach Additional Sheets If Necessary



Attachment 5

Laboratory Analytical Reports

October 20, 2011

DAVID PAGANO

Chevron - Lovington

HCR 60 Box 423

Lovington, NM 88260

RE: SOIL SAMPLES

Enclosed are the results of analyses for samples received by the laboratory on 10/14/11 15:17.

Cardinal Laboratories is accredited through Texas NELAP for:

Method SW-846 802.1	Benzene, Toluene, Ethyl Benzene, and Total Xylenes
Method SW-846 8260	Benzene, Toluene, Ethyl Benzene, and Total Xylenes
Method TX 1005	Total Petroleum Hydrocarbons

Certificate number T104704398-08-TX. Accreditation applies to solid and chemical materials and non-potable water matrices.

Cardinal Laboratories is accredited through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,



Celey D. Keene

Lab Director/Quality Manager

Analytical Results For:

 Chevron - Lovington
 DAVID PAGANO
 HCR 60 Box 423
 Lovington NM, 88260
 Fax To: None

 Received: 10/14/2011
 Reported: 10/20/2011
 Project Name: SOIL SAMPLES
 Project Number: AN5
 Project Location: NOT GIVEN

 Sampling Date: 10/12/2011
 Sampling Type: Soil
 Sampling Condition: ** (See Notes)
 Sample Received By: Celey D. Keene

Sample ID: AN 5 SS #1 (H102226-01)

BTEx 8021B		mg/kg		Analyzed By: AP					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/17/2011	ND	2.08	104	2.00	0.829	
Toluene*	<0.050	0.050	10/17/2011	ND	2.07	103	2.00	0.173	
Ethylbenzene*	<0.050	0.050	10/17/2011	ND	2.05	102	2.00	0.0754	
Total Xylenes*	<0.150	0.150	10/17/2011	ND	6.20	103	6.00	1.33	

Surrogate: 4-Bromofluorobenzene (PIL) 99.1 % 64.4-134

Chloride, SMA500Cl-B		mg/kg		Analyzed By: HM					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	512	16.0	10/17/2011	ND	432	108	400	3.64	

TPH 8015M		mg/kg		Analyzed By: AB					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10	<10.0	10.0	10/18/2011	ND	169	84.6	200	6.36	
DRO >C10-C28	<10.0	10.0	10/18/2011	ND	158	78.9	200	9.21	

Surrogate: 1-Chlorooctane 75.0 % 55.5-154

Surrogate: 1-Chlorodecane 75.1 % 57.6-158

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:Chevron - Lovington
DAVID PAGANO
HCR 60 Box 423
Lovington NM, 88260
Fax To: NoneReceived: 10/14/2011
Reported: 10/20/2011
Project Name: SOIL SAMPLES
Project Number: AN5
Project Location: NOT GIVENSampling Date: 10/12/2011
Sampling Type: Soil
Sampling Condition: ** (See Notes)
Sample Received By: Celey D. Keene**Sample ID: AN 5 SS #2 (H102226-02)****BTEX 8021B** mg/kg

Analyzed By: AP

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/17/2011	ND	2.08	104	2.00	0.829	
Toluene*	<0.050	0.050	10/17/2011	ND	2.07	103	2.00	0.173	
Ethylbenzene*	<0.050	0.050	10/17/2011	ND	2.05	102	2.00	0.0754	
Total Xylenes*	<0.150	0.150	10/17/2011	ND	6.20	103	6.00	1.33	

Surrogate: 4-Bromofluorobenzene (PIL) 97.8 % 64.4-134**Chloride, SM4500Cl-B** mg/kg

Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	17000	16.0	10/17/2011	ND	448	112	400	3.64	
TPH 8015M mg/kg Analyzed By: AB									

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GR0 C6-C10	<10.0	10.0	10/18/2011	ND	169	84.6	200	6.36	
DRO >C10-C28	254	10.0	10/18/2011	ND	158	78.9	200	9.21	

Surrogate: 1-Chlorooctane 79.0 % 55.5-154*Surrogate: 1-Chlorodecane* 73.3 % 57.6-158

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages: Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 Chevron - Lovington
 DAVID PAGANO
 HCR 60 Box 423
 Lovington NM, 88260
 Fax To: None

 Received: 10/14/2011
 Reported: 10/20/2011
 Project Name: SOIL SAMPLES
 Project Number: AN5
 Project Location: NOT GIVEN

 Sampling Date: 10/12/2011
 Sampling Type: Soil
 Sampling Condition: ** (See Notes)
 Sample Received By: Celey D. Keene

Sample ID: AN 5 SS #3 (H102226-03)

BTEx 8021B		mg/kg		Analyzed By: AP					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/17/2011	ND	2.08	104	2.00	0.829	
Toluene*	<0.050	0.050	10/17/2011	ND	2.07	103	2.00	0.173	
Ethylbenzene*	<0.050	0.050	10/17/2011	ND	2.05	102	2.00	0.0754	
Total Xylenes*	<0.150	0.150	10/17/2011	ND	6.20	103	6.00	1.33	
Surrogate: 4-Bromofluorobenzene (PIL)									
Chloride, SM4500Cl-B		97.9 %	64.4-134						
		mg/kg	Analyzed By: HM						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	14200	16.0	10/17/2011	ND	448	112	400	3.64	
TPH 8015M		mg/kg	Analyzed By: AB						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10	<10.0	10.0	10/18/2011	ND	169	84.6	200	6.36	
DRO >C10-C28	11.2	10.0	10/18/2011	ND	158	78.9	200	9.21	
Surrogate: 1-Chlorooctane									
		86.2 %	55.5-154						
Surrogate: 1-Chlorodecane									
		89.6 %	57.6-158						

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages: Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:Chevron - Lovington
DAVID PAGANO
HCR 60 Box 423
Lovington NM, 88260
Fax To: NoneReceived: 10/14/2011
Reported: 10/20/2011
Project Name: SOIL SAMPLES
Project Number: AN5
Project Location: NOT GIVENSampling Date: 10/12/2011
Sampling Type: Soil
Sampling Condition: ** (See Notes)
Sample Received By: Celey D. Keene**Sample ID: AN 5 SS #4 (H102226-04)**

BTEx 8021B		mg/kg		Analyzed By: cms					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/18/2011	ND	2.06	103	2.00	2.26	
Toluene*	<0.050	0.050	10/18/2011	ND	2.03	101	2.00	3.33	
Ethylbenzene*	<0.050	0.050	10/18/2011	ND	2.02	101	2.00	4.01	
Total Xylenes*	<0.150	0.150	10/18/2011	ND	6.03	101	6.00	4.41	
Surrogate: 4-Bromofluorobenzene (PIL)									
Chloride, SM4500Cl-B		102 %	64.4-134						
		mg/kg	Analyzed By: HM						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	9600	16.0	10/17/2011	ND	448	112	400	3.64	
TPH 8015M									
		mg/kg	Analyzed By: AB						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10	<10.0	10.0	10/18/2011	ND	169	84.6	200	6.36	
DRO >C10-C28	<10.0	10.0	10/18/2011	ND	158	78.9	200	9.21	
Surrogate: 1-Chlorooctane									
		69.0 %	55.5-154						
Surrogate: 1-Chlorodecane									
		73.7 %	57.6-158						

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages: Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 Chevron - Lovington
 DAVID PAGANO
 HCR 60 Box 423
 Lovington NM, 88260
 Fax To: None

 Received: 10/14/2011
 Reported: 10/20/2011
 Project Name: SOIL SAMPLES
 Project Number: AN5
 Project Location: NOT GIVEN

 Sampling Date: 10/12/2011
 Sampling Type: Soil
 Sampling Condition: ** (See Notes)
 Sample Received By: Celey D. Keene

Sample ID: AN 5 SS #5 (H102226-05)

BTEx 8021B		mg/kg		Analyzed By: cms				A-01	
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/18/2011	ND	2.06	103	2.00	2.26	
Toluene*	<0.050	0.050	10/18/2011	ND	2.03	101	2.00	3.33	
Ethylbenzene*	<0.050	0.050	10/18/2011	ND	2.02	101	2.00	4.01	
Total Xylenes*	<0.150	0.150	10/18/2011	ND	6.03	101	6.00	4.41	
Surrogate: 4-Bromofluorobenzene (PIL)									
Chloride, SM4500Cl-B		102 %	64.4-134		Analyzed By: HM				A-01
mg/kg									
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	1580	16.0	10/17/2011	ND	448	112	400	3.64	
TPH 8015M		mg/kg	Analyzed By: AB		A-01				
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10	<10.0	10.0	10/18/2011	ND	169	84.6	200	6.36	
DRO >C10-C28	<10.0	10.0	10/18/2011	ND	158	78.9	200	9.21	
Surrogate: 1-Chlorooctane									
		76.1 %	55.5-154						
Surrogate: 1-Chlorodecane									
		88.1 %	57.6-158						

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages: Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:Chevron - Lovington
DAVID PAGANO
HCR 60 Box 423
Lovington NM, 88260
Fax To: NoneReceived: 10/14/2011
Reported: 10/20/2011
Project Name: SOIL SAMPLES
Project Number: AN5
Project Location: NOT GIVENSampling Date: 10/12/2011
Sampling Type: Soil
Sampling Condition: ** (See Notes)
Sample Received By: Celey D. Keene**Sample ID: AN 5 SS #6 (H102226-06)**

BTEx 80218		mg/kg		Analyzed By: cms				A-01	
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	10/18/2011	ND	2.06	103	2.00	2.26	
Toluene*	<0.050	0.050	10/18/2011	ND	2.03	101	2.00	3.33	
Ethylbenzene*	<0.050	0.050	10/18/2011	ND	2.02	101	2.00	4.01	
Total Xylenes*	<0.150	0.150	10/18/2011	ND	6.03	101	6.00	4.41	
Surrogate: 4-Bromofluorobenzene (PIL)									
Chloride, SM4500Cl-B		103 %		64.4-134		A-01			
		mg/kg		Analyzed By: HM					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	9800	16.0	10/17/2011	ND	448	112	400	3.64	
TPH 8015M		mg/kg		Analyzed By: AB					
		mg/kg		A-01					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10	<10.0	10.0	10/18/2011	ND	172	85.9	200	4.35	
DRO >C10-C28	<10.0	10.0	10/18/2011	ND	157	78.6	200	6.92	
Surrogate: 1-Chlorooctane									
		77.8 %		55.5-154					
Surrogate: 1-Chlorodecane									
		91.6 %		57.6-158					

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages: Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Notes and Definitions

A-01	WATER LEAKED IN FROM ICE CHEST.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500C-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager



CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

Company Name: <u>Chevron</u>		BILL TO		ANALYSIS REQUEST																						
Project Manager: <u>David Pagano</u>		P.O. #:																								
Address: <u>56 Texas Camp Rd.</u>		Company: <u>Chevron</u>																								
City: <u>Livingston</u> State: <u>NM</u> Zip: <u>88260</u>		Attn: <u>Nick Moschetti</u>																								
Phone #: <u>505-787-9816</u> Fax #:		Address: <u>56 Texas Camp Rd.</u>																								
Project #:		City: <u>Livingston</u>																								
Project Name:		State: <u>NM</u> Zip: <u>88260</u>																								
Project Location:		Phone #: <u>575-396-4414 x201</u>																								
Sampler Name:		Fax #:																								
FOR LAB USE ONLY	Lab I.D.	Sample I.D.	(G)RAB OR (C)OMP.	# CONTAINERS	MATRIX				PRESERV.	SAMPLING																
					GROUNDWATER	WASTEWATER	SOIL	OIL	SLUDGE	OTHER	ACID/BASE	ICE / COOL	OTHER	DATE	TIME	TPH	BTEX	Chlorides								
	<u>H107226</u>																									
	1	ANS SS #1	✓	1			✓							10-12-11	3:30	✓	✓	✓								
	2	ANS SS #2	✓	1			✓								3:35	✓	✓	✓								
	3	ANS SS #3	✓	1			✓								3:40	✓	✓	✓								
	4	ANS SS #4	✓	1			✓							10-12-11	3:45	✓	✓	✓								
	5	ANS SS #5 *	✓	1			✓								3:50	✓	✓	✓								
	6	ANS SS #6 *	✓	1			✓								3:55	✓	✓	✓								

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising whether based in contract or tort shall be limited to the amount paid by the client for the analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within 30 days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise.

Relinquished By:	Date:	Received By:	Phone Result: <input type="checkbox"/> Yes <input type="checkbox"/> No	Add'l Phone #:
	Time:		Fax Result: <input type="checkbox"/> Yes <input type="checkbox"/> No	Add'l Fax #:
Relinquished By: <u>David Pagano</u>			REMARKS:	
Date: <u>10/14/11</u>			* Sample had water leak in from ice chest. <u>Ch</u> <u>10/14/11</u>	
Time: <u>3:17</u>				
Delivered By: (Circle One)				
Sampler - UPS - Bus - Other:				
Sample Condition				
Cool Intact				
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
CHECKED BY: <u>Cash</u>				



PHONE (575) 393-2326 • 101 E. MARLAND • HOBBS, NM 88240

June 06, 2013

JONATHAN OLSEN

ARCADIS U.S., INC. - HOUSTON

630 PLAZA DRIVE, SUITE 600

HIGHLANDS RANCH, CO 80129

RE: CHEVRON BUCKEYE

Enclosed are the results of analyses for samples received by the laboratory on 05/08/13 8:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number T104704398-11-3. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accredited through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Halocetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

A handwritten signature in black ink, appearing to read "Celey D. Keene". The signature is fluid and cursive, with the first name "Celey" being more prominent.

Celely D. Keene

Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 9 (10') (H301088-01)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	7.18	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						

Chloride	Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
		64.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 9 (15') (H301088-02)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	2.60	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						

Chloride	Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
		48.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 9 (20') (H301088-03)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.06	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						

Chloride	Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
		32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 9 (25') (H301088-04)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	2.83	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 6 (2') (H301088-05)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.33	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	848	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 6 (5') (H301088-06)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	6.31	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 6 (10') (H301088-07)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	6.06	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 6 (15') (H301088-08)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.17	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 6 (20') (H301088-09)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.31	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 6 (25') (H301088-10)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	2.76	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	< 16.0	16.0	05/09/2013	ND	432 108 400 0.00

Sample ID: STATE AN005 - 1 (2') (H301088-11)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	5.07	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	656	16.0	05/09/2013	ND	432 108 400 0.00

Sample ID: STATE AN005 - 1 (5') (H301088-12)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	9.23	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	1940	16.0	05/09/2013	ND	432 108 400 0.00

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 1 (10') (H301088-13)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	10.6	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	1460	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 1 (15') (H301088-14)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	2.59	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	192	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 1 (20') (H301088-15)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	1.73	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	96.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

* = Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 1 (25') (H301088-16)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	2.78	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	96.0	16.0	05/09/2013	ND	416 104 400 0.00

Sample ID: STATE AN005 - 5 (2') (H301088-17)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	2.27	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416 104 400 0.00

Sample ID: STATE AN005 - 5 (15') (H301088-18)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	8.26	0.100	05/09/2013	ND	3.69
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416 104 400 0.00

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 5 (5') (H301088-19)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	7.80	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 5 (10') (H301088-20)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	11.3	0.100	05/09/2013	ND				3.69	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 2 (20') (H301088-21)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.22	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/ kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 2 (25') (H301088-22)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	8.59	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 7 (2') (H301088-23)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.64	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	176	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 7 (5') (H301088-24)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.83	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 7 (10') (H301088-25)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.48	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery <td>True Value QC</td> <td>RPD</td> <td>Qualifier</td>	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 7 (15') (H301088-26)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.01	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery <td>True Value QC</td> <td>RPD</td> <td>Qualifier</td>	True Value QC	RPD	Qualifier
Chloride	128	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 7 (20') (H301088-27)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.70	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

 Received: 05/08/2013
 Reported: 06/06/2013
 Project Name: CHEVRON BUCKEYE
 Project Number: B0048601.0000.TAX03
 Project Location: BUCKEYE OILFIELD

 Sampling Date: 05/06/2013
 Sampling Type: Soil
 Sampling Condition: Cool & Intact
 Sample Received By: Jodi Henson

Sample ID: STATE AN005 - 7 (25') (H301088-28)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.76	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg	Analyzed By: DW							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 3 (2') (H301088-35)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.60	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	96.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 3 (5') (H301088-36)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.04	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	48.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/07/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 3 (10') (H301088-37)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.95	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	176	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 3 (15') (H301088-38)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.19	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	48.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 3 (20') (H301088-39)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.43	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/07/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 3 (25') (H301088-40)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.24	0.100	05/13/2013	ND				5.31	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 4 (2') (H301088-41)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	6.35	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	240	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 4 (5') (H301088-42)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	6.28	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	272	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/07/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 4 (10') (H301088-43)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	6.70	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 4 (15') (H301088-44)

% Moisture		Analyzed By: AP							
%									
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	4.32	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 4 (20') (H301088-45)

% Moisture		Analyzed By: AP							
	%								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.02	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/07/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 4 (25') (H301088-46)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.25	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 12 (2') (H301088-47)

Chloride, SM4500Cl-B		Analyzed By: DW							
	mg/kg								
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	128	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 8 (2') (H301088-51)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.63	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	192	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 8 (5') (H301088-52)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	13.9	0.100	05/13/2013	ND	0.474
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	304	16.0	05/09/2013	ND	432 108 400 0.00

Sample ID: STATE AN005 - 8 (10') (H301088-53)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	11.5	0.100	05/13/2013	ND	0.474
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	3480	16.0	05/09/2013	ND	432 108 400 0.00

Sample ID: STATE AN005 - 8 (15') (H301088-54)

% Moisture		Analyzed By: AP			
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
% Moisture	4.25	0.100	05/13/2013	ND	0.474
Chloride, SM4500Cl-B					
	mg/kg		Analyzed By: DW		
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS % Recovery True Value QC RPD Qualifier
Chloride	80.0	16.0	05/09/2013	ND	432 108 400 0.00

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

 Received: 05/08/2013
 Reported: 06/06/2013
 Project Name: CHEVRON BUCKEYE
 Project Number: B0048601.0000.TAX03
 Project Location: BUCKEYE OILFIELD

 Sampling Date: 05/06/2013
 Sampling Type: Soil
 Sampling Condition: Cool & Intact
 Sample Received By: Jodi Henson

Sample ID: STATE AN005 - 8 (20') (H301088-55)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.82	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	64.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 8 (25') (H301088-56)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.88	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 2 (2') (H301088-57)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.45	0.100	05/13/2013	ND				0.474	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	384	16.0	05/09/2013	ND	416	104	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 2 (5') (H301088-58)

% Moisture		Analyzed By: AP					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
% Moisture	8.27	0.100	05/13/2013	ND			0.474
Chloride, SM4500Cl-B							
	mg/kg		Analyzed By: DW				
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400 0.00

Sample ID: STATE AN005 - 2 (10') (H301088-59)

% Moisture		Analyzed By: AP					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
% Moisture	3.22	0.100	05/13/2013	ND			0.474
Chloride, SM4500Cl-B							
	mg/kg		Analyzed By: DW				
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400 0.00

Sample ID: STATE AN005 - 2 (15') (H301088-60)

% Moisture		Analyzed By: AP					
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
% Moisture	6.28	0.100	05/13/2013	ND			0.474
Chloride, SM4500Cl-B							
	mg/kg		Analyzed By: DW				
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC RPD Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400 0.00

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 5 (20') (H301088-71)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	2.90	0.100	05/14/2013	ND				200	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery <td>True Value QC</td> <td>RPD</td> <td>Qualifier</td>	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 5 (25') (H301088-72)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	2.50	0.100	05/14/2013	ND				200	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery <td>True Value QC</td> <td>RPD</td> <td>Qualifier</td>	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	05/09/2013	ND	416	104	400	0.00	

Sample ID: STATE AN005 - 13 (2') (H301088-73)

Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	32.0	16.0	05/09/2013	ND	416	104	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Analytical Results For:

 ARCADIS U.S., INC. - HOUSTON
 JONATHAN OLSEN
 630 PLAZA DRIVE, SUITE 600
 HIGHLANDS RANCH CO, 80129
 Fax To: (713) 977-4620

Received:	05/08/2013	Sampling Date:	05/06/2013
Reported:	06/06/2013	Sampling Type:	Soil
Project Name:	CHEVRON BUCKEYE	Sampling Condition:	Cool & Intact
Project Number:	B0048601.0000.TAX03	Sample Received By:	Jodi Henson
Project Location:	BUCKEYE OILFIELD		

Sample ID: STATE AN005 - 9 (2') (H301088-79)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	3.13	0.100	05/14/2013	ND				200	
Chloride, SM4500Cl-B									
		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	80.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 9 (5') (H301088-80)

% Moisture		Analyzed By: AP							
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
% Moisture	5.44	0.100	05/14/2013	ND				200	
Chloride, SM4500Cl-B									
	mg/kg		Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	48.0	16.0	05/09/2013	ND	432	108	400	0.00	

Sample ID: STATE AN005 - 15 (10') (H301088-87)

Chloride, SM4500Cl-B		mg/kg	Analyzed By: DW						
Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	160	16.0	05/09/2013	ND	432	108	400	0.00	

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

Notes and Definitions

ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analysis. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.



Celey D. Keene, Lab Director/Quality Manager

*=Accredited Analyte

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

Company Name: APCML-45 Project Manager: Jonathan Olson Address: 2929 Brimpatch Dr., Suite 300 City: Houston State: TX Zip: 77402 Phone #: 713.953.4874 Fax #: 713.977.4620 Project #: 1504861, 8800, TR03 Project Owner: Chevron City: Houston State: Texas Project Location: Buckeye oil field Project Name: Chevron Buckeye Sampler Name: Bryan Manning		Lab I.D. H301088		Sample I.D.	
		(G)RAB OR (C)OUMP # CONTAINERS GROUNDWATER WASTEWATER SOIL OIL SLUDGE OTHER: ACID/BASE ICE/COOL OTHER: <i>None</i>		MATRIX PRESERV	
P.O. #: Company: Attn: Address: City: State: Zip: Phone #: Fax #:		ANALYSIS REQUEST			

DATE	TIME	SAMPLING									
		DATE	TIME	DATE	TIME	DATE	TIME	DATE	TIME	DATE	TIME
5-6-13	1320	X									
5-6-13	1325	X									
5-6-13	1328	X									
5-6-13	1334	X									
5-6-13	1337	X									
5-6-13	1343	X									
5-6-13	1650	X									
5-6-13	1700	X									
5-6-13	1654	X									
5-6-13	1656	X									

PLEASE NOTE: Chain of Custody and Control: Cardinal's custody and control begins when the sample is received by the laboratory and ends when the sample is returned to the client. Cardinal is not responsible for samples that are not received by the laboratory or for samples that are not returned to the client. Cardinal is not responsible for samples that are not received by the laboratory or for samples that are not returned to the client.

Relinquished By: *[Signature]* **Date:** 5-8-13 **Time:** 0800

Received By: *[Signature]* **Date:** 5-8-13 **Time:** 0800

Delivered By: (Circle One) ☒ Driver ☐ Other

Sampler - UPS - Bus - Other: ☒ Driver ☐ Other

Sample Condition: ☒ Yes ☐ No ☐ Intact ☐ Not Intact

Checked By: *[Signature]*

REMARKS:

Phone Result: ☐ Yes ☐ No **Add'l Phone #:**

Fax Result: ☐ Yes ☐ No **Add'l Fax #:**

† Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2326

#54

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

Company Name: ARCA/14-45	
Project Manager: Jonathan Olson	P.O. #:
Address: 2929 Bismarck Blvd, Suite 300	
City: Houston	State: TX Zip: 77402
Phone #: 713.953.4874	Fax #: 713.977.4620
Project #: 00048601, 00048603 Project Owner: Chevron	
Project Name: Chevron Buckeye	
Project Location: Buckeye oil field	
Sampler Name: Ryan Manning	

Lab I.D.	Sample I.D.	Matrix										DATE	TIME
		(GRAB OR COMPOUND) CONTAINERS	GROUNDWATER	WASTEWATER	X-SOL	OIL	SLUDGE	OTHER:	ACID/BASE	ICE/COOL	OTHER:		
30	4th - AR005-14(5)	6										5-6-13	1620
31	4th - AR005-2(25)	6										5-6-13	1632
32	4th - AR005-7(21)	6										5-6-13	1220
33	4th - AR005-7(5)	6										5-6-13	1228
34	4th - AR005-7(10)	6										5-6-13	1232
35	4th - AR005-7(15)	6										5-6-13	1237
36	4th - AR005-7(20)	6										5-6-13	1243
37	4th - AR005-7(25)	6										5-6-13	1247
38	4th - AR005-14(2)	6										5-6-13	1008
39	4th - AR005-14(5)	6										5-6-13	1620

Portion of Chain of Custody Request

Hold

XX

ANALYSIS REQUEST

BILL TO

REMARKS:

Phone Result: ☐ Yes ☐ No Add'l Phone #:

Fax Result: ☐ Yes ☐ No Add'l Fax #:

Received By: *John Johnson*

Received By: *John Johnson*

Relinquished By: *John Johnson*

Relinquished By: *John Johnson*

Delivered By: (Circle One)

Sample - UPS - Bus - Other:

Sample Condition: ☐ Cool ☐ Intact ☐ No ☐ Yes

CHECKED BY: *John Johnson*

Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2326

#54

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

Company Name: ALRADIS-45 Project Manager: Jonathan Olson Address: 2929 Briggard R., Suite 300 City: Houston State: TX Zip: 77402 Phone #: 713.953.4874 Fax #: 713.972.4620 Project #: 800.486.01.0000-TR03 Project Owner: Chevron Project Name: Chevron Fuel 274 Project Location: Buckeye Oil Field Sampler Name: Ryan Kang		Lab I.D. H361088 Sample I.D.	
BILL TO ANALYSIS REQUEST		MATRIX (S)RAB OR (C)OMP # CONTAINERS GROUNDWATER WASTEWATER SOIL OIL SLUDGE OTHER:	
PRESERV ACID/BASE ICE / COOL OTHER:		DATE TIME	
SAMPLING		DATE TIME	
1023 1028 1034 1040 0943 0946 0950 0953 0956 1000		1 1 1 1 1 1 1 1 1 1	

PLEASE NOTE: Using and abusing Cardinal's ability and directly violating property by any other means without written consent from Cardinal Laboratories, Inc. is strictly prohibited. Any violation of this policy will result in the immediate termination of service and all associated costs will be charged to the client. Cardinal Laboratories, Inc. is not responsible for any damage or loss of samples or data caused by negligence or misuse of the service. Cardinal Laboratories, Inc. is not responsible for any damage or loss of samples or data caused by negligence or misuse of the service.

Relinquished By: [Signature]
Date: 5-8-13
Time: 0800
Relinquished By: [Signature]
Date: 5-8-13
Time: 0800

Delivered By: (Circle One)
 UPS - Bus - Other:

Sample Condition: Cool Intact ☒ Yes ☐ No
 Cool Intact ☒ Yes ☐ No
 CHECKED BY: [Signature]

Received By: [Signature]
Date: 5-8-13
Time: 0800

Phone Result: ☐ Yes ☐ No
Add'l Phone #:
Add'l Fax #:

REMARKS:

† Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2476 #54

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

Company Name: ARCA/14-15 Project Manager: Jonathan Olson Address: 2929 Bright Path Dr., Suite 300 City: Houston State: TX Zip: 77402 Phone #: 713.953.4874 Fax #: 713.972.4620 Project #: 48601, 48602, 48603 Project Owner: Chevron Project Name: Chevron Bunkertage Project Location: Buckertage oil field Sample Name: Bunker Bunkertage		Lab I.D. H301088 Sample I.D.	
Grab or (C)ump # Containers Groundwater Wastewater Soil Oil Sludge Other Acid/base Ice/Cool Other: None		Matrix Preserv Sampling	
DATE TIME		ANALYSIS REQUEST	
3-7-13 1037 3-7-13 1035 3-7-13 1040 3-7-13 1043 3-7-13 1046 3-7-13 1050 3-2-13 1115 3-2-13 1117 3-2-13 1120 3-7-13 1121		XXXX Hold CI - added 5/30/12	

Relinquished By: [Signature] Date: 5-8-13 Time: 0800		Relinquished By: [Signature] Date: 5-8-13 Time: 0800	
Delivered By: (Circle One) Sampler - UPS - Bus - Other:		Sample Condition Cool <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Intact <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
Received By: [Signature] Date: 5-8-13 Time: 0800		Received By: [Signature] Date: 5-8-13 Time: 0800	
Phone Result: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Add'l Phone #:		REMARKS:	

† Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2326

#54

09/5

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

Company Name: APCADIS-45 Project Manager: Jonathan Olson Address: 2929 Brinkman Dr., Suite 300 City: Houston State: TX Zip: 77402 Phone #: 713.953.4874 Fax #: 713.972.4620 Project #: 8004860000-TRP3 Project Owner: Chevron Project Name: Chevron Brinkman Project Location: Brinkman 0.1 Field Sampler Name: Ryan Kany		Lab I.D. H301088 Sample I.D.	
Matrix: <input type="checkbox"/> GROUNDWATER <input type="checkbox"/> WASTEWATER <input type="checkbox"/> SOIL <input type="checkbox"/> OIL <input type="checkbox"/> SLUDGE <input type="checkbox"/> OTHER:		DATE TIME	
PREPARE <input type="checkbox"/> ACID/BASE <input type="checkbox"/> ICE / COOL <input type="checkbox"/> OTHER:		SAMPLING	
ANALYSIS REQUEST			

Lab I.D.	Sample I.D.	Matrix	PREPARE	SAMPLING	DATE	TIME
51	Hot-Air-Air-2 (2)	X			5-6-13	1128
52	Hot-Air-Air-8 (5)	X			5-6-13	1132
53	Hot-Air-Air-8 (10)	X			5-6-13	1136
54	Hot-Air-Air-8 (15)	X			5-6-13	1140
55	Hot-Air-Air-8 (20)	X			5-6-13	1144
56	Hot-Air-Air-8 (25)	X			5-6-13	1145
57	Hot-Air-Air-8 (30)	X			5-6-13	1608
58	Hot-Air-Air-8 (35)	X			5-6-13	1614
59	Hot-Air-Air-8 (40)	X			5-6-13	1617
60	Hot-Air-Air-8 (45)	X			5-6-13	1623

PLEASE NOTE: (Include and attach) evidence for any claim arising without basis in contract or fact, shall be looked to the amount paid by the client for the analysis. All items, including those for negligible use, shall be destroyed without written notice to agency and received by Cardinal within 30 days after completion of the applicable service. Do not exceed that. Cardinal will not be responsible for negligence or other claims arising from the destruction of evidence.		Refused By: Date: 5-8-13 Time: 0800	Received By: Date: 5-8-13 Time: 0800	Delivered By: (Circle One) Sampler - UPS - Bus - Other:
Refused By: Date: 5-8-13 Time: 0800	Received By: Date: 5-8-13 Time: 0800	Delivered By: (Circle One) Sampler - UPS - Bus - Other:	Sample Condition: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Intact <input type="checkbox"/> Cool <input type="checkbox"/> (Initials)	
REMARKS: Phone Result: <input type="checkbox"/> Yes <input type="checkbox"/> No Add'l Phone #: <input type="checkbox"/> Yes <input type="checkbox"/> No Add'l Fax #: <input type="checkbox"/> Yes <input type="checkbox"/> No				

† Cardinal cannot accept verbal changes. Please fax written changes to (575) 393-2326

#54



Attachment 6

Boring Logs (May 2013)

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-1



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0		AR		0.0	☒		SILTY SANDY CALICHE, Pale Yellow (2.5YR8/2), intermixed with White(5YR8/1), indurated, 80% caliche, 20% sand, silt to very fine grained, poorly sorted, dry, formation contains indurated silica cemented sandstone, Pale Brown (10YR6/3), concretion, silt to very fine grained, subangular, poorly sorted, dry.
		1	AR	5	0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/2), firm, dry, 60% caliche, 40% sand, fine grained, subangular to subrounded, poorly sorted, formation contains trace interbeds of indurated sandstone Light Gray (2.5YR7/2) and Pale Yellow (2.5YR8/2) caliche, silty to very fine grains, subrounded, well sorted, silica cemented, caliche is indurated, contains silt to fine grains, 70% caliche, 30% sand, dry, thinly interbedded throughout formation.
5	-5					☒		
		2	AR	5	0.0	☒		
10	-10					☒		Same as above, sandy caliche had slight color change.
		3	AR	5	0.0	☒		Same as above, slightly moist.
15	-15					☒		SAND, Very Pale Brown (10YR8/3) very fine to fine grained, subrounded to subangular, poorly sorted, loose, dry calcareous, formation contains thin sandstone interbeds, Light Brown (7.5YR6/4), silt to very fine grained, subrounded, moderately sorted, silica cemented.
		4	AR	5	0.0	☒		SANDSTONE, Light Brown (7.5YR6/4), silt to very fine grained, subrounded, moderately sorted, silica cemented.
20	-20					☒		SAND, Pink (7.5YR7/3), fine grained, moderately sorted, loose, dry.
		5	AR	5	0.0	☒		
25	-25					☒		



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-2



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0		AR		0.0			SILTY/SANDY CALICHE, Pale Yellow (2.5YR8/2), interbedded with White(5YR8/1), indurated, 75% caliche, 25% sand, silt to very fine grained, trace fine grains in sample, subangular, poorly sorted, dry.
1		1	AR	5	0.0	☒		SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented, friable, slightly moist, 80% caliche, 20% sand, silt to fine grained, subrounded, moderately sorted, loose, caliche is arenaceous.
5	-5				0.0	☒		
2		2	AR	5	0.0	☒		
10	-10				0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/7), soft, dry, 60% caliche, 40% sand, very fine to fine grained, subrounded, moderately sorted, loose.
3		3	AR	5	0.0	☒		
15	-15				0.0	☒		SANDSTONE, Light Yellowish Brown (2.5YR6/3), silt to fine grained, subrounded, poorly sorted, indurated, silica cementation, dry, interbedded with calcareous sand, Pink (7.5YR8/3), fine grained, subrounded, moderately sorted, dry loose, 3 inch interbeds throughout formation.
4		4	AR	5	0.0	☒		
20	-20				0.0	☒		SAND, PINK (7.5YR8/3), fine grained with trace medium grains, subrounded, moderately to well sorted, loose, slightly calcareous, dry.
5		5	AR	5	0.0	☒		
25	-25				0.0	☒		Same as above, at 25 feet bgs, moderately sorted, contains sandstone Brown (7.5YR5/3), silt to very fine grains, with trace fine grains, subrounded, moderately to poorly sorted, indurated, silica cementation, thinly interbedded, formation is slightly calcareous.



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/07/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-3



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0	☒		SILTY/SANDY CALICHE, Pale Yellow (2.5YR8/2), intermixed with White(5YR8/1), indurated, 80% caliche, 20% sand, silt to very fine grained, trace fine grains in sample, poorly sorted, subangular, dry, formation contains indurated silica cemented sandstone, Pale Brown (10YR6/3) concretions, silt to very fine grained, subangular, poorly sorted, dry.
			AR	5	0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/3), slightly firm, lightly cemented, 65% caliche, 35% sand, very fine to fine grained, subangular, poorly sorted, dry. Formation contains paper thin sandstone interbeds, Light Brown (7.5YR6/4), silt to very fine grained, moderately sorted, subangular, dry, indurated, silica cementation throughout formation.
-5	-5	2	AR	5	0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/2), soft, powdery, dry arenaceous, 60% caliche, 40% sand, very fine to fine grained, subangular to subrounded, poorly sorted, formation contains trace paper interbeds of sandstone, indurated as described above throughout.
-10	-10	3	AR	5	0.0	☒		SAND, Very Pale Brown (10YR8/3), very fine to fine grained, subangular to subrounded, poorly sorted, loose, dry, calcareous. Formation contains indurated sandstone as described above throughout.
-15	-15	4	AR	5	0.0	☒		SAND, PINK (7.5YR7/3), fine grained, subrounded, moderately sorted, loose, dry, slightly calcareous.
-20	-20	5	AR	5	0.0	☒		
-25	-25					☒		



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/07/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-4



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0	☒		SILTY/SANDY CALICHE, Pale Yellow (2.5YR8/2), intermixed with White(5YR8/1), indurated, 80% caliche, 20% sand, silt to very fine grained, trace fine grains in sample, poorly sorted, subangular, dry, arenaceous, formation contains indurated silica cemented sandstone, Pale Brown (10YR6/3), concretion, silt to very fine grained, subangular, poorly sorted, dry.
					0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/3), slightly firm, lightly cemented, 75% caliche, 25% sand, very fine to fine grained, subangular, poorly sorted, dry, formation contains thin sandstone, Light Brown (7.5YR6/4), silt to very fine grained, moderately sorted, subangular, dry, indurated, silica cementation throughout formation.
5	-5	2	AR	5	0.0	☒		
					0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/3), soft, powdery, dry arenaceous, 70% caliche, 30% sand, very fine to fine grained, subangular to subrounded, poorly sorted, formation contains indurated sandstone inerbeds, throughout formation.
10	-10	3	AR	5	0.0	☒		
					0.0	☒		SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented, 60% caliche, 40% sand, very fine to fine grained, subangular to subrounded, poorly sorted, dry, calcareous.
15	-15	4	AR	5	0.0	☒		
					0.0	☒		SAND, PINK (7.5YR7/3), fine grained, moderately sorted, loose, dry, slightly calcareous.
20	-20	5	AR	5	0.0	☒		
					0.0	☒		
25	-25					☒		



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-5



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0	☒		SILTY/SANDY CALICHE, Pale Yellow (2.5YR8/2), White(5YR8/1), indurated, 75% caliche, 25% sand, silt to very fine grained, poorly sorted, dry,
					0.0			
5	-5	2	AR	5	0.0	☒		SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented 80% caliche, 20% sand, silt to very fine grained, subrounded, moderately sorted, loose, slightly moist.
10	-10	3	AR	5	0.0	☒		SAND, Pink (7.5YR8/4), fine grained with trace medium grains in sample, sunrounded, poorly sorted, loose, calcareous.
15	-15	4	AR	5	0.0	☒		SANDSTONE, Light Yellowish Brown (2.5YR6/3), silt to very fine grained with trace fine grains in sample, subrounded, poorly sorted, indurated, silica cemented, dry. Formation was interbedded with thin sand, Very Pale Brown (10YR8/3), fine grained, subrounded, moderately sorted, loose throughout formation.
20	-20	5	AR	5	0.0	☒		SAND, PINK (7.5YR8/3), fine grained,subrounded, moderately to well sorted, loose, dry.
25	-25					☒		Same as above, at 25 feet, Pink (7.5YR7/3), fine grained with trace medium grains in sample, moderately to well sorted, loose, dry.



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-6



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0			SILTY/SANDY CALICHE (BEDROCK), Pale Yellow (2.5Y 8/2) with White(5YR8/1), indurated, 75% caliche, 25% sand, silt to very fine grained, trace fine grains in sample, subangular, poorly sorted, dry,
					0.0			SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented, friable, powdery, 80% caliche, 20% sand, silty to very fine grained, subrounded, moderately sorted, dry, loose.
5	-5	2	AR	5	0.0			
10	-10	3	AR	5	0.0			Same as above, at 10 feet bgs, sand increased to 35% , trace thin sandstone, Light Yellowish Brown (2.5Y6/3), silt to fine grained, subrounded poorly sorted, indurated, silica cemented interbeds continued throughout formation.
15	-15	4	AR	5	0.0			SANDSTONE, Light Yellowish Brown (2.5YR6/3), silt to fine grained, subrounded, poorly sorted, indurated, silica cemented, dry, interbedded with sand, Pink (7.5YR8/3), fine grained, subrounded, moderately to well sorted, loose, thinly interbedded (3 inch) with sandstone through out formation
20	-20	5	AR	5	0.0			SAND, Pink (7.5YR8/3), fine grained, subrounded, moderately sorted, loose, dry, formation contains very thin interbedded sandstone as described above, indurated, silica cementation.
25	-25							



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-6



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

25 25



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-7



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0			SILTY/SANDY CALICHE (BEDROCK), Pale Yellow (2.5Y 8/2) intermixed with White(5YR8/1), indurated, 80% caliche, 20% sand, subangular silt, to very fine grained, poorly sorted, dry formation contained indurated silica cemented sandstone Pale Brown (10YR6/3), concretions, silt to very fine grains, subangular, poorly sorted, dry
5	-5	2	AR	5	0.0			SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), indurated, dry, powdery, 75% caliche, 25% silt to very fine grains, sub-angular, poorly sorted, formation contains trace indurated silica cemented, sandstone Pale Brown (10YR6/3), thin interbedding.
10	-10	3	AR	5	0.0			Same as above, sand increased slightly to 30% showing trace fine grains.
15	-15	4	AR	5	0.0			SAND, Very Pale Brown (7.5YR 8/2), very fine to fine grained, sub-rounded, poorly sorted, moderately calcareous, dry, loose
20	-20	5	AR	5	0.0			SAND, Pink (7.5YR8/3), fine grained, sub-rounded, moderately sorted, loose, dry.
25	-25							Same as above, at 25 feet bgs Pink (7.5YR7/3).



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-7



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

25 25



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-8



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0				0.0			SANDY CALICHE (BEDROCK), Pale Yellow (2.5YR8/2) intermixed with White(5YR8/1), indurated, 65% caliche, 35% sand very fine to fine grained, trace medium grains in sample. sub-angular, poorly sorted, dry.
		1	AR	5	0.0			SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented, friable argillaceous, 65% caliche, 35% sand, silt to fine grained, subrounded, moderately sorted, slightly moist
5	-5							
		2	AR	5	0.0			
10	-10							
		3	AR	5	0.0			
15	-15							SANDSTONE, Light Yellowish Brown (2.5YR6/3), silt to fine grained, subrounded, poorly sorted, indurated, silica cementation, dry
		4	AR	5	0.0			CALICHE SAND, Very Pale Brown (10YR8/2), very fine to fine grained, sub-rounded, moderately sorted, very lightly cemented, 50% caliche, 50% sand, dry, powdery
20	-20							SAND, Pink (7.5YR 8/3), fine grained, subrounded, moderately sorted, loose, slightly calcareous, dry
		5	AR	5	0.0			
25	-25							



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-9



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0	1	AR	5	0.0	☒		SANDY CALICHE (BEDROCK), Pale Yellow (2.5YR8/2) intermixed with White(5YR8/1), indurated, 65% caliche, 35% sand very fine to fine grained, trace medium grains in sample. subangular, poorly sorted, dry
					0.0			SILTY/SANDY CALICHE, Very Pale Brown (10YR8/2), soft, lightly cemented, friable argillaceous, 65% caliche, 35% sand, silt to fine grained, subrounded, moderately sorted, slightly moist
5	-5	2	AR	5	0.0	☒		
10	-10	3	AR	5	0.0	☒		
15	-15	4	AR	5	0.0	☒		SANDSTONE, Light Yellowish Brown (2.5YR6/3), silt to fine grained, subrounded, poorly sorted, indurated, silica cemented, dry
								SAND, Very Pale Brown (10YR 8/2), very fine to fine grained, subrounded, moderately sorted, very lightly cemented 50% caliche, 50% sand, slightly powdery, dry
20	-20	5	AR	5	0.0	☒		SAND, Pink (7.5YR 8/3).
25	-25					☒		



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-12



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0				0.0			TOPSOIL, Sandy/Silty Clay, Dark Brown (7.5YR3/2), firm, blocky, dry, roots in sample, sand is silt to fine grained, sub-angular, poorly sorted, formation has trace caliche, White (10YR8/1), soft, friable, dry
		1	AR	5	0.0			SILTY/SAND CALICHE (BEDROCK), Pale Yellow (2.5YR8/2) with White (5Y8/1), indurated, 65% caliche, 35% sand, silt to very fine grained, trace fine grains and medium grains in sample, subangular, poorly sorted, dry
					0.0			
5	-5							SANDY CALICHE, Very Pale Brown (10YR 8/2), lightly cemented, dry, arenaceous, 75% caliche, 25% sand, very fine to fine grained, trace medium grains in sample, subangular, poorly sorted
		2	AR	5	0.0			
10	-10							CALCAREOUS SAND, Very Pale Brown (10YR 8/2), very fine to fine grained, subrounded to subangular, poorly sorted, loose, dry, formation contains trace sandstone, Pale Yellow (2.5Y7/3), silt to fine grained, subangular, poorly sorted, indurated, silica cemented, interbedded, thin throughout formation, subgrains increased in size slightly to mostly fine grained
		3	AR	5	0.0			
15	-15							
		4	AR	5	0.0			SAND, Pink (7.5YR8/3), fine grained, subrounded, moderately sorted, loose, moderately calcareous, strongly interbedded with thin sandstone, Light Yellowish Brown (2.5Y6/3), silt to fine grained, subrounded, poorly sorted, indurated, silica cementation, dry
20	-20							
		5	AR	5	0.0			
25	-25							



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-13



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0				0.0			TOPSOIL, Sandy/Silty Clay, Dark Brown (7.5YR3/2), firm, blocky, dry, roots in sample, sand is silt to fine grained, subangular, poorly sorted, formation has trace caliche, White (10YR8/1), soft, friable, dry
		1	AR	5	0.0			SILTY/SAND CALICHE (BEDROCK), Pale Yellow (2.5YR8/2) with White (5YR8/1), indurated, 65% caliche, 35% sand, silt to very fine grained, trace medium grains in sample, subangular, poorly sorted, dry
					0.0			
5	-5							
		2	AR	5	0.0			
10	-10							SANDY CALICHE, Very Pale Brown (10YR 8/2), very soft, powdery, dry, 80% caliche, 20% sand, very fine grained, subrounded, moderately sorted, loose. Formation contains thin sandstone, Light Yellowish Brown (2.5YR6/3), silt to fine grained, subrounded, poorly sorted.
		3	AR	5	0.0			
15	-15							Same as above, formation contains silica cementation throughout.
		4	AR	5	0.0			
20	-20							SAND, Pink (7.5YR8/3), very fine to fine grained, with trace medium grains in sample, subrounded, poorly sorted, loose, calcareous, formation contains thin sandstone interbeds.
		5	AR	5	0.0			
25	-25							



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;

Date Start/Finish: 05/06/2013
Drilling Company: White Drilling

Well/Boring ID: STATE AN005-15



Drilling Method: Air Rotary
Sampling Method: Shovel

Client: Chevron EMC
Location: State AN 5

Borehole Depth: 25' bgs
Descriptions By: R.Nanny

DEPTH	ELEVATION	Sample Run Number	Sample/Int/Type	Recovery (feet)	PID Headspace (ppm)	Analytical Sample	Geologic Column	Stratigraphic Description
-------	-----------	-------------------	-----------------	-----------------	---------------------	-------------------	-----------------	---------------------------

0	0							TOPSOIL, Sandy/Silty Clay, Dark Brown (7.5YR3/2), firm, blocky, dry, roots in sample, sand is silt to fine grained, subangular, poorly sorted, formation has trace caliche, White (10YR8/1), soft to indurated, trace nodules, dry
		1	AR	5	0.0			SILTY/SAND CALICHE (BEDROCK), Pale Yellow (2.5YR8/2) intermixed with White (5YR8/1), indurated, 65% caliche, 35% sand, very fine to fine grained with trace medium grains in sample, subangular, poorly sorted, dry
					0.0			
5	-5							
		2	AR	5	0.0			
10	-10							SILTY SANDY CALICHE, Very Pale Brown (10YR8/2), firmly to strongly cemented, arenaceous, 75% caliche, 25% sand, silt to very fine to fine grained, subangular, poorly sorted, dry.
		3	AR	5	0.0			
15	-15							SANDY CALICHE, Very Pale Brown (10YR8/2), very fine to fine grained, subrounded to subangular, moderately to poorly sorted, firmly cemented, 50% sand, 50% caliche, dry.
		4	AR	5	0.0			
20	-20							SAND, Pink (7.5YR8/3), fine grained, subrounded, moderately sorted, loose, calcareous, dry.
		5	AR	5	0.0			
25	-25							Same as above, at 25 feet bgs, formation contains sandstone, Pale Brown (7.5YR6/3), silt to fine grained, subrounded, moderately sorted, silica cementation, indurated, thin interbeds throughout formation.



Remarks: ags = above ground surface; AK = air knife; amsl = above mean sea level; AR = air rotary; bgs = below ground surface; ppm = parts per million;



Attachment 7

Chloride Multimedia Exposure
Assessment Model Simulated
Soil Screening Levels for the
Protection of Groundwater Memo



ARCADIS U.S., Inc.
2929 Briarpark Drive
Suite 300
Houston
Texas 77042
Tel 713 953 4800
Fax 713 977 4620

MEMO

To:
Kegan Boyer, Chevron Environmental
Management Company

Copies:
Chris Shepherd, ARCADIS
Kathleen Abbott, ARCADIS
David Evans, ARCADIS

From:
Jonathan Olsen

Date:
May 8, 2014

ARCADIS Project No.:
B0048615.0000

Subject:
**Chloride Multimedia Exposure Assessment Model Simulated Soil Screening
Levels for the Protection of Groundwater**
HES Transfer Sites, Lea County, New Mexico

On behalf of Chevron Environmental Management Company, ARCADIS U.S., Inc. (ARCADIS) evaluated chloride remediation action levels for use at the Health Environmental Safety (HES) Transfer Sites near Hobbs, New Mexico. The New Mexico Oil Conservation District (NMOCD) has established soil screening levels (SSLs) for fluid management pits (also known as the "NMOCD PIT RULE" [NMAC 19.15.17]); however, no formal SSLs have been established by the NMOCD or the New Mexico Environmental Department (NMED) for surface releases of production water. The Risk Assessment Guidance for Investigation and Remediation (NMED 2012) states that SSLs should be based on risk to human health and the potential migration to groundwater with respect to the NMED-specific tap water SSL. Chloride is not considered hazardous and the NMED and the United States Environmental Protection Agency (USEPA) have not established tap water screening levels for chloride. However, the NMED has established a chloride standard for groundwater (NMAC 20.6.2.1101) of 250 milligrams per liter (mg/L). Therefore, the SSL for chloride should be based on the soil leaching to groundwater pathway.

To evaluate a chloride SSL for use at the HES Transfer Sites, ARCADIS performed simulations of unsaturated zone flow, transport, and saturated zone mixing of chloride using the Multimedia Exposure Assessment Model Version 2.0 (MULTIMED; USEPA 1996) to evaluate the potential migration of chloride in shallow soil through the unsaturated zone to the underlying groundwater. The initial simulations were intended to estimate a maximum allowable chloride soil concentration (site SSL) to evaluate HES Transfer

Sites in Lea County and eastern Eddy County, New Mexico, and to develop a baseline approach for using the model for potential future evaluations of solute migration at other HES Transfer Sites in New Mexico.

MULTIMED Overview

MULTIMED was originally designed to simulate the movement of solutes leaching from a landfill to various exposure pathways. Due to its general acceptance by the NMOCD and the USEPA and its ability to simulate unsaturated and saturated zone flow and transport, MULTIMED was selected for this evaluation. The model, as designed, simulates one-dimensional vertical transport in the unsaturated zone to the saturated zone based on user-provided input parameters considering vadose zone, saturated zone, and chemical-specific characteristic parameters.

The simulations were performed using both the unsaturated and saturated zone modules available in MULTIMED. The unsaturated zone module performs solutions of the downward flow of infiltrating water to the water table by Darcy's Law:

$$Q = -K_v \cdot K_{rw} \left(\frac{\delta\psi}{\delta z} \right)$$

Where:

ψ is the pressure head (meters [m])

z is the depth (m)

K_v is the saturated hydraulic conductivity (meters per year [m/year])

K_{rw} is the relative hydraulic conductivity

The boundary condition at the water table is:

$$\psi \cdot L = 0$$

Where:

L is the thickness of the unsaturated zone (m)

In the unsaturated zone, it is necessary to specify the relationship between relative hydraulic conductivity, pressure head, and water saturation. This relationship is given by van Genuchten (1976):

$$S_e = \theta_r + \frac{\theta_s - \theta_r}{[1 + (\alpha\psi^\beta)^\gamma]}$$

Where:

θ_r and θ_s are the residual water saturation and total water saturation (dimensionless), respectively

β, γ, α are empirical soil-specific parameters (dimensionless)

ψ is the air pressure entry head (m)

S_e is the effective saturation (fraction)

Source area concentrations are input as leachate concentrations, therefore, the soil/water partition equation was used to convert between total soil concentration in milligrams per kilogram (mg/kg) and the leachate concentration in mg/L:

$$C_t = \frac{C_l \cdot R \cdot \theta_w}{\rho_b}$$

Where:

C_t is the concentration of the chemical of interest in soil (mg/kg)

C_l is the concentration of the chemical of interest in leachate (mg/L)

R is the retardation coefficient (dimensionless, assumed 1 for chloride)

ρ_b is the bulk density of the soil (mg/L or grams per cubic centimeter)

The mass of the chemical of interest that reaches the groundwater is expressed by the simplified steady-state equation (Salhotra et al. 1995) that couples the vadose zone to the groundwater:

$$M_L = A_w \cdot Q_f \cdot C_l$$

Where:

M_L is the chemical of interest mass that leaches from site soil (grams per year [g/year])

A_w is the width of the source area (m²)

Q_f is the percolation rate from the facility/site (m/year)

The mixed groundwater concentration is controlled by the quasi-three-dimensional advection dispersion equations that are evaluated based on the following chemical concentration relationship within the mixing zone (Salhotra et al. 1995):

$$C(x, y, z, t) = \frac{H}{B} C_f(x, y, t) + \Delta C_p(x, y, z, t)$$

Where:

C is the dissolved concentration (mg/L, g/m³)

x, y, z are the spatial coordinates (m)

t is elapsed time (year)

H is the source zone penetration (m), with a maximum equal to B

B is the thickness of the saturated zone (m)

MULTIMED's output concentration is a centerline concentration based on a calculated dilution attenuation factor. Thus, the output concentration is the maximum concentration of the chemical of interest in groundwater at a reasonable distance downgradient from the source area.

Model Design, Inputs, and Assumptions

The required input parameters for the MULTIMED simulations are summarized in Table 1. Input parameters include model structure, unsaturated and saturated zones, and chemical characteristics. Minimal site-specific data regarding the HES sites are available; therefore, numerous input parameters are based on published reports, default NMED values (2012), default values provided in the modeling code, and ARCADIS's experience, as indicated in Table 1. The model values are considered representative of the Lea County, New Mexico area. Due to the intended use of the SSL at multiple sites, more conservative values were generally selected for the given ranges of input parameters.

The general assumptions used in the MULTIMED model design include:

- The unsaturated and saturated zones are a single, homogeneous material.
- The applied recharge and infiltration are constant throughout the simulation.
- Initial chloride concentrations in soil below the source area and in groundwater are equal to 0.
- The model assumes no chemical transformation or adsorption of chloride to soil materials.

The simulations were performed using the transient model capabilities of MULTIMED. Steady-state simulations were not chosen because MULTIMED requires the assumption that the source is continuous and constant throughout the simulation, which is not appropriate for these evaluations. Also, the transient model was selected to provide output that simulates the aquifer concentrations versus time and models a finite source.

Model Simulations and Results

Using the input parameters provided, soil concentrations for chloride were iteratively varied to arrive at an appropriate maximum allowable soil concentration that would be protective of groundwater for each of the scenarios. To calculate the maximum concentration that would be observed given the input concentrations and parameters, the simulation period selected was 1,980 years with 20-year time steps.

To ascertain the maximum allowable chloride concentration for more typical chloride concentration distribution and depth to groundwater scenarios, eight MULTIMED simulations were completed. The scenarios are summarized in Table 2. The input values for the simulations were the same, except for the thickness and width of the chloride-affected soil within the soil column. The first four simulations evaluated homogeneous chloride-affected soil 20 meters wide (400 square meters [m^2]) and varied the chloride-affected soil thickness between 1 meter and 3 meters and the depth to groundwater between 20 and 30.5 meters. The remaining four simulations evaluated homogeneous chloride-affected soil 45 meters wide (2,000 m^2) and varied the chloride affected soil thickness between 1 meter and 3 meters and the depth to groundwater between 20 and 30.5 meters

The predicted groundwater concentrations versus time are illustrated on Figures 1 through 8. The peak arrival times varied between 540 and 860 years. The simulations indicate the site SSLs for the protection of groundwater ranged from 8,525 to 266,100 mg/kg (Table 2) depending on the scenario and are protective of the New Mexico chloride groundwater standard of 250 mg/L.

The MULTIMED model, like any model, requires the use of simplifying assumptions regarding subsurface conditions and flow processes that result in inherent limitations and uncertainty compared to an actual flow system. In this case, uncertainty may be related to:

- The model assumes homogeneous unsaturated and saturated zones; the actual conditions at the sites likely contain numerous heterogeneities.
- The applied recharge and infiltration rates are constant. The aquifer hydraulic gradient is also assumed to be constant. These rates likely vary with time, and these variations may influence the solute migration and mixing, resulting in short-term changes in aquifer concentrations
- The model is a theoretical simulation of transport processes and is not verified or calibrated against site-specific data.

Conclusions and Recommendations

The model simulations reasonably represent conditions encountered at most of the Lea County and eastern Eddy County HES Transfer Sites. HES Transfer Sites with chloride-affected soil can be screened

against SSLs in Table 2, assuming they meet the specified conditions (source length, source depth, depth to groundwater, and soil concentration). For calculated SSLs greater than 100,000 mg/kg, a maximum allowable soil concentration of 100,000 mg/kg is recommended in accordance with the NMED risk assessment guidance (NMED 2012). For sites that meet all of these conditions, no further action is recommended. For the sites that do not meet these conditions, site-specific evaluations should be conducted.

Enclosures:

Tables

Table 1 MULTIMED V2.0 Model Inputs

Table 2 Soil Screening Level Matrix

Figures

Figure 1 MULTIMED Simulated Chloride Concentration vs. Time (Source = 20m, Chloride 0-1m, & Depth to Groundwater = 20m)

Figure 2 MULTIMED Simulated Chloride Concentration vs. Time (Source = 20m, Chloride 0-1m, & Depth to Groundwater = 30.5m)

Figure 3 MULTIMED Simulated Chloride Concentration vs. Time (Source = 20m, Chloride 0-3m, & Depth to Groundwater = 20m)

Figure 4 MULTIMED Simulated Chloride Concentration vs. Time (Source = 20m, Chloride 0-3m, & Depth to Groundwater = 30.5m)

Figure 5 MULTIMED Simulated Chloride Concentration vs. Time (Source = 45m, Chloride 0-1m, & Depth to Groundwater = 20m)

Figure 6 MULTIMED Simulated Chloride Concentration vs. Time (Source = 45m, Chloride 0-1m, & Depth to Groundwater = 30.5m)

Figure 7 MULTIMED Simulated Chloride Concentration vs. Time (Source = 45m, Chloride 0-3m, & Depth to Groundwater = 20m)

Figure 8 MULTIMED Simulated Chloride Concentration vs. Time (Source = 45m, Chloride 0-3m, & Depth to Groundwater = 30.5m)

References

- New Mexico Environment Department. 2012. Risk Assessment Guidance for Investigations and Remediation, Volume I. February 2012 (updated June 2012).
- Salhotra, A.M., P. Mineart, S. Sharp-Hansen, T. Allison, R. Johns, and W.B. Mills. 1995. Multimedia Exposure Assessment Model (MULTIMED 2.0) for Evaluating the Land Disposal of Wastes--Model Theory. United States Environmental Protection Agency, Athens, GA. Unpublished Report.
- United States Environmental Protection Agency. 1996. A Subtitle D Landfill Application Manual for the Multimedia Exposure Assessment Model (MULTIMED 2.0). Final Report.
- Van Genuchten, M, Th., and P.J. Wierenga. 1976. Mass Transfer Studies in Sorbing Porous Media I. Analytical Solutions. Soil Science Society of America Proceedings. v 40, 473-480.



Tables

Table 1
MULTIMED V2.0 Model Inputs
Chevron HES Transfer Sites
Lea County, New Mexico

Parameters	Value(s)	Units	Notes	
Unsaturated Zone Flow Parameters:				
Depth of Unsaturated Zone	20.0	m	Local water levels (20m & 30.5m)	
Hydraulic Conductivity	0.06	cm/hr	Texas (2011)	
Unsaturated Zone Porosity	0.44	fraction	NMED (2012) Default	
Residual Water Content	0.260	fraction	NMED (2012) Default	
Unsaturated Zone Transport Parameters:				
Thickness of Layer	20 & 30.5	m	Regional water levels	
Percent of Organic Matter	1.5%		NMED (2012) Default (not used)	
Bulk Density	1.5	g/cm ³	NMED (2012) Default	
Biological Decay Coefficient	0	1/yr	(not used)	
Aquifer Parameters:				
Aquifer Porosity	0.43	fraction	NMED (2012) Default	
Bulk Density	1.5	g/cm ³	NMED (2012) Default	
Aquifer Thickness	12.0	m	NMED (2012) Default	
Hydraulic Conductivity	542	m/yr	Texas (2011), Velocity ~ 1/2 NMED Default	
Hydraulic Gradient	0.010	m/m	NMED (2012) Default	
Organic Carbon Content	0.020	fraction	NMED (2012) Default (not used)	
Temperature of Aquifer	15.0	°C	NMED (2012) Default (not used)	
pH	6.2		(not used)	
x-distance Radial Distance from Site to Receptor	12	m	equal to aquifer thickness	
Source Parameters:				
Infiltration Rate	0.013	m/yr	~0.5 in/yr, Texas (2011)	
Area of Waste	400 & 2000	m ²	NMED (2012) Default (~45m x45m)	
Recharge Rate	0.013	m/yr	Texas (2011)	
Duration of Pulse	540 to 840	yr	Varied, set equal to peak arrival time	
Discharge Concentrations	0	mg/L		
Initial Soil Concentrations:				
	Depth (m)			
Chloride leachate concentration	0	varied	mg/L	Calculated for each scenario ¹
Chloride leachate concentration	1 & 3	0	mg/L	
Chloride leachate concentration	20 & 30.5	0	mg/L	
Additional Parameters:				
Method	Gaussian			
New Mexico Environment Department. 2012. Risk	Chloride			
Chemical Parameters:				
Normalized Distribution Coefficient	0.00	mL/g	Model Derived	
Van Genuchten Parameters:				
Alpha Van Genuchten coefficient	0.38	unitless	NCSS Soil Characterization Data ²	
Beta Van Genuchten coefficient	1.2	unitless	NCSS Soil Characterization Data ²	

Notes:

°C - degrees celcius
cm - centimeters
cm³ - cubic centimeters
g - grams
hr - hour
L - liters
m - meters
m² - meter squared
mg - milligrams
mL - milliliters
yr - year

1 - calculated using the soil-water partitioning equation

2 - van Genutchen transport parameters are typical values for caliche-like material

References:

NMED - New Mexico Environmental Department Risk Assessment Guidance for Site Investigations and Remediation. February 2012.
NCSS - National Cooperative Soil Survey, National Cooperative Soil Characterization Database
Texas - Texas Water Development Board 2011. Update of the Groundwater Availability Model for the Edwards-Trinity (Plateau) and Pecos Valley Aquifers of Texas. January 21, 2011

Table 2
Soil Screening Level Matrix
Chevron HES Transfer Sites
Lea County, New Mexico

Scenario	Source Length (m)	Source Area (m)	Source Depth (m)	Depth to Groundwater (m)	SSL _{gw} (mg/Kg)	Notes
1	20	400	0-1	20.0	108,000	1
2	20	400	0-1	30.5	266,100	1
3	20	400	0-3	20.0	23,750	
4	20	400	0-3	30.5	45,000	
5	45	2,000	0-1	20.0	38,800	
6	45	2,000	0-1	30.5	95,500	
7	45	2,000	0-3	20.0	8,525	
8	45	2,000	0-3	30.5	16,100	

NMED SSL Ceiling = 100,000 mg/Kg

Notes:

m - meters

mg/Kg - milligrams per Kilogram

NMED - New Mexico Environmental Department

SSL_{gw} - Site soil screening levels for the migration to groundwater pathway

SSL Ceiling - Soil Screening Level Ceiling (NMED 2012)

1 - the NMED SSL ceiling should be used

References:

New Mexico Environment Department. 2012. Risk Assessment Guidance for Investigations and Remediation, Volume I. February 2012 (updated June 2012).

Figures

Figure 1
MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 20m, Chloride 0-1m, & Depth to Groundwater = 20m)

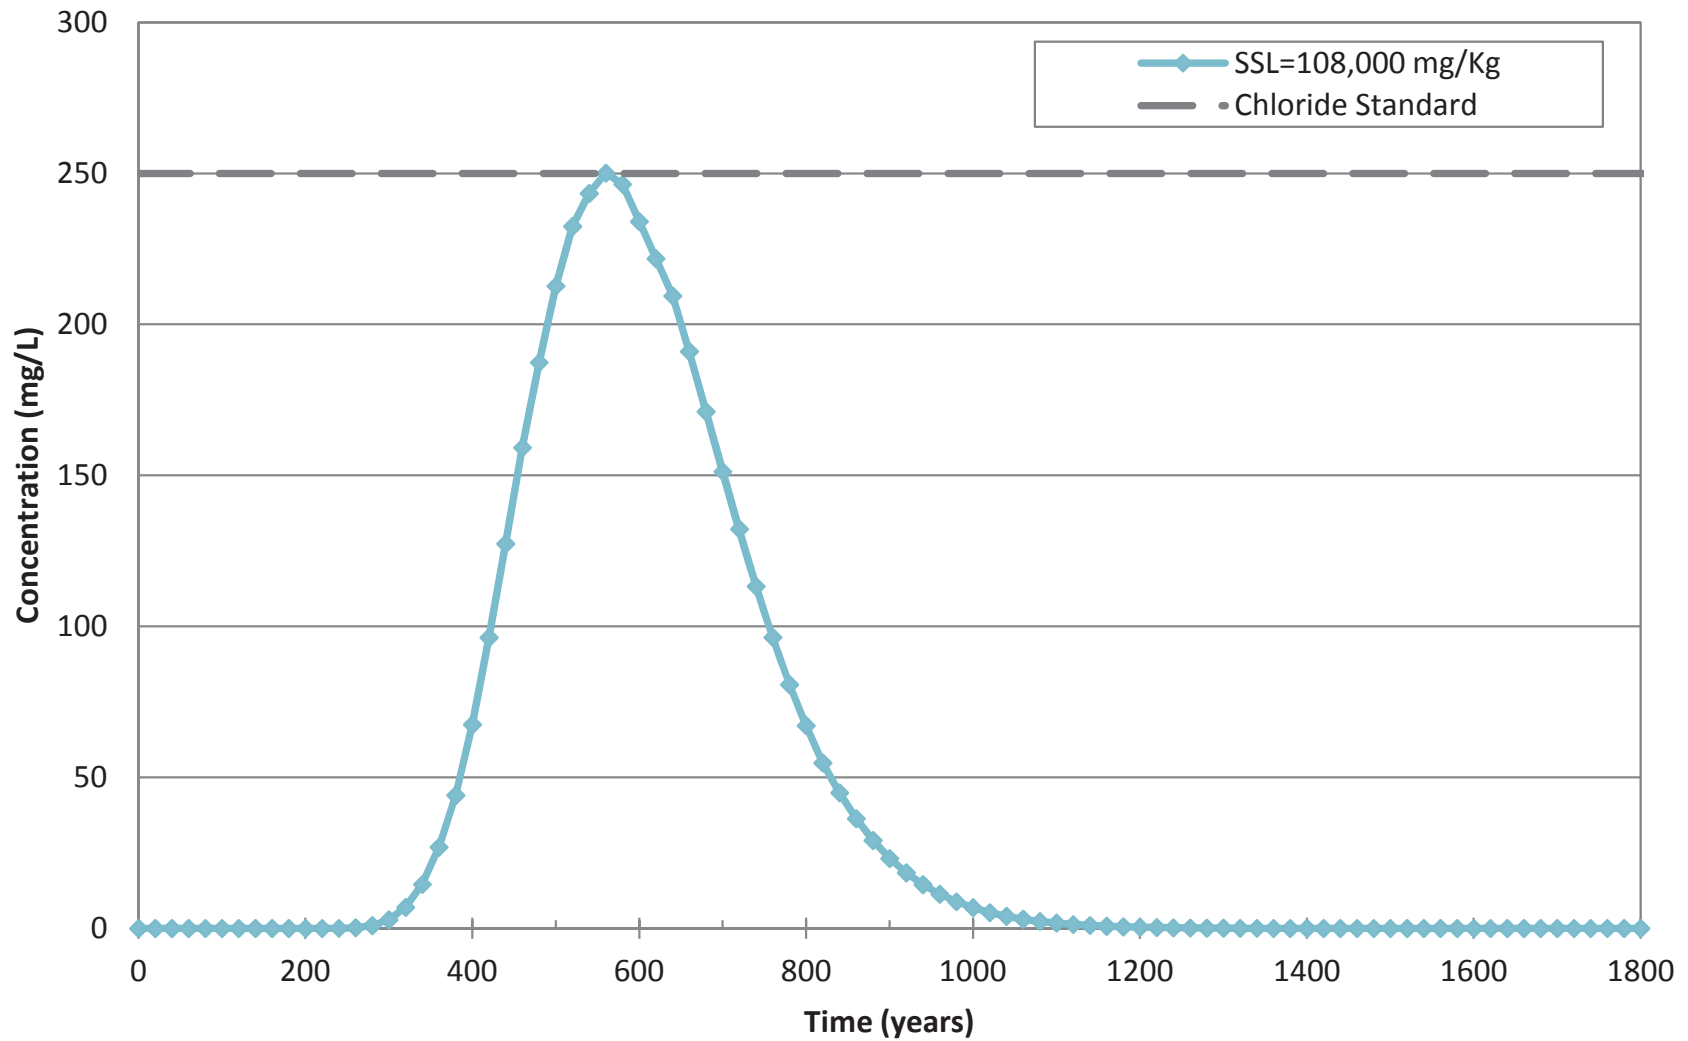


Figure 2
MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 20m, Chloride 0-1m, & Depth to Groundwater = 30.5m)

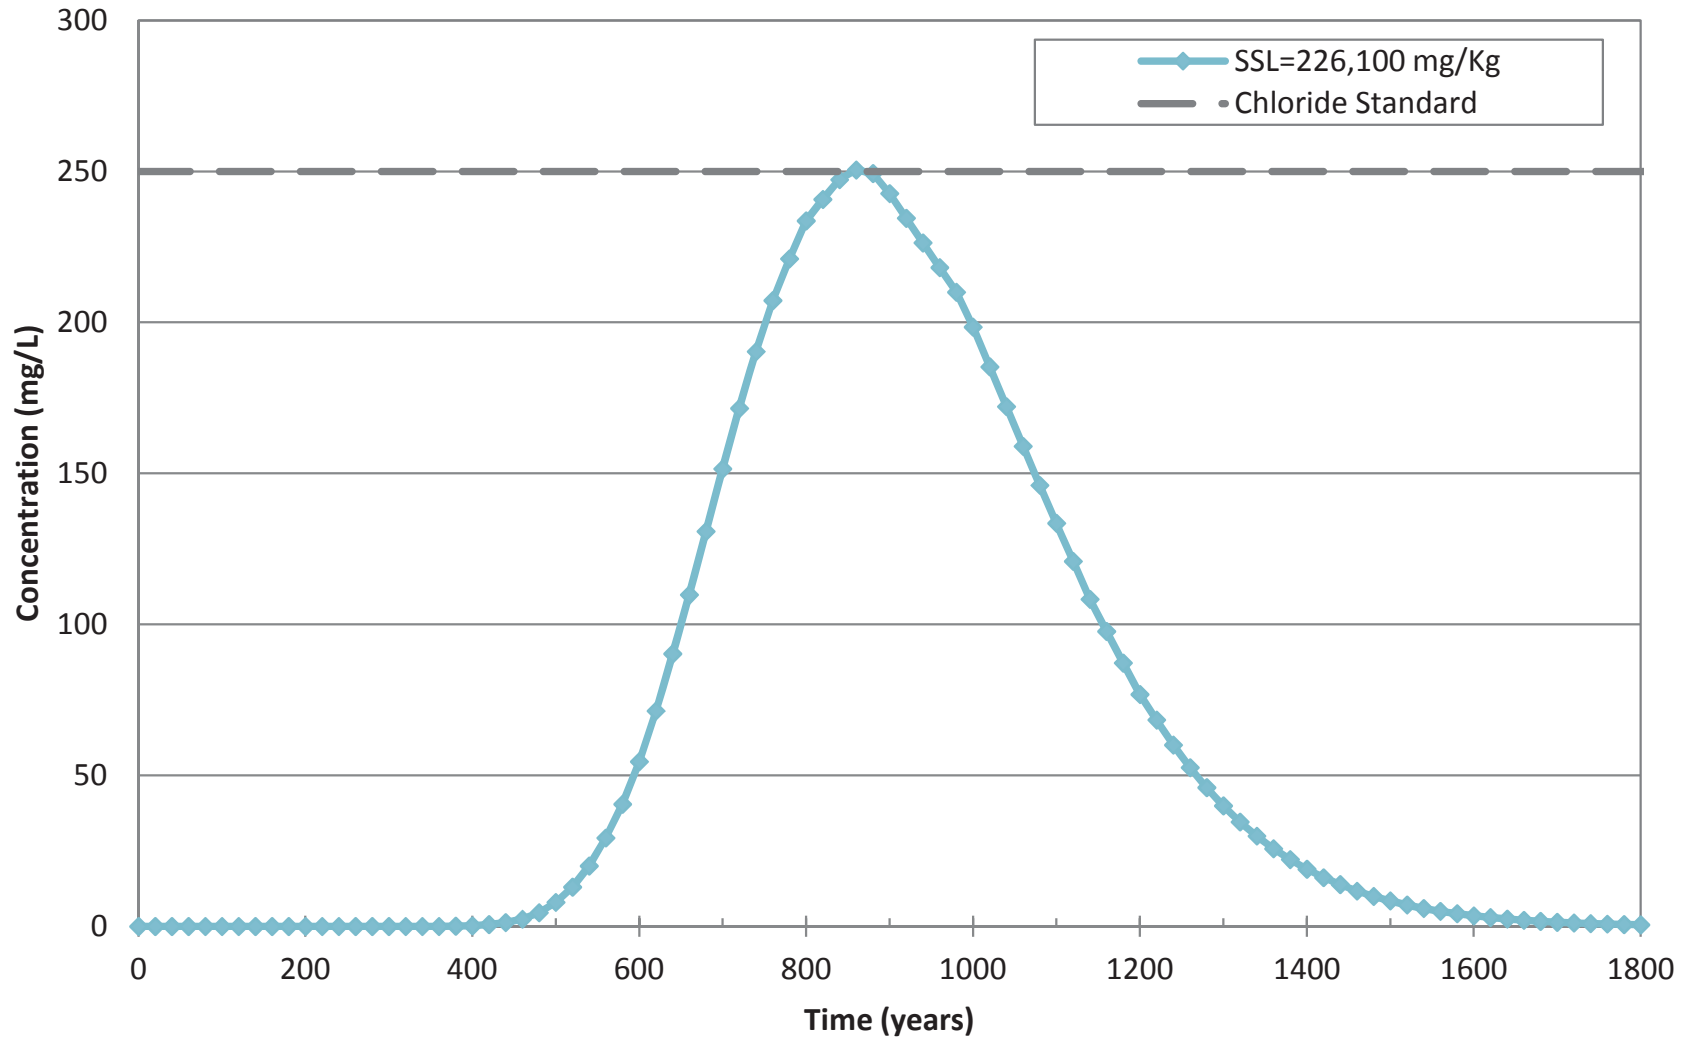


Figure 3

**MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 20m, Chloride 0-3m, & Depth to Groundwater = 20m)**

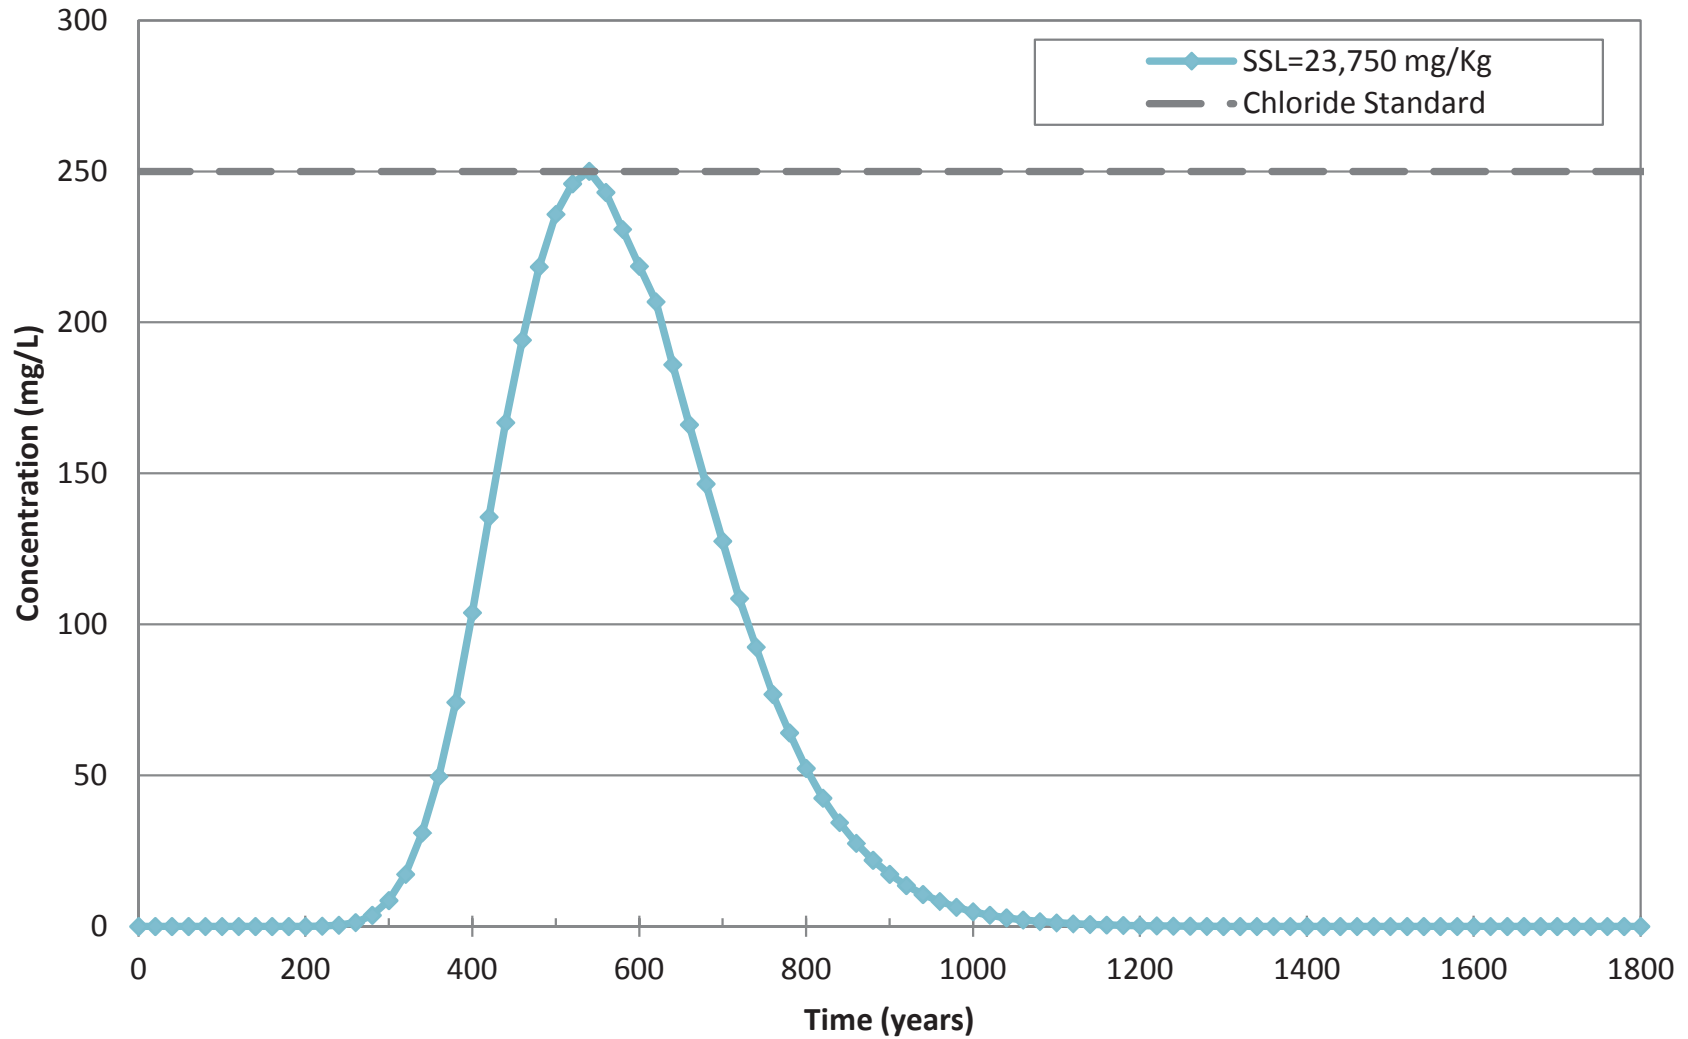


Figure 4

**MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 20m, Chloride 0-3m, & Depth to Groundwater = 30.5m)**

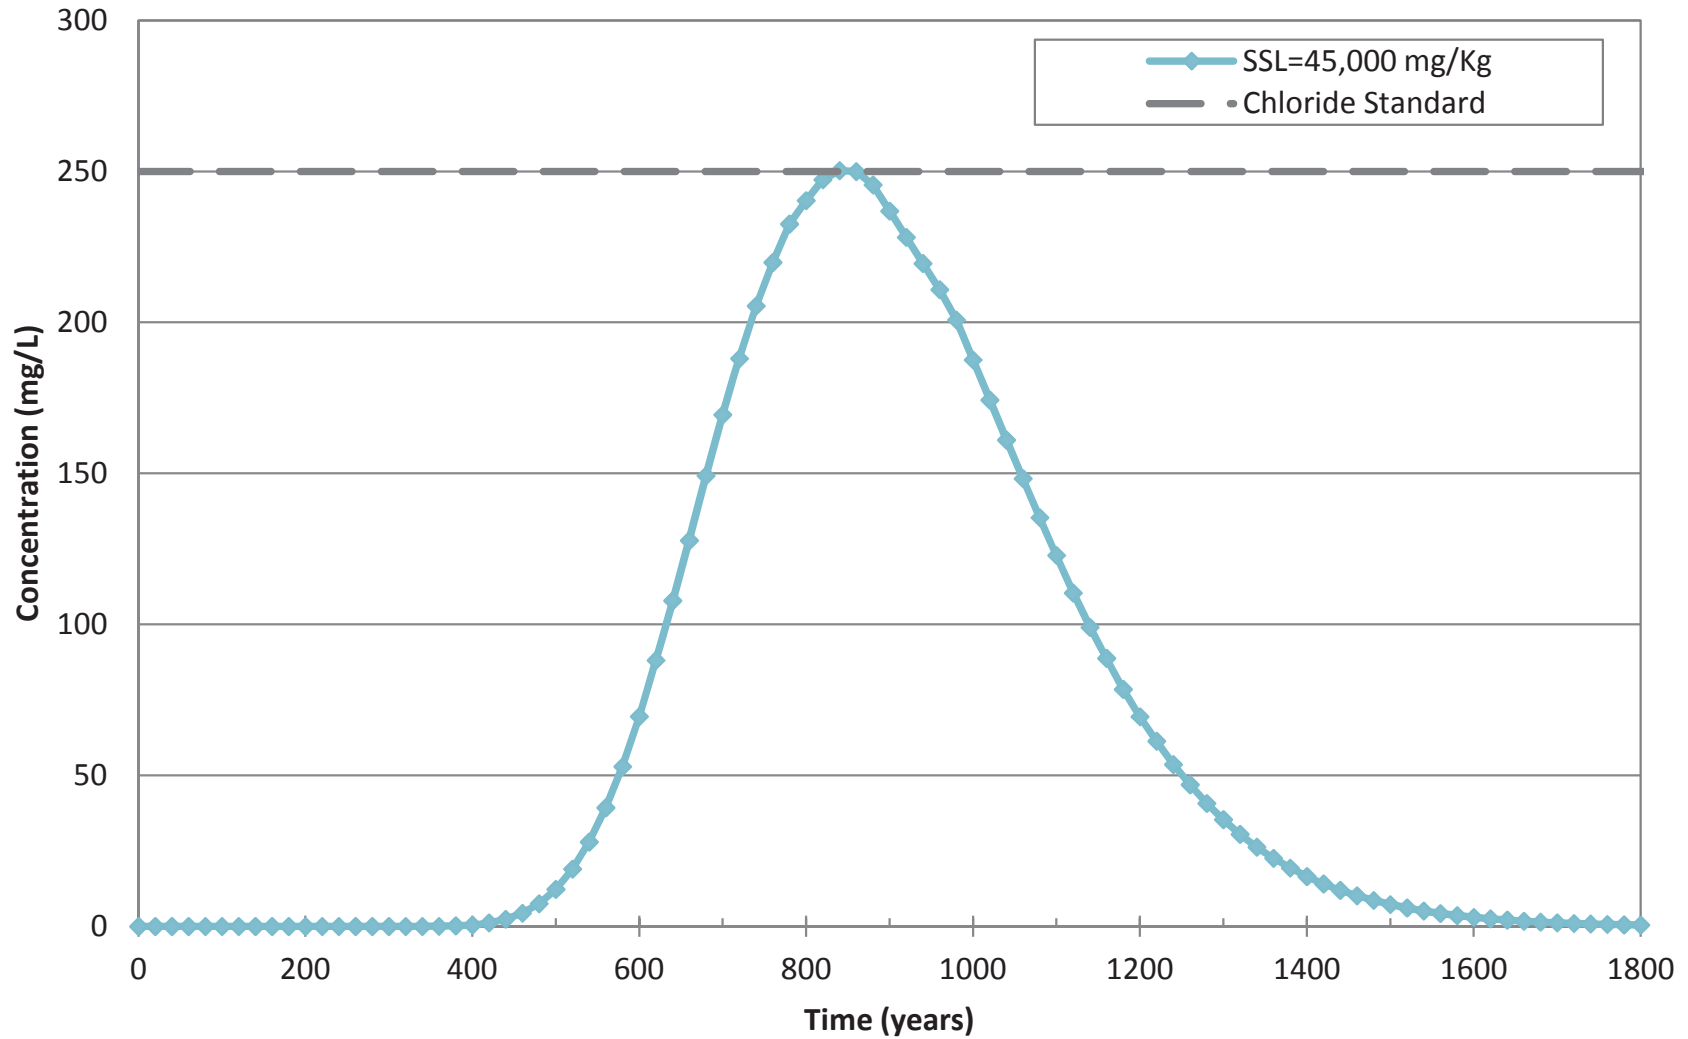


Figure 5

MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 45m, Chloride 0-1m, & Depth to Groundwater = 20m)

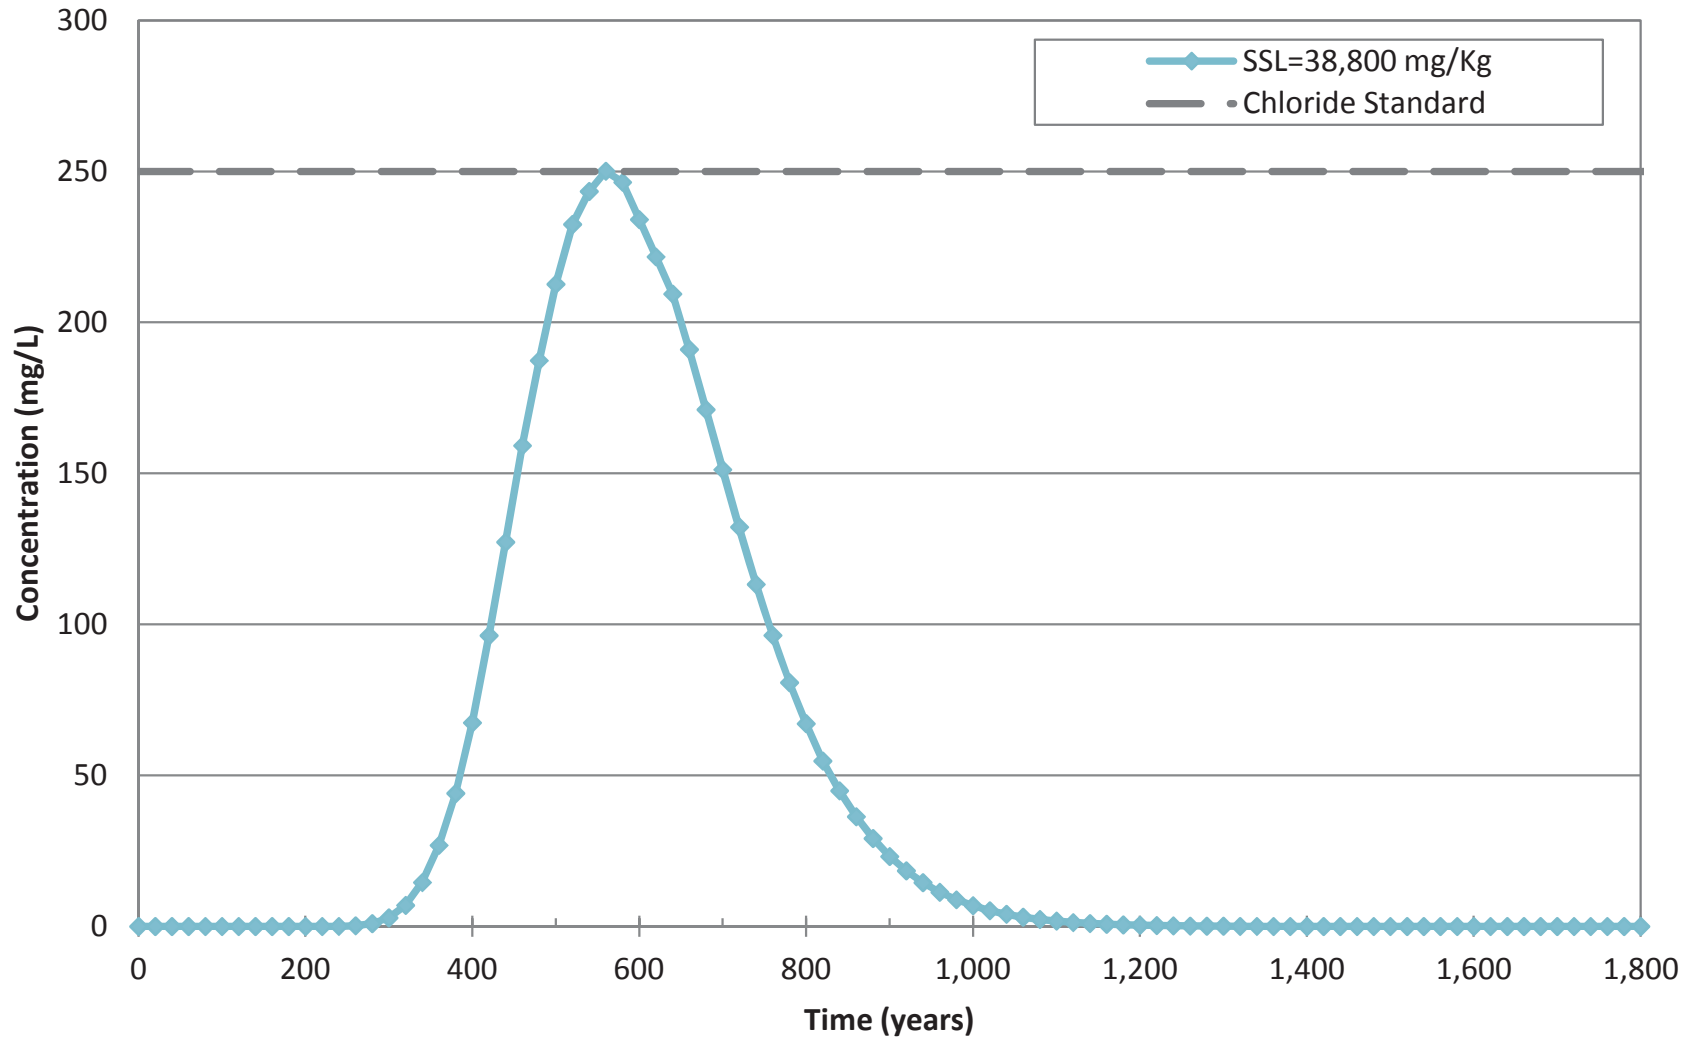


Figure 6
MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 45m, Chloride 0-1m, & Depth to Groundwater = 30.5m)

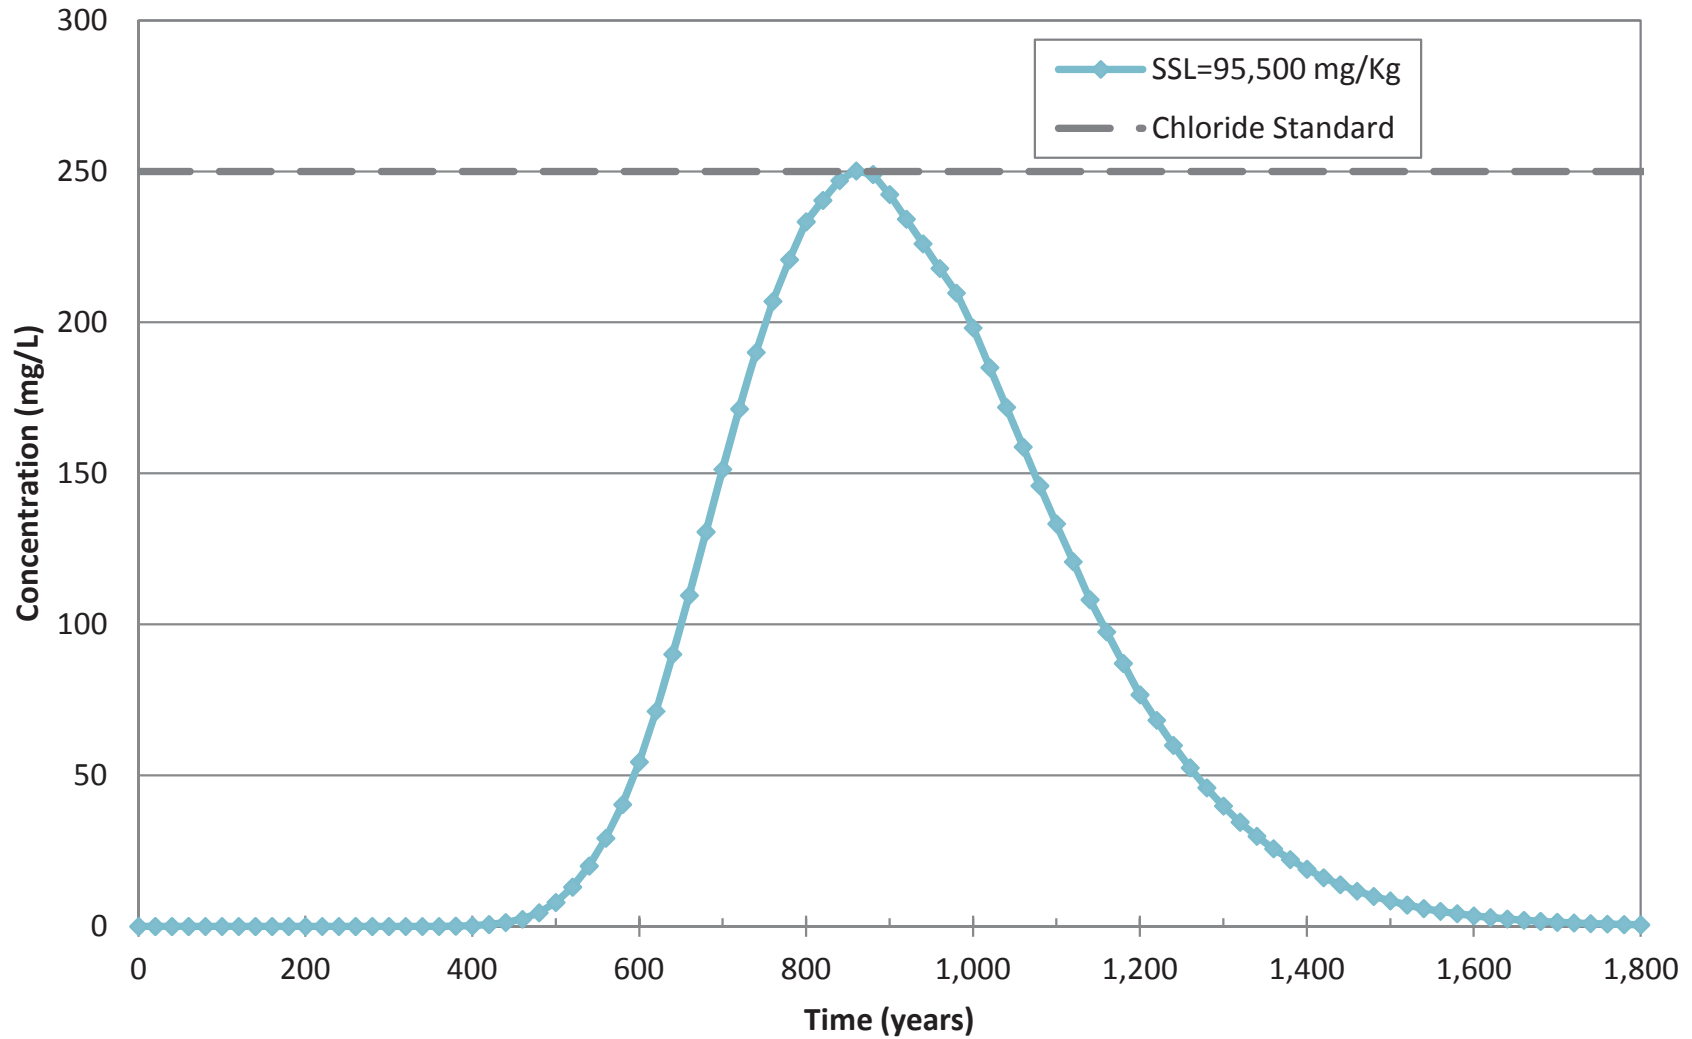


Figure 7

**MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 45m, Chloride 0-3m, & Depth to Groundwater = 20m)**

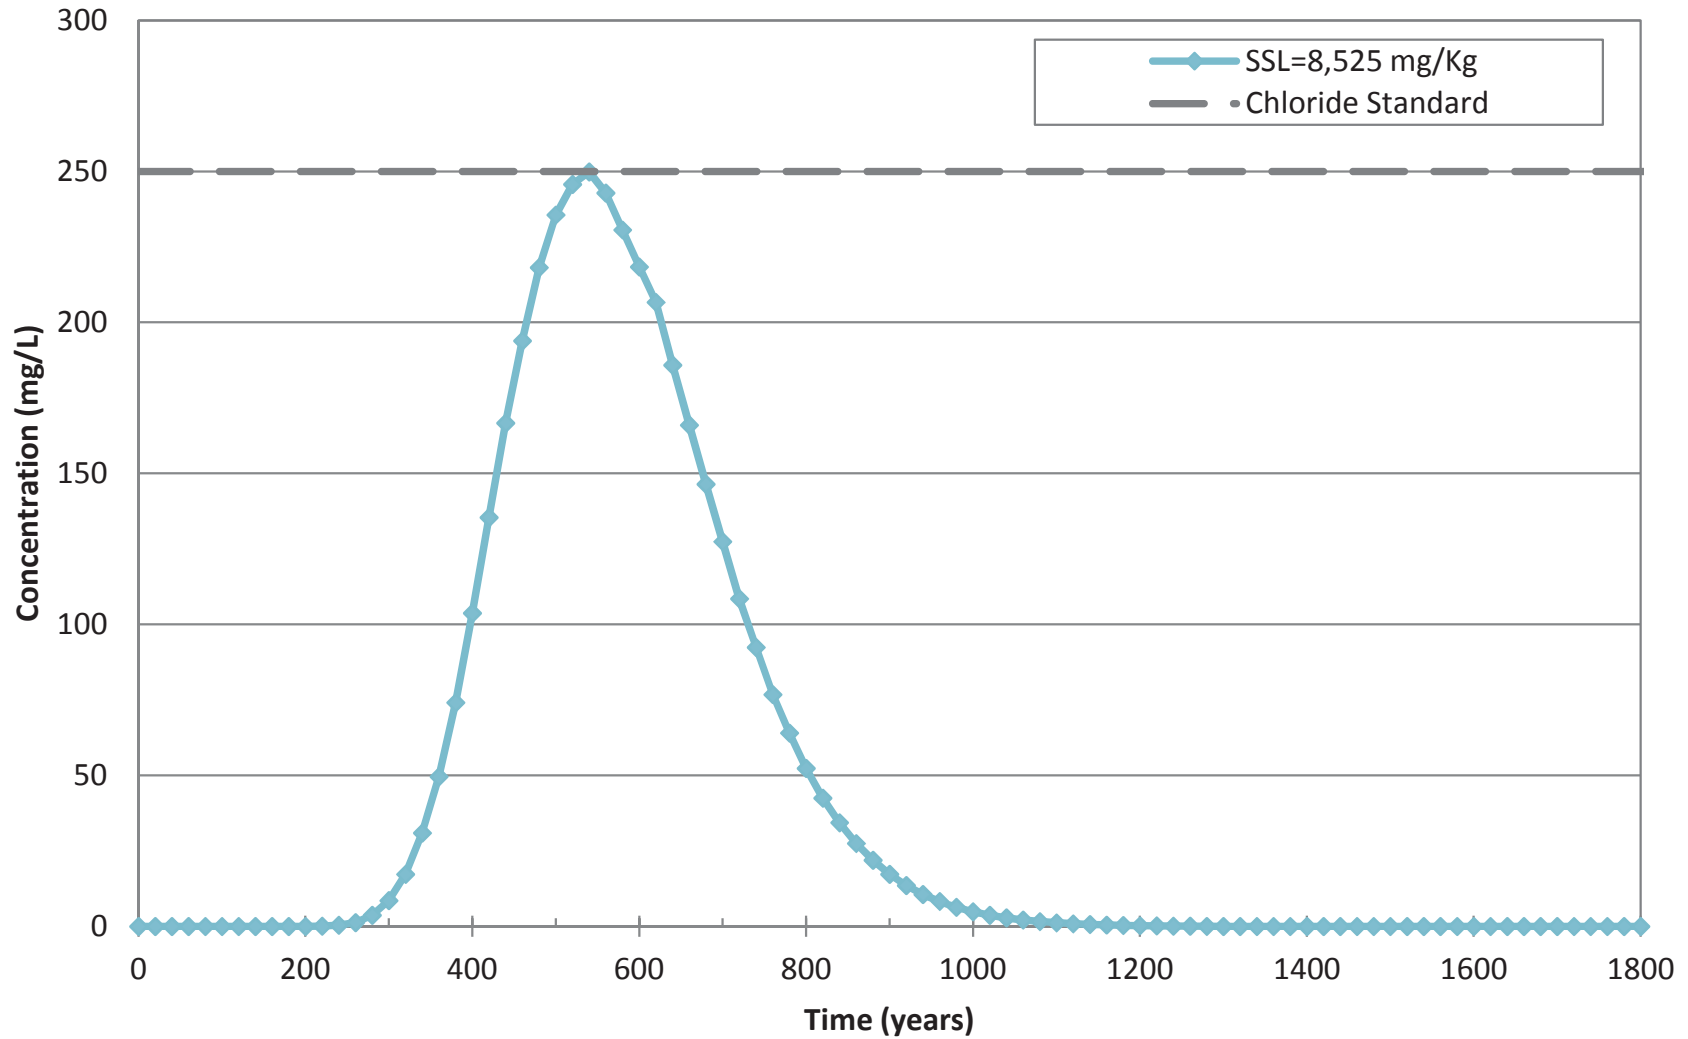


Figure 8

**MULTIMED Simulated Chloride Concentration Vs Time in Groundwater
(Source = 45m, Chloride 0-3m, & Depth to Groundwater = 30.5m)**

