District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Ave., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-144 July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
	Pit, Closed-Loop System, Below-Grad	
Propose	d Alternative Method Permit or Closur	re Plan Application
Type of action:	<ul> <li>X Permit of a pit, closed-loop system, below-grade ta</li> <li>Closure of a pit, closed-loop system, below-grade</li> <li>Modification to an existing permit</li> </ul>	
Í	Closure plan only submitted for an existing permit below-grade tank, or proposed alternative method	ted or non-permitted pit, closed-loop system,
Instructions: Please submit one app	plication (Form C-144) per individual pit, closed-loo	p system, below-grade tank or alternative request
	his request does not relieve the operator of liability should operations r e the operator of its responsibility to comply with any other applicable	
1	and dependent of the section of the	
Operator: ConocoPhillips Company	NIN 07400	OGRID#: <u>217817</u>
Address: <b>PO Box 4289, Farmington</b> Facility or well name: <b>BRUINGTON</b>		
	04533988 OCD Permit Numbe	хг.
U/L or Qtr/Qtr: B Section		11W County: San Juan
Center of Proposed Design: Latitude:	<b>36.84642°N</b> Longitude:	-108.02773°W NAD: X 1927 1983
Surface Owner: X Federal	State Private Tribal Trust or India	
Lined Unlined Line		HDPE PVC Other bb1 Dimensions Lx Wx D
	n H of 19.15.17.11 NMAC Drilling a new well Workover or Drilling (Applies to notice of intent)	activities which require prior approval of a permit or
Drying Pad Above Ground Lined Unlined Liner Liner Seams: Welded Fac	d Steel Tanks Haul-off Bins Other	HDPE PVD Other
4 X <u>Below-grade tank:</u> Subsection I of Volume: <u>120</u> bb Tank Construction material:		
Secondary containment with leak determined with lea	Visible sidewalls onlyOther	omatic overflow shut-off Unspecified
5 Alternative Method: Submittal of an exception request is requ	ired. Exceptions must be submitted to the Santa Fe Enviro	nmental Bureau office for consideration of approval.

Encing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)      Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)     Four toot height, four strands of barbed wire evenly spaced between one and four feet									
X Alternate. Please specify <u>4' hog wire fencing topped with two strands barbed wire.</u>									
7       Netting:       Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)         X       Screen       Netting       Other         Monthly inspections (If netting or screening is not physically feasible)									
8       Signs:       Subsection C of 19.15.17.11 NMAC         12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers.       X         X       Signed in compliance with 19.15.3.103 NMAC									
9 <u>Administrative Approvals and Exceptions:</u> Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. <i>Please check a box if one or more of the following is requested, if not leave blank:</i> X Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for con-	sideration of a	nproval.							
(Fencing/BGT Liner)									
		]							
<sup>10</sup> <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.									
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	X No							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo							
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)									
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image									
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes XNA								
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo							
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.									
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo							
<ul> <li>Written confirmation or verification from the municipality; Written approval obtained from the municipality</li> <li>Within 500 feet of a wetland.</li> </ul>	Yes	XNo							
<ul> <li>US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site</li> <li>Within the area overlying a subsurface mine.</li> <li>Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division</li> </ul>	Yes	XNo							
Within an unstable area.	Yes	XNo							
<ul> <li>Engincering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>									
Within a 100-year floodplain - FEMA map	Yes	XNo							

,

.

11 <u>Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist:</u> Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
X Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
<b>X</b> Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
<ul> <li>Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19,15,17,9 NMAC and 19,15,17,13 NMAC</li> </ul>
Previously Approved Design (attach copy of design) API or Permit
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC     Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.     Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit XBelow-grade Tank Closed-loop System
Proposed Closure Method: X Waste Excavation and Removal (Below-Grade Tank)
Waste Removal (Closed-loop systems only)
On-site Closure Method (only for temporary pits and closed-loop systems)
In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached.
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
X         Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)           X         Soil Backfill and Court Design Specifications - backd upon the convergence of Subsection H of 10 15 17 13 NMAC
X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
X Re-vegetation Plan - based upon the appropriate requirements of Subsection 1 of 19.15.17.13 NMAC
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

· · · ·

10			
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tan Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids are required.		cilities	
Disposal Facility Name: Disp	posal Facility Permit #:		
Disposal Facility Name: Disp			
Will any of the proposed closed-loop system operations and associated activities occ         Yes (If yes, please provide the information         No			ations?
Required for impacted areas which will not be used for fitture service and operations:         Soil Backfill and Cover Design Specification - based upon the appropriate re         Re-vegetation Plan - based upon the appropriate requirements of Subsection         Site Reclamation Plan - based upon the appropriate requirements of Subsection	lof 19.15.17.13 NMAC		
17 <u>Siting Criteria (Regarding on-site closure methods only:</u> 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recomm certaon siting criteria may require administrative approval from the appropriate district office or may for consideration of approval. Instifications and/or demonstrations of equivalency are required. Ple	be considered an exception which must be submitted to the S		
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS: Data obtained is	from nearby wells	Yes N/A	No
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes	No
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained fi</li> </ul>	rom nearby wells		
Ground water is more than 100 feet below the bottom of the buried waste.		Yes	No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained fi	rom nearby wells	N/A	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant w (measured from the ordinary high-water mark).	atercourse or lakebed, sinkhole, or playa lake	Yes	No
- Topographic map; Visual inspection (certification) of the proposed site			
Within 300 feet from a permanent residence, school, hospital, institution, or church in exister - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	nce at the time of initial application.	Yes	No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence a - NM Office of the State Engineer - iWATERS database; Visual inspection (certification)	t the time of the initial application.	Yes	No
Within incorporated municipal boundaries or within a defined municipal fresh water well fie pursuant to NMSA 1978, Section 3-27-3, as amended.		Yes	No
Written confirmation or verification from the municipality; Written approval obtained Within 500 feet of a wetland	from the municipality		
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection	(certification) of the proposed site		
Within the area overlying a subsurface mine.		Yes	No
- Written confiramtion or verification or map from the NM EMNRD-Mining and Minera	1 Division	_	
Within an unstable area.		Yes	∐No
<ul> <li>Engineering measures incorporated into the design: NM Bureau of Geology &amp; Mineral Topographic map</li> </ul>	Resources; USGS; NM Geological Society;		
Within a 100-year floodplain. - FEMA map		Yes	No
18         On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached.         Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Surface Owner Notice - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the app Construction/Design Plan of Temporary Pit (for in place burial of a drying part Protocols and Procedures - based upon the appropriate requirements of 19.15.	irements of 19.15.17.10 NMAC Subsection F of 19.15.17.13 NMAC ropriate requirements of 19.15.17.11 NMAC d) - based upon the appropriate requirements of 19. .17.13 NMAC		
Confirmation Sampling Plan (if applicable) - based upon the appropriate requ			
Waste Material Sampling Plan - based upon the appropriate requirements of S			
Disposal Facility Name and Permit Number (for liquids, drilling fluids and dr. Soil Cover Design - based upon the appropriate requirements of Subsection H	•	tot be achieved	1)

Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19 Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Crystal Tafoya Title: Regulatory Technician
Signature: Date: Date: 12/22/2008
e-mail address: <u>crystal tailera @ conocceptilips com</u> Telephone: 505-326-9837
20         OCD Approval:       Permit Application (including closure plan)         Closure Plan (only)       OCD Conditions (see attachment)         OCD Representative Signature:       Approval Date:
Title: OCD Permit Number:
21 Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:
22
Closure Method:         Waste Excavation and Removal       On-site Closure Method       Alternative Closure Method       Waste Removal (Closed-loop systems only)         If different from approved plan, please explain.
23
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that <i>will not</i> be used for future service and opeartions? Yes (If yes, please demonstrate compliane to the items below)
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
24 Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in
the box, that the documents are attached.
Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure)
Plot Plan (for on-site closures and temporary pits)
Confirmation Sampling Analytical Results (if applicable)
Waste Material Sampling Analytical Results (if applicable)
Disposal Facility Name and Permit Number
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
Site Reclamation (Photo Documentation)         On-site Closure Location:       Latitude:         Longitude:       NAD         1927       1983
25
<b>Operator Closure Certification:</b> I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Title:
Signature: Date:
e-mail address:Telephone:

• • • •

Town	ship: 30N Range: 11W	Sections:	
NAD27	X: Y:	Zone: Search Radius:	
County:	Basin:	✓ Number: Su	iffix:
Owner Name: (Firs	st) (La	st) C Non-Domestic C	Domestic • All
POD / Surfac	e Data Report	Avg Depth to Water Report Water C	olumn Report

# WATER COLUMN REPORT 08/21/2008

(gr.	arter	s are	a 1=)	W	2=	NE	3= <b>SW</b> 4	=SE)						
· -	larter	s are	e big	gge	est	: to	small	est)			Depth	Depth	Water	(in
POD Number	Tws		Sec	đ	đ	đ	Zone	3	х	Y	Well	Water	Column	
RG 50669	30N	11W									360	310	50	
SJ 02765	30N	11W	02	1							54	20	34	
SJ 00975	30N	11W		1							60	20	40	
SJ 01217	30N	11W	02	1							60	30	30	
SJ 02837	30N	11W		3	4	1					150			
SJ 01437	30N	11W	03	1							40	28	12	
SJ 03121	30N	11W	03	1		4					36	12	24	
SJ 02049	30N	11W	03	1							26	8	18	
SJ 01339	30N	11W	03	1	-	1					40	15	25	
SJ 02814	30N	11W			3	2					31	8	23	
SJ 00350	30N	11W	03		3	2					46	12	34	
SJ 01441	30N	11W	03		3	2					48	20	28	
SJ 02835	30N	11W			3	2					26	8	18	
SJ 01387	30N	11W	03	1	4						40	18	22	
SJ 03698 POD1	30N	11W	03	1		1					40	5	35	
SJ 02785	30N	11W		1	4	2					31	5	26	
SJ 01313	30N	11W	03	2							70	58	12	
SJ 01805	30N	11W		2							35	20	15	
SJ 01807	30N	11W			1						50	30	20	
SJ 01202	30N	11W		2	1	2					35	8	27	
SJ 02781	30N	11W		2	1	2					48	23	25	
SJ 03758 POD1	30N	11W		2	1	2		26815		2127473	49	21	28	
SJ 03765 POD1	30N	11W	03	2	1	2		26816	3	2127605	43	20	23	
SJ 03756 POD1	30N	11W	03	2	1	2		26817	9	2127870	41	20	21	
SJ 02786	30N	11W	03	2	3	1					51	24	27	
SJ 01901	30N	11W	03	2	3	2					60	26	34	
SJ 00698	30N	11W	03	2	3	3					44	14	30	
SJ 01261	30N	11W	03	2	3	4						20		
SJ 02930	30N	11W	03	2	4	4					81	64	17	
SJ 02798	30N	11W	03	2	4	4					80	61	19	
SJ 00402	30N	11W	03	3							32	18	14	
SJ 01734	30N	11W	03	3	2						33	5	28	

SJ 00762	_ 30N	11W 03	32				47	22	25
SJ 01440	30N	11W 03	323				41	21	20
SJ 01020	30N	11W 03	3 3				27	5	22
SJ 03242	30N	11W 03	331				23	9	14
SJ 03732 POD1	30N	11W 03	331				38	9	29
SJ 03239	30N	11W 03	333				33	12	21
SJ 01238	30N	11W 03	4 1				95	38	57
SJ 02245	30N	11W 03	4 1 3				66	30	36
SJ 01043	30N	11W 03	4 1 4				50		
SJ 01249	30N	11W 03	4 2				52	22	30
SJ 02563	30N	11W 03	4 2 1				96	60	36
SJ 02824	30N	11W 03	421				70	50	20
SJ 03153	30N	11W 03	4 2 1				80	60	20
SJ 03454	30N	11W 03	4 2 4				100		
SJ 03291	30N	11W 03	4 3 2				38	18	20
SJ 00366	30N	11W 03	444				33	18	15
SJ 01364	30N	11W 04	2				115	86	29
SJ 03076	30N	11W 04	223				44	10	34
SJ 02903	30N	11W 04	2 3 2				49	31	18
SJ 03039	30N	11W 04	4 1 2				53	40	13
SJ 01450	30N	11W 04	4 3				45	20	25
SJ 02941	30N	11W 04	4 3 2				58	37	21
SJ 01367	30N	11W 04	$4 \ 4 \ 1$				48	20	28
SJ 03407	30N	11W 04	444	W	453700	2124100	30	5	25
SJ 03267	30N	11W 04	2 1 3	**	433700	2124100	83	60	23
SJ 03245	30N	11W 05	4 4 4				80	65	15
SJ 02194	30N	11W 00	4 4 4				59	22	37
SJ 02140	30N	11W 07	1 1 1				70		
SJ 00689	30N	11W 07 11W 07	1 4 3				78	60 65	10
SJ 00690	30N	11W 07 11W 07						65	13
SJ 00882	30N	11W 07 11W 07					60	5.0	10
SJ 00889	30N		1 4 3				60	50	10
SJ 00806		11W 07 11W 07	1 4 3				55	2.0	1.0
SJ 00739	30N	11W 07 11W 07	1 4 3				38	20	18
SJ 00389	30N	11W 07 11W 07	$\begin{array}{cccc}1&4&3\\1&4&3\end{array}$				70	58	12
SJ 00589	30N	11W 07 11W 07	1 4 3 1 4 3				53	FO	10
SJ 00358	30N	11W 07 11W 07	1 4 3 1 4 3				70	58	12
SJ 00397	30N	11W 07 11W 07	1 4 3 1 4 3				61 F 6	38	23
SJ 00415	30N	11W 07 11W 07	1 4 3 1 4 3				56	35	21
SJ 00387	30N	11W 07 11W 07					53	40	13
SJ 00748	30N	11W 07 11W 07					60	4.1	1.0
SJ 03271	30N	11W 07	$\begin{array}{cccccccccccccccccccccccccccccccccccc$				60	41	19
SJ 01475	30N	11W 07 11W 07	2 3 2				49	27	2.2
SJ 03465	30N	11W 07	2 3 4				80	27	22
SJ 00259	30N	11W 07	2 4				25	12	13
SJ 01492	30N	11W 07	3				60	22	38
SJ 03794 POD1	30N	11W 07	313		266272	2119520	44	27	17
SJ 01172	30N	11W 07	3 2		2002/2	2119920	50	30	20
SJ 01310	30N	11W 07	3 3				80	50	30
SJ 01484	30N	11W 07	3 3				61	10	51
SJ 03630	30N	11W 07	3 3 3				68		
SJ 01425	30N	11W 07 11W 07	3 4				55	24	44
SJ 01468	30N	11W 07 11W 07	34				55 60	25	30
SJ 02006	30N	11W 07 11W 07						25	35
SJ 02008 SJ 03484	30N 30N	11W 07 11W 07					50	24	26
	-		343				75	2.0	25
SJ 02005	30N	11W 07	3 4 4				55	20	35
SJ 02715	30N	11W 07	3 4 4				68	20	48
SJ 00135	30N	11W 07	4 1				180	23	157
SJ 00769	30N	11W 07	4 1				50	14	36

SJ 01406	30N	11W 07	4 1		45	12	33
SJ 02936	30N	11W 07	4 1	1	38	30	8
SJ 00679	30N	11W 07	4 1	3	48	22	26
SJ 00620	30N	11W 07	4 1	3	52	35	17
SJ 00329	30N	11W 07	4 1	3	63	20	43
SJ 00162	30N	11W 07	4 1	3	58	23	35
SJ 02906	30N	11W 07	4 1	4	45	24	21
SJ 00893	30N	11W 07	4 2		80	40	40
SJ 01667	30N	11W 07	43		41	21	20
SJ 01404	30N	11W 07	43		40	15	25
SJ 00919	30N	11W 07	43	2	35	12	23
SJ 00604	30N	11W 07	43	2	38	22	16
SJ 00601	30N	11W 07	4 3		40	22	18
SJ 00918	30N	11W 07		2	35	14	21
SJ 00920	30N	11W 07		2	35	12	23
SJ 01567	30N	11W 07		2	35	14	21
SJ 00183	30N	11W 08	1 1	2	360	300	60
SJ 03154	30N	11W 08		4	40	500	00
SJ 03431	30N	11W 08	14	1	50		
SJ 00332	30N	11W 08	2 2		52	34	18
SJ 01451	30N	11W 08	22		52 64	34	30
SJ 01968	30N	11W 08	$\frac{2}{2}$ 2		40	25	15
SJ 01999	30N	11W 08	2 2		40 61	25 45	
SJ 01814	30N	11W 08	2 2		52		16
SJ 03398	30N	11W 08		1		10	42
SJ 03210	30N	11W 08	2 2		80	20	60
SJ 03098	30N	11W 08	22		60 62	30	30
SJ 03381	30N	11W 08		2 2	63 50	23	40
SJ 03240	30N	11W 08			50		
SJ 00220				2	50	2.6	0.4
SJ 03639	30N 30N	11W 08 11W 08	22 22	3 4	60 60	36	24
SJ 01115	30N	11W 08 11W 08	22		60 25	24	36
SJ 03653	30N	11W 08	22	4 4	35	26	9
SJ 03646	30N	11W 08 11W 08	22		62	26	36
SJ 00228	30N	11W 08		4	61	24	37
SJ 03202	30N	11W 08			67	38	29
SJ 03030	30N	11W 08 11W 08		2	45 5	10	10
SJ 0305	30N	11W 08 11W 08	24 24	2 2	56	40	16
SJ 03378	30N	11W 08 11W 08	2 4 2 4		50		
				2	50	25	1.0
SJ 02331 SJ 03303	30N 30N	11W 08 11W 08	$\begin{array}{ccc} 2 & 4 \\ 2 & 4 \end{array}$	2 2	53	35	18
SJ 02293	30N	11W 08 11W 08		2	55	30	25
SJ 00249	30N	11W 08 11W 08		2	50	35	15
SJ 01368	30N	11W 08 11W 08	32	4	46 50	30	16
SJ 03089	30N	11W 08 11W 08		4	59	39	20
SJ 03480	30N	11W 08 11W 08		$\frac{4}{4}$	48	36	12
SJ 03199	30N	11W 08 11W 08		1	50	20	2.0
SJ 02413	30N	11W 08 11W 08		1	40	20	20
SJ 02915	30N	11W 08 11W 08		1	40	31	9
SJ 03367	30N	11W 08 11W 08			45	F	2.4
and the second design of the second sec				4	29	5	24
SJ 01570	30N	11W 08	4 1	2	59	37	22
SJ 00925	30N	11W 08	4 1		32	20	12
SJ 03642	30N	11W 08		2	58	32	26
SJ 01520	30N	11W 08	4 1		58	18	40
SJ 03313	30N	11W 08	4 1		58	20	38
SJ 02485	30N	11W 08	4 1		49	30	19
SJ 02261	30N	11W 08	4 3			-	
SJ 03419	30N	11W 08		2	41	9	32
SJ 02241	30N	11W 09	1		39	27	12

SJ 01560	30N	11W 09	1 1		36	26	10
SJ 01585	30N	11W 09	1 1	-	40	28	12
SJ 03499	30N	11W 09	1 1		53	12	41
SJ 02236	30N	11W 09	1 1		35	17	18
SJ 03304	30N	11W 09	1 1		55	30	25
SJ 03209	30N	11W 09	1 1		49	32	17
SJ 03726 POD1	30N	11W 09	1 1		47	30	17
SJ 03342	30N	11W 09	1 1		50	31	19
SJ 03225	30N	11W 09	1 1		50		
SJ 03229	30N	11W 09	1 1		50	1.0	2.0
SJ 00924	30N	11W 09	12		46	16	30
SJ 00438 SJ 01169	30N 30N	11W 09 11W 09	12 13	3	29	19	10
SJ 01109	30N	11W 09 11W 09	1 3		56	33	23
SJ 02237	30N	11W 09	1 3	1	46 48	27 28	19 20
SJ 03019	30N	11W 09	1 3		48 50	30	20
SJ 02493	30N	11W 09	1 3		49	26	23
SJ 03724 POD1	30N	11W 09	1 3		47	36	11
SJ 03031	30N	11W 09	1 3		55	35	20
SJ 01465	30N	11W 09			47	55	20
SJ 02336	30N	11W 09	1 3		46	11	35
SJ 03482	30N	11W 09	1 3		50	**	55
SJ 03423	30N	11W 09	1 3		50	20	30
SJ 00750	30N	11W 09	1 4	-	26	6	20
SJ 02975	30N	11W 09	2 1	4	37	12	25
SJ 03268	30N	11W 09	2 2	2	61	10	51
SJ 00364	30N	11W 09	23	2	50	20	30
SJ 03128	30N	11W 09	23	2	50		
SJ 00364 CLW263561	30N	11W 09	23	2	33	11	22
SJ 01955	30N	11W 09	24		40	11	29
SJ 02528	30N	11W 09	2 4		60	28	32
SJ 02290	30N	11W 09	24	2	45	15	30
SJ 00347	30N	11W 09	4		36	19	17
SJ 01436	30N	11W 09	4 1		210	50	160
SJ 03471	30N	11W 09	4 1		20	5	15
SJ 03223	30N	11W 09	4 2	2	59	25	34
SJ 03263	30N	11W 09	4 2	2	63	35	28
SJ 03374	30N	11W 09		1	44	29	15
SJ 02796	30N	11W 09	4 3		100	62	2.0
SJ 03214	30N 30N	11W 09	4 4		93	63	30
SJ 03213 SJ 02176	30N	11W 09 11W 10	4 4 1 3	2	100 57	37	20
SJ 03356	30N	11W 10	1 3	1	55	30	25
SJ 03258	30N	11W 10	1 3		55	10	45
SJ 03444	30N	11W 10	1 3		60	10	-15
SJ 03248	30N	11W 10	1 3		90	30	60
SJ 03354	30N	11W 10	1 3		80	30	50
SJ 00348	30N	11W 10	1 3		72	24	48
SJ 03032	30N	11W 10	14		80	30	50
SJ 02819	30N	11W 10	2 3	3	140	40	100
SJ 03282	30N	11W 10	23	4	70	30	40
SJ 03281	30N	11W 10	23	4	62	32	30
SJ 03572	30N	11W 10	3 1		70		
SJ 03218	30N	11W 10	33	3	50	30	20
SJ 01720	30N	11W 13			225	90	135
SJ 03745 POD1	30N	11W 13	1 1	2	325	150	175
SJ 01693	30N	11W 13	1 3		225	89	136
SJ 01672	30N	11W 13	1 3		180	80	100
SJ 01294	30N	11W 13	1 3	3	92	52	40

SJ 02773	30N	11W 16	1 1 3		46	25	21
SJ 00410	30N	11W 16	1 2		61	45	16
SJ 03010	30N	11W 16	1 3 1		80	40	40
SJ 03257	30N	11W 16	1 3 3		80	40	40
SJ 02923	30N	11W 16	1 3 3		75	40	35
SJ 03265	30N	11W 16	1 3 3		90	70	20
SJ 03310	30N	11W 16	1 3 3		55	20	35
SJ 01082	30N	11W 16	2 2 1		80	34	46
SJ 01722	30N	11W 17	1		20	8	12
SJ 01528	30N	11W 17	1 1		26	10	16
SJ 03373	30N	11W 17	1 1 3		50	35	15
SJ 01948	30N	11W 17	1 2		21	3	18
SJ 02817	30N	11W 17	1 2 2		15		
SJ 01722 POD2	30N	11W 17	124	266967 2116417	17	3	14
SJ 01899	30N	11W 17	1 3 2		27	7	20
SJ 03771 POD1	30N	11W 17	1 3 3	266811 211517	20	6	14
SJ 03750 POD1	30N	11W 17	1 3 3	266811 211517	20	6	14
SJ 03319	30N	11W 17	1 3 4		55	31	24
SJ 03266	30N	11W 17	1 4 3		30	10	20
SJ 03436	30N	11W 17	1 4 3		20		
SJ 00745	30N	11W 17	2		54	30	24
SJ 00665	30N	11W 17	2 1		28	14	14
SJ 01342	30N	11W 17	2 1 1		26	5	21
SJ 00166	30N	11W 17	2 3		48	11	37
SJ 01057	30N	11W 17	2 3		63	28	35
SJ 01060	30N	11W 17	23		58	23	35
SJ 03241	30N	11W 17	2 3 3		75	20	55
SJ 03269	30N	11W 17	2 3 4		80	10	70
SJ 01200	30N	11W 17	2 4		50	20	30
SJ 03219 SJ 00159	30N 30N	11W 17 11W 17	2 4 2 3 1		68 35	38 8	30 27
SJ 03276	30N	11W 17 11W 17	3 1 4		60		40
SJ 01296	30N	11W 17 11W 17	3 2		50	20 10	40
SJ 03249	30N	11W 17 11W 17	3 2 2		55	10	40
SJ 01810	30N	11W 17	3 4		29	9	20
SJ 00411	30N	11W 17	4 1		60	25	35
SJ 00234	30N	11W 17	4 1		54	23	31
SJ 01847	30N	11W 17	4 1		30	6	24
SJ 00457	30N	11W 17	4 1 2		52	18	34
SJ 00650	30N	11W 17	4 1 3		49	18	31
SJ 02018	30N	11W 17	4 2		100	40	60
SJ 00136	30N	11W 17	4 2		69	35	34
SJ 03718 POD1	30N	11W 17	4 2 2		68	41	27
SJ 03261	30N	11W 17	4 2 2		88	50	38
SJ 03215	30N	11W 18	1 1 3		52	9	43
SJ 01316	30N	11W 18	1 1 3		46	12	34
SJ 03152	30N	11W 18	1 1 3		52	22	30
SJ 02805	30N	11W 18	1 2 1		60		
SJ 03463	30N	11W 18	1 2 1		70	20	50
SJ 02996	30N	11W 18	1 2 1		50	25	25
SJ 00932	30N	11W 18	124		32	15	17
SJ 01738	30N	11W 18	1 3		33	6	27
SJ 01733	30N	11W 18	1 3		29	9	20
SJ 01786	30N	11W 18	1 3		35	10	25
SJ 01401	30N	11W 18	1 3		44	12	32
SJ 03526	30N	11W 18	1 3 1		40		
SJ 03176	30N	11W 18	141		48	20	28
SJ 03177	30N	11W 18	1 4 2		37	15	22
SJ 03344	30N	11W 18	1 4 2		100	8	92

GT 03801 DOD1	2 (1)	11. 10	2	2		266702	2116440	0.1	C	1 Г
SJ 03801 POD1 SJ 03800 POD1	30N 30N	11W 18	2			266702	2116449	21	6	15
SJ 03800 PODI SJ 01639	30N	11W 18 11W 18	2		2	266718	2116651	21	6	15
SJ 02098				2	2			40	18	22
	30N	11W 18	2	4				21	7	14
SJ 02109	30N	11W 18	2	4				19	4	15
SJ 02123	30N	11W 18	2	4				22	8	14
SJ 03290	30N	11W 18		4	4			40	10	30
SJ 02045	30N	11W 18	4		4			480	200	280
SJ 03322	30N	11W 18	4	4				40	10	30
SJ 03320	30N	11W 18		4	-			80		
SJ 03321	30N	11W 18	4	4	3			80		
SJ 02193	30N	11W 19		-					105	
SJ 03403	30N	11W 19			2			400		
SJ 00638	30N	11W 19		1				130	70	60
SJ 01073	30N	11W 19		1				100	38	62
SJ 03615	30N	11W 19						105	35	70
SJ 03434	30N	11W 19			4			140		
SJ 03088	30N	11W 19		1	4			120	80	40
SJ 01636	30N	11W 19		2				70	25	45
SJ 02862	30N	11W 19	2	2	3			20		
SJ 00284	30N	11W 19	2	4				200	35	165
SJ 03645	30N	11W 19		1				60	20	40
SJ 03533	30N	11W 19	3		3			20		
<u>SJ 01621</u>	30N	11W 19	3	2				40	38	2
SJ 02692	30N	11W 19	3	2	2			52	12	40
SJ 02968	30N	11W 19	3	2	2			75	5	70
SJ 02812	30N	11W 19	3	2	2			50		
SJ 01123	30N	11W 19	4	1				40	15	25
SJ 03437	30N	11W 19		1	2			30		
SJ 03315	30N	11W 19	4	1	2			60	54	6
SJ 00284 CLW222415	30N	11W 19	4	4				200	35	165
SJ 03224	30N	11W 30	1	2	4			80	30	50
SJ 03077	30N	11W 30	2	1	1			75	70	5
SJ 03668	30N	11W 30	2	1	2			380	280	100
SJ 03251	30N	11W 32	3	4	4			150	77	73

Record Count: 303

	lexico Office of the State OD Reports and Down	0
Township: 30N Range	: 12W Sections:	
NAD27 X: Y:	Zone:	Search Radius:
County: Basin:	<u>_</u>	Number: Suffix:
Owner Name: (First)	(Last)	Non-Domestic C Domestic C All
POD / Surface Data Report	Avg Depth to Water I	Report Water Column Report
Clear f	Form WATERS Mer	nu Help

#### WATER COLUMN REPORT 08/21/2008

							3=SW 4	-					
_			-				small	-			Depth	Depth	Water (in
POD Number	Tws		Sec				Zone		x	Y		Water	Column
SJ 02643	30N	12W	02	3	3	2					195	140	55
SJ 02707	30N	12W	02	3		3					235	135	100
SJ 02145	30N	12W	04		1	1					160	110	50
SJ 02341	30N	12W	04	4							85	39	46
SJ 01898	30N	12W	04	4							140	88	52
SJ 01692	30N	12W	-	4							156	65	91
SJ 01798	30N	12W		4							158	70	88
SJ 01792	30N	12W		4							155	109	46
SJ 03058	30N	12W	04	4	3	3					120	48	72
SJ 03447	30N	12W	04	4	4	4					120	80	40
SJ 03767 POD1	30N	12W	10	2	4	2		26515	51	2121325	265	82	183
SJ 02128	30N	12W	10	3	4						140	60	80
SJ 00945	30N	12W	10	3	4						130	70	60
SJ 00421	30N	12W	10	4	4						126	43	83
SJ 00142	30N	12W	11	4	4	2					192	122	70
SJ 00651	30N	12W	11	4	4	4					193	123	70
SJ 03129	30N	12W	12	3	4	2					44	35	9
SJ 03027	30N	12W	12	3	4	3					100		
SJ 00384	30N	12W	12	4	3	2					57	20	37
SJ 03020	30N	12W	12	4	3	4					52	30	22
SJ 00643	30N	12W	12	4	4						75	51	24
SJ 03757 POD1	30N	12W	12	4	4			26612	23	2118278	22	12	10
SJ 00322	30N	12W	12	4	4	1					66	40	26
SJ 00888	30N	12W	13	1							81	50	31
SJ 00518	30N	12W	13	1							55	15	40
SJ 00935	30N	12W	13	1							54	10	44
SJ 00316	30N	12W	13	1	1						56	30	26
SJ 00337	30N	12W		1							43	17	26
SJ 00773	30N	12W			1	1					68	50	18
SJ 00821	30N	12W		1		_					42	15	27
SJ 03063	30N	12W			3	1					40	25	15
SJ 02803	30N	12W			2						68	43	25
	501	- 2111	10	2	2	~					00	E F	25

SJ 02114	30N	12W 13	2 2	4	49		
SJ 01403	30N	12W 13	22	4	51	15	36
SJ 01773	30N	12W 13	3		60	25	35
SJ 00299	30N	12W 13	3 2		49	18	31
SJ 00123	30N	12W 14	1 1	1	60	38	22
SJ 00854	30N	12W 14	1 4		87	50	37
SJ 00667	30N	12W 14	2 2	4	60	45	15
SJ 01161	30N	12W 14	24		37	20	17
SJ 00596	30N	12W 14	3 1		72		46
SJ 00105	30N	12W 14	3 1		38		13
SJ 00735	30N	12W 14		3	50		20
SJ 00676	30N	12W 14	3 2		51		21
SJ 00574	30N	12W 14	3 2		72		22
SJ 03318	30N	12W 14	3 3		50		
SJ 00129	30N	12W 14	3 4		50		40
SJ 00107	30N	12W 14	3 4		50		35
SJ 01674	30N	12W 14	3 4		65		49
SJ 00124	30N	12W 14	3 4		55		45
SJ 00271	30N	12W 14	3 4		43		20
SJ 00508	30N	12W 14	3 4		45		39
SJ 00458	30N	12W 14	4 1		37		22
SJ 03472	30N	12W 14	4 2		60		52
SJ 02739	30N	12W 14	4 2		65		55
SJ 03643	30N	12W 14		4	40		25
SJ 00482	30N	12W 14	43		43	6	37
SJ 00290	30N	12W 14	43		39		31
SJ 02168	30N	12W 14	чJ		78		28
SJ 00367	30N	12W 15			95		45
SJ 01178	30N	12W 15	14		110		30
SJ 03401	30N	12W 15 12W 15		3	180		124
SJ 01881	30N	12W 15	2	J	157		57
SJ 00817	30N	12W 15		4	96		43
SJ 03108	30N	12W 15		1	110		43 81
SJ 03432	30N	12W 15		2	165		60
SJ 01162	30N	12W 15	3	2	50		00
SJ 00145	30N	12W 15	3		165		105
SJ 00709	30N	12W 15	3		52		32
SJ 02120	30N	12W 15	3		77	55	22
SJ 00883	30N	12W 15	3		75		40
SJ 00416	30N	12W 15	3 1		120		60
SJ 02127	30N	12W 15	3 3		55		20
SJ 03238	30N	12W 15	3 3		75		45
SJ 02760	30N	12W 15	3 3		50		29
SJ 00928	30N	12W 15	3 4		68		36
SJ 00710	30N	12W 15	3 4		90		60
SJ 00816	30N	12W 15	3 4		58		28
SJ 00717	30N	12W 15	3 4		100		40
SJ 00684	30N	12W 15	34		73		43
SJ 01215	30N	12W 15	34		60		30
SJ 01037	30N	12W 15	34		50		30
SJ 00829	30N	12W 15	3 4		68		38
SJ 00714	30N	12W 15	3 4		92		52
SJ 00730	30N	12W 15	3 4		90		60
SJ 00731	30N	12W 15	3 4		90		60
SJ 00912	30N	12W 15	34		58		23
SJ 01793	30N	12W 15	34		50		28
SJ 00828 (1)	30N	12W 15	34		43		23
SJ 00828	30N	12W 15 12W 15	34		59		31
SJ 01438	30N	12W 15 12W 15	34		96		30
20 1200	501	12m 13	5 1		50	00	50

SJ 00481	30N	12W 15	3 4 2				52	30	22
SJ 00516	30N	12W 15	3 4 3				55	8	47
SJ 00927	30N	12W 15	4 1 2				204	75	129
SJ 00594	30N	12W 15	4 2				145	95	50
SJ 00810	30N	12W 15	4 3 3				96	35	61
SJ 03159	30N	12W 15	4 4 2				60		
SJ 02514	30N	12W 15	444				57	25	32
SJ 01279	30N	12W 16	4 4				200	100	100
SJ 02627	30N	12W 18	1 2 2				354	250	104
SJ 03808 POD1	30N	12W 18	1 3 1	26	6399	2116162	42	9	33
SJ 02697	30N	12W 18	1 4 3				360	290	70
SJ 01892	30N	12W 18	144				465	420	45
SJ 01619	30N	12W 18	21				395	345	50
SJ 01619 X	30N	12W 18 12W 18	$\begin{array}{ccc} 2 & 1 \\ 2 & 2 & 4 \end{array}$				380	350	30
SJ 02137 SJ 01737	30N	12W 18 12W 18					460 540	380	80
SJ 02080	30N 30N	12W 18 12W 18	23 23				340	240	30
SJ 01013	30N	12W 18	3				310	340 250	60
SJ 01014	30N	12W 18	3				306	250	56
SJ 01080	30N	12W 10	3 1				305	265	40
SJ 00575	30N	12W 18	331				420	390	30
SJ 01514	30N	12W 18	3 4 3				430	380	50
SJ 02035	30N	12W 18	4				500	190	310
SJ 01971	30N	12W 18	4				405	345	60
SJ 02040	30N	12W 18	4 1 4				460	400	60
SJ 02247	30N	12W 18	4 3				465	375	90
SJ 01283	30N	12W 18	4 3				425	380	45
SJ 01896	30N	12W 18	4 4				415	372	43
SJ 01809	30N	12W 18	4 4				371	317	54
SJ 00148	30N	12W 19					270	240	30
SJ 01831	30N	12W 19	31				244	195	49
SJ 03477	30N	12W 19	343						
SJ 00950	30N	12W 21	4 4				70	35	35
SJ 02163	30N	12W 21	4 4 4	W 42	4400	2174000	31	15	16
SJ 01877	30N	12W 22	1 1 2				94	66	28
SJ 01152	30N	12W 22	1 1 2				66	19	47
SJ 01297	30N	12W 22	1 2 2				67	30	37
SJ 00439	30N	12W 22	13				97	50	47
SJ 03087	30N	12W 22	134				40	21	19
SJ 00462 SJ 03056	30N 30N	12W 22 12W 22	$\begin{array}{ccc} 1 & 4 \\ 1 & 4 & 1 \end{array}$				61 88	12	49
SJ 00312	30N	12W 22 12W 22	2				88 94	30 35	58 59
SJ 00695	30N	12W 22	2				70	29	41
SJ 00360	30N	12W 22	22				35	3	32
SJ 00746	30N	12W 22	2 2 2				42	6	36
SJ 01273	30N	12W 22	2 3				100	38	62
SJ 00800	30N	12W 22	2 3				79	27	52
SJ 01684	30N	12W 22	31				80	45	35
SJ 03424	30N	12W 22	32				64	24	40
SJ 03661	30N	12W 22	321				65	19	46
SJ 03289	30N	12W 22	321				70	19	51
SJ 03607	30N	12W 22	321	26	4817	2109564	57	33	24
SJ 03101	30N	12W 22	3 2 2				74	12	62
SJ 03662	30N	12W 22	322				63	20	43
SJ 03616	30N	12W 22	322				67	20	47
SJ 03059	30N	12W 22	322				61	24	37
SJ 03060	30N	12W 22	322				57	21	36
SJ 03500	30N	12W 22	3 3 1				56	24	32
SJ 03157	30N	12W 22	332				46	18	28

,

SJ 01312	30N	12W 22	34				38	20	18
SJ 00569	30N	12W 22	34				44	10	34
SJ 01165	30N	12W 22	34				42	14	28
SJ 01393	30N	12W 22	34				39	12	27
SJ 03317	30N	12W 22	34	2			50		
SJ 02008	30N	12W 22	4 1				42	7	35
SJ 01614	30N	12W 22	4 1				45	7	38
SJ 02014	30N	12W 22	4 1				45	10	35
SJ 01301	30N	12W 22	4 2				50	10	40
SJ 00460	30N	12W 22	4 2				40	3	37
SJ 00224		12W 22	4 2				48	22	26
SJ 02305	30N	12W 22	4 2				40	20	21
SJ 02133		12W 22	43				40	14	26
SJ 00903	30N	12W 22	43				45	10	35
SJ 01464	30N	12W 22 12W 22	43				40		25
	30N	12W 22 12W 22	4 3 4 3				40	15	25
SJ 03473	30N	12W 22 12W 22	43				40	0	34
SJ 03233								8	
SJ 01340	_ 30N	12W 22 12W 22	43				40	9	31
SJ 01386	30N		4 3				40	12	28
SJ 01860	30N	12W 22	4 4				20	3	17
SJ 01980	30N	12W 22	4 4				20	5	15
SJ 02876	30N	12W 22		3			33	23	10
SJ 03397	30N	12W 22		3			42	5	37
SJ 03038	30N	12W 22		3			30	5	25
SJ 02387	30N	12W 22		4			16	5	11
SJ 03041	30N	12W 22	4 4	4			43	8	35
SJ 01168	30N	12W 23					33	13	20
SJ 00869	30N	12W 23	1 1				42	12	30
SJ 02995	30N	12W 23		1			62	24	38
SJ 02221	30N	12W 23		3			47	12	35
SJ 03510	30N	12W 23	1 1				40	3	37
SJ 01035	30N	12W 23	1 2				39	6	33
SJ 01021	30N	12W 23	1 2				35	13	22
SJ 00644	30N	12W 23	1 2				35	15	20
SJ 00642	30N	12W 23	1 2				45	12	33
SJ 00449	30N	12W 23		1					
SJ 02826	30N	12W 23		4			30		
SJ 02288	30N	12W 23	13				40	15	25
SJ 00538	30N	12W 23	14				37	6	31
SJ 00537	30N	12W 23	14				37	6	31
SJ 00934	30N	12W 23	14				31	5	26
SJ 01959	30N	12W 23	14				25	10	15
SJ 00186	30N	12W 23	14	4			31	4	27
SJ 01750	30N	12W 23	2				34	12	22
SJ 02742	30N	12W 23	2 1				28	10	18
SJ 01074	30N	12W 23	2 1				26	10	16
SJ 00244	30N	12W 23	2 1	2			40	2	38
SJ 00318	30N	12W 23	22				41	2	39
SJ 02112	30N	12W 23	2 2				30	5	25
SJ 01461	30N	12W 23	2 2				43	8	35
SJ 00475	30N	12W 23	2 2				40	3	37
SJ 02767	30N	12W 23		1			40	6	34
SJ 02767 RPR	30N	12W 23	2 2				39	2	37
SJ 00856	30N	12W 23		2			40	10	30
SJ 00479	30N	12W 23	2 3				24	8	16
SJ 02701	30N	12W 23	23				20	5	15
SJ 02997	30N	12W 23	2 3				17	5	12
SJ 03770 POD1	30N	12W 23	23		265563	211067	25	5	20
SJ 02788	30N	12W 23	2 3		200000	211007	45	27	18
50 02700	501	12W 2J	2 )	J			40	21	10

SJ 00923	30N	12W 23	24				23	10	13
SJ 02940	30N	12W 23	2 4	1			32	19	13
SJ 03601	30N	12W 23	24	2			34	15	19
SJ 03657	30N	12W 23	32				21	5	16
SJ 03366	30N	12W 23	32	3			21	20	1
SJ 03552	30N	12W 23	32	3			80		
	30N	12W 23	3 2				28	10	1.0
SJ 03551	-								18
SJ 00588	30N	12W 23	33	1			22	4	18
SJ 02921	30N	12W 23	33	1			23		
SJ 00588 1-EXPL	30N	12W 23	33	3			25	6	19
SJ 03226	30N	12W 23		3			38	10	28
	-				065242	0107206			
SJ 03816 POD1	30N	12W 23		3	265343	2107306	32	6	26
SJ 01276	30N	12W 23	34	4			18	8	10
SJ 01148	30N	12W 23	4				140	80	60
SJ 03380	30N	12W 23	4 1	1			42	7	35
SJ 03375	30N	12W 23	4 1				42	7	35
SJ 03664	30N	12W 23	4 1				22	6	16
SJ 02653	30N	12W 23	4 1				21	9	12
SJ 03665	30N	12W 23	4 1	3			25	6	19
SJ 03663	30N	12W 23	4 1	4			32	8	24
SJ 01513	30N	12W 23	4 2	_			31	7	24
				1					
SJ 01272	30N	12W 23		1			35	12	23
SJ 03506	30N	12W 23		2			40	8	32
SJ 03156	30N	12W 23	4 2	2			14	8	6
SJ 00117	30N	12W 23	4 2	3			38	20	18
SJ 00114	30N	12W 23	4 2				40	20	20
SJ 01381	30N	12W 23	4 3	5			29	10	19
SJ 00111	30N	12W 23	4 3				28	18	10
SJ 00896	30N	12W 23	44				40	20	20
SJ 03638	30N	12W 23	44	1			38	10	28
SJ 00633	30N	12W 24	13				38	10	28
SJ 02616	30N	12W 24	1 4				27	5	22
SJ 01682	3 0 N	12W 24	1 4				22	4	
									18
SJ 01681	30N	12W 24	24				22	4	18
SJ 01680	30N	12W 24	24				22	4	18
SJ 00691	30N	12W 24	31				30	15	15
SJ 00686	30N	12W 24	31	1			20	10	10
SJ 00404	30N	12W 24	3 1				54	44	10
SJ 01511	30N	12W 24	3 2	Ŭ			60	30	30
				1					
SJ 03054	30N	12W 25	32	T			43	22	21
SJ 01429	30N	12W 25	4				230	150	80
SJ 03008	30N	12W 25	4 1	2			100		
SJ 03418	30N	12W 25	4 1	4			75	18	57
SJ 01427	30N	12W 25	43				147	70	77
SJ 03799 POD1	30N	12W 26	2 1	З	265470	2106124	175	80	95
SJ 00429	30N	12W 26	3 3	5	2001/0	2100124	114		74
								40	
SJ 02032	30N	12W 27	1 2				35	5	30
SJ 00127 X	30N	12W 27	1 2				36	15	21
SJ 00127	30N	12W 27	1 2				30	5	25
SJ 01646	30N	12W 27	1 3				23	6	17
SJ 01599	30N	12W 27	1 3				25	6	19
	-	12W 27					24		
SJ 01617	_ 30N		1 3	2				4	20
SJ 01239	30N	12W 27	1 3				23	5	18
SJ 00963	30N	12W 27	14	2			106	50	56
SJ 02829	30N	12W 27	14	2			26	10	16
SJ 02700	30N	12W 27	2 1				21	7	14
SJ 01530	30N	12W 27	21 21				33	10	23
The second									
SJ 01694	30N	12W 27	2 1				32	6	26
SJ 01988	30N	12W 27	2 1				29	18	11

SJ 02620	30N	12W 27	2 1	1			30	10	20
SJ 03254	30N	12W 27	2 1	1			35	10	25
SJ 03243	30N	12W 27		2			35	6	29
SJ 02784	30N	12W 27		2			30		
SJ 00276	30N	12W 27	2 1				35	3	32
SJ 03433	30N	12W 27	2 1				25		
SJ 03496	30N	12W 27	2 1				50	10	40
SJ 03120	30N	12W 27	23				70		
SJ 02498	30N	12W 27		1			21	5	16
SJ 00844	30N	12W 27	31				31	12	19
SJ 03761 POD1	30N	12W 27	33		264712	2103138	65	35	30
SJ 03542	30N	12W 27		4			8	4	4
SJ 01572	30N	12W 27	4				43	23	20
SJ 03227	30N	12W 27	4 1				70	55	15
SJ 03641	30N	12W 27	43	2			60	25	35
SJ 00282	30N	12W 28					84	52	32
SJ 00122 CLW283728	30N	12W 28	1 3				126	61	65
SJ 01309	30N	12W 28	1 3				55	32	23
SJ 00122	30N	12W 28		2			80	40	40
SJ 02142	30N	12W 28	14	2			55	35	20
SJ 01275	30N	12W 28	14	3			30	5	25
SJ 02016	30N	12W 28	2 1	~			120	56	64
SJ 01129	30N	12W 28	$\begin{array}{ccc} 2 & 1 \\ 2 & 2 \end{array}$				40	10	30
SJ 03702 POD1 SJ 03702	30N 30N	12W 28 12W 28	22 22				30	5	25
SJ 00346	30N	12W 28 12W 28		3 1			30	5	25
SJ 03796 POD1	30N	12W 28	3 1		264258	2104657	41 22	15	26
SJ 02571	30N	12W 28		2 3	204250	2104057	22	5 6	17 15
SJ 03096	30N	12W 28	4 3				125	0	15
SJ 00669	30N	12W 28	<b>4</b> 4	7			70	30	40
SJ 02833	30N	12W 28	44	1			50	50	40
SJ 03688 POD1	30N	12W 28	4 4				50	25	25
SJ 03383	30N	12W 28	44				50	20	30
SJ 03688	30N	12W 28		3			50	25	25
SJ 02022	30N	12W 29	3				297	100	197
SJ 03187	30N	12W 29	31	1			160	29	131
SJ 02476	30N	12W 29	32	1			225	185	40
SJ 03280	30N	12W 29	3 2				100		
SJ 03358	30N	12W 29	33	1			100	60	40
SJ 03278	30N	12W 29	33	3			120	40	80
SJ 03279	30N	12W 29	33	4			120	60	60
SJ 00536	30N	12W 29	4				50	28	22
SJ 02309	30N	12W 29		2			50	27	23
SJ 02306	30N	12W 29	44	1			44	25	19
SJ 01052	30N	12W 29	44	3			39	11	28
SJ 01006	30N	12W 30	1				38	16	22
SJ 01314	30N	12W 30		1			240	220	20
SJ 01637	30N	12W 30	3 3				127	52	75
SJ 01632	30N	12W 30		4			175	87	88
SJ 02219	30N	12W 30	4 4				240	80	160
SJ 03361	30N	12W 31		4			150		
SJ 03365	30N	12W 31		2			50	20	10
SJ 03145	30N	12W 31		4			49	32	17
SJ 03132	30N	12W 31		4			58	32	26
SJ 00223	30N	12W 31	24				63	22	41
SJ 00170	30N	12W 31	24	2			45	20	25
SJ 03236	30N	12W 31		2			63	15	48
SJ 03331 SJ 03174	30N 30N	12W 31		2			67	18	49
SU VJI/1	2010	12W 31	24	2			60	46	14

SJ 03161	30N	12W 31	24	3	62	47	15
SJ 03252	30N	12W 31	24	4	42	11	31
SJ 03150	30N	12W 31	24	4	53	30	23
SJ 03237	30N	12W 31	24	4	70		
SJ 01236	30N	12W 31	32		50	38	12
SJ 02815	30N	12W 31	34	2	30		
SJ 03148	30N	12W 31		1	56	34	22
SJ 02882	30N	12W 31		2	33	19	14
SJ 03147	30N	12W 31	4 1		49	28	21
SJ 02867	30N	12W 31	4 1		28	14	14
SJ 03051		12W 31	4 1		40	24	16
SJ 02792	30N	12W 31	4 1		49	30	19
SJ 03296	30N	12W 31	41		49 56	30	
SJ 02877	30N	12W 31	4 1				26
					31	17	14
SJ 03099	30N	12W 31	4 1		34	9	25
SJ 03602	30N	12W 31	4 1		31	7	24
SJ 03409	30N	12W 31		4	44	24	20
SJ 03725 POD1	30N	12W 31	4 2	3	17	17	
SJ 03235	30N	12W 31		4	70	40	30
SJ 03122	30N	12W 31		1	29	15	14
SJ 02965	30N	12W 31		3	35	14	21
SJ 02213	30N	12W 32	1		33	13	20
SJ 02166	30N	12W 32	1		33	10	23
SJ 02207	30N	12W 32	1		25	4	21
SJ 02208	30N	12W 32	1		25	4	21
SJ 01664	30N	12W 32		1	32	16	16
SJ 03610	30N	12W 32		2	80	50	30
SJ 03517	30N	12W 32	1 1	2	60	30	30
SJ 03523	30N	12W 32	1 1	2	77	42	35
SJ 03516	30N	12W 32	1 1	2	70	35	35
SJ 03511	30N	12W 32	1 1	4	60	30	30
SJ 03518	30N	12W 32	1 1	4	60	30	30
SJ 03522	30N	12W 32	1 1	4	70	35	35
SJ 03521	30N	12W 32	1 1	4	55	25	30
SJ 03520	30N	12W 32	1 1		55	25	30
SJ 03519	30N	12W 32	1 1	4	55	25	30
SJ 03515	30N	12W 32	1 1	4	70	35	35
SJ 03514	30N	12W 32	1 1		70	35	35
SJ 03513	30N	12W 32	1 1	4	60	30	30
SJ 03512	30N	12W 32	1 1		60	30	30
SJ 03494	30N	12W 32			50		
SJ 03221	30N	12W 32		3	50	12	38
SJ 03629	30N	12W 32	1 2		60	20	40
SJ 03217	30N	12W 32	1 2		42	12	30
SJ 02214	30N	12W 32	1 3	0	30	12	18
SJ 02214 X	30N	12W 32	1 3		31	15	16
SJ 02262	30N	12W 32	1 3		31	15	10
SJ 02211	30N	12W 32	1 3		25	11	14
SJ 02220	30N	12W 32	1 3		28	10	18
SJ 02246	30N	12W 32	1 3		19	9	10
SJ 02117	30N	12W 32	1 3		40	19	21
SJ 02311	30N	12W 32	1 3		34		
SJ 02311 SJ 02177	30N	12W 32 12W 32				11 11	23
			13		35	11	24
SJ 02286	30N	12W 32	13		40	18	22
SJ 01832	30N	12W 32	13	1	41	10	31
SJ 03613	30N	12W 32	1 3		70	20	50
SJ 02942	30N	12W 32		1	35	19	16
SJ 02982	30N	12W 32		1	36	10	26
SJ 03009	30N	12W 32	13	2	37	10	27

SJ	03748 POD1	30N	12W 32	1	3 3						
	03190	30N	12W 32		3 3				25	8	17
	02371	30N	12W 32		34				31	11	20
1	00190	30N	12W 32	1	4				34	15	19
	02239	30N	12W 32		1 2				65	17	48
	03207	30N	12W 32		3 2				60	30	30
	03206	30N	12W 32		3 2				60	50	50
	00116	30N	12W 32		3 3				25		
	00116 S	30N	12W 32		33				25		
	03606	30N	12W 32		43				67	49	18
	02908	30N	12W 32		24				50	49	TO
	03779 POD1	30N	12W 32		$2 \frac{1}{4}$		263644	2098600	26	8	18
	02804	30N	12W 32		34		203044	2090000	50	0	10
	00519	30N	12W 32		43				24	12	12
	03349	30N	12W 32		2 1				55	12	12
	03143	30N	12W 33		2 3				97	60	37
	03110	30N	12W 33		2 4				320	54	266
	01390	30N	12W 33		3				40	22	18
	01174	30N	12W 33		3				36	19	17
	03143 POD2	30N	12W 33		4 2				40	10	30
	03133	30N	12W 33		44				39	20	19
	00605	30N	12W 33		1 2				72	35	37
	02981	30N	12W 33		1 2				100	60	40
	00606	30N	12W 33		$\frac{1}{1}$ 2				100	35	69
	01072	30N	12W 33		2				110	50	60
	01036	30N	12W 33		2				105	70	35
	01045	30N	12W 33		2				73	45	28
	03140	30N	12W 33		31				42	20	23
	00474	30N	12W 33		33				104	60	44
	03614	30N	12W 33		33				42	33	9
	00505	30N	12W 33		4 4				85	45	40
	00444	30N	12W 33		4				66	34	32
	01256	30N	12W 33		4				250	160	90
	01286	30N	12W 33	3	-				265	227	38
	01118	30N	12W 33		2				32	10	22
	00613	30N	12W 33		23				147	95	52
	02212	30N	12W 33		3				320	269	51
	01633	30N	12W 33		3				280	240	40
	00447	30N	12W 33	4					104	65	39
and the second second second	00622	30N	12W 33		- 1 2				76	41	35
	00590	30N	12W 33		1 3				98	60	38
	00986	30N	12W 33		2				104	80	24
	01231	30N	12W 33		23				246	161	85
	00428	30N	12W 34	4					107	25	82
	02296	30N	12W 36	4					300	89	211
	02296 S	30N	12W 36		3 1	W	436910	2097860	300	100	200

Record Count: 432

	Tow	nship: 31N	Range:	11W	Sections:			
	NAD27	X:	Y:		Zone:		Search Radius	5:
County:		Bas	in:			Nurr	iber:	Suffix:
)wner N	lame: (Fii	rst)		(Last)		0	Non-Domestic	ODomestic • All
F	POD / Surfac	ce Data Repo	rt ]	Avg	Depth to Water	Report	Wate	er Column Report

# WATER COLUMN REPORT 08/20/2008

(quarters are biggest to smallest) Depth Depth	Water (in feet)
	Column
<b>SJ 02395</b> 31N 11W 13 1 1 3 95 35	60
<b>SJ 01640</b> 31N 11W 13 2 4 32 7	25
<b>SJ 01551</b> 31N 11W 13 2 4 64 42	22
<b>SJ 00560</b> 31N 11W 13 2 4 39 25	14
<b>SJ 01729</b> 31N 11W 13 2 4 48 28	20
<b>SJ 01541</b> 31N 11W 13 3 52 30	22
<b>SJ 01539</b> 31N 11W 13 3 52 30	22
<b>SJ 00946</b> 31N 11W 13 3 3 135 100	35
<b>SJ 01540</b> 31N 11W 13 4 52 30	22
<b>SJ 01879</b> 31N 11W 13 4 26 8	18
<b>SJ 01801</b> 31N 11W 13 4 22 15	7
<b>SJ 03413</b> 31N 11W 13 4 2 60	
<b>SJ 03412</b> 31N 11W 13 4 2 60	
<b>SJ 03736 POD1</b> 31N 11W 13 4 2 1 19 6	13
<b>SJ 02495</b> 31N 11W 13 4 2 1 28 12	16
<b>SJ 03623</b> 31N 11W 13 4 2 1 30 16	14
<b>SJ 03264</b> 31N 11W 13 4 2 2 20 11	9
<b>SJ 03124</b> 31N 11W 13 4 2 4 20 5	15
<b>SJ 03125</b> 31N 11W 13 4 2 4 20 5	15
<b>SJ 03712 POD1</b> 31N 11W 13 4 3 1 19 11	8
<b>SJ 03018</b> 31N 11W 13 4 3 4 20 8	12
<b>SJ 03670</b> 31N 11W 13 4 3 4 26 10	16
<b>SJ 01538</b> 31N 11W 13 4 4 52 30	22
<b>SJ 01683</b> 31N 11W 13 4 4 45 25	20
<b>SJ 01731</b> 31N 11W 13 4 4 43 25	18
<b>SJ 01644</b> 31N 11W 13 4 4 23 6	17
<b>SJ 02149</b> 31N 11W 13 4 4 35	
<b>SJ 01645</b> 31N 11W 13 4 4 22 6	16
<b>SJ 01767</b> 31N 11W 13 4 4 42 18	24
<u>SJ 01730</u> 31N 11W 13 4 4 40 24	16
<b>SJ 01699</b> 31N 11W 13 4 4 42 12	30
<b>SJ 01609</b> 31N 11W 13 4 4 40 18	22

с.т	01537	31N	11W 13	4 4				52	28	24
	01542	31N	11W 13 11W 13	44				77	20	24
	01663	31N	11W 13	4 4				45	25	20
21 A	02093	31N	11W 13	4 4	W	470700	2143800	40	20	20
SJ	03440	31N	11W 13	4 4 1				20	6	14
SJ	03084	31N	11W 13	4 4 2				19	11	8
SJ	03085	31N	11W 13	4 4 2				18	8	10
	02801	31N	11W 13	4 4 3				36	5	31
	03064	31N	11W 13	4 4 3				45		
	01142	31N	11W 13	4 4 4				30	8	22
	02838	31N	11W 13	444				38	10	28
	02855	31N	11W 13	4 4 4				31	0.0	4.0
	01173	31N	11W 13	444				46	28	18
	02289 03458	31N 31N	11W 13 11W 19	$\begin{array}{cccc} 4 & 4 & 4 \\ 3 & 3 & 4 \end{array}$				45 140	16	29
	02978	31N	11W 13 11W 23	213				800		
	01817	31N	11W 23	2 4				65	20	45
	02129	31N	11W 23	24				72	35	37
	02161	31N	11W 23	3 4				40	25	15
	01600	31N	11W 24	1				30	6	24
	02124	31N	11W 24	1 1				55	40	15
SJ	03755 POD1	31N	11W 24	1 4		269112	2142037	27	7	20
SJ	03695 POD1	31N	11W 24	142				25	13	12
	03695 POD	31N	11W 24	1 4 2				25	13	12
	03696	31N	11W 24	1 4 2				24	12	12
	03695	31N	11W 24	142				25	13	12
	03696 POD1	31N	11W 24	142				24	12	12
	01559 01744	31N	11W 24	2				50	27	23
	01375	31N 21N	11W 24 11W 24	22 22				44	20	24
	01986 S	31N 31N	11W 24 11W 24	2 2 2				30 45	11 30	19 15
	01986	31N	11W 24 11W 24	$\begin{array}{c} 2 \\ 2 \\ 2 \\ 2 \end{array}$				38	30 21	17
	00555	31N	11W 24	2 2 4				60	19	41
	03408	31N	11W 24	2 3 1				26	11	15
	02928	31N	11W 24	232				70		
SJ	02924	31N	11W 24	2 3 2				33	15	18
	02846	31N	11W 24	233				45	18	27
	02888	31N	11W 24	233				65		
	03650	31N	11W 24	233				32	15	17
	00555 X	31N	11W 24	24				58	39	19
1 A A A A A A A A A A A A A A A A A A A	02839 03707 POD1	31N 31N	11W 24 11W 24	2 4 1				55	19	36
	02758	31N	11W 24 11W 24	$\begin{array}{cccccccccccccccccccccccccccccccccccc$				60 69	40 51	20 18
	02791	31N	11W 24	2 4 2 2 4 2				74	54	20
	00379	31N	11W 24	$2 \ 4 \ 4$				65	40	25
	00365	31N	11W 24	244				71	40	31
SJ	01670	31N	11W 24	3				45	27	18
SJ	00287	31N	11W 24	3 2 4				38	6	32
	01553	31N	11W 24	3 4				44	35	9
	02171	31N	11W 24	3 4 3				45	25	20
	01366	31N	11W 24	4 1				30	11	19
	02644	31N	11W 24	4 1 4				45	18	27
	00913	31N 21N	11W 24	43				81	55	26
	01405 01455	31N 31N	11W 24 11W 24	43 434				30 101	9 66	21 35
	01047	31N	11W 24 11W 24	434 434				205	66 70	35 135
	00405	31N	11W 24 11W 24	434				205 69	42	27
1.11.14	03438	31N	11W 24	444				40		41
	03045	31N	11W 25	1 4 4				200		
								. •		

				_					
add the second second second	02499	31N	11W 25	2 1			66	45	21
	03198	31N	11W 25		1		600	100	500
	02834	31N	11W 25	33			200	160	40
	03450	31N	11W 25	33			144	95	49
	03126	31N	11W 26	1 1	1		41	21	20
	01233	31N	11W 26	14			49	27	22
SJ	03158	31N	11W 26	1 4	2		280	25	255
SJ	00675	31N	11W 26	14	3		36	22	14
SJ	02887	31N	11W 26	14	4		51	28	23
SJ	02898	31N	11W 26	2 1	4		50		
SJ	01789	31N	11W 26	31			29	12	17
SJ	00705	31N	11W 26	31	1		18	8	10
SJ	00371	31N	11W 26	31	2		29	9	20
SJ	03323	31N	11W 26	31	4		30	6	24
SJ	00363	31N	11W 26	31	4		25	5	20
	01545 X	31N	11W 26	33			27	10	17
	00926	31N	11W 26	4 1			62	32	30
	01519	31N	11W 26	42			69	47	22
	01620	31N	11W 26	4 2			67	26	41
	00610	31N	11W 26	4 2			80	50	30
	02011	31N	11W 26	4 2			55	38	17
	01628	31N	11W 26	4 2			66	25	41
	03697 POD1	31N	11W 26	4 2	З		80	50	30
	00562	31N	11W 26	4 3	5		40	20	20
	00561	31N	11W 26	4 3			38	20	18
	01042	31N	11W 26	44			100	30	70
	00494	31N	11W 20 11W 26	4 4			88		28
	02482	31N	11W 20 11W 27	4 1	2		88 75	60 55	
	03600	31N	11W 27					55	20
	03540	31N	11W 27 11W 27	4 2 4 2			51	39	12
	03772 POD1		11W 27 11W 27	4 2 4 2		260220 2125717	40	21	19
	02914	31N				268239 2135717	41	30	11
		31N	11W 27	42			25	15	10
	02468	31N	11W 27	42 42			49	30	19
	02656 02871	31N	11W 27		4 4		21	9	12
	02215	31N	11W 27 11W 27	42 43	4		22	11	11
	02676	31N	11W 27 11W 27	4 3 4 3			54	23	31
	03247	31N 31N	11W 27 11W 27	43 43	1		19	7	12
			11W 27 11W 27	43 43			70	1.4	2.6
	03505	31N 21N					50	14	36
- Marca 110 100 100 100 1	02549 02853	31N	11W 27	43			49	30	19
		31N	11W 27	4 3			22	6	16
	02984 03181	31N 31N	11W 27 11W 27	44			20	1.0	0
	01884		11W 27 11W 30	$\begin{array}{c} 4 & 4 \\ 4 & 2 \end{array}$			19	10	9
	01739	31N 31N	11W 30	42 42			71	30	41
	01154	31N	11W 30	42 42			98 190	30	68
	01834	31N	11W 30	4 2 4 2				150	40
	01797	31N	11W 30	44	4		103	30	73
	01396	31N	11W 30		1		100	40	60
				44			80	57	23
	00970	31N 31N	11W 30	44	4		110	80 50	30
	01811	31N	11W 31	22	2		89	50	39
	02994	31N	11W 33	43			300	200	100
	02993	31N	11W 33	4 3			280	160	120
A	01137	31N	11W 33	4 4	4		37	19	18
	02277	31N	11W 34	1 2			16	7	9
	02167	31N	11W 34	14			83	69	14
	01533	31N	11W 34	14			58	40	18
	01251	31N	11W 34	14			79	65	14
SJ	03211	31N	11W 34	14	1		24	14	10

	01105	2437	1111 24	1 4 0			5.0	40	1 1
AND A DESCRIPTION OF	01125	31N	11W 34	1 4 2			59	42	17
	01657	31N	11W 34	2			20	6	14
	01675	31N	11W 34	2			33	7	26
	00632	31N	11W 34	2			25	7	18
1001001111	01656	31N	11W 34	2			20	6	14
	00656	31N	11W 34	2			30	8	22
The second second second	00631	31N	11W 34	2			30	11	19
ana mana in	03448	31N	11W 34	2 1			41	21	20
SJ	01267	31N	11W 34	2 1			65	45	20
SJ	01618	31N	11W 34	2 1			28	8	20
SJ	01840	31N	11W 34	2 1 1			65	25	40
SJ	03316	31N	11W 34	2 1 1			30	10	20
SJ	00660	31N	11W 34	2 1 1			50	30	20
SJ	01768	31N	11W 34	2 2			20	6	14
SJ	01721	31N	11W 34	2 2			22	10	12
SJ	03172	31N	11W 34	2 2 2			19	7	12
	03047	31N	11W 34	224			19	6	13
THE REAL PROPERTY AND INCOME.	02119	31N	11W 34	2 3			11	3	8
	02113	31N	11W 34	2 3			12	4	8
	00659	31N	11W 34	2 3			33	11	22
	00661	31N	11W 34	2 3 1			52	32	20
	02972	31N	11W 34	2 3 4			15	5	10
contraction second from a	03107	31N	11W 34	2 4 1			18	8	10
and the rank of the second	03106	31N	11W 34	2 4 1			25	0	ŦŎ
	03183	31N	11W 34	2 4 4			19	6	13
	03780 POD1	31N	11W 34	3 1 2	267922	2130341	28	12	16
	02859	31N	11W 34	3 1 4	201922	2100341	22	6	16
	02967		11W 34 11W 34	3 2 3			22	5	
		31N	11W 34 11W 34						15
	02856	31N					24	6	18
A shearder -	02852	31N	11W 34	3 2 3			23	7	16
	03065	31N	11W 34	3 2 3			22	7	15
	03025	31N	11W 34	3 2 3			22	5	17
	03014	31N	11W 34	3 2 4			30	5	25
	03002	31N	11W 34	3 2 4			22	_	
	02861	31N	11W 34	3 3 1			21	7	14
	03220	31N	11W 34	3 3 1			20	6	14
	03042	31N	11W 34	3 3 2			23	6	17
	03710 POD1	31N	11W 34	3 3 2			20	4	16
	03048	31N	11W 34	3 3 4			21	4	17
	02857	31N	11W 34	3 4 1			23	6	17
1.1.01.1	03492	31N	11W 34	3 4 2			30	_	
	03631	31N	11W 34	3 4 2			27	6	21
	03493	31N	11W 34	3 4 2			25	15	10
· · · · · · · · · · · · · · · · · · ·	03357	31N	11W 34	3 4 2			22	6	16
	03260	31N	11W 34	3 4 4			41	3	38
	03609	31N	11W 34	3 4 4			27	6	21
	01608	31N	11W 34	4			48	17	31
	03720 POD1	31N	11W 34	4 1 3			21	6	15
	03497	31N	11W 34	4 1 4			30	10	20
	03402	31N	11W 34	4 1 4			25		
	03377	31N	11W 34	4 2 4			20	2	18
SJ	03016	31N	11W 34	4 3 1			35		
SJ	03739 POD1	31N	11W 34	431			25	3	22
SJ	02966	31N	11W 34	4 3 3			48	20	28
SJ	00985	31N	11W 34	4 4			40	16	24
SJ	02827	31N	11W 35	1 1 2			60		
	03371	31N	11W 35	1 1 3			21	5	16
	02902	31N	11W 35	1 1 3			19	5	14
	02897	31N	11W 35	1 3 1			17	6	11
				—				-	

	2 1 22	11 25	-	2		
SJ 00333	31N	11W 35	1	-	4	
SJ 03760 POD1	31N	11W 35	1	4	1 2	68465
SJ 03543	31N	11W 35	1	4	4	
SJ 01144	31N	11W 35	1	4	4	
SJ 01319	31N	11W 35	2	2	2	
SJ 00185	31N	11W 35	2	3		
SJ 03676	31N	11W 35	2	3	1	
SJ 03560	31N	11W 35	2	3	2	
SJ 03165	31N	11W 35	2	4	4	
SJ 03166		11W 35	2	4	4	
SJ 00983	31N	11W 35	3			
SJ 00939	31N	11W 35	3			
SJ 00940	31N	11W 35	3	1		
SJ 01580	31N	11W 35	3	1	1	
SJ 02932	31N	11W 35	3	1	2	
SJ 02933	31N	11W 35	3	1	2	
<u>SJ 03574</u>	31N	11W 35	3	1	4	
SJ 00591	31N	11W 35	3	1	4	
SJ 00939 1	31N	11W 35	3	2		
SJ 00713	31N	11W 35	4	2		


Record Count: 229


		<i>ffice of the State</i> oorts and Downl	
Township: 31	N Range: 12W	Sections:	
NAD27 X:	Y:	Zone:	Search Radius:
County:	Basin:		Number: Suffix:
Owner Name: (First)	(Last)		○Non-Domestic ○Domestic ④All
POD / Surface Data Re	eport Ave	g Depth to Water F	Report Water Column Report
	Clear Form	iWATERS Men	u Help
		nee – e e aeradat felare un la Rhattillade (efa) to made comes quade a Raza d	

#### WATER COLUMN REPORT 08/20/2008

								3=SW 4=SE)							
		· -		-				smallest)			Depth	Depth		(in	feet)
	lumber	Tws						Zone	х	Y	Well	Water	Column		
SJ 03	488	31N	12W	01	3	32	2				150				
SJ 03	738 POD1	31N	12W	01	4	13	3				115	50	65		
SJ 02	034	31N	12W	01	4	3					85	55	30		
SJ 03	134	31N	12W	01	4	32	2				80	20	60		
SJ 03	3022	31N	12W	01	4	3 2	2				490	250	240		
	660		12W	01	4	33	3				320	275	45		
	649		12W	01	4	34	1				220	161	59		
	660		12W	01	4	3 4	l				70	42	28		
	2099		12W	01	4	4					95				
SJ 02	904	31N	12W	80	4	44	1				325	142	183		
	026		12W	24	4	34	Į				140	85	55		
	477		12W	25	2						565	505	60		
	.163		12W	25	2	1 3	3				200	90	110		
SJ 01	108	31N	12W	25	2	14	l				245	90	155		
	.303		12W	25	2	23	3				210				
	180		12W	25	2	2 4	1				200	120	80		
	968		12W	25	2	4					170	100	70		
	3204		12W	31	4	31	L				40	20	20		
	2021 X		12W	35	4	2					290	250	40		
SJ 02			12W	35	4	2					115				
SJ 03	309		12W	35	4	44	1				240	210	30		


Record Count: 21

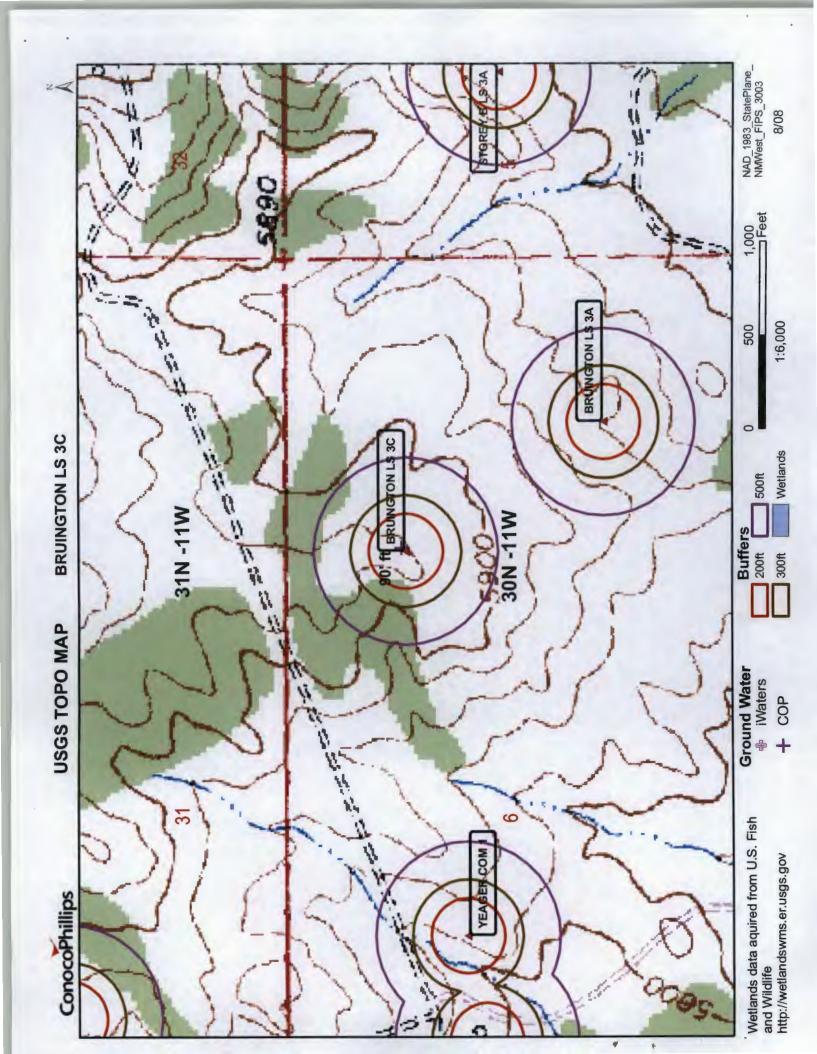


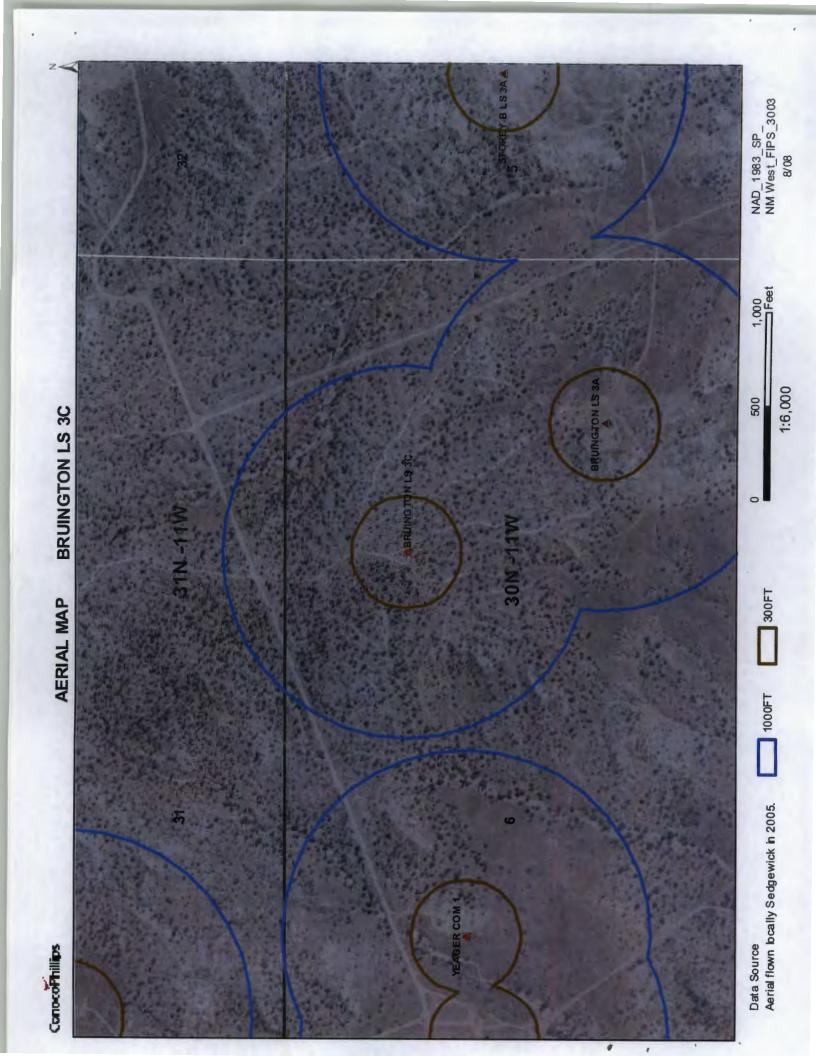

# Mines, Mills and Quarries Web Map **BRUINGTON LS 3C**

Unit Letter: B, Section: 06, Town: 030N, Range: 011W

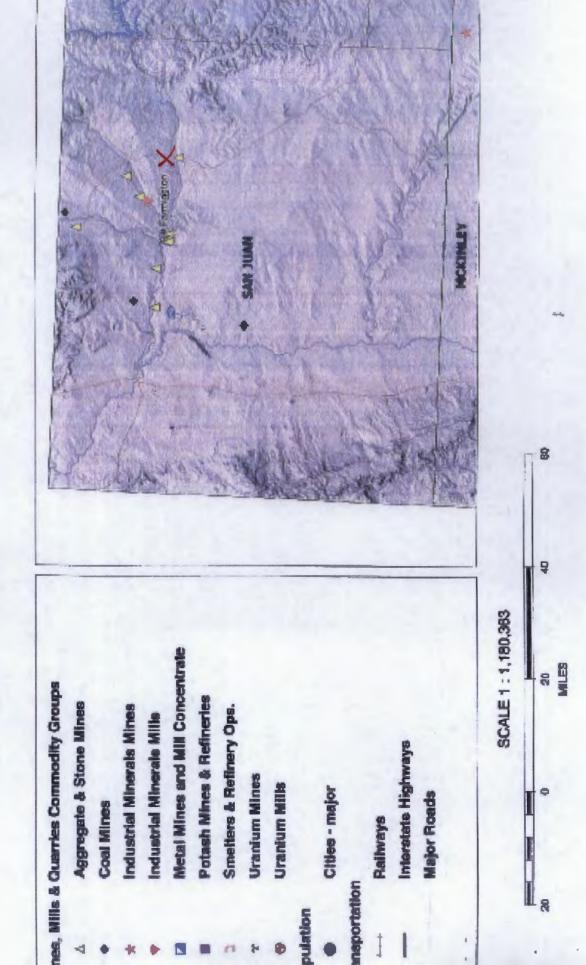

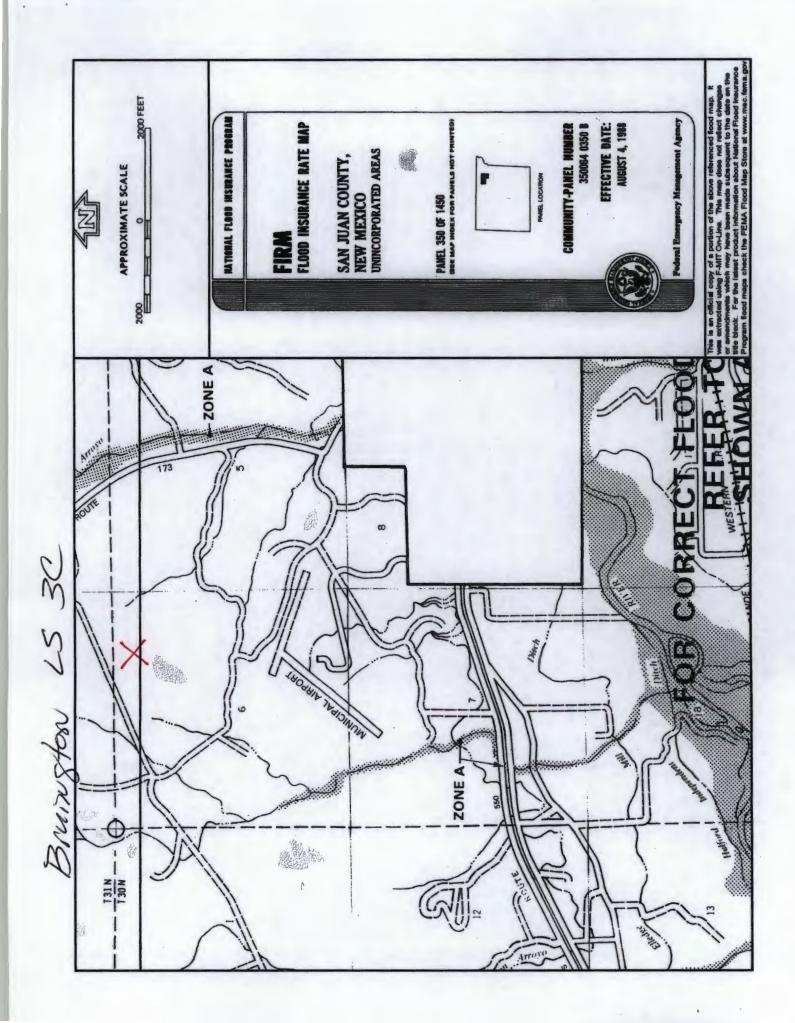

# **BRUINGTON LS 3C**

#### Site Specific Hydrogeology

A visual site inspection confirming the information contained herein was performed on the well 'BRUINGTON LS 3C', which is located at 36.84642 degrees North latitude and 108.02773 degrees West longitude. This location is located on the Flora Vista 7.5' USGS topographic quadrangle. This location is in section 6 of Township 30 North Range 11 West of the Public Land Survey System (New Mexico Principal Meridian). This location is located in San Juan County, New Mexico. The nearest town is Aztec, located 2.5 miles to the southeast. The nearest large town (population greater than 10,000) is Farmington, located 12.6 miles to the southwest (National Atlas). The nearest highway is State Highway 574, located 0.6 miles to the northeast. The location is on BLM land and is 1,337 feet from the edge of the parcel as notated in the BLM land status layer updated January 2008. This location is in the Animas. Colorado, New Mexico, Sub-basin. This location is located 1808 meters or 5930 feet above sea level and receives 11 inches of rain each year. The vegetation at this location is classified as Colorado Plateau Pinon-Juniper Woodland as per the Southwest Regional Gap Analysis Program.

The estimated depth to ground water at this point is 114 feet. This estimation is based on the data published on the New Mexico Engineer's iWaters Database website and water depth data from ConocoPhillips' cathodic wells. Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. The nearest stream is 1,191 feet to the east and is classified by the USGS as an intermittent stream. The nearest perennial stream is named Estes Arroyo and is 3,542 feet to the northeast. The nearest water body is named Coach Tank and is 3,971 feet to the northwest. It is classified by the USGS as an intermittent lake and is 1.8 acres in size. The nearest spring is 31,464 feet to the northeast. All stream, river, water body and spring information was determined as per the USGS Hydrographic Dataset (High Resolution), downloaded 3/2008. The nearest water well is 348 feet to the west. The nearest wetland is a 1.1 acre other located 4,029 feet to the northwest. The slope at this location is 2 degrees to the east as calculated from USGS 30M National Elevation Dataset. This information is also discerned from the aerial and topographic map included. The surface geology at this location is NACIMIENTO FORMATION--Shale and sandstone with a Shale dominated formations of all ages substrate. The soil at this location is 'Gypsiorthids-Badland-Stumble complex, moderately steep' and is somewhat excessively drained and not hydric with severe erosion potential as taken from the NRCS SSURGO map unit, downloaded January 2008. The nearest underground mine is 9.1 miles to the north as indicated on the Mines, Mills and Quarries Map of New Mexico provided.

#### Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it conformably overlies and inter-tongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones.

Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

#### Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

#### References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, eastcentral San Juan Basin, New Mexico: USGS Professional Paper 552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p. Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.


### ConocoPhillips Company San Juan Basin Below Grade Tank Design and Construction

In accordance with NMAC 19.15.17 the following information describes the design and construction of below grade tanks on ConocoPhillips Company (COPC) locations. This is COPC's standard procedure for all below grade tanks (BGT). A separate plan will be submitted for any BGT which does not conform to this plan.

#### General Plan:

- 1. COPC will design and construct a properly sized and approved BGT which will contain liquids and should prevent contamination of fresh water to protect the public health and environment.
- 2. COPC signage will comply with 19.15.3.103 NMAC when COPC is the operator. If COPC is not the operator it will comply with 19.15.17.11NMAC. COPC includes Emergency Contact information on all signage.
- 3. COPC has approval to use alternative fencing that provides better protection. COPC constructs fencing around the BGT using 4 foot hog wire fencing topped with two strands of barbed wire, or with a pipe top rail. A six foot chain link fence topped with three strands of barbed wire will be use if the well location is within 1000 feet of permanent residence, school, hospital, institution or church. COPC ensures that all gates associated with the fence are closed and locked when responsible personnel are not onsite.
- 4. COPC will construct a screened, expanded metal covering, on the top of the BGT.
- 5. COPC shall ensure that a below-grade tank is constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight as shown on design drawing and specification sheet.
- 6. The COPC below-grade tank system shall have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom as shown on design drawing.
- 7. COPC shall operate and install the below-grade tank to prevent the collection of surface water run-on. COPC has built in shut off devices that do not allow a below-grade tank to overflow. COPC constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 8. COPC will construct and use a below-grade tank that does not have double walls. The below-grade tank's side walls will be open for visual inspection for leaks, the below-grade tank's bottom is elevated a minimum of six inches above the underlying ground surface and the below-grade tank is underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.

- 9. COPC has equipped the below-grade tanks with the ability to detect high level in the tank and provide alarm notification and shutdown process streams into the tank. Once high level is detected RTU logic closes the inlet separator sales valve and does not permit vent valve to open. This shutdown of the sales valve and gagging of the vent valves prevents any hydrocarbon process streams from entering the pit tank once a high level is detected. Furthermore, an electronic page is sent to the COPC MSO for that well site and to the designated contract "Water-Hauling" Company indicating a high level and that action must be taken to address this alarm. The environmental drain line from COPC's compressor skid under normal operating conditions is in the open position. The environmental drain line is in place to capture any collected rain water or spilled lubricants from our compressor skids. The swab drain line is a manually operated drain and by normal operating procedures is in the closed position. The tank drain line is also a manually operated drain and during normal operations it is in the closed position.
- 10. The geomembrane liner consists of a 45-mil flexible LLDPE material manufactured by Raven Industries as J45BB. This product is a four layer reinforced laminated containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. The J45BB is reinforced with 1300 denier (minimum) tri-directional scrim reinforcement. It exceeds ASTMD3083 standard by 10%. J45BB has a warranty for 20 years from Raven Industries and is attached. It is typically used in Brine Pond, Oilfield Pit liner and other industrial applications. The manufacture specific sheet is attached and the design attached displays the proper installation of the liner.
- 11. The general specification for design and construction are attached in the COPC document.

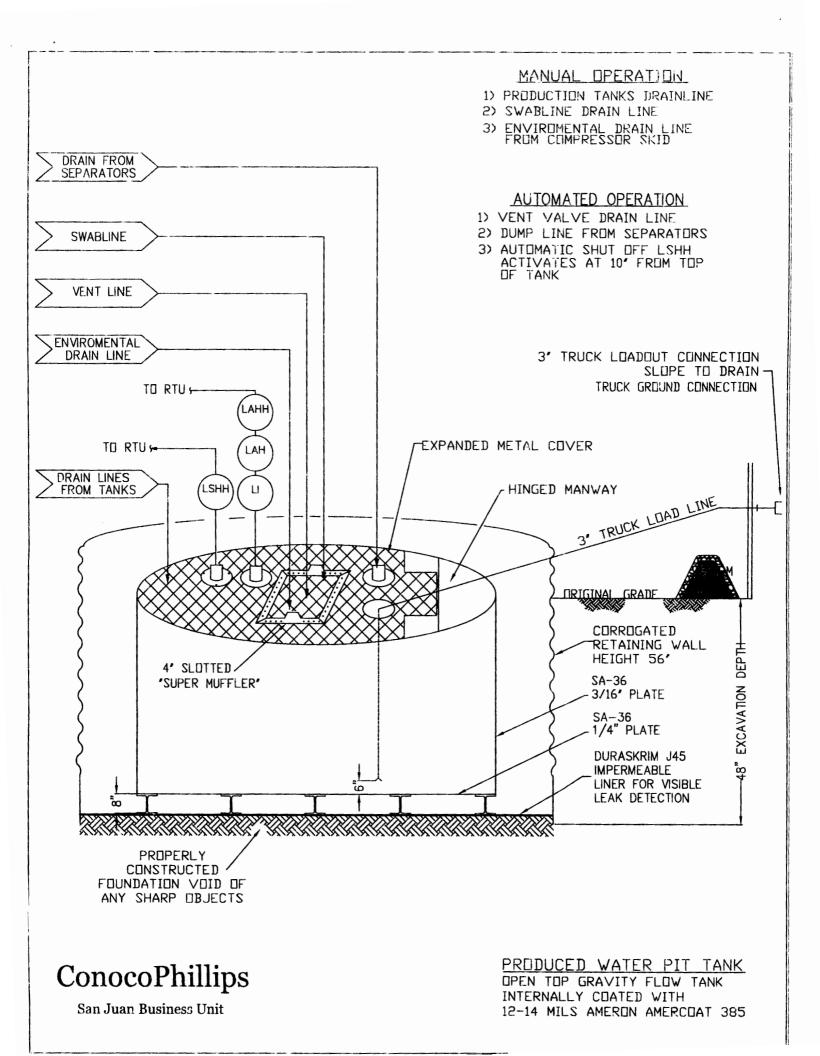

# DURA-SKRIM® J30, J36 & J46

PROPERTIES	DPERTIES TEST METHOD		0BB	J36	BB	J45BB			
		Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages		
Appearance		Blac	k/Black	Black/	Black	Black/	Black		
Thickness	ASTM D 5199	27 mil	30 mil	32 mil	36 mil	40 mil	45 mil		
Weight Lbs Per MSF (oz/yd²)	ASTM D 5261	126 ibs (18.14)	140 lbs (20.16)	151 lbs (21.74)	168 lbs (24.19)	189 lbs (27.21)	210 lbs (30.24)		
Construction		**Extr	usion laminated	with encapsulat	ed tri-direction	al scrim reinford	ement		
Ply Adhesion	ASTM D 413	16 lbs	20 lbs	19 lbs	24 lbs	25 lbs	31 lbs		
1" Tensile Strength	ASTM D 7003	88 lbf MD 63 lbf DD	110 lbf MD 79 lbf DD	90 lbf MD 70 lbf DD	113 lbf MD 87 lbf DD	110 lbf MD 84 lbf DD	138 lbf MD 105 lbf DD		
1" Tensile Elongation @ Break % (Film Break)	ASTM D 7003	550 MD 550 DD	750 MD 750 DD	550 MD 550 DD	750 MD 750 DD	550 MD 550 DD	750 MD 750 DD		
1" Tensile Elongation @ Peak % (Scrim Break)	ASTM D 7003	20 MD 20 DD	33 MD 33 DD	20 MD 20 DD	30 MD 31DD	20 MD 20 DD	36 MD 36 DD		
Tongue Tear Strength	ASTM D 5884	75 lbf MD 75 lbf DD	97 lbf MD 90 lbf DD	75 lbf MD 75 lbf DD	104 lbf MD 92 lbf DD	100 lbf MD 100 lbf DD	117 lbf MD 118 lbf DD		
Grab Tensile	ASTM D 7004	180 lbf MD 180 lbf DD	218 lbf MD 210 lbf DD	180 lbf MD 180 lbf DD	222 lbf MD 223 lbf DD	220 lbf MD 220 lbf DD	257 lbf MD 258 lbf DD		
Trapezoid Tear	ASTM D 4533	120 lbf MD 120 lbf DD	146 lbf MD 141 lbf DD	130 lbf MD 130 lbf DD	189 lbf MD 172 lbf DD	160 lbf MD 160 lbf DD	193 lbf MD 191 lbf DD		
* Dimensional Stability	ASTM D 1204	<1	<0.5	<1	<0.5	<1	<0.5		
Puncture Resistance	ASTM D 4833	50 lbf	64 lbf	65 lbf	83 lbf	80 lbf	99 lbf		
Maximum Use Temperature		180° F							
Minimum Use Temperature		-70° F							

MD = Machine Direction

DD = Diagonal Directions



Note: Minimum Roll Averages are set to take into account product variability in addition to testing variability between laboratories.

\*Dimensional Stability Maximum Value

\*\*DURA-SKRIM J30BB, J36BB & J45BB are a four layer reinforced laminate containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. DURA-SKRIM J30BB, J36BB & J45BB are reinforced with a 1300 denier (minimum) tri-directional scrim reinforcement.

Note: RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.



# PLANT LOCATION

Sioux Falls, South Dakota

# SALES OFFICE

P.O. Box 5107 Sioux Falls, SD 57117-5107 (605) 335-0174 (605) 331-0333 FAX **800-635-3456** 

# RAVEN INDUSTRIES INC. EXPOSED GEOMEMBRANE LIMITED WARRANTY

Raven Industries Inc. warrants Dura-Skrim J30BB, J36BB, and J45BB to be free from manufacturing defects and to be able to withstand normal exposure to sunlight for a period of 20 years from the date of sale for normal use in approved applications in the U.S and Canada, excluding Hawaii. This warranty is effective for products sold and shipped from January 1, 2008 to December 31, 2008. These dates will be updated prior to December 31, 2008.

This Limited Warranty does not include damages or defects in the Raven geomembrane resulting from acts of God, casualty or catastrophe including but not limited to: earthquakes, floods, piercing hail, or tornadoes. The term "normal use" as used herein does not include, among other things improper handling during transportation, unloading, storage or installation, the exposure of Raven geomembranes to harmful chemicals, atypical atmospheric conditions, abuse of Raven geomembranes by machinery, equipment or people; improper site preparation or covering materials, excessive pressures or stresses from any source or improper application or installation. Raven geomembrane material warranty is intended for commercial use only and is not in effect for the consumer as defined in the Magnuson Moss Warranty or any similar federal, state, or local statues. The parties expressly agree that the sale hereunder is for commercial or industrial use only.

Should defects or premature loss of use within the scope of the above Limited Warranty occur, Raven Industries Inc. will, at its option, repair or replace the Raven geomembrane on a pro-rata basis at the then current price in such manner as to charge the Purchaser/User only for that portion of the warranted life which has elapsed since purchase of the material. Raven Industries Inc. will have the right to inspect and determine the cause of any alleged defect in the Raven geomembrane and to take appropriate steps to repair or replace the Raven geomembrane if a defect exists which is covered under this warranty. This Limited Warranty extends only to Raven's geomembrane, and does not extend to the installation service of third parties nor does it extend to materials furnished or installed by others in connection with the intended use of the Raven geomembranes.

Any claim for any alleged breach of this warranty must be made in writing, by certified mail, to the General Manager of Engineered Films Division of Raven Industries Inc. within ten (10) days of becoming aware of the alleged defect. Should the required notice not be given, the defect and all warranties are waived by the Purchaser, and Purchaser shall not have any rights under this warranty. Raven Industries Inc. shall not be obligated to perform repairs or replacements under this warranty unless and until the area to be repaired or replaced is clean, dry, and unencumbered. This includes, but is not limited to, the area made available for repair and/or replacement of Raven geomembrane to be free from all water, dirt, sludge, residuals and liquids of any kind. If after inspection it is determined that there is no claim under this Limited Warranty, Purchaser shall reimburse Raven Industries Inc. for its costs associated with the site inspection.

In the event the exclusive remedy provided herein fails in its essential purpose, and in that event only, the Purchaser shall be entitled to a return of the purchase price for so much of the material as Raven Industries Inc. determines to have violated the warranty provided herein. Raven Industries Inc. shall not be liable for direct, indirect, special, consequential or incidental damages resulting from a breach of this warranty including, but not limited to, damages for loss of production, lost profits, personal injury or property damage. Raven Industries Inc. shall not be obligated to reimburse Purchaser for any repairs, replacement, modifications or alterations made by Purchaser unless Raven Industries Inc. specifically authorized, in writing, said repairs, replacements, modifications or alteration in advance of them having been made. Raven Industry's liability under this warranty shall in no event exceed the replacement cost of the material sold to the Purchaser for the particular installation in which it failed.

Raven Industries Inc. neither assumes nor authorizes any person other than the undersigned of Raven Industries Inc. to assume for it any other or additional liability in connection with the Raven geomembrane made on the basis of the Limited Warranty. The Limited Warranty on the Raven geomembrane herein is given in lieu of all other possible material warranties, either expressed or implied, and by accepting delivery of the material; Purchaser waives all other possible warranties, except those specifically given. This Limited Warranty may only be modified by written document mutually executed by Owner and Raven Industries Inc.

Limited Warranty is extended to the purchaser/owner and is non-transferable and non-assignable; i.e., there are no third-party beneficiaries to this warranty.

Purchaser acknowledges by acceptance that the Limited Warranty given herein is accepted in preference to any and other possible materials warranties.

THIS LIMITED WARRANTY SHALL BE GOVERNED BY SOUTH DAKOTA LAW AND VENUE FOR ALL LEGAL PROCEEDINGS IN CONNECTION WITH THIS LIMITED WARRANTY SHALL BE IN MINNEHAHA COUNTY, SOUTH DAKOTA. RAVEN INDUSTRIES INC. MAKES NO WARRANTY OF ANY KIND OTHER THAN THAT GIVEN ABOVE AND HEREBY DISCLAIMS ALL WARRANTIES, BOTH EXPRESSED OR IMPLIED, OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS IS THE ONLY WARRANTY THAT APPLIES TO THE MATERIALS REFERED TO HEREIN AND RAVEN INDUSTRIES INC. DISCLAIMS ANY LIABILITY FOR ANY WARRANTIES GIVEN BY ANY OTHER PERSON OR ENTITY, EITHER WRITTEN OR ORAL.

#### RAVEN INDUSTRIES' WARRANTY BECOMES AN OBLIGATION OF RAVEN INDUSTRIES INC. TO PERFORM UNDER THE WARRANTY ONLY UPON RECEIPT OF FINAL PAYMENT AND EXECUTION BY A DULY AUTHORIZED OFFICER OF RAVEN INDUSTRIES INC.

# ConocoPhillips Company Sar. Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of Below Grade Tank (BGT) on ConocoPhillips Company (COPC) locations. This is COPC's standard procedure for all BGT. A separate plan will be submitted for any BGT which does not conform to this plan.

# General Plan:

- COPC will operate and maintain a BGT to contain liquids and solids and maintain the integrity of the liner, liner system and secondary containment system to prevent contamination of fresh water and protect public health and environment. COPC will accomplish this by performing an inspection on a monthly basis, installing cathodic protection, and automatic overflow shutoff devices as seen on the design plan.
- 2. COPC will not discharge into or store any hazardous waste in the BGT.
- 3. COPC shall operate and install the below-grade tank to prevent the collection of surface water run-on. COPC has built in shut off devices that do not allow a below-grade tank to overflow. COPC constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 4. As per 19.17.15.12 Subsection D, Paragraph 3, COPC will inspect the below-grade tank at least monthly reviewing several items which include 1) containment berms adequate and no oil present, 2) tanks had no visible leaks or sign of corrosion, 3) tank valves, flanges, and hatches had no visible leaks and 4) no evidence of significant spillage of produced liquids. In addition, COPC's multi-skilled operators (MSOs) are required to visit each well location once per week. If detected on either inspection, COPC shall remove any visible or measurable layer of oil from the fluid surface of a below-grade tank in an effort to prevent significant accumulation of oil overtime. The written record of the monthly inspections will include the items listed above and will be maintained for five years.
- 5. COPC shall require and maintain a 10" adequate freeboard to prevent overtopping of the below-grade tank.
- 6. If the below grade tank develops a leak, or if any penetration of the pit liner or below grade tank, occurs below the liquid's surface, then COPC shall remove all liquid above the damage or leak line within 48 hours. COPC shall notify the appropriate district office. COPC shall repair or replace the pit liner or below grade tank, within 48 hours of discovery. If the below grade tank or pit liner does not demonstrate integrity, COPC shall promptly remove and install a below grade tank or pit liner that complies with Subsection I of 19.15.17.11 NMAC. COPC shall notify the appropriate district office of a discovery of leaks less than 25 barrels as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within twenty-four (24) hours of discovery of leaks greater than 25 barrels. In addition, immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.

# ConocoPhillips Company San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of Below Grade Tanks (BGTs) on ConocoPhillips Company locations hereinafter known as COPC locations. This is COPC's standard procedure for all BGTs. A separate plan will be submitted for any BGT which does not conform to this plan.

#### General Requirements:

- COPC shall clcse a below-grade tank within the time periods provided in Subsection A of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) permitted below-grade tanks within 60 days of cessation of the below-grade tank's operation., or c) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, COPC will file the C144 Closure Report as required.
- COPC shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.
- 3. COPC will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. Documentation of how the below-grade tank was disposed of or recycled will be provided in the closure report.
- If there is any on-site equipment associated with a below-grade tank, then COPC shall remove the equipment, unless the equipment is required for some other purpose.
- 5. COPC shall test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 50 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. COPC shall notify the division of its results on form C-141.

- 6. If COPC or the division determines that a release has occurred, then COPC shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.
- 7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then COPC shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.
- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
  - i. Operator's name
  - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- The surface owner shall be notified of COPC's closing of the below-grade tank prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 11. COPC shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally jurisdicted lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.
- 12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
  - Soil Backfilling and Cover Installation
  - Re-vegetation application rates and seeding techniques
  - Photo documentation of the site reclamation
  - Confirmation Sampling Results
  - Proof of closure notice

- Signed C-144 (Page 5 of C-144)
- Site Specific Hydrogeology

# **19.15.17.10 NMAC SITTING REQUIREMENTS**

- ✓ New Mexico Office of State Engineer attachment
- USGS TOPO map
- 🖌 Aerial Map
- ✓ Mines, Mills and Quarries Map
- FIRM map (flood insurance rate map from Federal Emergency Agency)

# **19.15.17.11 NMAC DESIGN PLAN CONTENTS**

Below Grade Tank Design and Construction Plan

# **19.15.17.12 NMAC OPERATING AND MAINTENCE PLAN**

Below Grade Tank Operating and Maintenance Plan

# 19.15.17.13 NMAC CLOSURE PLAN

Below Grade Tank Closure Plan

# **REGISTRATION DATE:**

04/28/2015

# NOTES: