

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources  
Department  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-144  
July 21, 2008

**For temporary pits, closed-loop systems, and below-grade tanks**, submit to the appropriate NMOCD District Office.  
**For permanent pits and exceptions** submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

**Pit, Closed-Loop System, Below-Grade Tank, or  
Proposed Alternative Method Permit or Closure Plan Application**

Type of action: ☒ Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method  
☐ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method  
☐ Modification to an existing permit  
☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

**Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request**

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.  
Operator: Four Star Oil & Gas Company OGRID #: 131944  
Address: P.O. Box 36366 Houston, TX 77236  
Facility or well name: Blanco #4A  
API Number: 30-045-30215 OCD Permit Number: \_\_\_\_\_  
U/L or Qtr/Qtr Qtr/Qtr D Section 12 Township 27N Range 9W County: San Juan  
Center of Proposed Design: Latitude 36 593575° Longitude 107 746035° NAD: ☐ 1927 ☐ 1983  
Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2.  
☐ **Pit:** Subsection F or G of 19.15.17.11 NMAC  
Temporary: ☐ Drilling ☐ Workover  
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A  
☐ Lined ☐ Unlined Liner type: Thickness \_\_\_\_\_ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other \_\_\_\_\_  
☐ String-Reinforced  
Liner Seams: ☐ Welded ☐ Factory ☐ Other \_\_\_\_\_ Volume: \_\_\_\_\_ bbl Dimensions: L \_\_\_\_\_ x W \_\_\_\_\_ x D \_\_\_\_\_

3.  
☐ **Closed-loop System:** Subsection H of 19.15.17.11 NMAC  
Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)  
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other \_\_\_\_\_  
☐ Lined ☐ Unlined Liner type: Thickness \_\_\_\_\_ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other \_\_\_\_\_  
Liner Seams: ☐ Welded ☐ Factory ☐ Other \_\_\_\_\_

4.  
☒ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC  
Volume: 25 bbl Type of fluid: Produced Water  
Tank Construction material: Galvanized  
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off  
☐ Visible sidewalls and liner ☒ Visible sidewalls only ☐ Other \_\_\_\_\_  
Liner type: Thickness \_\_\_\_\_ mil ☐ HDPE ☐ PVC ☒ Other None

5.  
☐ **Alternative Method:**  
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.

**Fencing:** Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)

- ☐ Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify Four foot, pipe frame with square wire mesh.

7.

**Netting:** Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☐ Screen ☒ Netting ☐ Other \_\_\_\_\_
- ☐ Monthly inspections (If netting or screening is not physically feasible)

8.

**Signs:** Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.3.103 NMAC

9.

**Administrative Approvals and Exceptions:**

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

**Please check a box if one or more of the following is requested, if not leave blank:**

- ☒ Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.

**Siting Criteria (regarding permitting):** 19.15.17.10 NMAC

**Instructions:** The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - Please reference hydrogeologic report and printout from iWATERS database.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Please reference the attached topographic map with distance rings. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no watercourses within the distance specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Please reference the attached aerial photo. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no referenced buildings within the distance specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Please reference the attached aerial photo. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no referenced buildings within the distance specified above.	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - Please reference the attached iWATERS printout. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no wells or springs within the distances specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The site is not within any known incorporated municipal boundaries, please reference the attached topographic map.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - Please reference the attached topographic map with distance rings. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no wetlands within the distance specified above	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Please reference the attached topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Please reference the attached topographic map which includes FEMA flood map data. The map indicates the well site is outside of any known 100 year floodplains.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11.

**Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist:** Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  
☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  
☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  
☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  
☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  
☒ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: \_\_\_\_\_ or Permit Number: \_\_\_\_\_

12.

**Closed-loop Systems Permit Application Attachment Checklist:** Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 NMAC  
☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  
☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  
☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: \_\_\_\_\_

☐ Previously Approved Operating and Maintenance Plan API Number: \_\_\_\_\_ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

**Permanent Pits Permit Application Checklist:** Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC  
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  
☐ Climatological Factors Assessment  
☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Quality Control/Quality Assurance Construction and Installation Plan  
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  
☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  
☐ Nuisance or Hazardous Odors, including H<sub>2</sub>S, Prevention Plan  
☐ Emergency Response Plan  
☐ Oil Field Waste Stream Characterization  
☐ Monitoring and Inspection Plan  
☐ Erosion Control Plan  
☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

**Proposed Closure:** 19.15.17.13 NMAC**Instructions:** Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Closed-loop System  
☐ Alternative

Proposed Closure Method: ☒ Waste Excavation and Removal  
☐ Waste Removal (Closed-loop systems only)  
☐ On-site Closure Method (Only for temporary pits and closed-loop systems)  
☐ In-place Burial ☐ On-site Trench Burial  
☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

**Waste Excavation and Removal Closure Plan Checklist:** (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  
☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  
☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  
☒ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  
☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  
☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16.

**Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:** (19.15.17.13.D NMAC)

**Instructions:** Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please provide the information below) ☐ No

*Required for impacted areas which will not be used for future service and operations:*

☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17.

**Siting Criteria (regarding on-site closure methods only):** 19.15.17.10 NMAC

**Instructions:** Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 50 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Ground water is between 50 and 100 feet below the bottom of the buried waste

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Ground water is more than 100 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No

☐ NA

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No

Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- Written confirmation or verification from the municipality; Written approval obtained from the municipality

☐ Yes ☐ No

Within 500 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within the area overlying a subsurface mine.

- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

☐ Yes ☐ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☐ No

Within a 100-year floodplain.

- FEMA map

☐ Yes ☐ No

18.

**On-Site Closure Plan Checklist:** (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC

☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC

☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC

☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC

☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)

☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC


☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19.

**Operator Application Certification:**

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Rodney Bailey Title: Waste & Water Group Lead

Signature:  Date: March 1, 2010

e-mail address: Bailerg@chevron.com Telephone: (432) 687 7123

20.

**OCD Approval:** ☐ Permit Application (including closure plan) ☒ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature:  Approval Date: 12Apr18

Title: Hydrologist OCD Permit Number: na

21.

**Closure Report (required within 60 days of closure completion):** Subsection K of 19.15.17.13 NMAC

*Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.*

☐ Closure Completion Date: \_\_\_\_\_

22.

**Closure Method:**

☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)  
☐ If different from approved plan, please explain.

23.

**Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:**

*Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.*

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Were the closed-loop system operations and associated activities performed on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

*Required for impacted areas which will not be used for future service and operations:*

- ☐ Site Reclamation (Photo Documentation)  
☐ Soil Backfilling and Cover Installation  
☐ Re-vegetation Application Rates and Seeding Technique

24.

**Closure Report Attachment Checklist:** *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)  
☐ Proof of Deed Notice (required for on-site closure)  
☐ Plot Plan (for on-site closures and temporary pits)  
☐ Confirmation Sampling Analytical Results (if applicable)  
☐ Waste Material Sampling Analytical Results (required for on-site closure)  
☐ Disposal Facility Name and Permit Number  
☐ Soil Backfilling and Cover Installation  
☐ Re-vegetation Application Rates and Seeding Technique  
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude \_\_\_\_\_ Longitude \_\_\_\_\_ NAD: ☐ 1927 ☐ 1983

25.

**Operator Closure Certification:**

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): \_\_\_\_\_ Title: \_\_\_\_\_

Signature: \_\_\_\_\_ Date: \_\_\_\_\_


e-mail address: \_\_\_\_\_ Telephone: \_\_\_\_\_



# Site Inventory Sheet

27  
7-22-08

- Well Name & Number: Blanco #4A
- API #: 3004630215
- Lease #: 1-149 IND 8465
- Quarter/Quarter: D Section: 12 Township: T27N Range: R9W
- Lat: N36.593575 Long: W107.746035
  
- Pit Tank #1: Manufacturer: HW Brand
- Serial #: N/A DOM: N/A Size N/A bbl
  - If N/A – Dimensions: Diameter 8' Height 2"
- Material: Steel \_\_\_\_\_ Galvanized X Fiberglass \_\_\_\_\_
- Tank Configuration: Double Wall \_\_\_\_\_ Single Wall X (Buried \_\_\_\_\_ or Exposed X Walls)
- Contents: Produced Water X Condensate \_\_\_\_\_ Recycled Oil X
- Tank Top Covering: Solid/Cone-top \_\_\_\_\_ Netting X (Solid \_\_\_\_\_ Fiber X)
- Secondary Containment: Yes \_\_\_\_\_ No X
- Fencing around berm: Yes X No \_\_\_\_\_
  - Fence Type: Cattle Panel \_\_\_\_\_ Field Fence X Barbwire \_\_\_\_\_
  
- Pit Tank #2: Manufacturer: \_\_\_\_\_
- Serial #: \_\_\_\_\_ DOM: \_\_\_\_\_ Size \_\_\_\_\_ bbl
  - If N/A – Dimensions: Diameter \_\_\_\_\_ Height \_\_\_\_\_
- Material: Steel \_\_\_\_\_ Galvanized \_\_\_\_\_ Fiberglass \_\_\_\_\_
- Tank Configuration: Double Wall \_\_\_\_\_ Single Wall \_\_\_\_\_ (Buried \_\_\_\_\_ or Exposed \_\_\_\_\_ Walls)
- Contents: Produced Water \_\_\_\_\_ Condensate \_\_\_\_\_ Recycled Oil \_\_\_\_\_
- Tank Top Covering: Solid/Cone-top \_\_\_\_\_ Netting \_\_\_\_\_ (Solid \_\_\_\_\_ Fiber \_\_\_\_\_)
- Secondary Containment: Yes \_\_\_\_\_ No \_\_\_\_\_
- Fencing around berm: Yes \_\_\_\_\_ No \_\_\_\_\_
  - Fence Type: Cattle Panel \_\_\_\_\_ Field Fence \_\_\_\_\_ Barbwire \_\_\_\_\_
  
- Above-Ground Tank #1: Manufacturer: Posco
- Serial #: T-3977 DOM: 2000 Size 95 bbl
  - If N/A – Dimensions: Diameter \_\_\_\_\_ Height \_\_\_\_\_
- Material: Steel X Galvanized \_\_\_\_\_ Fiberglass \_\_\_\_\_
- Contents: Produced Water X Condensate \_\_\_\_\_ (State # \_\_\_\_\_) Recycled Oil \_\_\_\_\_
- Secondary Containment: Yes \_\_\_\_\_ No X
  
- Above-Ground Tank #2: Manufacturer: Posco
- Serial #: T-3807 DOM: 2000 Size 100 bbl
  - If N/A – Dimensions: Diameter \_\_\_\_\_ Height \_\_\_\_\_
- Material: Steel X Galvanized \_\_\_\_\_ Fiberglass \_\_\_\_\_
- Contents: Produced Water \_\_\_\_\_ Condensate X (State # GI 7800) Recycled Oil \_\_\_\_\_
- Secondary Containment: Yes X No \_\_\_\_\_
  
- Above-Ground Tank #3: Manufacturer: \_\_\_\_\_
- Serial #: \_\_\_\_\_ DOM: \_\_\_\_\_ Size \_\_\_\_\_ bbl
  - If N/A – Dimensions: Diameter \_\_\_\_\_ Height \_\_\_\_\_
- Material: Steel \_\_\_\_\_ Galvanized \_\_\_\_\_ Fiberglass \_\_\_\_\_
- Contents: Produced Water \_\_\_\_\_ Condensate \_\_\_\_\_ (State # \_\_\_\_\_) Recycled Oil \_\_\_\_\_
- Secondary Containment: Yes \_\_\_\_\_ No \_\_\_\_\_

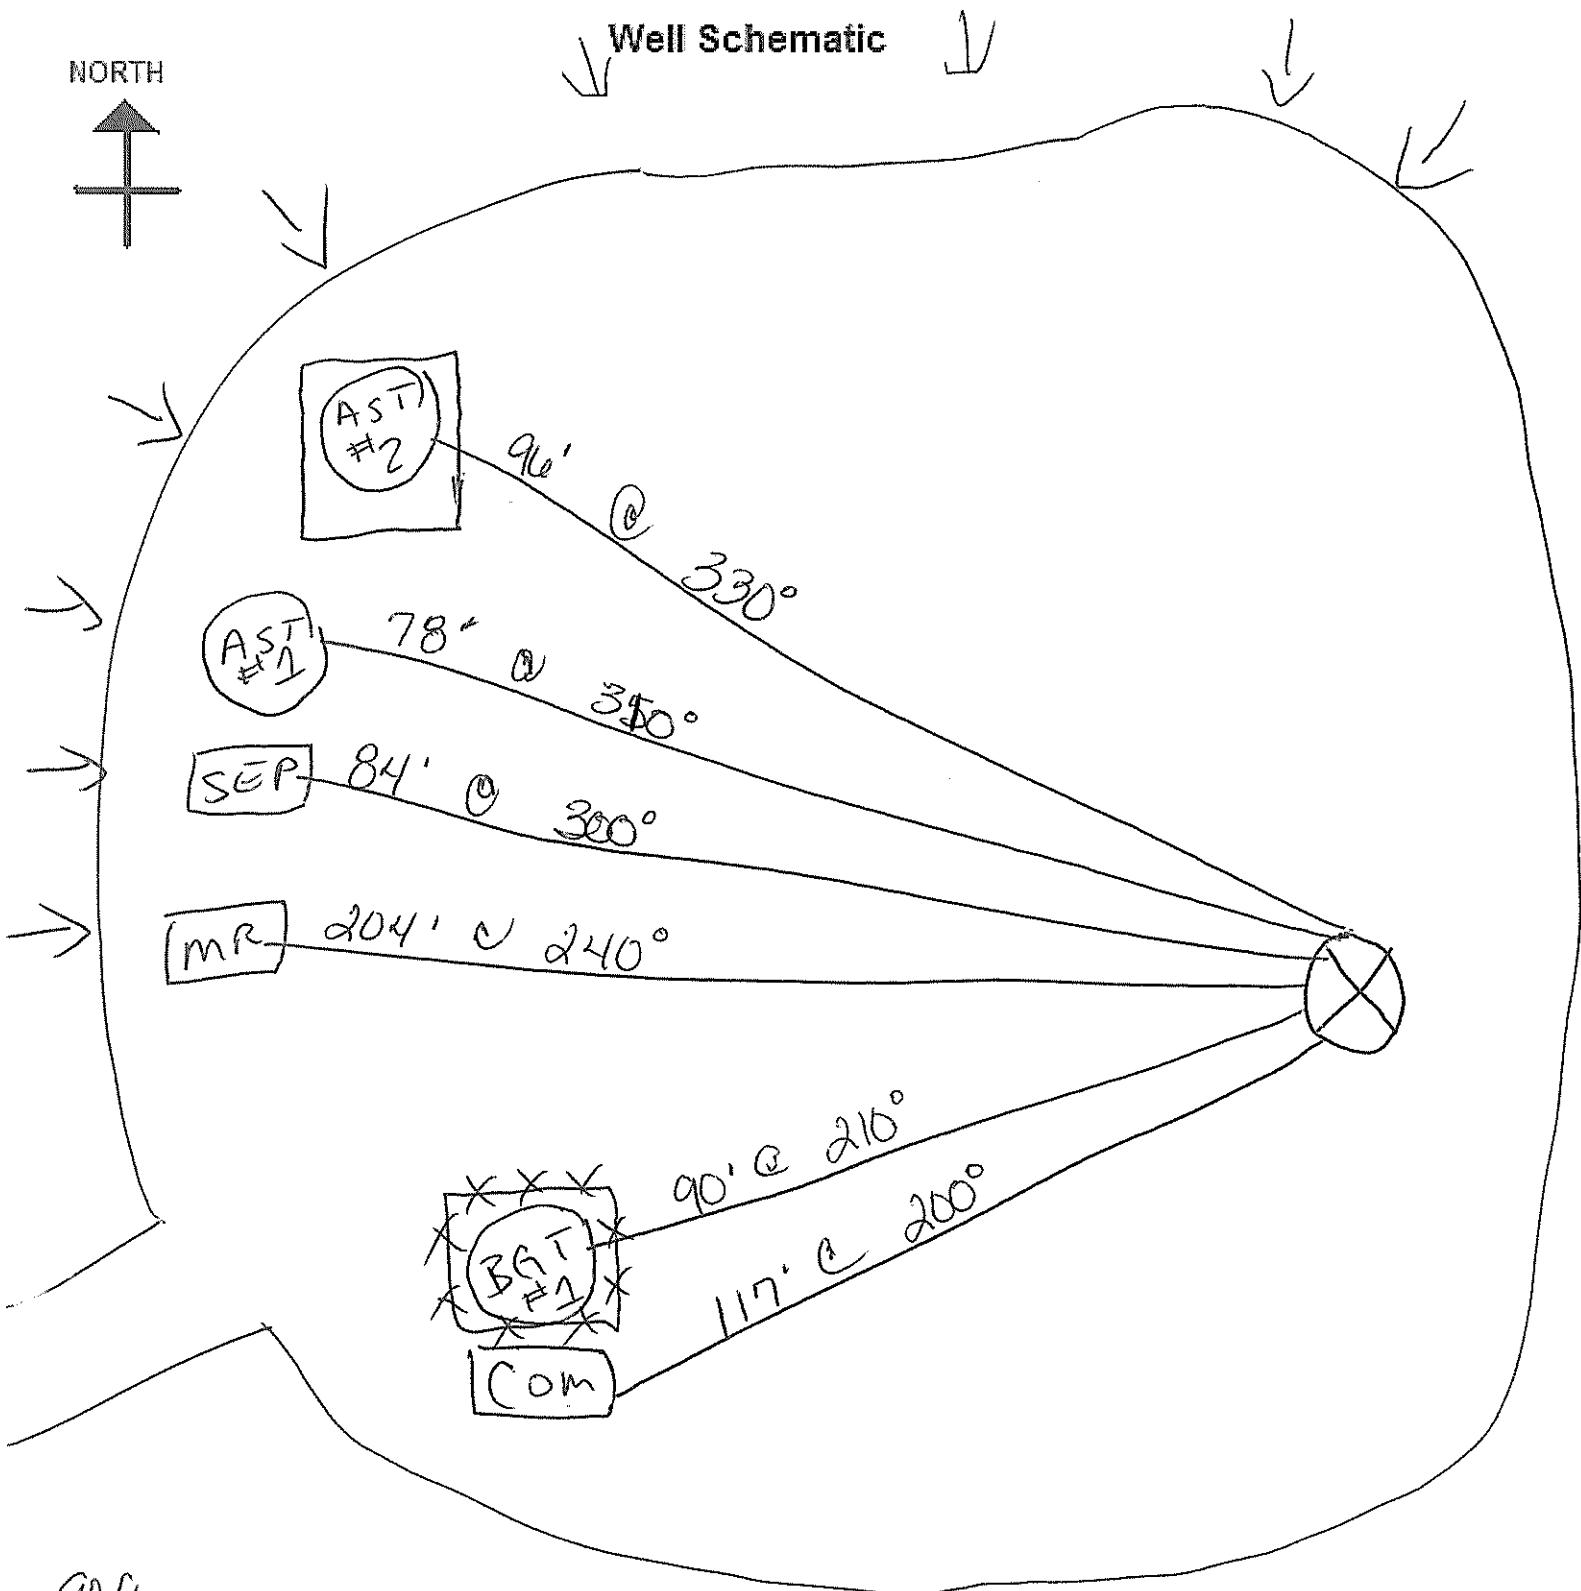

90 ft.

**Schematic Key:**

Separator

SEP

Artificial Lift

AL

Condensate Tank

COND

Compressor

COM

Meter Run

METER RUN

Dehydrator

DEH

Well Head



Water Tank

WATER

Measure any distance 1000ft or less of the following:


• From wellhead to any continuous flowing or significant water course. N/A

• From below-grade tanks to any permanent residence, school, church, hospital, etc. N/A



# Blanco 4 A

## API # 30-045-30215

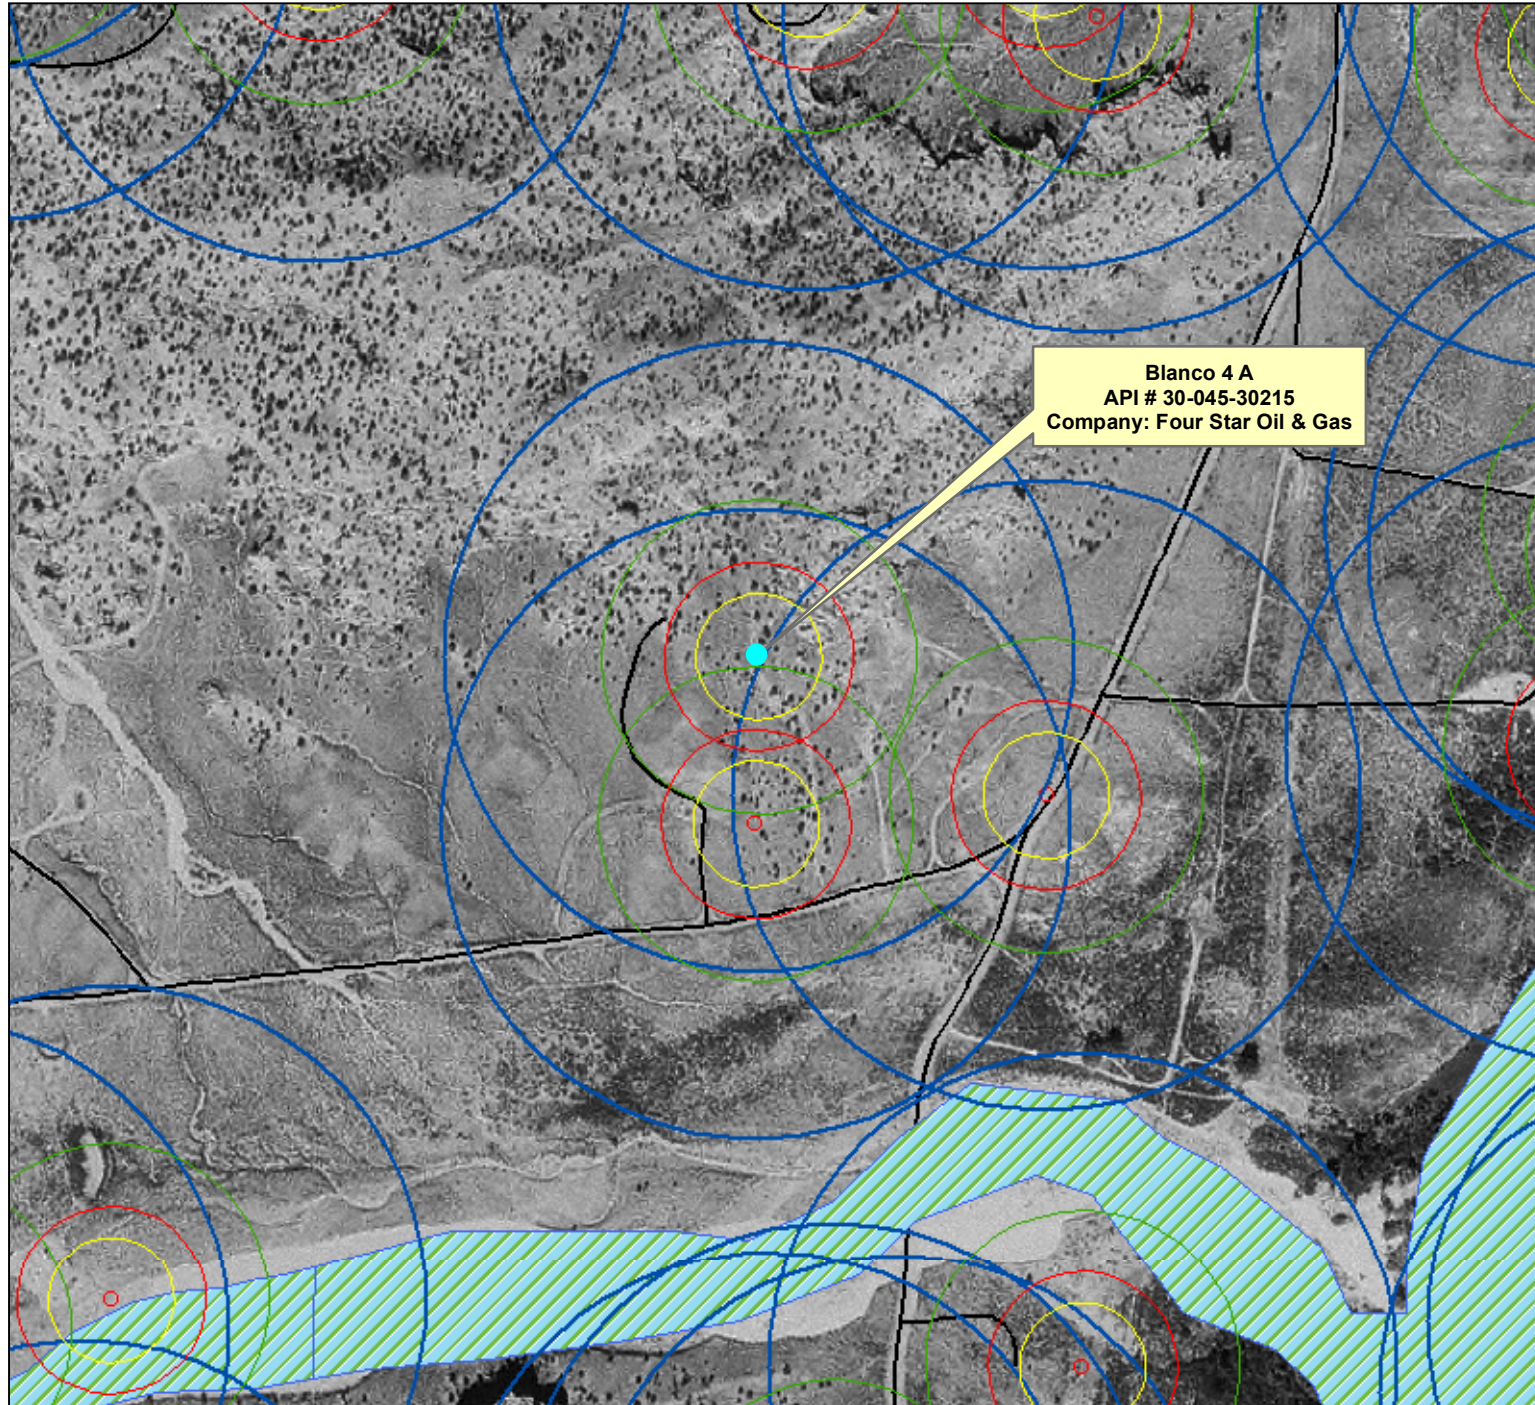

### Legend

- Mines; NMRGIS
- 200' buffer
- 300' buffer
- 500' buffer
- 1000' Buffer
- NWI wetland polygons
- Chevron/4 Star Locations
- Water Wells (iWaters)
- roads

0.00 0.02 0.04 0.06 0.08  
Miles


Disclaimer: Data presented in the maps has been obtained or modified from data available from many different environmental programs, including data gathered from regional observations by Envirotech, Inc. personnel. Outside data sources include the NMU GIS, Waters Database, USGS 7.5 Minute Quadrangle Maps, Chevron Midcontinent LP, and National Wetlands Inventory.

Political boundaries may change. Drought, precipitation and other natural events cause constant change in vegetation distribution, and environmental conditions. As such the information provided in these maps is only valid for the time period in which it was obtained and transcribed. Moreover, the information's accuracy, as presented, is only as accurate as the sources from which it was obtained. Care should be taken in interpreting these data. Written documents may accompany these maps and should be referenced. The information portrayed on these maps should not replace field assessments. Data discrepancies may become apparent at scales different than those at which data was created. The areas portrayed here are graphic representations of some phenomena that are difficult to reduce to two dimensions.

ANY DATA OR INFORMATION PROVIDED BY THESE MAPS IS "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Data or information provided by these maps shall be used and relied upon only at the user's sole risk, and the user agrees to indemnify and hold harmless Pymony Environmental Consulting, Inc., its officials, officers and employees from any liability arising out of the use of the data or information provided.



Human Energy





# Blanco 4 A

## API # 30-045-30215



### Legend

- Mines; NMRGIS
- 200' buffer
- 300' buffer
- 500' buffer
- 1000' Buffer
- NWI wetland polygons
- Chevron/4 Star Locations
- Water Wells (iWaters)
- roads

0.00 0.02 0.04 0.06 0.08  
Miles


Disclaimer: Data presented in the maps has been obtained or modified from data available from many different environmental programs, including data gathered from regional observations by Envirotech, Inc. personnel. Outside data sources include the NMU GIS, Waters Database, USGS 7.5 Minute Quadrangle Maps, Chevron Midcontinent LP, and National Wetlands Inventory.

Political boundaries may change. Drought, precipitation and other natural events cause constant change in vegetation distribution, and environmental conditions. As such the information provided in these maps is only valid for the time period in which it was obtained and transcribed. Moreover, the information's accuracy, as presented, is only as accurate as the sources from which it was obtained. Care should be taken in interpreting these data. Written documents may accompany these maps and should be referenced. The information portrayed on these maps should not replace field assessments. Data discrepancies may become apparent at scales different from those at which data was created. The areas portrayed here are graphic representations of some phenomena that are difficult to reduce to two dimensions.


ANY DATA OR INFORMATION PROVIDED BY THESE MAPS IS "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Data or information provided by these maps shall be used and relied upon only at the user's sole risk, and the user agrees to indemnify and hold harmless Pymonys Environmental Consulting, Inc., its officials, officers and employees from any liability arising out of the use of the data or information provided.



Human Energy



Blanco # 4A  
API # 30-045-30215  
NW ¼ NW ¼ Sec. 12 T27N R9W

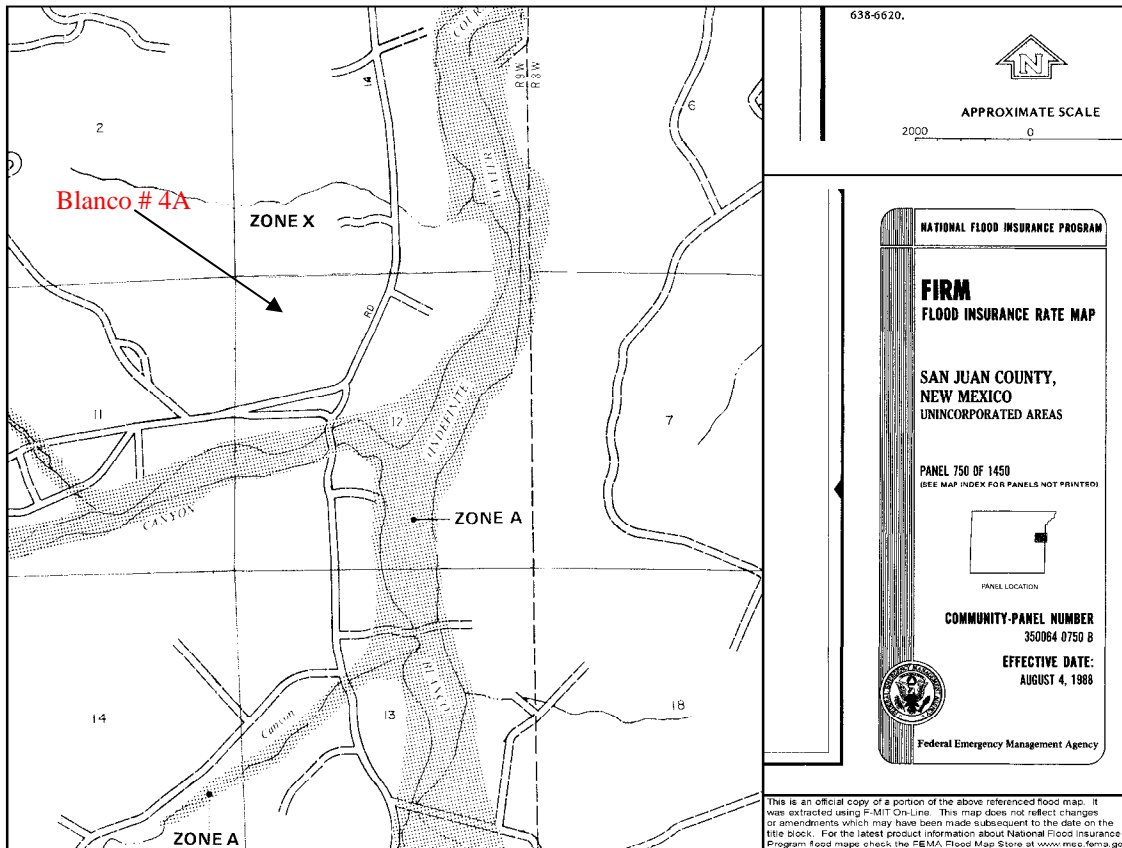



## **Blanco #4A Groundwater Statement**


The attached iWATERS database search and topographic map shows a water well approximately 5.58 miles to the north-west with a depth to groundwater of 40 feet. This water well is labeled on the topographic map with a red point. As evidenced on the attached topographic map, the water well is at an elevation approximately 174 feet lower than the Blanco #4A well site, which is represented by a blue flag on the topographic map. The attached monitoring well data for a monitoring well on the Ramenta Et Al #1 well site, owned and operated by Energen Resources Corporation, shows that groundwater levels are approximately nine (9) feet below ground surface. This monitoring well data was collected in March of 2002. The Ramenta Et Al #1 well site is located approximately 1.60 miles to the south-east of the Blanco #4A well site at an elevation approximately 38 feet lower than the Blanco #4A well site. The Ramenta Et Al #1 well site is represented on the map with a yellow flag. The soil type at the Blanco #4A well site is a Blancot-Notal association, gently sloping. This is a well drained soil, characterized by stream and fan alluvium derived from sandstone and shale, with a high to low available water capacity. The nearest surface water is approximately 187 feet to the east of the Blanco #4A well site at an elevation of 5,996 feet. This is a south-east flowing wash that only exists during periods of heavy precipitation. This wash is a first order tributary of Blanco Wash. The Blanco #4A well site lies in the Nacimiento Formation Aquifer which dips at 6 degrees to the north-east (Frenzel, 1983); see Topographic Map for aquifer dip direction. The Nacimiento Formation lies at the surface in a broad belt at the western and southern edges of the central basin and dips beneath the San Jose Formation in the basin center. (Frenzel, 1983). These findings indicate that the depth to groundwater may not be greater than 50 feet from the bottom of the BGT at the Blanco #4A well site. All above information, excluding the aquifer dip, was confirmed by a visual inspection performed by Envirotech, Inc

The **Nacimiento Formation** (Tn) is Paleocene in age and grades laterally into the **Animas Formation** (Tka) around Dulce, New Mexico thickening considerably around Durango, Colorado. The Animas occurs at the same stratigraphic interval as the Nacimientos (Fassett and Hinds, 1971, p. 34). The Nacimiento sits unconformably to conformably below the San Jose Formation, outcrops in a broad band inside the southern and western boundaries of the central basin and rises structurally as a narrow band along the west side of the Nacimiento Uplift (Baltz, 1967, p. 35). The Nacimiento is the surface formation in the eastern third of the San Juan Basin, and being nonresistant, erodes to low rounded hills or the formation of badlands-type physiography distinctive from the much more resistant overlying San Jose Formation. The Nacimiento Formation is present in only the southern two-thirds of the Basin where it conformably both overlies and intertongues with the much thinner Ojo Alamo Sandstone (Fassett, 1974, p. 229). Thickness ranges from 800 feet in the southern part to nearly 2232 feet (Stone, et al, 1983, p. 30) in the subsurface of the northern part. In the eastern outcrops, the thickness is less than 500 feet to nearly 1400 feet due to folding and erosion (Baltz, 1967, p. 1). In general, the total thickness of the Nacimiento thickens from the basin margins towards the basin center. The Nacimiento in the southern area is comprised predominantly of drab interbedded black and gray claystones and siltstones with some discontinuous





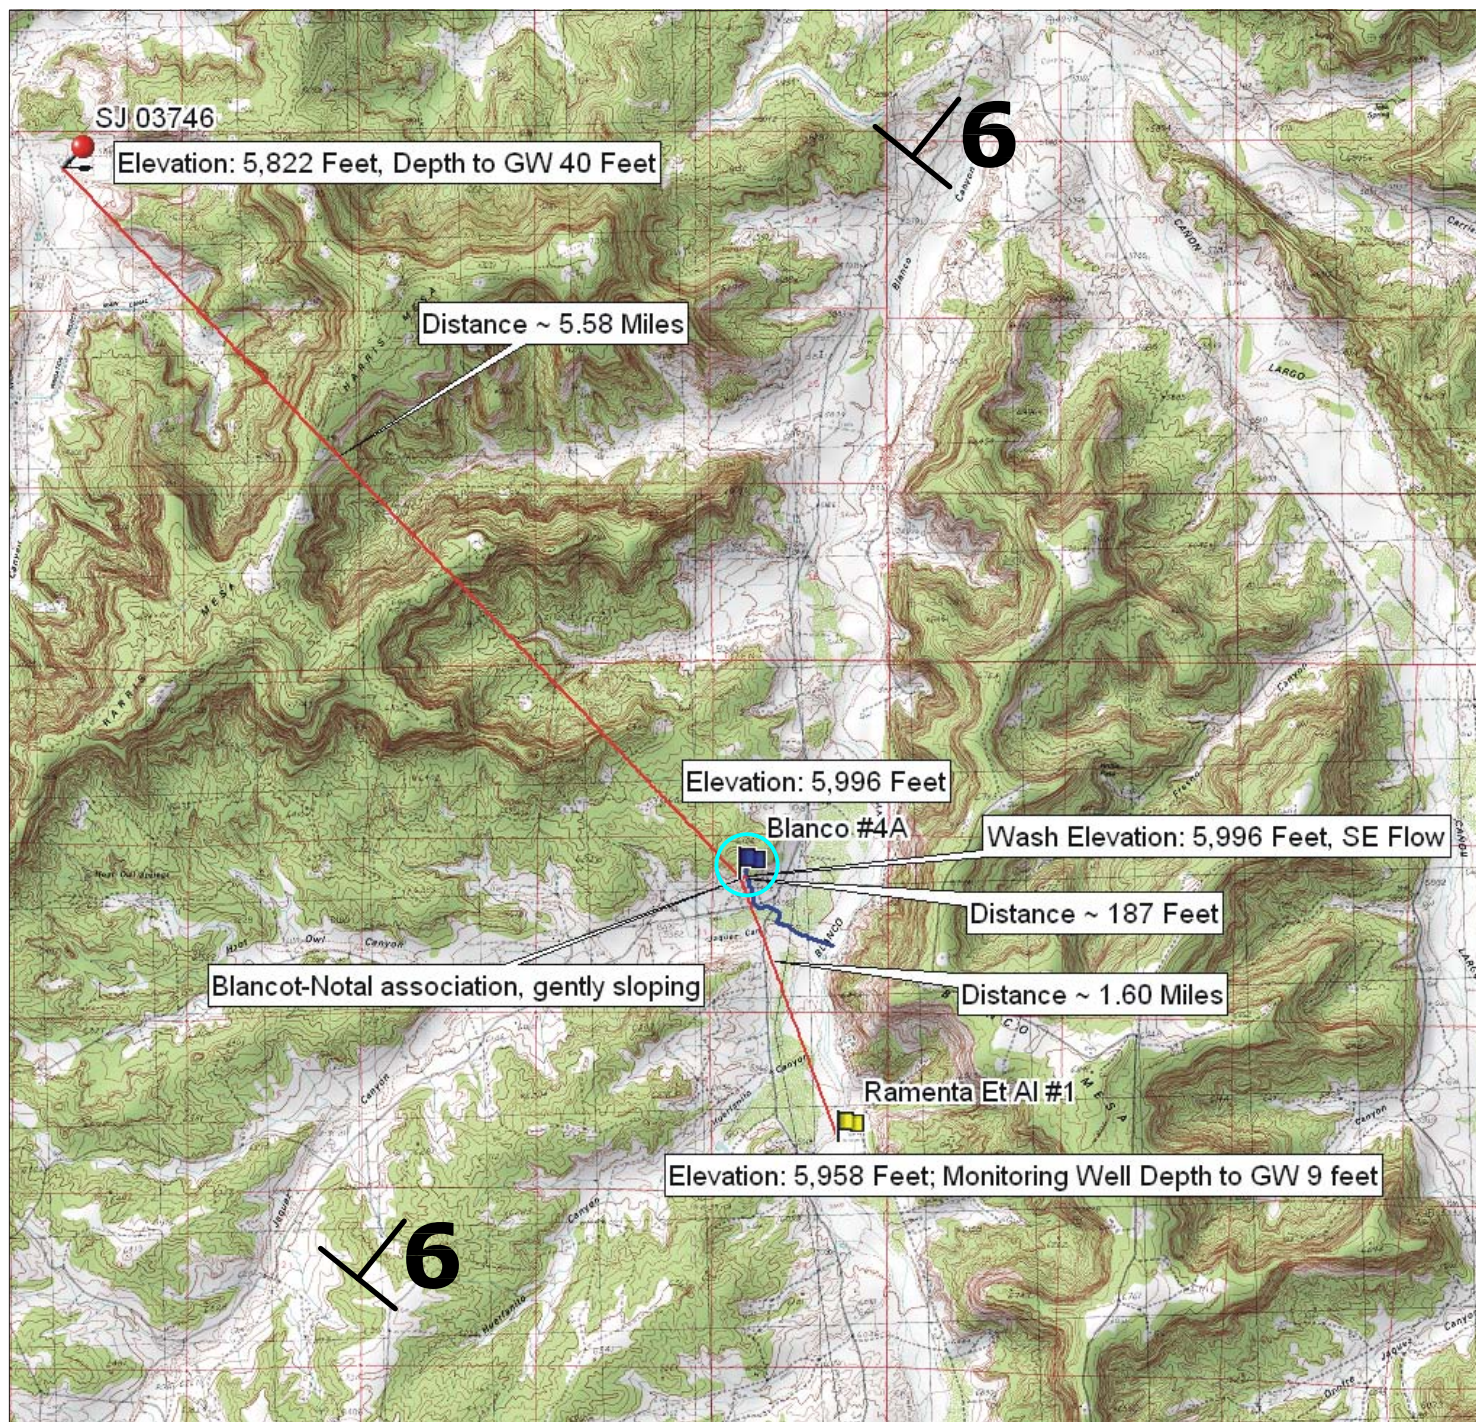

relatively unconsolidated white, medium to coarse-grained arkosic sandstone with a few interbedded resistant sandstone strata (Stone, etal, 1983, p.30). To the north, the Nacimiento Formation contains a much greater proportion of sandstone, and at some localized places more than 50 percent (Baltz, 1967, p. 1), although most of the sandstones extend only a few thousand feet (Brimhall, 1973, p. 201). Overall, the environment of deposition is predominantly lake deposits and to a lesser extent localization in stream channels (Brimhall, 1973, p. 201).





# LEGEND

-  Aquifer Strike & Dip
-  Ephemeral Wash
-  Well Area Soil Type
-  Distance


Topographic Map  
Blanco #4A  
Sec 12, Twp 27N, Rge 9W  
San Juan County, New Mexico

SCALE: NTS			FIGURE NO. 1			REV	
PROJECT NO92270-0342							
REVISIONS							
NO.	DATE	BY	DESCRIPTION				
MAP	DRWN	JPM	DATE	6/22/09			





Soil Map—San Juan County, New Mexico, Eastern Part  
(Blanco #4A)

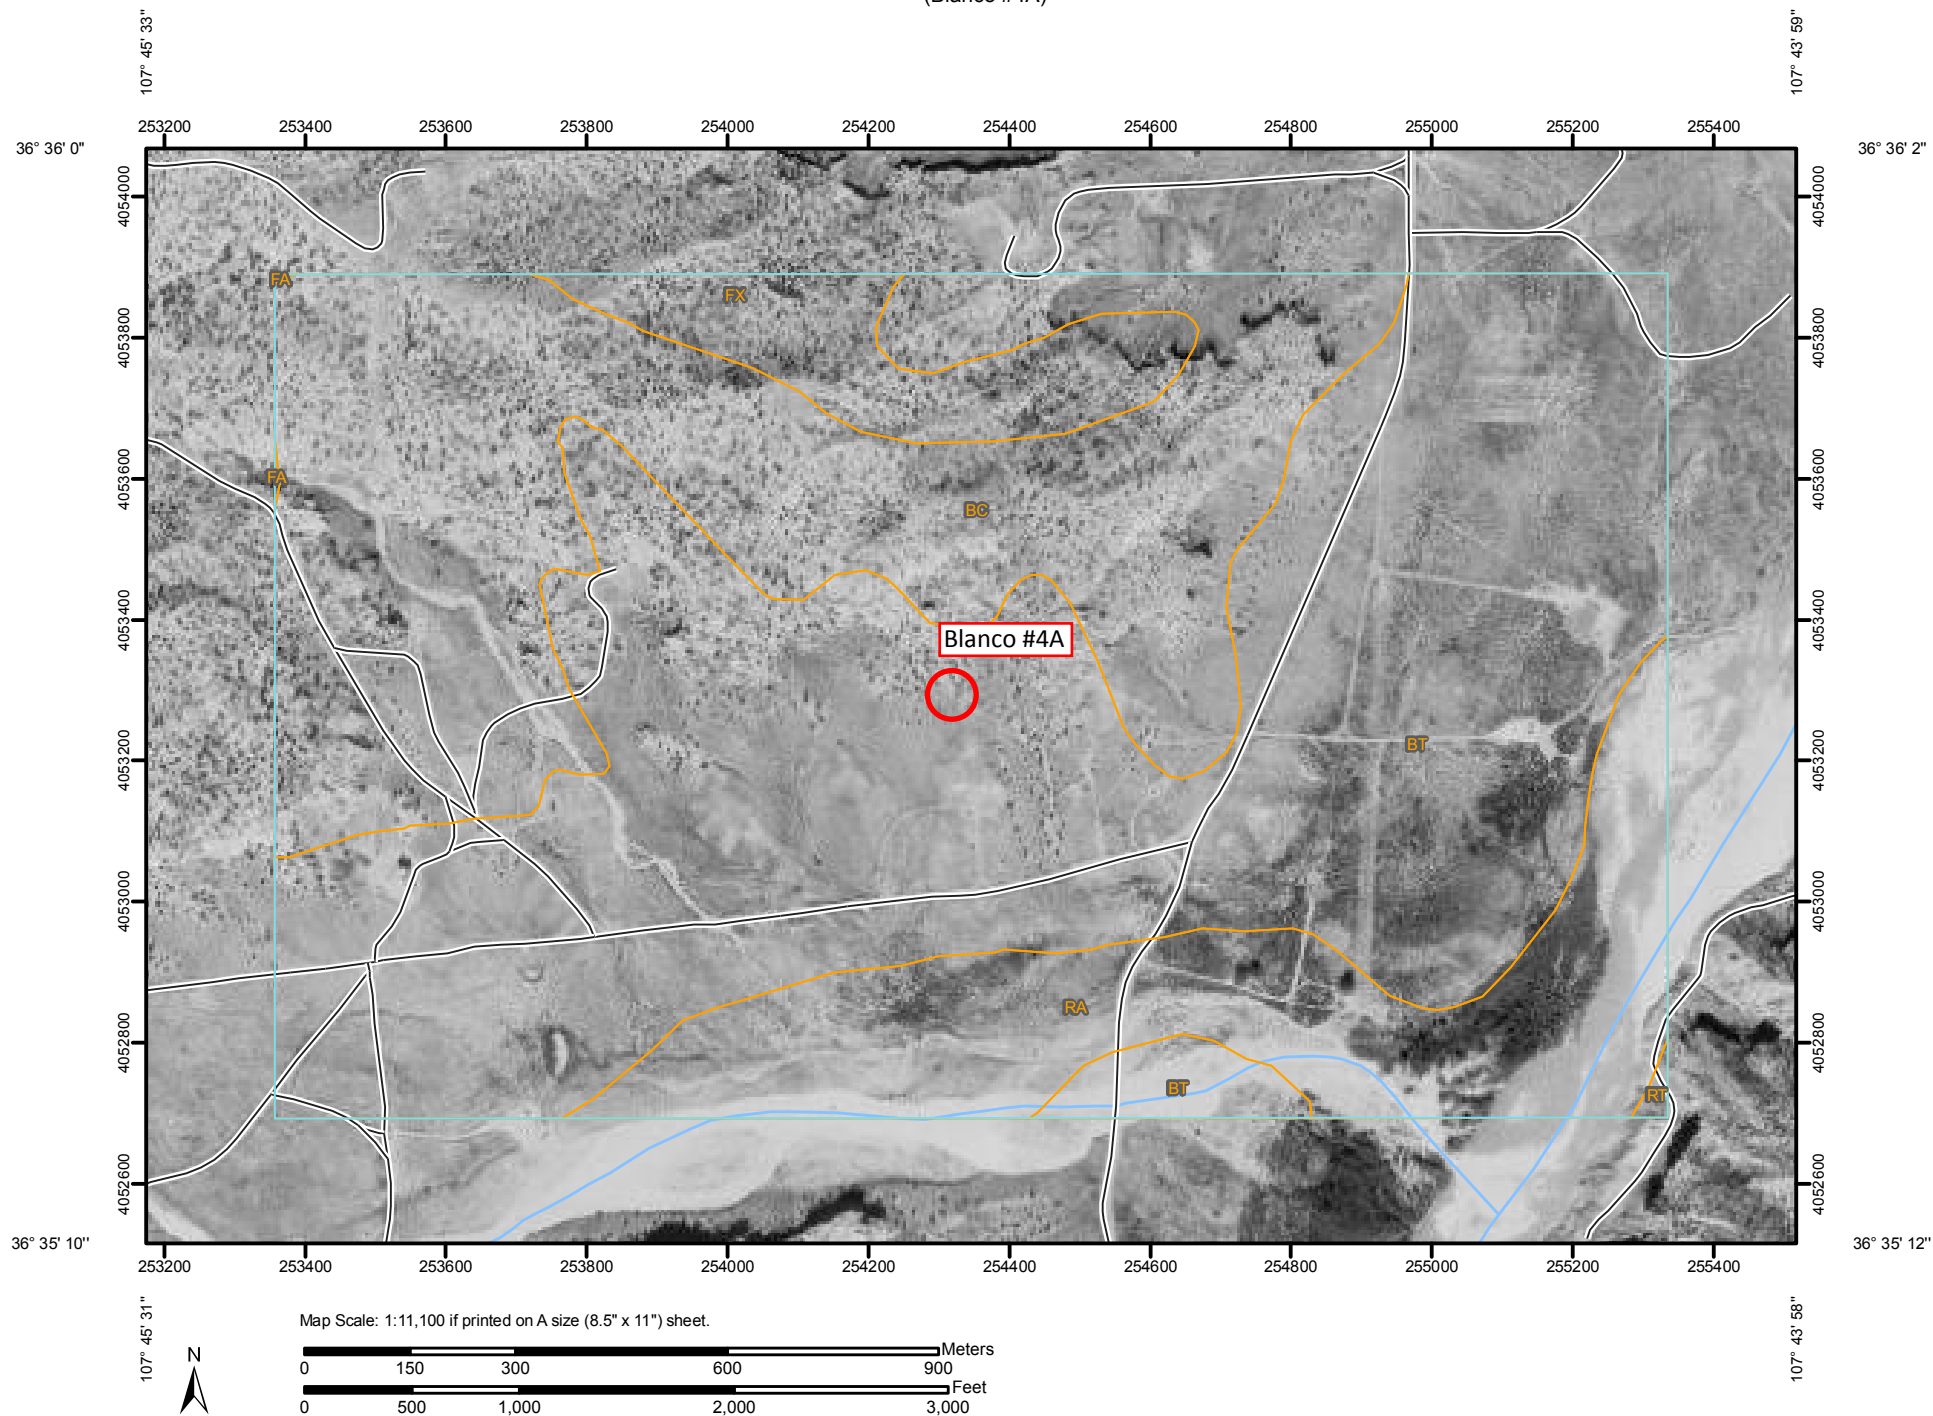




Soil Map—San Juan County, New Mexico, Eastern Part  
(Blanco #4A)

## MAP LEGEND






















### Area of Interest (AOI)




 Area of Interest (AOI)

### Soils




 Soil Map Units

### Special Point Features

-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot
-  Spoil Area
-  Stony Spot

-  Very Stony Spot
-  Wet Spot
-  Other



### Special Line Features

-  Gully
-  Short Steep Slope
-  Other






### Political Features

-  Cities

### Water Features

-  Oceans
-  Streams and Canals

### Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

## MAP INFORMATION

Map Scale: 1:11,100 if printed on A size (8.5" × 11") sheet.

The soil surveys that comprise your AOI were mapped at 1:63,360.

Please rely on the bar scale on each map sheet for accurate map measurements.

Source of Map: Natural Resources Conservation Service  
Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>  
Coordinate System: UTM Zone 13N NAD83

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: San Juan County, New Mexico, Eastern Part  
Survey Area Data: Version 9, Feb 20, 2009

Date(s) aerial images were photographed: 10/13/1997

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.



## Map Unit Legend

San Juan County, New Mexico, Eastern Part (NM618)			
Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
BC	Badland-Rock outcrop-Persayo complex, extremely steep	173.3	29.6%
BT	Blancot-Notal association, gently sloping	301.0	51.5%
FA	Farb-Persayo-Rock outcrop complex, moderately steep	0.1	0.0%
FX	Fruitland-Persayo-Sheppard complex, hilly	27.7	4.7%
RA	Riverwash	82.1	14.0%
RT	Rock outcrop-Travessilla-Weska complex, extremely steep	0.7	0.1%
<b>Totals for Area of Interest</b>		<b>584.8</b>	<b>100.0%</b>

## San Juan County, New Mexico, Eastern Part

### BT—Blancot-Notal association, gently sloping

#### Map Unit Setting

*Elevation:* 5,600 to 6,400 feet  
*Mean annual precipitation:* 6 to 10 inches  
*Mean annual air temperature:* 51 to 55 degrees F  
*Frost-free period:* 140 to 160 days

#### Map Unit Composition

*Blancot and similar soils:* 55 percent  
*Notal and similar soils:* 25 percent

#### Description of Blancot

##### Setting

*Landform:* Fan remnants  
*Landform position (three-dimensional):* Tread  
*Down-slope shape:* Convex  
*Across-slope shape:* Convex  
*Parent material:* Fan alluvium derived from sandstone and shale

##### Properties and qualities

*Slope:* 0 to 5 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Well drained  
*Capacity of the most limiting layer to transmit water (Ksat):* Moderately high to high (0.60 to 2.00 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Calcium carbonate, maximum content:* 2 percent  
*Gypsum, maximum content:* 2 percent  
*Maximum salinity:* Nonsaline to very slightly saline (0.0 to 4.0 mmhos/cm)  
*Sodium adsorption ratio, maximum:* 2.0  
*Available water capacity:* High (about 9.7 inches)

##### Interpretive groups

*Land capability (nonirrigated):* 6c  
*Ecological site:* Loamy (R035XB001NM)

##### Typical profile

*0 to 2 inches:* Loam  
*2 to 15 inches:* Sandy clay loam  
*15 to 60 inches:* Clay loam

#### Description of Notal

##### Setting

*Landform:* Stream terraces  
*Landform position (three-dimensional):* Talf  
*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Stream alluvium derived from sandstone and shale

**Properties and qualities**

*Slope:* 0 to 2 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Well drained

*Capacity of the most limiting layer to transmit water (Ksat):* Very low  
to moderately low (0.00 to 0.06 in/hr)

*Depth to water table:* More than 80 inches

*Frequency of flooding:* Rare

*Frequency of ponding:* None

*Calcium carbonate, maximum content:* 5 percent

*Gypsum, maximum content:* 5 percent

*Maximum salinity:* Very slightly saline to slightly saline (4.0 to 8.0  
mmhos/cm)

*Sodium adsorption ratio, maximum:* 10.0

*Available water capacity:* Low (about 5.4 inches)

**Interpretive groups**

*Land capability classification (irrigated):* 3s

*Land capability (nonirrigated):* 7c

*Ecological site:* Salt Flats (R035XB005NM)

**Typical profile**

*0 to 3 inches:* Silty clay loam

*3 to 60 inches:* Clay

## Data Source Information

Soil Survey Area: San Juan County, New Mexico, Eastern Part

Survey Area Data: Version 9, Feb 20, 2009

# BELOW GRADE TANK (BGT) DESIGN AND CONSTRUCTION PLAN

SUBMITTED TO:

ENVIRONMENTAL BUREAU,

NEW MEXICO OIL CONSERVATION DIVISION

ON BEHALF OF:

CHEVRON USA INC., CHEVRON MIDCONTINENT, L.P., AND FOUR STAR OIL & GAS  
COMPANY

P.O. Box 730

AZTEC, NEW MEXICO 87410

(505) 333-1901

**Chevron**  
**San Juan Basin**  
**Below Grade Tank Design and Construction Plan**

**INTRODUCTION**

In accordance with NMAC §§ 19.15.17.9(B)(4) and 19.15.17.11 Chevron (representing Chevron USA Inc, Chevron Midcontinent, L.P., and Four Star Oil & Gas Company) submits this Design and Construction Plan for below grade tanks (BGTs) in New Mexico. This Plan contains standard conditions that attach to multiple BGTs.


1. Chevron will design and construct a BGT to contain liquids and solids, prevent contamination of fresh water, and protect public health and the environment. NMAC § 19.15.17.11(A).
2. Chevron will post an upright sign not less than 12 inches by 24 inches with lettering not less than two inches in height in a conspicuous place on the fence surrounding the BGT, unless the BGT is located on a site where there is an existing well, signed in compliance with NMAC § 19.15.16.8, that is operated by Chevron. Chevron will post the sign in a manner and location such that a person can easily read the legend. The sign will provide the following information: Chevron's name; the location of the site by quarter-quarter or unit letter, section, township and range; and emergency telephone numbers. NMAC § 19.15.17.11(C).
3. Chevron will fence or enclose a BGT in a manner that prevents unauthorized access and will maintain the fences in good repair. Fences are not required if there is an adequate surrounding perimeter fence that prevents unauthorized access to the well site or facility, including the BGT. NMAC § 19.15.17.11(D)(1).
4. Chevron will fence or enclose a BGT located within 1000 feet of a permanent residence, school, hospital, institution or church with a chain link security fence, at least six feet in height with at least two strands of barbed wire at the top. Chevron will close and lock all gates associated with the fence when responsible personnel are not on-site. NMAC § 19.15.17.11(D)(2).
5. Chevron will fence BGTs to exclude livestock with a four foot fence that has at least four strands of barbed wire evenly spaced in the interval between one foot and four feet above ground level. NMAC § 19.15.17.11(D)(3). Chevron may install tubular steel cattle panels, as it determines appropriate (photo of cattle

panel fence submitted to NMOCD, 24 June 2009). As illustrated on the attach photo.

6. Chevron will screen the permanent opening on the tank top with expanding steel mesh in order to render it non-hazardous to wildlife, including migratory birds. NMAC § 19.15.17.11(E).
7. Chevron's BGTs will be constructed with the design features illustrated on the attached drawing.
8. Only double-walled, double-bottomed BGTs will be installed.
9. Chevron will use 3/16" carbon steel which is resistant to the anticipated contents and resistant to damage from sunlight. NMAC § 19.15.17.11(I)(1).
10. Chevron will construct a BGT foundation on a level base free of rocks, debris, sharp edges or irregularities to help prevent punctures, cracks or indentations of the liner or tank bottom. NMAC § 19.15.17.11(I)(2).
11. Chevron will construct a BGT to prevent overflow and the collection of surface water run-on. NMAC § 19.15.17.11(I)(3). Chevron, or a contractor representing Chevron, will install a level control device to help prevent overflow from the BGT and will use berms and/or a diversion ditch to prevent surface run on from entering the BGT. NMAC §§ 19.15.17.11(I)(3), 19.15.17.12(A)(7), and 19.15.17.12(D)(1).
12. All BGTs, in which the side walls are not open for visible inspection for leaks, will be double walled with leak detection capability. NMAC § 19.15.17.11(I)(4)(b).
13. Chevron, as the operator of a below-grade tank constructed and installed prior to June 16, 2008 that does not meet all the requirements in Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC and is not included in Paragraph (6) of Subsection I of 19.15.17.11 NMAC, is not required to equip or retrofit the below-grade tank to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC so long as it demonstrates integrity. If the existing below-grade tank does not demonstrate integrity, the operator shall promptly remove that below-grade tank and install a below-grade tank that complies with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, as illustrated in the approved drawing. Chevron shall comply with the operational requirements of 19.15.17.12 NMAC.

14. Chevron, as the operator of a below-grade tank constructed and installed prior to June 16, 2008 that is single walled and where any portion of the tank sidewall is below the ground surface and not visible, shall equip or retrofit the below-grade tank to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, or close it, within five years after June 16, 2008. If the existing below-grade tank does not demonstrate integrity, Chevron shall promptly remove that below-grade tank and install a below-grade tank that complies with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, as illustrated in the approved drawing. Chevron shall comply with the operational requirements of 19.15.17.12 NMAC.



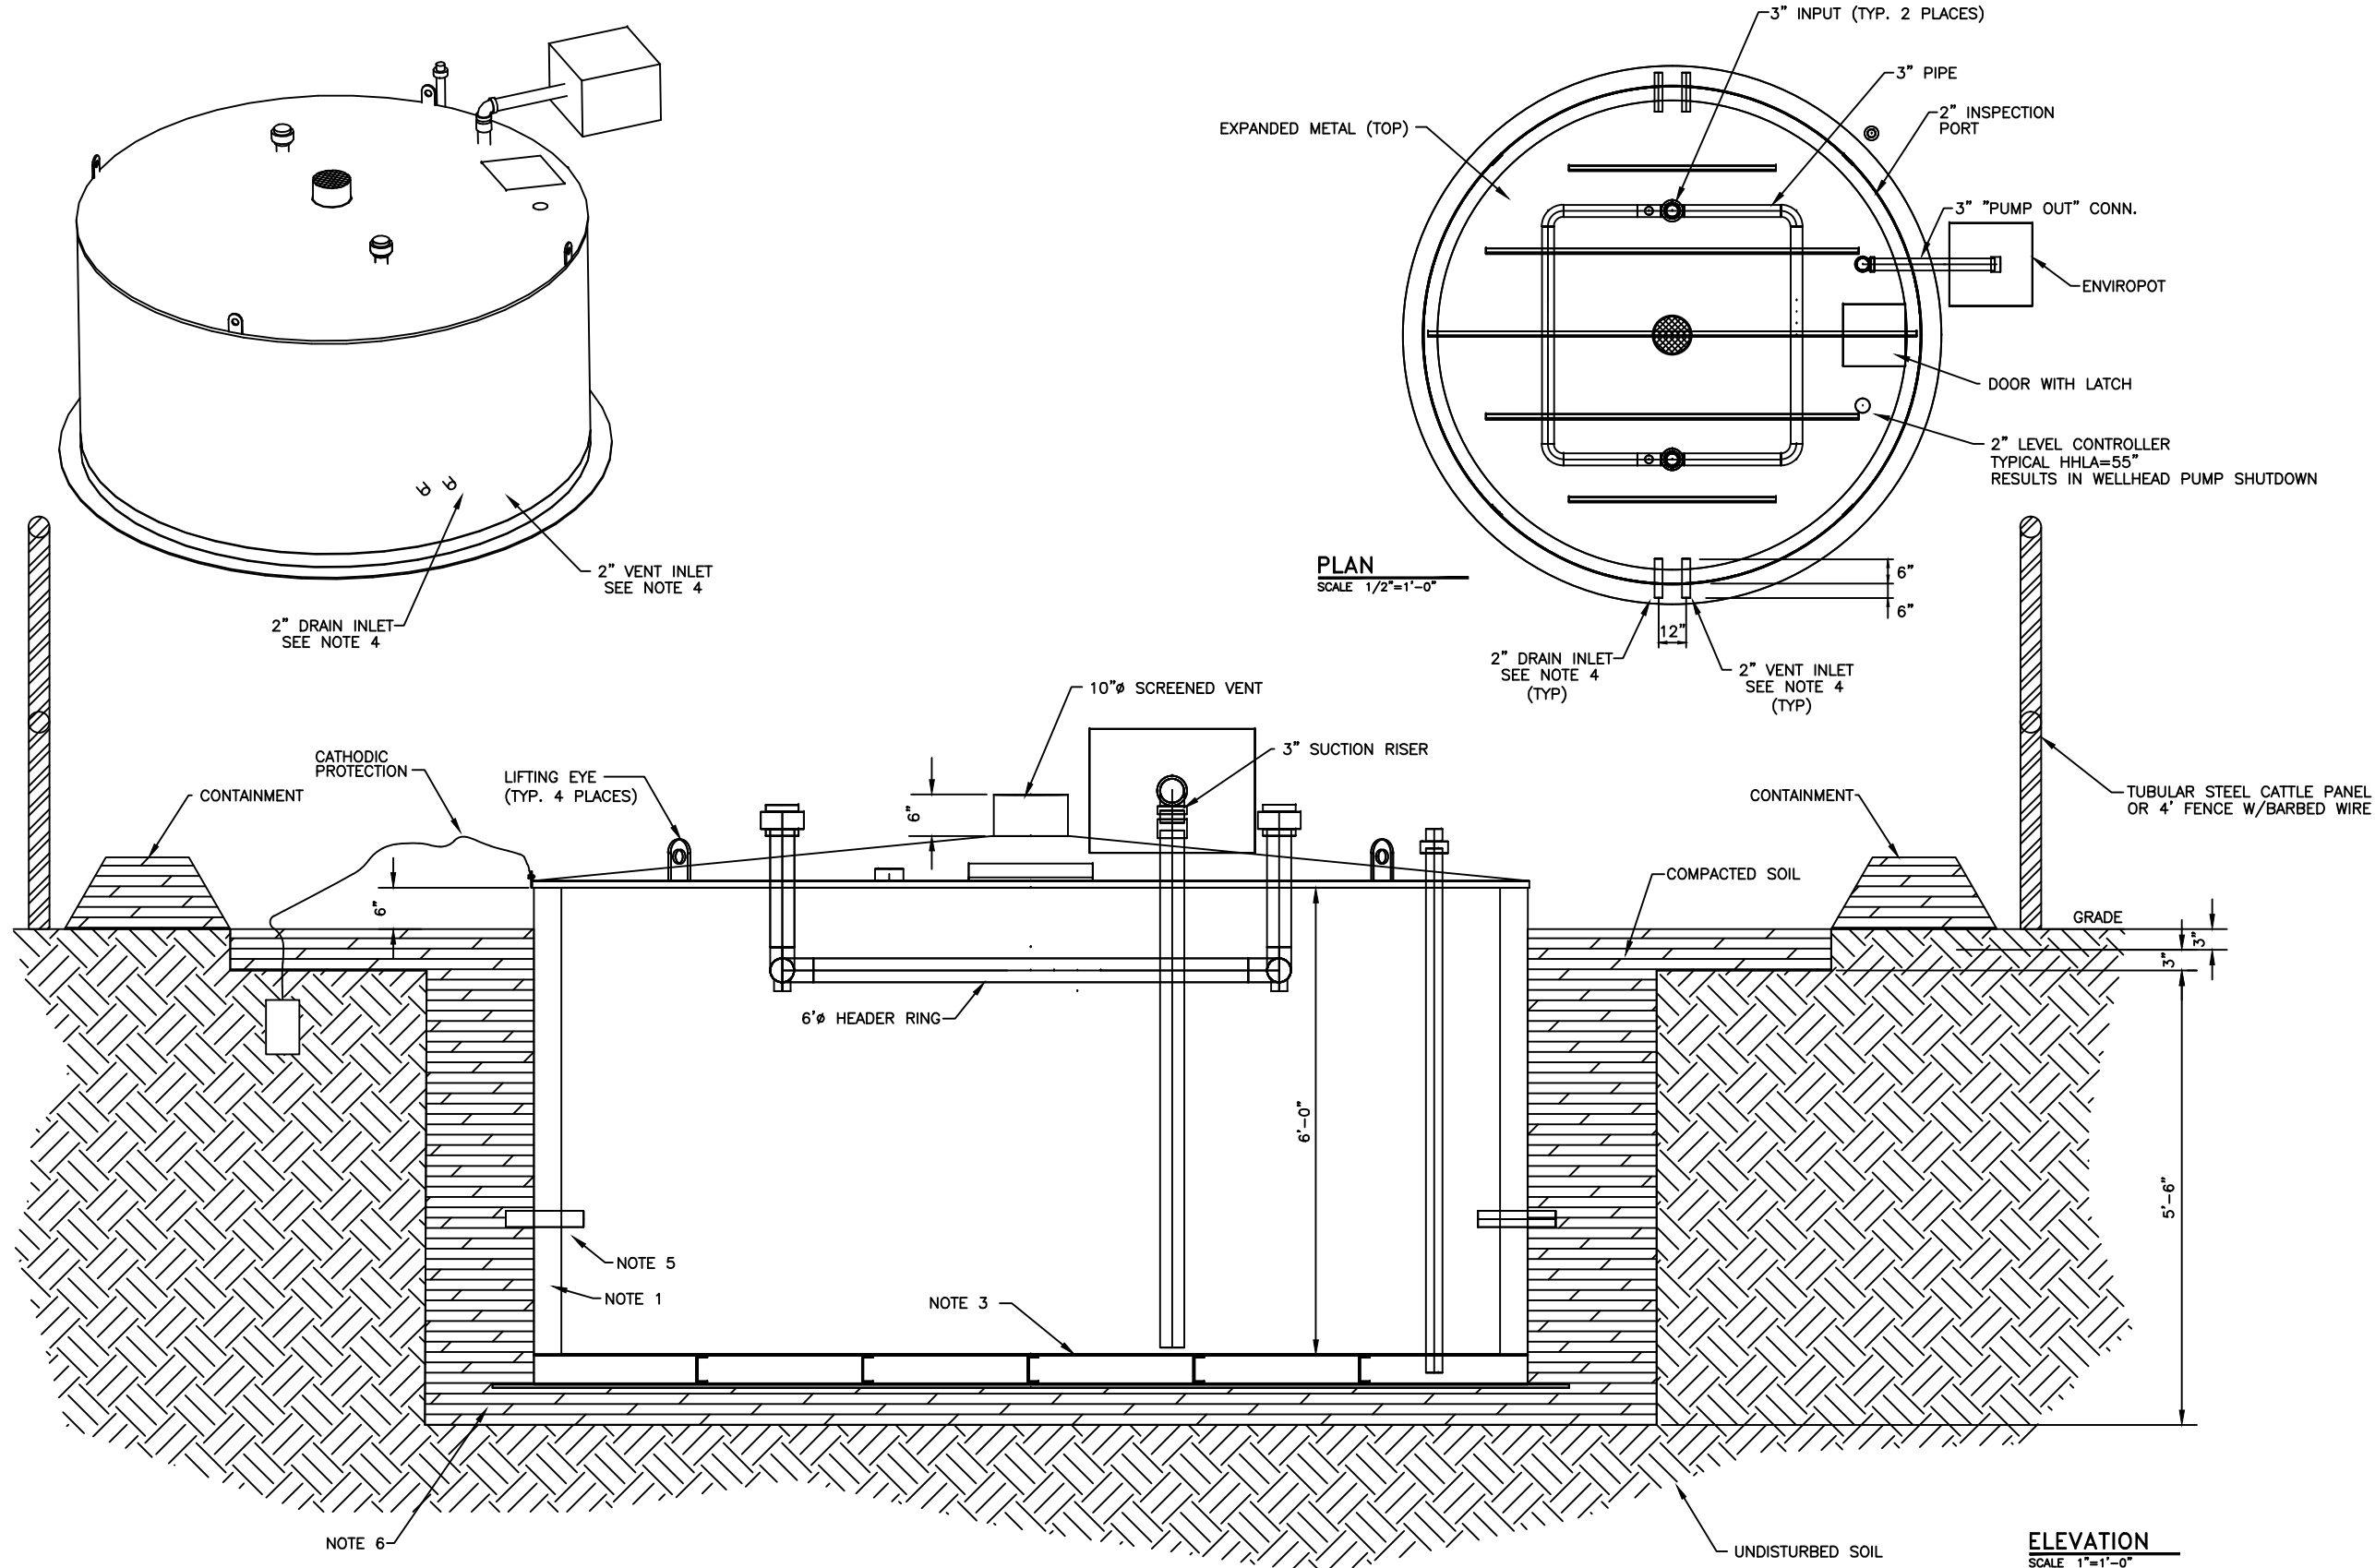

# NOTES:

1. FABRICATOR TO PRESSURE TEST THE AREA BETWEEN THE TANK WALLS TO ENSURE LEAK-FREE DOUBLE CONTAINMENT.
2. TANK TO BE CONSTRUCTED OF 3/16" THK. ASTM A36 STEEL. ALL PIPING TO BE SCH. 40 CARBON STEEL.
3. DOUBLE WALL DOUBLE BOTTOM.
4. DEPENDING ON THE ORIENTATION OF THE EQUIPMENT ON LOCATION, ONE OF THE STUBS MAY BE CONNECTED TO THE DIFFUSER. ANY OF THE FOUR 2" STUBS THAT ARE NOT CONNECTED TO THE DIFFUSER WILL BE CAPPED BOTH INTERNALLY AND EXTERNALLY.
5. UNDERGROUND TANK CONNECTIONS AND TRANSFER LINES ARE WELDED. ALL UNDERGROUND TRANSFER LINES HAVE A FUSION BONDED EPOXY (FBE) COATING OR SIMILAR
6. CHEVRON WILL CONSTRUCT A BGT FOUNDATION ON A LEVEL BASE FREE OF ROCKS, DEBRIS, SHARP EDGES OR IRREGULARITIES TO HELP PREVENT PUNCTURES, CRACKS OR INDENTATIONS OF THE LINER OR TANK BOTTOM. NMAC 19.15.17.11(I)(2).

This document is the exclusive property of ForeRunner Corp. and/or client. It has not been published and is confidential in consideration of the client thereof. This document is NOT to be copied, reproduced, exhibited, loaned or otherwise published, disposed of, nor to be used for the purpose other than that for which it is specifically published without the written permission of ForeRunner Corp. and/or client, or to use the same in any way detrimental to ForeRunner Corp. and/or client.

**FORERUNNER**  
CORPORATION  
10000, Houston, Texas 77036  
Tel: 281-465-0000  
Fax: 281-465-0000

REV	BY	DATE	REVISION	ERC CHECKED	ERC APPROVED	DATE	CHEV CHECKED	CHEV APPROVED	DATE
D	RJP	8/28	ADDED NOTE 6.						
C	MDB	3/08	ADDED NOTES						
B	MDB	11/08	REVISED DIFFUSER, ADDED NOTES						
A	JF	8/08	ISSUED FOR APPROVAL						

## ELEVATION SCALE 1"=1'-0"

## CHEVRON NORTH AMERICA EXPLORATION AND PRODUCTION



## 95 BBL STANDARD BELOW GRADE TANK

DATE DRAWN: 05/15/06	SCALE: AS NOTED	PROJ. NO: 12088	SHP. NO:	REV:
DRAWN BY: J. FUNK	ENGINEER:	FILE: BLOWDOWN TANK	EDDI NO: 110	D