

Submit 1 Copy To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-25558
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. LG-2824
7. Lease Name or Unit Agreement Name State 28
8. Well Number 1
9. OGRID Number 15878
10. Pool name or Wildcat

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other SWD
2. Name of Operator
New Mexico Salt Water Disposal Company, Inc.
3. Address of Operator P. O. Box 1518, Roswell, NM 88202-1518

4. Well Location
Unit Letter I : 1980 feet from the South line and 660 feet from the East line
Section 28 Township 10S Range 34E NMPM Lea County
11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4,209' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

E-PERMITTING
P&A NR P.m. P&A R _____
INT TO P&A P.m. COMP _____
CSNG _____ CHG Loc _____
TA _____ RBDMS CHART _____

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

MIRU. CIRC HOLE W/MLF.

- Set 50 sxs plug @ 5882' and tag.
- Set 75 sxs plug from tag to 5020'.
- 4256' perf and sqz 40 sxs for 8 5/8" shoe at 4206'. WOC & TAG
- 2850' perf and sqz 40 sxs. Base of salt 2800'. WOC & TAG
- 2200' perf and sqz 40 sxs. Top of salt 2250'. WOC & TAG
- 477' perf and sqz circ cmt from surface to surface 12 3/4" shoe at 427'.
- Set dry hole marker, clean and reseed location and road per surface owner agreement.

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tim Collier TITLE Sr VP, Exploration & Development DATE 11/25/2014

Type or print name Tim Collier E-mail address: tcollier@read-stevens.com PHONE: 575-622-3770

For State Use Only

APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 11/25/2014
Conditions of Approval (if any):

DEC 01 2014

Nov. 25, 2014

Plugging Procedure

NMSWD

State 28 #1 sec. 28, T-10s-S, R-28-E NMPM

CIRC HOLE W/ M.L.F.

1. Set 50sx plug @5,882' and Tag
2. Set 75sx plug from tag to 5020'
3. 4256' perf and sqz. 40 sacks for 8 5/8 shoe at 4206' *WOC & TAG*
4. 2850' perf and sqz. 40 sacks. Base of Salt 2800 *WOC & TAG*
5. 2200' perf and sqz. 40 sacks. Top of Salt 2250 *WOC & TAG*
6. 477' perf and sqz circulate cement from surface to surface 12 3/4" shoe at 427'
7. Set dry hole marker, clean and reseed location and road per surface owner agreement

STATE 28 #1 SWD

ELEV: 4209' GL

RKB:

API: 30-025-25558

Pool: DEVONIAN COUNTY: LEA ST: NM
LOCATION: I Sec. 28 - T10S - R34E, 1980' FSL & 660' FEL
DATE: 11/05/2014 BY:

CASING RECORD

SURFACE CASING

O.D.	WT/FT	GRADE	SET AT
12 3/4"			427'

INTERMEDIATE CASING

8 5/8"	I# 28# & 32#	4206'
--------	--------------	-------

PRODUCTION CASING

4 1/2"	13,421'
--------	---------


TUBING

NO. JTS	O.D.	THD.	WT.	GDE.	SET AT
313	2 3/8"		2000#	EUE	9827'

Packer @ 9726'

WELL HISTORY

8/26/1977 - TD reached
1/16/2006 - Well ready for disposal
9/05/2014 - Csg damaged from 5046' - 5882'

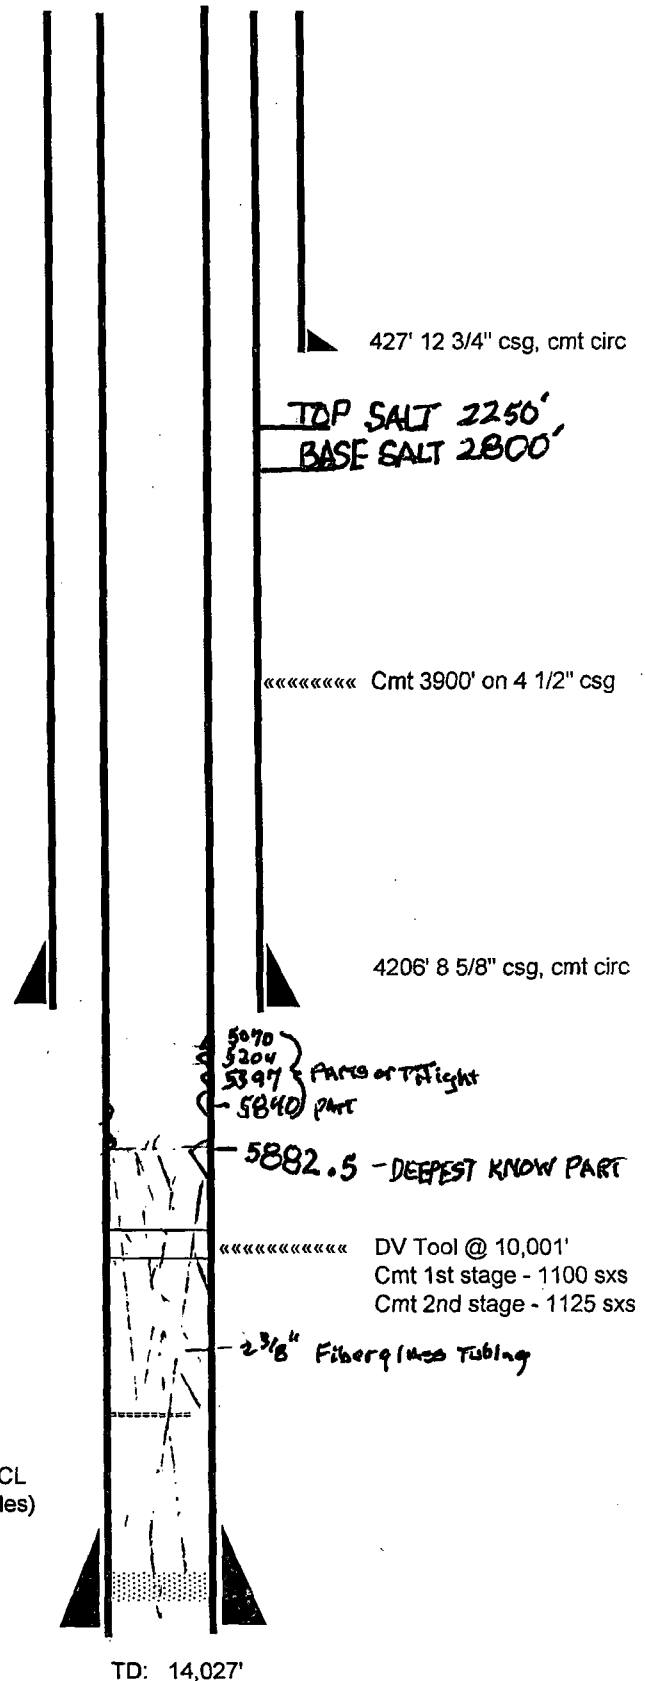

Perfs @ 13,424' - 13,531'
Open hole 13,531' - 14,024'
13,424' - 14,024' 10 gals 15% HCL
(no information on how many holes)

TD: 14,027'