Form 3160 -3 (March 2012)		HOBBS	OCD	OMB N	APPROVE o. 1004-013	37
UNITED STATES DEPARTMENT OF THE INTE BUREAU OF LAND MANAGE		APR 262	2017	5. Lease Serial No. NMNM114988	ctober 31, 2	
APPLICATION FOR PERMIT TO DRIL	L OR	REENTER	/ED	6. If Indian, Allotee		S. P
la. Type of work: 🗹 DRILL 🗌 REENTER				7. If Unit or CA Agree	ement, Na	me and No.
lb. Type of Well: 🔽 Oil Well 🔲 Gas Well 🛄 Other	Sin	gle Zope 🖌 Multip	ole Zone 🔬	8. Lease Name and V SEAWOLF 1-12 FE		317671)
2. Name of Operator DEVON ENERGY PRODUCTION COMPAN	Y LP	(6137)	K	9. API Well No. 70-02 9	5-4	3766 2001
	hone No. 5)552-6	(include area code) 571	Ø	10. Field and Pool, or H WC-025 G-09 S253		L /
4. Location of Well (Report location clearly and in accordance with any State	requirem	ents.*)	1	11. Sec., T. R. M. or B		
At surface NENE / 200 FNL / 800 FEL / LAT 32.0791853 / LO	NG -10	3.5201141	Color.	SEC 1 / T26S / R33	3E / NM	P
At proposed prod. zone SESE / 330 FSL / 1284 FEL / LAT 32.05	16032	/ LONG -103.5216	783	>		
14. Distance in miles and direction from nearest town or post office*			b.	12. County or Parish LEA		13. State NM
15. Distance from proposed* 16. 1 location to nearest 200 feet property or lease line, ft. 128 (Also to nearest drig, unit line, if any) 16. 1		cres in lease	17. Spacin 320	g Unit dedicated to this w	vell	
to nearest well, drilling, completed, 340 feet	Proposed 664 feet	Depth / 22534 feet	20. BLM/	BIA Bond No. on file O1104		
	Approxin /25/201	nate date work will star 7	rt*	23. Estimated duration 45 days	n	
24.	Attac	hments				
The following, completed in accordance with the requirements of Onshore Oil a	and Gas	Order No.1, must be a	ttached to th	is form:		
1. Well plat certified by a registered surveyor.			he operatio	ns unless covered by an	existing	bond on file (see
 A Drilling Plan. A Surface Use Plan (if the location is on National Forest System Lands SUPO must be filed with the appropriate Forest Service Office). 	, the	Item 20 above). 5. Operator certific 6. Such other site BLM.		ormation and/or plans as	s may be r	required by the
25. Signature (Electronic Submission)		(Printed/Typed) cca Deal / Ph: (405	5)228-842	9	Date 10/14/	2016
Title	L					
Regulatory Compliance Professional					D	
Approved by (Signature) (Electronic Submission)		(Printed/Typed) Layton / Ph: (575)2	234-5959		Date 04/17/	/2017
Title Supervisor Multiple Resources	Office HOBE	3S				
Application approval does not warrant or certify that the applicant holds lega conduct operations thereon. Conditions of approval, if any, are attached.	l or equit	table title to those righ	its in the sub	oject lease which would e	ntitle the	applicant to
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for States any false, fictitious or fraudulent statements or representations as to any	or any pe matter w	erson knowingly and v rithin its jurisdiction.	willfully to r	nake to any department o	or agency	of the United
(Continued on page 2)	þ	04/26	17	*(Inst	ruction	s on page 2)
		CONNIT	ONS			
APPROVED	WIT	HCONDI		RE	QU	RES NS

_

Well Name: SEAWOLF 1-12 FED

Sel

Well Number: 85H

.0	String Type: SURFACE	Other String Type:	
COA	Hole Size: 17.5		
CO'	Top setting depth MD: 0		Top setting depth TVD: 0
	Top setting depth MSL:		
	Bottom setting depth MD: 1000		Bottom setting depth TVD: 1000
	Bottom setting depth MSL:		
	Calculated casing length MD: 1000		
	Casing Size: 13.375	Other Size	
	Grade: H-40 J-55	Other Grade:	
	Weight: 48 54 5		
	Joint Type: STC BT C.	Other Joint Type:	
	Condition: NEW		
	Inspection Document:		
	Standard: API		
	Spec Document:		
	Tapered String?: N		
	Tapered String Spec:		
	Safety Factors		
	Collapse Design Safety Factor: 1.59	Э	Burst Design Safety Factor: 3.46

Joint Tensile Design Safety Factor type: BUOYANT Body Tensile Design Safety Factor type: BUOYANT Casing Design Assumptions and Worksheet(s):

Joint Tensile Design Safety Factor: 2.11 Body Tensile Design Safety Factor: 2.11

Seawolf 1-12 Fed 85H_Surf Csg Ass_10-13-2016.docx

Well Name: SEAWOLF 1-12 FED

See

Well Number: 85H

String Type: INTERMEDIATE	Other String Type:
Hole Size: 12.25	
Top setting depth MD: 0	Top setting depth TVD: 0
Top setting depth MSL:	
Bottom setting depth MD: 11400	Bottom setting depth TVD: 11400
Bottom setting depth MSL:	
Calculated casing length MD: 11400	
Casing Size: 9.625	Other Size
Grade: P-110 CC	Other Grade:
Weight: 40	
Joint Type: OTHER	Other Joint Type: BTC
Condition: NEW	
Inspection Document:	
Standard: API	
Spec Document:	
Tapered String?: N	
Tapered String Spec:	
Safety Factors	

Collapse Design Safety Factor: 1.25 Joint Tensile Design Safety Factor type: BUOYANT Body Tensile Design Safety Factor type: BUOYANT Casing Design Assumptions and Worksheet(s): Burst Design Safety Factor: 1.59 Joint Tensile Design Safety Factor: 2.58 Body Tensile Design Safety Factor: 2.58


Seawolf 1-12 Fed 85H_Int Csg Ass_10-13-2016.docx

	OCTG Casing	9		(
······	ANT ADDRESS OF		ining solo di Tabara)	
O.D.	T&C LB FT	PE LB FT	GRADE	115anii 1
9.625	-10 00	38 97	F110 EC	
	Grado - Matoria	al Proporties =		
	nimum Yield Strength	125 0	KS1	
	amum Yield Strength.	140	kS1	
1.4 man	num Tensile Strength.	135	har	
	Pipe Body I	Data (PE) ==		
	Geom	etry		
	Nominal ID	8 635	meh	
	Wall	0 395	meti	
	Nominal Area:	11.454	inch	
	API Drift	6 67 9	mch	
	Alternate Dritt	8 750	mah	
	Perform	nance		
Pube	Body Yield Strength	1 432	kips.	
	Collapse Resistance	4.230	0.04	
Internal Stield Pres	isure (API Historical)	8,980	DSI	
	Lame - Internal Y	field Pressure		
	Lame open	E. SAR,	1-9-	
	Lamé capped	9.97	(25×	
	Lame ductrie rupture	9,700	1.5	
	API Connec	tion Data		-
S	TC Internal Pressure	8,980	psi	
	STC Joint Strength	861	kaps.	
	LC Internal Prossure	8 980	1254	
	LC Joint Strength	988	kips	
	BC Internal Pressure	8,980		
	BC Joint Strength	1,266	par hips	
	LC Torque		niho	
naraban 741	Contraction of the second s	and an a south and the statistic street. At all of a	······	
ne estatut – z é [·	optimum	9.880 ma	annum 12.350	

An analysis which is a second of the second s

AFMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

 NAME: Rebecca Deal
 S

 Title: Regulatory Compliance Professional
 S

 Street Address: 333 West Sheridan Avenue
 S

 City: Oklahoma City
 State: OK
 Z

 Phone: (405)228-8429
 Email address: Rebecca.Deal@dvn.com

Field Representative

Representative Name: RICHARD WEDMANStreet Address: 6488 SEVEN RIVERS HWYCity: ARTESIAState: NMPhone: (575)748-1819Email address: RICHARD.WEDMAN@DVN.COM

Signed on: 10/13/2016

Zip: 73102

Zip: 88210

∛AFMSS

ų

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Submission Date: 10/14/2016

Application Data Report

04/19/2017

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: SEAWOLF 1-12 FED

Well Type: OIL WELL

APD ID: 10400005999

Well Number: 85H Well Work Type: Drill

Section 1 - General

APD ID:	10400005999	Tie to previous NOS?		Submission Date: 10/14/2016
BLM Office:	HOBBS	User: Rebecca Deal		Regulatory Compliance
Federal/India	an APD: FED	Is the first lease penetrate		ssional n Federal or Indian? FED
Lease numb	er: NMNM114988	Lease Acres: 1280		
Surface acce	ess agreement in place?	Allotted?	Reservation:	
Agreement i	n place? NO	Federal or Indian agreeme	ent:	
Agreement r	number:			
Agreement r	name:			
Keep applica	ation confidential? YES			
Permitting A	gent? NO	APD Operator: DEVON EN	IERGY PRODUC	CTION COMPANY LP
Operator lett	er of designation:			
Keep applica	ation confidential? YES			

Operator Info

Operator Organization Name: DEVON ENERGY PRODUCTION COMPANY LP
Operator Address: 333 West Sheridan Avenue
Operator PO Box:
Operator PO Box:
Operator City: Oklahoma City State: OK
Operator Phone: (405)552-6571
Operator Internet Address: aletha.dewbre@dvn.com

Section 2 - Well Information

Well in Master Development Plan? NO	Mater Development Plan name	:
Well in Master SUPO? NO	Master SUPO name:	
Well in Master Drilling Plan? NO	Master Drilling Plan name:	
Well Name: SEAWOLF 1-12 FED	Well Number: 85H	Well API Number:
Field/Pool or Exploratory? Field and Pool	Field Name: WC-025 G-09 S253336D	Pool Name: UPPER WOLFCAMP

Page 1 of 4

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Describe other minerals: Is the proposed well in a Helium production area? N Use Existing Well Pad? YES New surface disturbance? Y Type of Well Pad: MULTIPLE WELL Multiple Well Pad Name: Number: 85H, 86H, 94H, 95H SEAWOLF 1-12 FED Well Class: HORIZONTAL Number of Legs: Well Work Type: Drill Well Type: OIL WELL **Describe Well Type:** Well sub-Type: INFILL Describe sub-type: Distance to lease line: 200 FT Distance to town: Distance to nearest well: 340 FT Reservoir well spacing assigned acres Measurement: 320 Acres SEAWOLF 1-12 FED 85H_C-102 Signed_10-13-2016.pdf Well plat: Well work start Date: 09/25/2017 Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey	Туре:		
Datum: NAD83		Vertical Datum: NAVD88	
Survey number:	4803A		
	STATE: NEW MEXICO	Meridian: NEW MEXICO PRINCIPA	L County: LEA
	Latitude: 32.0791853	Longitude: -103.5201141	
SHL	Elevation: 3325	MD : 0	TVD : 0
Leg #: 1	Lease Type: FEDERAL	Lease #: NMNM114988	
	NS-Foot: 200	NS Indicator: FNL	
	EW-Foot: 800	EW Indicator: FEL	
	Twsp: 26S	Range: 33E	Section: 1
	Aliquot: NENE	Lot:	Tract:

Well Name: SEAWOLF 1-12 FED

3

1 640

Well Number: 85H

	STATE: NEW MEXICO	Meridian: NEW MEXICO PRINCIPA	AL County: LEA
	Latitude: 32.0791853	Longitude: -103.5201141	
KOP	Elevation: -8881	MD: 12224	TVD: 12206
Leg #: 1	Lease Type: FEDERAL	Lease #: NMNM114988	
	NS-Foot: 200	NS Indicator: FNL	
	EW-Foot: 1284	EW Indicator: FEL	
	Twsp: 26S	Range: 33E	Section: 1
	Aliquot: NENE	Lot:	Tract:
	STATE: NEW MEXICO	Meridian: NEW MEXICO PRINCIP	AL County: LEA
	Latitude: 32.0791853	Longitude: -103.5201141	
PPP	Elevation: -9359	MD: 12975	TVD: 12684
Leg #: 1	Lease Type: FEDERAL	Lease #: NMNM114988	
	NS-Foot: 635	NS Indicator: FNL	
	EW-Foot: 1284	EW Indicator: FEL	
	Twsp: 26S	Range: 33E	Section: 1
		1	Treat
	Aliquot: NENE	Lot:	Tract:
	STATE: NEW MEXICO	Lot: Meridian: NEW MEXICO PRINCIP	
EXIT	STATE: NEW MEXICO	Meridian: NEW MEXICO PRINCIP,	
EXIT Leg #: 1	STATE: NEW MEXICO Latitude: 32.0516032	Meridian: NEW MEXICO PRINCIP, Longitude: -103.5216783	AL County: LEA
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339	Meridian: NEW MEXICO PRINCIP, Longitude: -103.5216783 MD: 22534	AL County: LEA
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL	Meridian: NEW MEXICO PRINCIP, Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988	AL County: LEA
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330	Meridian: NEW MEXICO PRINCIP, Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL	AL County: LEA
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284	Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL	AL County: LEA TVD: 12664
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S	Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E	AL County: LEA TVD: 12664 Section: 12 Tract:
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S Aliquot: SESE	Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E Lot:	AL County: LEA TVD: 12664 Section: 12 Tract:
	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S Aliquot: SESE STATE: NEW MEXICO	Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E Lot: Meridian: NEW MEXICO PRINCIP	AL County: LEA TVD: 12664 Section: 12 Tract:
Leg #: 1	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S Aliquot: SESE STATE: NEW MEXICO Latitude: 32.0516032	Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E Lot: Meridian: NEW MEXICO PRINCIP Longitude: -103.5216783	AL County: LEA TVD: 12664 Section: 12 Tract: AL County: LEA
Leg #: 1 BHL	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S Aliquot: SESE STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339	Meridian: NEW MEXICO PRINCIPA Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E Lot: Meridian: NEW MEXICO PRINCIPA Longitude: -103.5216783 MD: 22534	AL County: LEA TVD: 12664 Section: 12 Tract: AL County: LEA
Leg #: 1 BHL	STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL NS-Foot: 330 EW-Foot: 1284 Twsp: 26S Aliquot: SESE STATE: NEW MEXICO Latitude: 32.0516032 Elevation: -9339 Lease Type: FEDERAL	Meridian: NEW MEXICO PRINCIPA Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988 NS Indicator: FSL EW Indicator: FEL Range: 33E Lot: Meridian: NEW MEXICO PRINCIPA Longitude: -103.5216783 MD: 22534 Lease #: NMNM114988	AL County: LEA TVD: 12664 Section: 12 Tract: AL County: LEA

 Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

 Well Name: SEAWOLF 1-12 FED

 Well Number: 85H

 Twsp: 26S
 Range: 33E

 Aliquot: SESE
 Lot:

 Tract:

-

FMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



APD ID: 10400005999	Submission Date: 10/14/2016
Operator Name: DEVON ENERGY PRODUCTION COMPA	NY LP
Well Name: SEAWOLF 1-12 FED	Well Number: 85H
Well Type: OIL WELL	Well Work Type: Drill

Section 1 - Geologic Formations

ID: Surface formation	Name: UNKNOWN	
Lithology(ies):		
OTHER - SURFACE		
Elevation: 3325	True Vertical Depth: 0	Measured Depth: 0
Mineral Resource(s):		
NONE		
Is this a producing formation? N		
ID: Formation 1	Name: RUSTLER	
Lithology(ies):		
ANHYDRITE		
Elevation: 2406	True Vertical Depth: 919	Measured Depth: 919
Mineral Resource(s):		
NONE		
Is this a producing formation? N		
ID: Formation 2	Name: TOP OF SALT	
Lithology(ies):		
SALT		
Elevation: 2041	True Vertical Depth: 1284	Measured Depth: 1284
Mineral Resource(s):		
NONE		
Is this a producing formation? N		

Well Name: SEAWOLF 1-12 FED	Well Number: 85	H	
ID: Formation 3	Name: BASE OF SALT		
Lithology(ies):			
SALT			
Elevation: -1629	True Vertical Depth: 4954	Measured Depth: 4954	
Mineral Resource(s):			
NONE			
Is this a producing formation? N			
ID: Formation 4	Name: DELAWARE		
Lithology(ies):			
SANDSTONE			
Elevation: -1839	True Vertical Depth: 5164	Measured Depth: 5164	
Mineral Resource(s):			
NATURAL GAS			
OIL			
Is this a producing formation? N			
ID: Formation 5	Name: BRUSHY CANYON LOWER		
Lithology(ies):			
SANDSTONE			
Elevation: -5919	True Vertical Depth: 9244	Measured Depth: 9244	
Mineral Resource(s):			
NATURAL GAS			
OIL			
Is this a producing formation? N			
ID: Formation 6	Name: BONE SPRING LIME		
Lithology(ies):			
LIMESTONE			
Elevation: -6069	True Vertical Depth: 9394	Measured Depth: 9394	

Page 2 of 13

•

Well Name: SEAWOLF 1-12 FED	Well Number:	: 85H
/lineral Resource(s):		
NATURAL GAS		
OIL		
s this a producing formation? N		
D: Formation 7	Name: BONE SPRING	
.ithology(ies):		
SANDSTONE		
Elevation: -7004	True Vertical Depth: 10329	Measured Depth: 10329
/lineral Resource(s):		
NATURAL GAS		
OIL		
s this a producing formation? N		
D: Formation 8	Name: BONE SPRING	
.ithology(ies):		
LIMESTONE		
levation: -7264	True Vertical Depth: 10589	Measured Depth: 10589
/lineral Resource(s):		
NATURAL GAS		
OIL		
this a producing formation? N		
D: Formation 9	Name: BONE SPRING 2ND	
.ithology(ies):		
SANDSTONE		
levation: -7634	True Vertical Depth: 10959	Measured Depth: 10959
/lineral Resource(s):		
NATURAL GAS		
OIL		
s this a producing formation? N		

. .

Well Name: SEAWOLF 1-12 FED	Well Number	:: 85H
ID: Formation 10	Name: BONE SPRING 3RD	
Lithology(ies):		
SANDSTONE		
Elevation: -8644	True Vertical Depth: 11969	Measured Depth: 11969
Mineral Resource(s):		
NATURAL GAS		
OIL		
Is this a producing formation? N		
ID: Formation 11	Name: WOLFCAMP	
Lithology(ies):		
SHALE		
Elevation: -9109	True Vertical Depth: 12434	Measured Depth: 12434
Mineral Resource(s):		
NATURAL GAS		
OIL		
Is this a producing formation? Y		
ID: Formation 12	Name: WOLFCAMP	
Lithology(ies):		
SHALE		
Elevation: -9389	True Vertical Depth: 12714	Measured Depth: 12714
Mineral Resource(s):		
NATURAL GAS		
OIL		
Is this a producing formation? Y		
Section 2 - Blowout P	revention	

•

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Pressure Rating (PSI): 5M

Rating Depth: 12684

Equipment: 5M rotating head, mud-gas separator, panic line, and flare will be rigged up prior to drilling out surface casing.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi. • Wellhead will be installed by wellhead representatives. • If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal. • Wellhead representative will install the test plug for the initial BOP test. • Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time. • If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted. • Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating. • Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2. After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2. After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead. The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Choke Diagram Attachment:

Seawolf 1-12 Fed 85H_5M BOPE CK_10-13-2016.pdf

BOP Diagram Attachment:

Seawolf 1-12 Fed 85H_5M BOPE CK_10-13-2016.pdf

Pressure Rating (PSI): 5M Rating Depth: 12684

Equipment: 5M rotating head, mud-gas separator, panic line, and flare will be rigged up prior to drilling out surface casing.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi. • Wellhead will be installed by wellhead representatives. • If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal. • Wellhead representative will install the test plug for the initial BOP test. • Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

up. Therefore the BOP components will not be retested at that time. • If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted. • Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating. • Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2. After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2. After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead. The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Choke Diagram Attachment:

Seawolf 1-12 Fed 85H_5M BOPE CK_10-13-2016.pdf

BOP Diagram Attachment:

Seawolf 1-12 Fed 85H_5M BOPE CK_10-13-2016.pdf

Section 3 - Casing

. (.	
Operator Name: DEVON ENERGY PRODUC	TION COMPANY LP
Well Name: SEAWOLF 1-12 FED	Well Number: 85H

String Type: SURFACE	Other String Type:
Hole Size: 17.5	
Top setting depth MD: 0	Top setting depth TVD: 0
Top setting depth MSL:	
Bottom setting depth MD: 1000	Bottom setting depth TVD: 1000
Bottom setting depth MSL:	
Calculated casing length MD: 1000	
Casing Size: 13.375	Other Size
Grade: H-40	Other Grade:
Weight: 48	
Joint Type: STC	Other Joint Type:
Condition: NEW	
Inspection Document:	
Standard: API	
Spec Document:	
Tapered String?: N	
Tapered String Spec:	
Safety Factors	

Satety Factors

Collapse Design Safety Factor: 1.59 Joint Tensile Design Safety Factor type: BUOYANT Body Tensile Design Safety Factor type: BUOYANT Casing Design Assumptions and Worksheet(s):

Burst Design Safety Factor: 3.46 Joint Tensile Design Safety Factor: 2.11 Body Tensile Design Safety Factor: 2.11

Seawolf 1-12 Fed 85H_Surf Csg Ass_10-13-2016.docx

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

String Type: INTERMEDIATE	Other String Type:	
Hole Size: 12.25		
Top setting depth MD: 0	Top setting depth TVD: 0	
Top setting depth MSL:		
Bottom setting depth MD: 11400	Bottom setting depth TVD: 11400	
Bottom setting depth MSL:		
Calculated casing length MD: 11400		
Casing Size: 9.625	Other Size	
Grade: P-110	Other Grade:	
Weight: 40		
Joint Type: OTHER	Other Joint Type: BTC	
Condition: NEW		
Inspection Document:		
Standard: API		
Spec Document:		
Tapered String?: N		
Tapered String Spec:		
Safety Factors		

Collapse Design Safety Factor: 1.25 Joint Tensile Design Safety Factor type: BUOYANT Body Tensile Design Safety Factor type: BUOYANT Casing Design Assumptions and Worksheet(s):

Burst Design Safety Factor: 1.59 Joint Tensile Design Safety Factor: 2.58 Body Tensile Design Safety Factor: 2.58

Seawolf 1-12 Fed 85H_Int Csg Ass_10-13-2016.docx

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

String Type: PRODUCTION	Other String Type:	
Hole Size: 8.75		
Top setting depth MD: 0	Top setting depth TVD: 0	
Top setting depth MSL:		
Bottom setting depth MD: 22534	Bottom setting depth TVD: 12664	
Bottom setting depth MSL:		
Calculated casing length MD: 22534		
Casing Size: 5.5	Other Size	
Grade: P-110	Other Grade:	
Weight: 20		
Joint Type: OTHER	Other Joint Type: BTC	
Condition: NEW		
Inspection Document:		
Standard: API		
Spec Document:		
Tapered String?: N		
Tapered String Spec:		

Safety Factors

Collapse Design Safety Factor: 1.27 Joint Tensile Design Safety Factor type: BUOYANT Body Tensile Design Safety Factor type: BUOYANT Casing Design Assumptions and Worksheet(s): Burst Design Safety Factor: 1.26 Joint Tensile Design Safety Factor: 1.83 Body Tensile Design Safety Factor: 1.83

Seawolf 1-12 Fed 85H_ProdCsg Ass_10-13-2016.docx

Section 4 - Cement

Casing String Type: SURFACE

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Stage Tool Depth:

.

Lead		
Top MD of Segment: 0	Bottom MD Segment: 1000	Cement Type: C
Additives: 1% Calcium Chloride	Quantity (sks): 780	Yield (cu.ff./sk): 1.34
Density: 14.8	Volume (cu.ft.): 1042	Percent Excess: 50
Casing String Type: INTERMEDIATE		
Stage Tool Depth:		
Lead		
Top MD of Segment: 0	Bottom MD Segment: 9400	Cement Type: C
Additives: Poz (Fly Ash): 6% BWOC	Quantity (sks): 1600	Yield (cu.ff./sk): 2.31
Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sks Poly-E-Flake	Volume (cu.ft.): 3680	Percent Excess: 30
Pansity: 11.9		
	Bottom MD Segment: 11400	Cement Type: C
Top MD of Segment: 9400	Quantity (sks): 590	Yield (cu.ff./sk): 1.33
Additives: 0.125 lbs/sks Poly-R-Flake	Volume (cu.ft.): 783	Percent Excess: 30
Density: 14.8		
Casing String Type: PRODUCTION		
Stage Tool Depth:		
Lead		
Top MD of Segment: 11200	Bottom MD Segment: 12300	Cement Type: C
Additives: Enhancer 923 + 10% BWOO	Quantity (sks): 135	Yield (cu.ff./sk): 2.31
Bentonite + 0.05% BWOC SA-1015 + 0.3% BWOC HR-800 + 0.2% BWOC	Volume (cu.ft.): 305	Percent Excess: 25
Fan2 + 0.125 lb/sk Pol-E-Flake + 0.5 lb/sk D-Air 5000		
Density: 11.9	Bottom MD Segment: 22534	Cement Type: H
	Quantity (sks): 2370	Yield (cu.ff./sk): 1.2
Top MD of Segment: 12300	Volume (cu.ft.): 2842	Percent Excess: 25
Additives: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite Density: 14.5		

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: N/A

Circulating Medium Table

Top Depth: 0	Bottom Depth: 1000
Mud Type: WATER-BASED MUD	
Min Weight (Ibs./gal.): 8.4	Max Weight (Ibs./gal.): 8.5
Density (lbs/cu.ft.):	Gel Strength (Ibs/100 sq.ft.):
PH:	Viscosity (CP): 2
Filtration (cc):	Salinity (ppm):
Additional Characteristics:	
Top Depth: 1000	Bottom Depth: 11400
Top Depth: 1000 Mud Type: OIL-BASED MUD	Bottom Depth: 11400
	Bottom Depth: 11400 Max Weight (Ibs./gal.): 9
Mud Type: OIL-BASED MUD	
Mud Type: OIL-BASED MUD Min Weight (Ibs./gal.): 8.4	Max Weight (Ibs./gal.): 9
Mud Type: OIL-BASED MUD Min Weight (Ibs./gal.): 8.4 Density (Ibs/cu.ft.):	Max Weight (Ibs./gal.): 9 Gel Strength (Ibs/100 sq.ft.):

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Top Depth: 11400	Bottom Depth: 22534
Mud Type: OIL-BASED MUD	
Min Weight (Ibs./gal.): 10.5	Max Weight (Ibs./gal.): 11
Density (lbs/cu.ft.):	Gel Strength (lbs/100 sq.ft.):
PH:	Viscosity (CP): 12
Filtration (cc):	Salinity (ppm):
Additional Characteristics:	

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GR/CNL fromTD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.

List of open and cased hole logs run in the well:

GR,MUDLOG

Coring operation description for the well: N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 7200

Anticipated Surface Pressure: 4409.52

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal proessures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Seawolf 1-12 Fed 85H_H2S Plan_10-13-2016.pdf

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Seawolf 1-12 Fed 85H_Dir Plan_10-13-2016.pdf

Other proposed operations facets description:

ANTI COLLISION PLAN MULTI BOWL WELLHEAD MULTIBOWL VERBIAGE CLOSED LOOP DESIGN PLAN

Other proposed operations facets attachment:

Seawolf 1-12 Fed 85H_MB Verb_10-13-2016.pdf Seawolf 1-12 Fed 85H_Clsd Loop_10-13-2016.pdf Seawolf 1-12 Fed 85H_MB Wellhd_10-13-2016.pdf Seawolf 1-12 Fed 85H_AC Report_10-13-2016.pdf

Other Variance attachment:

Seawolf 1-12 Fed 85H_Co-flex_10-13-2016.pdf

WAFMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



APD ID: 10400005999Submission Date: 10/14/2016Operator Name: DEVON ENERGY PRODUCTION COMPANY LPWell Name: SEAWOLF 1-12 FEDWell Number: 85HWell Type: OIL WELLWell Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES Existing Road Map: Seawolf 1-12 Fed 85H_Access Rte Map_10-13-2016.pdf Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

Existing Road Improvement Description: Improve road to accommodate Drilling and Completion operations.

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Seawolf 1-12 Fed 85H_One mile map_10-13-2016.pdf

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Estimated Production Facilities description:

Production Facilities description: Seawolf 1-12 BS CTB 1 Plat, Battery Connect, Battery Connect Electric, Pad Connect Electric, Flowline (buried). **Production Facilities map:**

Seawolf 1-12 Fed 85H_CTB_1_BAT_CON_EL_10-13-2016.pdf Seawolf 1-12 Fed 85H_CTB_BATT CONN_10-13-2016.PDF Seawolf 1-12 Fed 85H_PAD_CONN_ELE_10-13-2016.PDF Seawolf 1-12 Fed 85H_Flowline_10-13-2016.pdf Seawolf 1-12 Fed 85H_Seawolf_1-12_BS_CTB_1 Plat_10-13-2016.PDF

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: STIMULATIONWater source type: RECYCLEDDescribe type:Source latitude:Source latitude:Source longitude:Source datum:Water source permit type: OTHERWater source permit type: OTHERSource land ownership: FEDERALWater source transport method: PIPELINESource transport method: PIPELINESource transportation land ownership: FEDERALSource volume (barrels): 350000Water source volume (barrels): 350000Source volume (acre-feet): 45.112583

Water source and transportation map:

Seawolf 1-12 Fed 84H_Water Map_11-16-2016.pdf

Water source comments: The attached Water Transfer Map is a proposal only and the final route and documentation will be provided by a Devon contractor prior to installation. When available Devon will always follow existing disturbance. New water well? NO

New Water Well Info

Well latitude:	Well Longitude:	Well datum:
Well target aquifer:		
Est. depth to top of aquifer(ft):	Est thickness of aquifer:	

Page 2 of 10

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Aquifer comments:

Aquifer documentation:

Well depth (ft):	Well casing type:
Well casing outside diameter (in.):	Well casing inside diameter (in.):
New water well casing?	Used casing source:
Drilling method:	Drill material:
Grout material:	Grout depth:
Casing length (ft.):	Casing top depth (ft.):
Well Production type:	Completion Method:
Water well additional information:	
State appropriation permit:	
Additional information attachment:	

Section 6 - Construction Materials

Construction Materials description: Dirt fill and caliche will be used to construct well pad. Caliche supplied by the Federal Pit on Section 7-26S-34E; SWNE & SENE **Construction Materials source location attachment:**

Section 7 - Methods for Handling Waste

Waste type: DRILLING Waste content description: Water and oil based cuttings Amount of waste: 1600 barrels Waste disposal frequency : Daily Safe containment description: N/A Safe containmant attachment: Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: PRIVATE FACILITY Disposal type description: Disposal location description: Water and oil based cuttings Waste type: FLOWBACK

Waste content description: Average produced BWPD over the flowback period (first 30 days of production).

Amount of waste: 4000 barrels

Waste disposal frequency : Daily

Safe containment description: N/A

Safe containmant attachment:

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Waste disposal type: OFF-LEASE INJECTION Disposal location ownership: STATE

Disposal type description:

Disposal location description: Produced water during flowback will be disposed of at our Rattlesnake 16 SWD.

Waste type: COMPLETIONS/STIMULATION

Waste content description: Flow back water during completion operations.

Amount of waste: 3000 barrels

Waste disposal frequency : One Time Only

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY Disposal type description:

Disposal location description: Various disposal locations in Lea and Eddy counties.

Waste type: PRODUCED WATER

Waste content description: Average produced BWPD over the first year of production.

Amount of waste: 1200 barrels

Waste disposal frequency : Daily

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: OFF-LEASE INJECTION Disposal location ownership: STATE

Disposal type description:

Disposal location description: Produced water will be primarily disposed of at our Rattlesnake 16 SWD. At certain times during the year, some of the water will be recycled and used for drilling/completion operations. This recycle facility is at the same location as the SWD (state).

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP Well Name: SEAWOLF 1-12 FED Well Number: 85H

Cuttings Area

Cuttings Area being used? NO Are you storing cuttings on location? NO **Description of cuttings location** Cuttings area length (ft.) Cuttings area width (ft.) Cuttings area depth (ft.) Is at least 50% of the cuttings area in cut? WCuttings area liner Cuttings area liner specifications and installation description

Cuttings area volume (cu. yd.)

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO **Ancillary Facilities attachment:**

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram: Seawolf 1-12 Fed 85H Rig Layout 11-16-2016.pdf Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: NEW **Recontouring attachment:** Seawolf 1-12 Fed 85H Interim Recl 10-13-2016.pdf Drainage/Erosion control construction: N/A Drainage/Erosion control reclamation: N/A Wellpad long term disturbance (acres): 2.086 Access road long term disturbance (acres): 0 Pipeline long term disturbance (acres): 1.6072108 Other long term disturbance (acres): 0 Total long term disturbance: 3.6932108

Wellpad short term disturbance (acres): 4.156 Access road short term disturbance (acres): 0 Pipeline short term disturbance (acres): 1.6072108 Other short term disturbance (acres): 0 Total short term disturbance: 5,763211

Page 5 of 10

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Reconstruction method: Operator will use Best Management Practices"BMP" to mechanically recontour to obtain the desired outcome. Topsoil redistribution: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns. Soil treatment: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns. Existing Vegetation at the well pad: Shinnery, yucca, grasses and mesquite. Existing Vegetation at the well pad attachment: Existing Vegetation Community at the road: Shinnery, yucca, grasses and mesquite. Existing Vegetation Community at the road attachment: Existing Vegetation Community at the pipeline: Shinnery, yucca, grasses and mesquite. Existing Vegetation Community at the pipeline attachment: Existing Vegetation Community at other disturbances: Shinnery, yucca, grasses and mesquite. Existing Vegetation Community at other disturbances attachment: Non native seed used? NO Non native seed description: Seedling transplant description: Will seedlings be transplanted for this project? NO Seedling transplant description attachment: Will seed be harvested for use in site reclamation? NO Seed harvest description: Seed harvest description attachment:

Seed Management

Seed Table

Seed type:	Seed source:
Seed name:	
Source name:	Source address:
Source phone:	
Seed cultivar:	
Seed use location:	
PLS pounds per acre:	Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type

Pounds/Acre

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Seed reclamation attachment:

	Operator Contact/Responsible Official Contact Info		
First Name: RICHARD Last Name: WEDMAN		Last Name: WEDMAN	
	Phone: (575)748-1819	Email: RICHARD.WEDMAN@DVN.COM	
	Seedbed prep:		
	Seed BMP:		
	Seed method:		
	Existing invasive species? NO		
	Existing invasive species treatment description:		
	Existing invasive species treatment attachment:		
	Weed treatment plan description: Maintain weeds on an as need basis.		
	Weed treatment plan attachment:		
	Monitoring plan description: Monitor as needed.		
	Monitoring plan attachment:		
	Success standards: N/A		
	Pit closure description: N/A		
	Pit closure attachment:		

Section 11 - Surface Ownership

Disturbance type: NEW ACCESS ROAD Describe: Surface Owner: BUREAU OF LAND MANAGEMENT Other surface owner description: BIA Local Office: BOR Local Office: COE Local Office: DOD Local Office: NPS Local Office: State Local Office: Wilitary Local Office: USFWS Local Office: USFS Region: USFS Forest/Grassland:

USFS Ranger District:

Well Name: SEAWOLF 1-12 FED

ġ.

Well Number: 85H

Disturbance type: EXISTING ACCESS ROAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT	
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	
State Local Office:	
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:

Disturbance type: WELL PAD
Describe:
Surface Owner: BUREAU OF LAND MANAGEMENT
Other surface owner description:
BIA Local Office:
BOR Local Office:
COE Local Office:
DOD Local Office:
NPS Local Office:
State Local Office:
Military Local Office:
USFWS Local Office:
Other Local Office:
USFS Region:
USFS Forest/Grassland: USFS Ranger District:

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Disturbance type: PIPELINE Describe: Surface Owner: BUREAU OF LAND MANAGEMENT Other surface owner description: BIA Local Office: BOR Local Office: COE Local Office: DOD Local Office: NPS Local Office: State Local Office: Military Local Office: USFWS Local Office: USFS Region: USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

 Right of Way needed? YES
 Use APD as ROW? YES

 ROW Type(s): 288100 ROW – O&G Pipeline,FLPMA (Powerline),Other

ROW Applications

SUPO Additional Information: Seawolf 1-12 BS CTB 1 Plat, Battery Connect, Battery Connect Electric, Pad Connect Electric, Flowline (buried). No anticipated change to location at this time. Location info is as originally applied for. **Use a previously conducted onsite?** YES

Previous Onsite information: Previous OnSite 7/20/2016


Other SUPO Attachment

Seawolf 1-12 Fed 85H_CTB_BATT CONN_10-13-2016.PDF Seawolf 1-12 Fed 85H_Flowline_10-13-2016.pdf Seawolf 1-12 Fed 85H_PAD_CONN_ELE_10-13-2016.PDF Seawolf 1-12 Fed 85H_Seawolf_1-12_BS_CTB_1 Plat_10-13-2016.PDF

Well Name: SEAWOLF 1-12 FED

Well Number: 85H

Seawolf 1-12 Fed 85H_CTB_1_BAT_CON_EL_10-13-2016.pdf

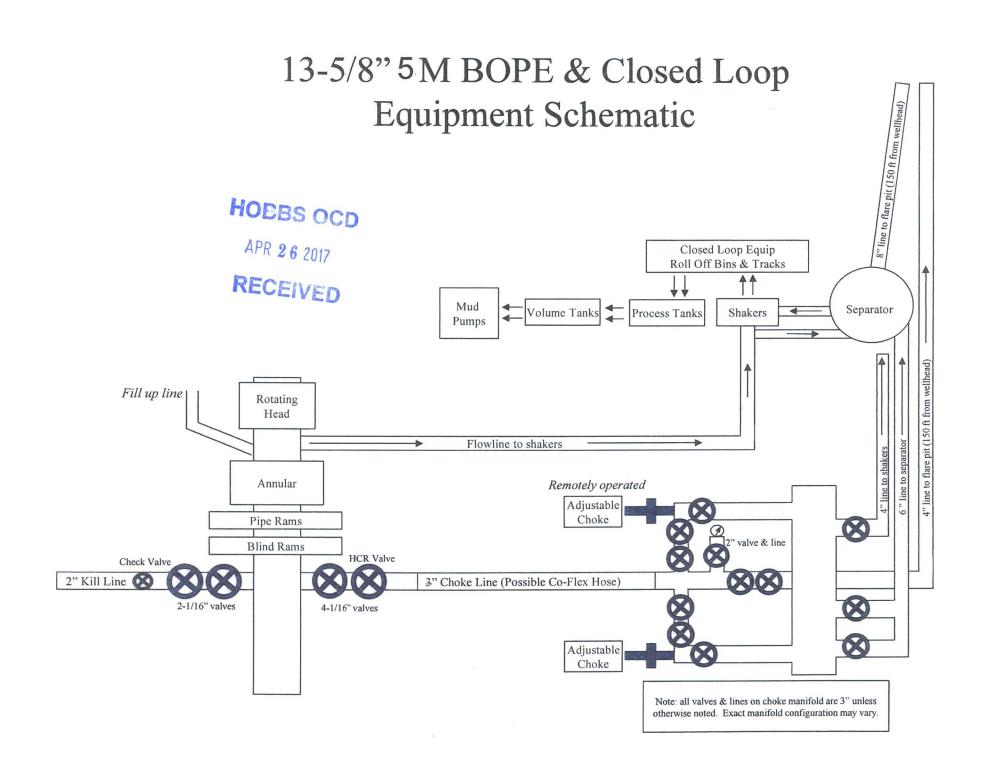

Ontinental & CONTITECH Fluid Technology

ContiTech Beattle Corp. Website: <u>www.contitechbeattle.com</u>

Monday, June 14, 2010

RE: Drilling & Production Hoses Lifting & Safety Equipment

To Helmerich & Payne,

.

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly it is good practice to use lifting & safety equipment but not mandatory

Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson Sales Manager ContiTech Beattie Corp

ContiTech Beattle Corp, 11535 Brittmoore Park Drive, Houston, TX 77041 Phone: +1 (832) 327-0141 Fax: +1 (832) 327-0148 www.contitechbeattle.com



RIG 212



PHOENIX RUBBER INDUSTRIAL LTD.

ş

QUALITY DOCUMENT

.

3

•)6728 Szeged, Budapest út 10. Hungary • H-6701 Szeged, P. O. Box 152 hone: (3662) 556-737 • Fax: (3662) 556-738 SALES & MARKETING: H-1092 Budapest, Ráday u. 42-44. Hungary • H-1440 Budapest, P. O. Box 26 Phone: (361) 456-4200 · Fax: (361) 217-2972, 456-4273 · www.taurusemerga.hu

INSPECTIO	LITY CONTR N AND TEST		ATE		CERT. N	ν.	55	2		
PURCHASER:	Phoenix Bea	ttie Co.			P.O. Nº•	1:	519FA	-871		
PHOENIX RUBBER order N	ENIX RUBBER order Nº 170466 HOSE TYPE: 3" ID Choke and Kill Hose									
HOSE SERIAL Nº	34128	NOMINAL / AC	TUAL LE	ENGTH:		11,43	m			
W.P. 68,96 MPa	10000 psi	T.P. 103,4	MPa	1500	0 psi	Duration	:	60	min.	
Pressure test with water at ambient temperature					,					
			•							
:	See at	tachment. (1	page)						3.1.8	
	•		and a set of the set o						1 Co. 1	
		4								
\uparrow 10 mm = 10 Min \rightarrow 10 mm = 25 MF		COLIELI	NGS	•					<u>دی .</u> <u>د</u>	
		COUPLI Serial N°	NGS	•	Quality			Heat N°	. चंद्र	
\rightarrow 10 mm = 25 MF	Pa , /	COUPLII Serial N° 20 719	NGS		Quality			Heat N°	<u>د من المن المن المن المن المن المن المن ا</u>	
→ 10 mm = 25 MF Type	² a <u>, , </u>	Serial Nº	NGS	A	Quality ISI 4130 ISI 4130				<u>رون ، .</u> <u></u>	
→ 10 mm = 25 MF Type 3" coupling with	² a <u>, , </u>	Serial Nº	NGS	A	ISI 4130			C7626	وی در این	
→ 10 mm = 25 MF Type 3" coupling with	² a <u>, , </u>	Serial Nº	-	A	ISI 4130 ISI 4130			C7626	د. بالکی 	
→ 10 mm = 25 MF Type 3" coupling with 4 1/16" Flange en	² a <u>, , </u>	Serial Nº	APIS	Al Al	ISI 4130 ISI 4130			C7626	<u>دی اور اور اور اور اور اور اور اور اور اور</u>	
→ 10 mm = 25 MF Type 3" coupling with 4 1/16" Flange en All metal parts are flawless WE CERTIFY THAT THE ABO	d //E HOSE HAS BEE	Serial N° 20 719 N MANUFACTURE	API S Temp	A A pec 16 peraturo	ISI 4130 ISI 4130 3 C e rate:"I	3"	MS OF 1	C7626 47357		
→ 10 mm = 25 MF Type 3" coupling with	d //E HOSE HAS BEE	Serial N° 20 719 N MANUFACTURE	API S Temp	A A pec 16 peraturo	ISI 4130 ISI 4130 S C e rate:"I NCE WITH	3"	JBBE	C7626 47357 THE ORD		

O Z D L	H	001		10.00	200	0 0 0							444	10			-						-								
		0.04				0 0 0							-	000	ł	6	0						80		No. of the local sector of			日子の日子		ころの王	X RUBBI
6															1										- HA	lo	s	e l	1 T	19	pection an
GR		100		10	2	0.0.0	1111					1	333	 000			ļ										1	iller-	fi	C	ation Dept
81	11			.0	-		Ť						2	9	-		-		-		I			1		-		1	-	1	
1000	i-t-	1001		100		0.0.0	00		-	-				10	-				-	-				-				-		-	
-BL	11			1		P							3	90		-						-								-	
				T	Ì													-		-				-					-		
SI		İ					-			3								-				T				Î			-		
			ŀ				1		T		F		T									Ī		Ī							
5	T						T	İ				Ī		-								T				I					

40920-0-00015 NB000 14094-65

28 7. 100

1 4

1. 1.

11

.

s

in the second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second se

VERIFIED TRUE CO. PHOENIX RUBBER & C.

18 2 204

÷



Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO Produced Water Disposal (PWD) Location: PWD surface owner: Lined pit PWD on or off channel: Lined pit PWD discharge volume (bbl/day): Lined pit specifications: **Pit liner description:** Pit liner manufacturers information: Precipitated solids disposal: Decribe precipitated solids disposal: Precipitated solids disposal permit: Lined pit precipitated solids disposal schedule: Lined pit precipitated solids disposal schedule attachment: Lined pit reclamation description: Lined pit reclamation attachment: Leak detection system description: Leak detection system attachment: Lined pit Monitor description: Lined pit Monitor attachment: Lined pit: do you have a reclamation bond for the pit? Is the reclamation bond a rider under the BLM bond? Lined pit bond number: Lined pit bond amount: Additional bond information attachment:

PWD disturbance (acres):

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location: PWD surface owner: Injection PWD discharge volume (bbl/day): Injection well mineral owner:

PWD disturbance (acres):

PWD disturbance (acres):

Injection well type: Injection well number: Assigned injection well API number? Injection well new surface disturbance (acres): Minerals protection information: Mineral protection attachment: Underground Injection Control (UIC) Permit? UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:PWD surface owner:PWD disturbance (acres):Surface discharge PWD discharge volume (bbl/day):Surface Discharge NPDES Permit?Surface Discharge NPDES Permit attachment:Surface Discharge site facilities information:Surface discharge site facilities map:Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location: PWD surface owner: Other PWD discharge volume (bbl/day): Other PWD type description: Other PWD type attachment: Have other regulatory requirements been met? Other regulatory requirements attachment:

PWD disturbance (acres):

Injection well name:

Injection well API number:

AFMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Information

Federal/Indian APD: FED BLM Bond number: CO1104 **BIA Bond number:** Do you have a reclamation bond? NO Is the reclamation bond a rider under the BLM bond? Is the reclamation bond BLM or Forest Service? **BLM** reclamation bond number: Forest Service reclamation bond number: Forest Service reclamation bond attachment: **Reclamation bond number: Reclamation bond amount: Reclamation bond rider amount:** Additional reclamation bond information attachment: Bond Info Data Report

04/19/2017

H&P Flex Rig Location Layout 4 Well Pad

