

District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM 87505

**HOBBS OCD**  
**JUL 27 2017**  
**RECEIVED**

**SOIL CONSERVATION DIVISION**  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30- <u>025-07796</u>
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name <u>Warren McKee Unit</u>
8. Well Number <u>112</u>
9. OGRID Number <u>192463</u>
10. Pool name or Wildcat <u>Warren McKee</u>

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator  
OXY USA WTP Limited Partnership

3. Address of Operator  
P.O. Box 50250 Midland, TX 79710

4. Well Location  
Unit Letter F: 1980 feet from the North line and 2317 feet from the West line  
Section 18 Township 20S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3564'

**12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data**

**NOTICE OF INTENTION TO:**

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐  
CLOSED-LOOP SYSTEM ☐  
OTHER: ☐

**SUBSEQUENT F**

REMEDIAL WORK ☐  
COMMENCE DRILLING OPNS. ☐ **INT TO PA Pmx**  
CASING/CEMENT JOB ☐ **P&A NR**  
**P&A R**

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NM. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-9300' PBTD-9236' Perfs-9095-9165'  
13-3/8" 36# csg @ 296' w/ 300sx, 17-1/2" hole, TOC-Surf-Circ  
8-5/8" 24-32# csg @ 3705' w/ 1500sx, 11" hole, TOC-840-TS  
5-1/2" 15.5-17# csg @ 9300' w/ 600sx, 7-7/8" hole, TOC-5575-TS  
1. RIH & set CIBP @ 9045', M&P 25sx cmt to 8895'  
2. M&P 25sx cmt @ 7980-7830' WOC-Tag  
3. M&P 25sx cmt @ 6400-6250' WOC-Tag  
4. Perf @ 5350', sqz 35sx cmt to 5250' WOC-Tag  
5. Perf @ 3900', sqz 85sx cmt to 3655' WOC-Tag  
6. Perf @ 2700', sqz 75sx cmt to 2500' WOC-Tag  
7. Perf @ 1550', sqz 60sx cmt to 1400' WOC-Tag **→ 1500'**  
8. Perf @ 346', sqz 265sx cmt to surface **VERIFY CMT TO SURFACE ALL STRINGS**  
10# MLF between plugs - Above ground steel tanks will be utilized

**T. ANHY 1425**  
**B. SALT 2537**

Spud Date:

**NOTIFY OCD 24 HOURS PRIOR TO  
BEGINNING PLUGGING OPERATIONS**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 7/25/17

Type or print name David Stewart E-mail address: david\_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark Whitaker TITLE Petroleum Engr. Specialist DATE 07/31/2017  
Conditions of Approval (if any):

OXY USA WTP LP - Proposed  
Warren McKee Unit #112  
API No. 30-025-07796

265sx @ 346'-Surface

60sx @ 1550-1400' WOC-Tag

75sx @ 2700-2500' WOC-Tag

85sx @ 3900-3655' WOC-Tag


35sx @ 5350-5250' WOC-Tag

25sx @ 6400-6250'

25sx @ 7980-7830' WOC-Tag

CIBP @ 9045' w/ 25sx to 8895'

PB-9236'

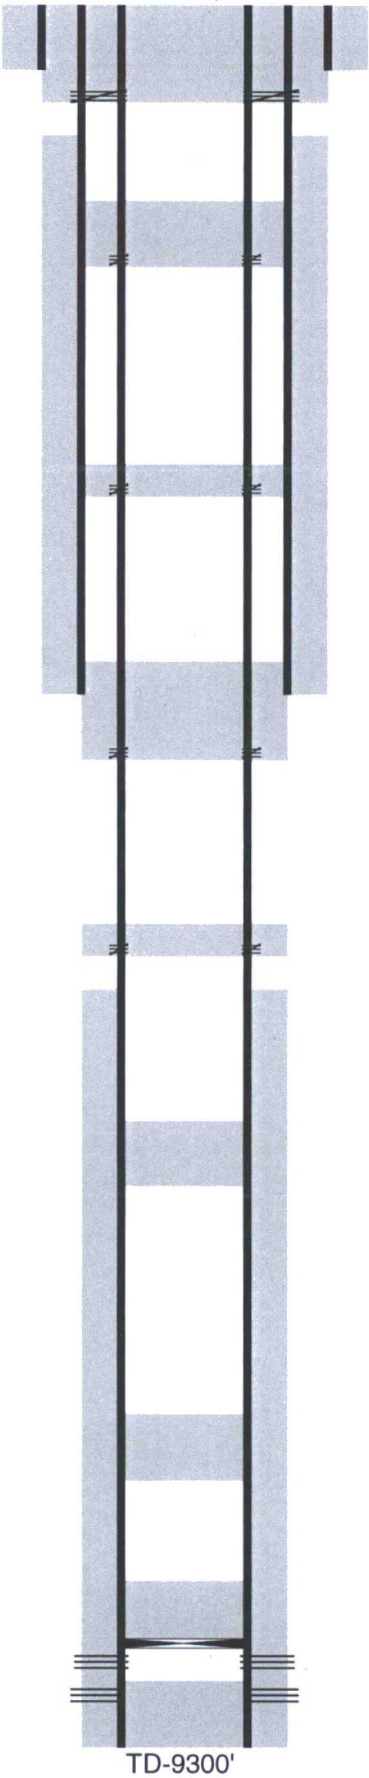

Perf @ 346'

Perf @ 1550'

Perf @ 3900'

Perf @ 5350'

Perfs @ 9095-9165'

Perfs @ 9236-9256' sqz w/ 50sx cmt

17-1/2" hole @ 296'  
13-3/8" csg @ 296'  
w/ 300sx-TOC-Surf-Circ

11" hole @ 3705'  
8-5/8" csg @ 3705'  
w/ 1500sx-TOC-840'-TS

7-7/8" hole @ 9300'  
5-1/2" csg @ 9300'  
w/ 600sx-TOC-5575'-TS

OXY USA WTP LP - Current  
Warren McKee Unit #112  
API No. 30-025-07796

17-1/2" hole @ 296'  
13-3/8" csg @ 296'  
w/ 300sx-TOC-Surf-Circ

11" hole @ 3705'  
8-5/8" csg @ 3705'  
w/ 1500sx-TOC-840'-TS

7-7/8" hole @ 9300'  
5-1/2" csg @ 9300'  
w/ 600sx-TOC-5575'-TS

PB-9236'

Perfs @ 9095-9165'  
Perfs @ 9236-9256' sqz w/ 50sx cmt

TD-9300'