

OCD Hobbs

HOBBS OCD
APR 30 2018

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		6. If Indian, Allottee or Tribe Name
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator COG OPERATING LLC (229137)		8. Lease Name and Well No. DOMINATOR 25 FEDERAL COM 105H (721209)
3a. Address 600 West Illinois Ave Midland TX 79701		9. API Well No. 30-025-44726 (97900)
3b. Phone No. (include area code) (432)683-7443		10. Field and Pool or Exploratory LEO HILL DCA / BONE SPRING
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SESW / 310 FSL / 2612 FWL / LAT 32.095107 / LONG -103.526161 At proposed prod. zone NENW / 200 FNL / 2310 FWL / LAT 32.108214 / LONG -103.527138		11. Sec., T. R. M. or Blk. and Survey or Area SEC 25 / T25S / R33E / NMP
14. Distance in miles and direction from nearest town or post office* 19 miles		12. County or Parish LEA
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 200 feet		13. State NM
16. No. of acres in lease 360		17. Spacing Unit dedicated to this well 160
18. Distance from proposed location* to nearest well, drilling, completed, 740 feet applied for, on this lease, ft.		20. BLM/BIA Bond No. on file FED: NMB000215
19. Proposed Depth 9585 feet / 14473 feet		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3338 feet
22. Approximate date work will start* 03/01/2018		23. Estimated duration 30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature (Electronic Submission)	Name (Printed/Typed) Mayte Reyes / Ph: (575)748-6945	Date 12/08/2017
Title Regulatory Analyst		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575)234-5959	Date 04/09/2018
Title Supervisor Multiple Resources		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

APPROVED WITH CONDITIONS
Approval Date: 04/09/2018

Requested GCP 04/10/18
Rek GCP 04/30/18

KZ
04/04/18

Double sided

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396, 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SESW / 310 FSL / 2612 FWL / TWSP: 25S / RANGE: 33E / SECTION: 25 / LAT: 32.095107 / LONG: -103.526161 (TVD: 0 feet, MD: 0 feet)
PPP: SENW / 2640 FNL / 2310 FWL / TWSP: 25S / RANGE: 33E / SECTION: 25 / LAT: 32.101508 / LONG: -103.527138 (TVD: 9606 feet, MD: 12000 feet)
PPP: SESW / 330 FSL / 2310 FWL / TWSP: 25S / RANGE: 33E / SECTION: 25 / LAT: 32.095162 / LONG: -103.527137 (TVD: 3000 feet, MD: 3000 feet)
BHL: NENW / 200 FNL / 2310 FWL / TWSP: 25S / RANGE: 33E / SECTION: 25 / LAT: 32.108214 / LONG: -103.527138 (TVD: 9585 feet, MD: 14473 feet)

BLM Point of Contact

Name: Sipra Dahal
Title: Legal Instruments Examiner
Phone: 5752345983
Email: sdahal@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

04/13/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Mayte Reyes

Signed on: 12/05/2017

Title: Regulatory Analyst

Street Address: 2208 W Main Street

City: Artesia

State: NM

Zip: 88210

Phone: (575)748-6945

Email address: Mreyes1@concho.com

Field Representative

Representative Name: Rand French

Street Address: 2208 West Main Street

City: Artesia

State: NM

Zip: 88210

Phone: (575)748-6940

Email address: rfrench@concho.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

04/13/2018

APD ID: 10400025058

Submission Date: 12/08/2017

Highlighted data
reflects the most
recent changes

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400025058

Tie to previous NOS?

Submission Date: 12/08/2017

BLM Office: CARLSBAD

User: Mayte Reyes

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM121958

Lease Acres: 360

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: COG OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: COG OPERATING LLC

Operator Address: 600 West Illinois Ave

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)683-7443

Operator Internet Address: RODOM@CONCHO.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WILDCAT

Pool Name: BONE SPRING

Is the proposed well in an area containing other mineral resources? USEABLE WATER,OIL

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Describe other minerals:

Is the proposed well in a Helium production area? N **Use Existing Well Pad?** NO **New surface disturbance?**

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: **Number:** 105H, 305H, 405H,
DOMINATOR 25 FEDERAL COM606H, 708H AND 707H

Well Class: HORIZONTAL

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 19 Miles

Distance to nearest well: 740 FT

Distance to lease line: 200 FT

Reservoir well spacing assigned acres Measurement: 160 Acres

Well plat: COG_Dominator_105H_C102_20171205084224.pdf

Well work start Date: 03/01/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	310	FSL	261 2	FWL	25S	33E	25	Aliquot SESW	32.09510 7	- 103.5261 61	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 121958	333 8	0	0
KOP Leg #1	310	FSL	261 2	FWL	25S	33E	25	Aliquot SESW	32.09510 7	- 103.5261 61	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 121958	333 8	0	0
PPP Leg #1	330	FSL	231 0	FWL	25S	33E	25	Aliquot SESW	32.09516 2	- 103.5271 37	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 121958	338	300 0	300 0

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	264 0	FNL	231 0	FWL	25S	33E	25	Aliquot SEnw	32.10150 8	- 103.5271 38	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 114987	- 626 8	120 00	960 6
EXIT Leg #1	330	FNL	231 0	FWL	25S	33E	25	Aliquot NENw	32.10785 7	- 103.5271 4	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 121958	- 624 8	144 00	958 6
BHL Leg #1	200	FNL	231 0	FWL	25S	33E	25	Aliquot NENw	32.10821 4	- 103.5271 38	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 121958	- 624 7	144 73	958 5



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/13/2018

APD ID: 10400025058

Submission Date: 12/08/2017

Highlighted data
reflects the most
recent changes

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	UNKNOWN	3338	0	0		NONE	No
2	RUSTLER	2254	1084	1084		NONE	No
3	TOP SALT	1914	1424	1424	SALT	NONE	No
4	BASE OF SALT	-1568	4906	4906	ANHYDRITE	NONE	No
5	LAMAR	-1828	5166	5166	LIMESTONE	NATURAL GAS,OIL	No
6	BELL CANYON	-1865	5203	5203		NONE	No
7	CHERRY CANYON	-2851	6189	6189		NATURAL GAS,OIL	No
8	BRUSHY CANYON	-4488	7826	7826		NATURAL GAS,OIL	No
9	BONE SPRING LIME	-5976	9314	9314	SANDSTONE	NATURAL GAS,OIL	No
10	UPPER AVALON SHALE	-6172	9510	9510	SHALE	NATURAL GAS,OIL	Yes
11	---	-6376	9714	9714		NATURAL GAS,OIL	No
12	---	-6614	9952	9952		NATURAL GAS,OIL	No
13	BONE SPRING 1ST	-7006	10344	10344		NATURAL GAS,OIL	No

Section 2 - Blowout Prevention

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Pressure Rating (PSI): 2M

Rating Depth: 5195

Equipment: Annular, Blind Ram, Pipe Ram. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Dominator_105H_2M_Choke_20171207145102.pdf

BOP Diagram Attachment:

COG_Dominator_105H_2M_BOP_20171207145109.pdf

COG_Dominator_105H_Flex_Hose_20171207145552.pdf

Pressure Rating (PSI): 3M

Rating Depth: 9585

Equipment: Annular, Blind Ram, Pipe Ram. Accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Dominator_105H_3M_Choke_20171207145615.pdf

BOP Diagram Attachment:

COG_Dominator_105H_3M_BOP_20171207145621.pdf

COG_Dominator_105H_Flex_Hose_20171207145629.pdf

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1100	0	1100	-8653	-9678	1100	J-55	54.5	STC	2.22	1.18	DRY	8.5	DRY	8.5
2	INTERMEDIATE	12.25	9.625	NEW	API	Y	0	5195	0	5195	-8653	-20153	5195	L-80	40	LTC	1.13	1.56	DRY	5.73	DRY	5.73
3	PRODUCTION	8.75	5.5	NEW	API	N	0	14473	0	14473	-8653	-21064	14473	P-110	17	LTC	1.61	2.89	DRY	2.73	DRY	2.73

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Dominator_105H_CasingRpt_20171207145735.pdf

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Casing Attachments

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

COG_Dominator_105H_CasingRpt_20171207145812.pdf

Casing Design Assumptions and Worksheet(s):

COG_Dominator_105H_CasingRpt_20171207145830.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Dominator_105H_CasingRpt_20171207145908.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1100	470	1.75	13.5	822	50	Lead: Class C	4% Gel + 1% CaCl2
SURFACE	Tail		0	1100	250	1.34	14.8	335	50	Tail: Class C	2% CaCl2
INTERMEDIATE	Lead		0	5195	1000	2	12.7	2000	50	Lead: 35:65:6 C Blend	As needed
INTERMEDIATE	Tail		0	5195	250	1.34	14.8	335	50	Tail: Class C	2% CaCl
PRODUCTION	Lead		0	1447 3	610	2.5	11.9	1525	25	Lead: 50:50:10 H Blend	As needed

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		0	1447 3	1370	1.24	14.4	1698	25	Tail: 50:50:2 Class H Blend	As needed

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
5195	1447 3	OTHER : Cut Brine	8.6	9.3							Cut Brine
0	1100	OTHER : FW Gel	8.6	8.8							FW Gel
1100	5195	OTHER : Saturated Brine	10	10.1							Saturated Brine

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

CNL,GR

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4640

Anticipated Surface Pressure: 2526.67

Anticipated Bottom Hole Temperature(F): 155

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

COG_Dominator_105H_H2S_Schem_20171207150131.pdf

COG_Dominator_105H_H2S_SUP_20171207150145.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

COG_Dominator_105H_AC_Rpt_20171207150214.PDF

COG_Dominator_105H_DirectRpt_20171207150221.pdf

Other proposed operations facets description:

Drilling Program Attached


Other proposed operations facets attachment:

COG_Dominator_105H_DrillRpt_20171207150229.pdf

Other Variance attachment:


W

CLOSED LOOP)

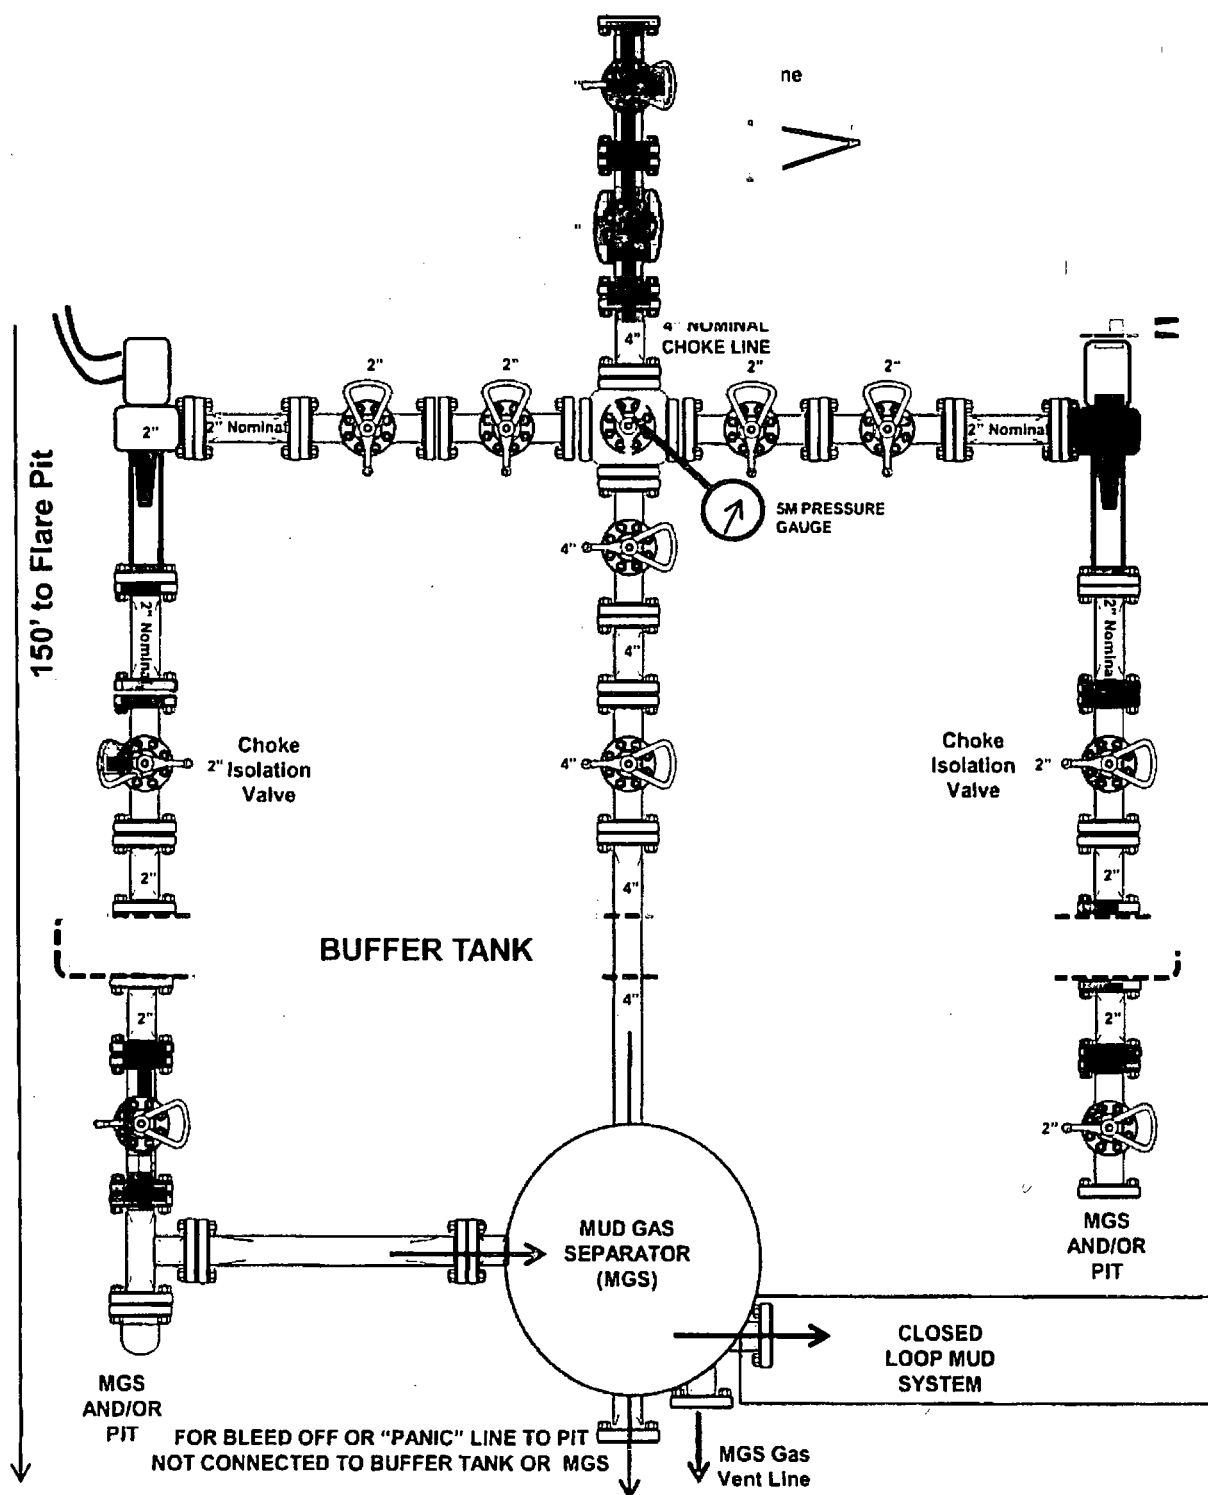


W


CLOSED LOOP)

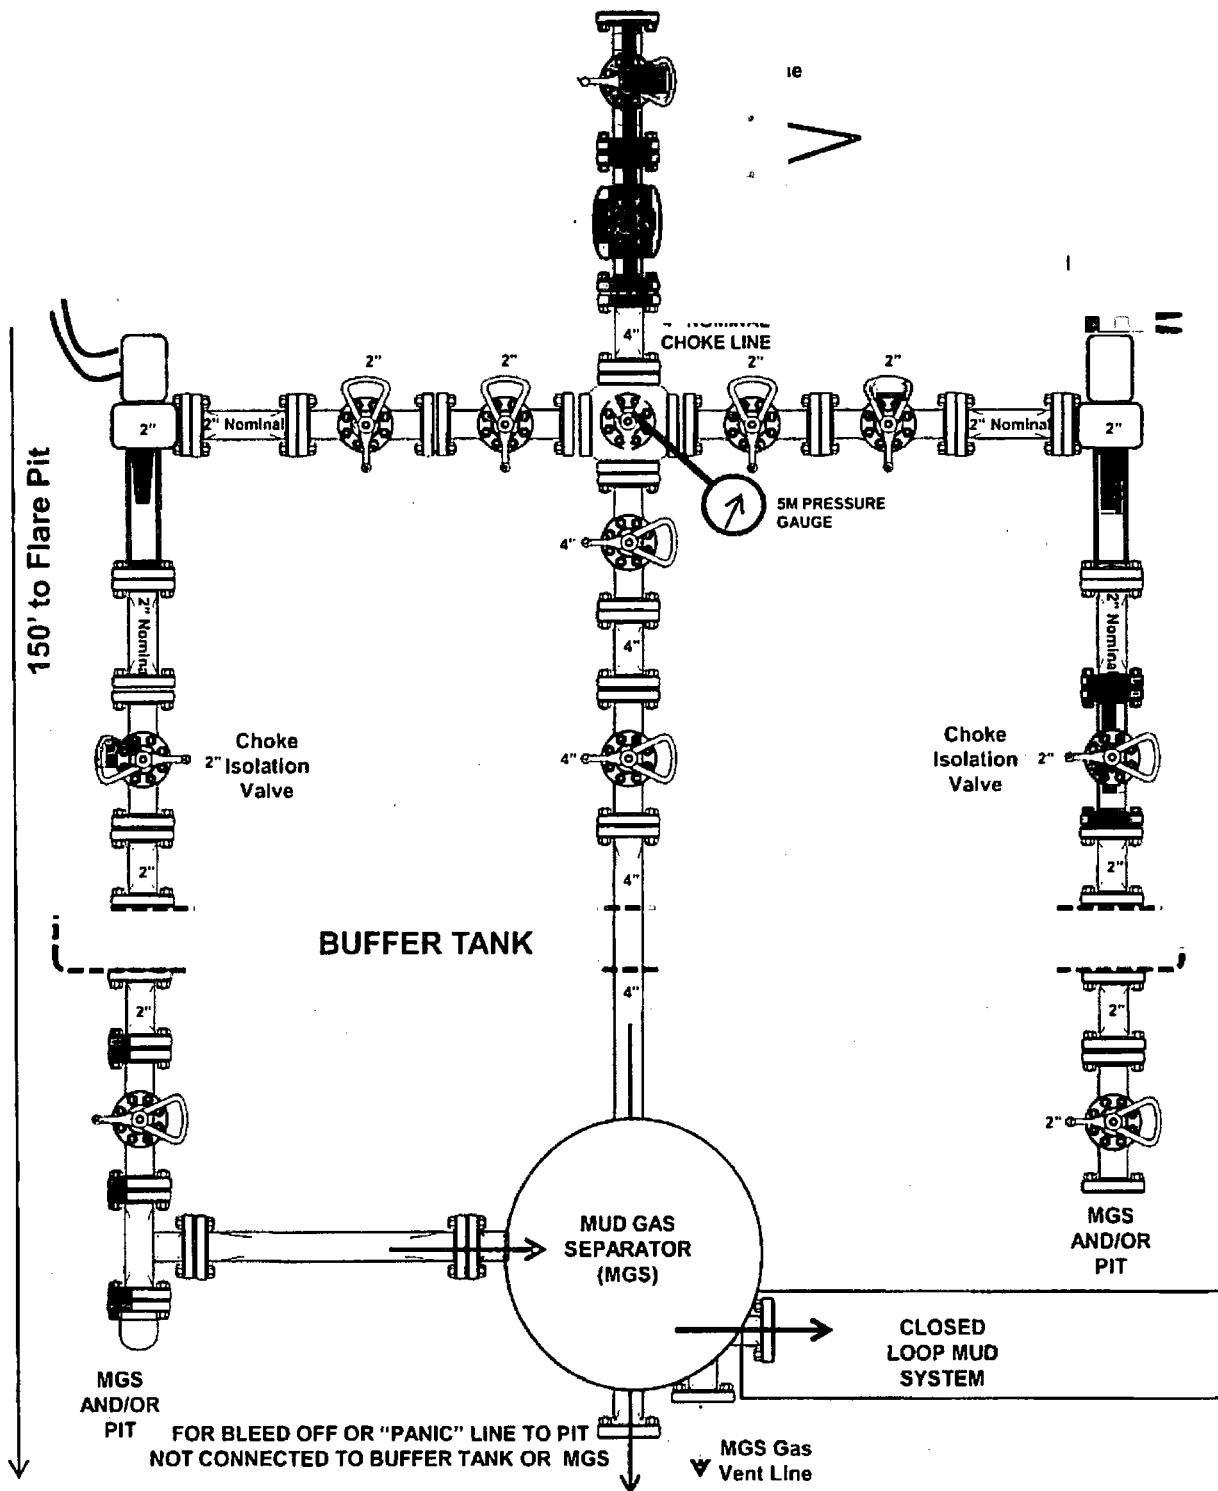


CLOSED LOOP)

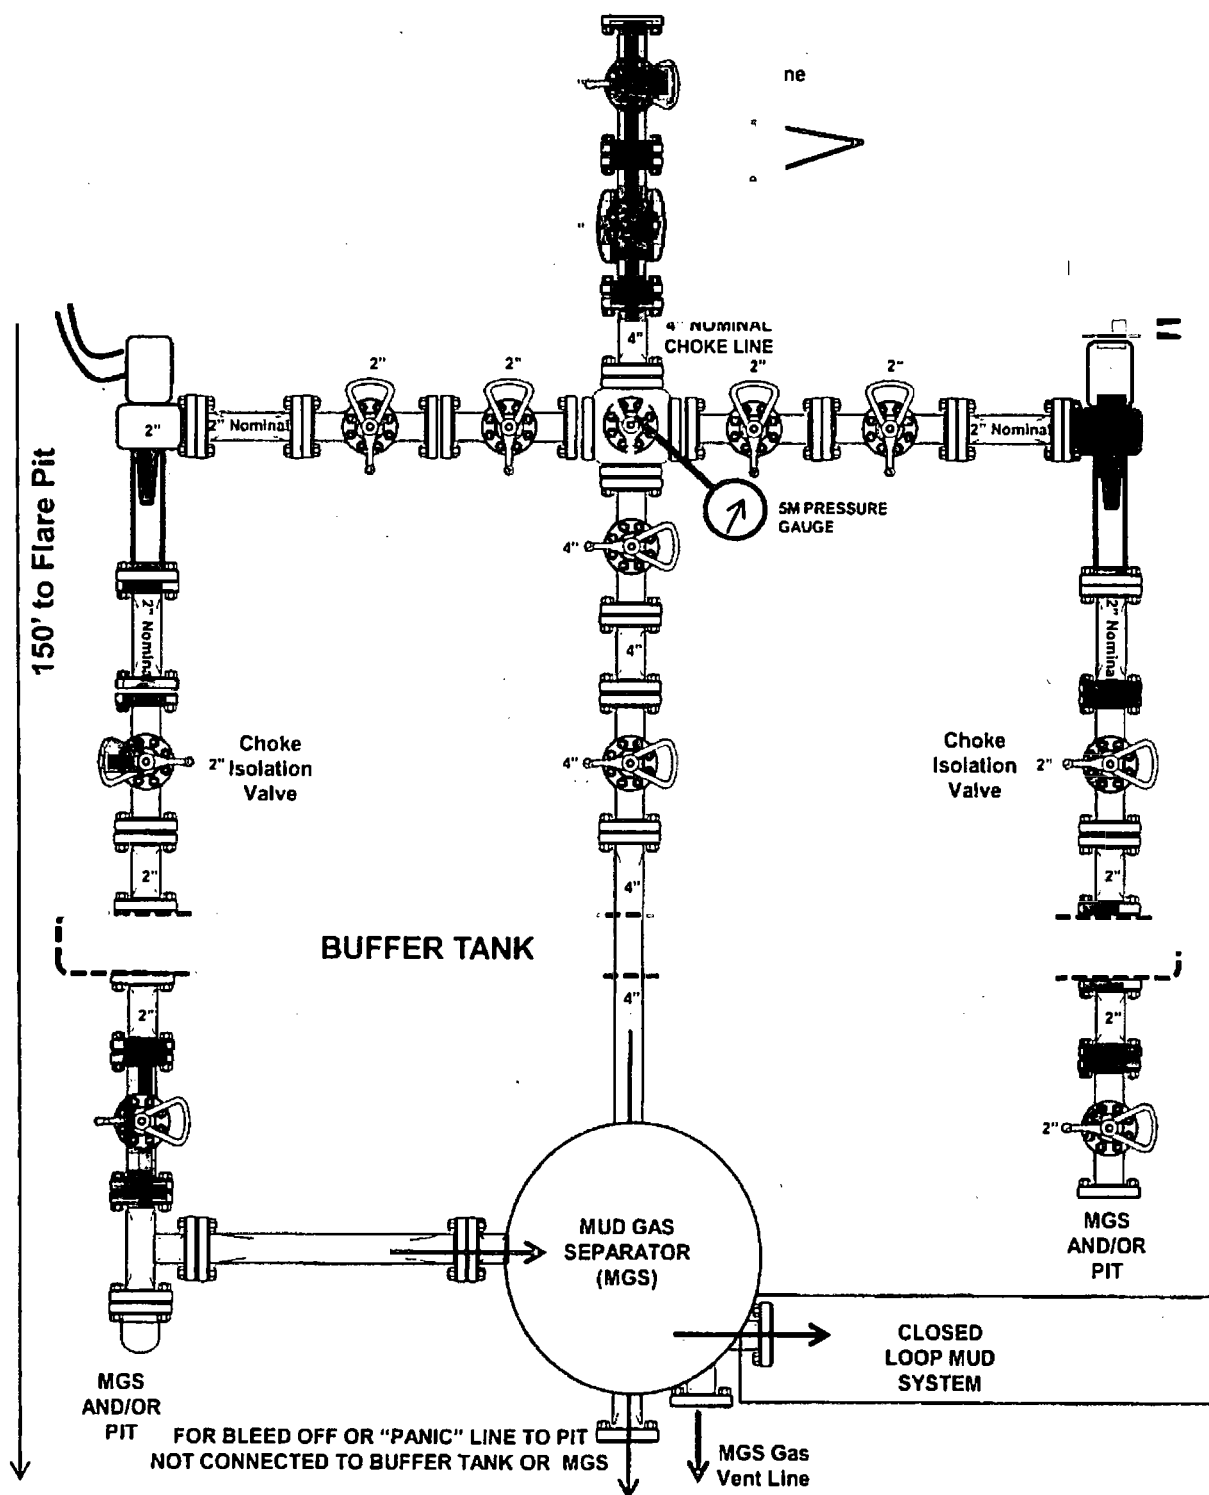


CLOSED LOOP)

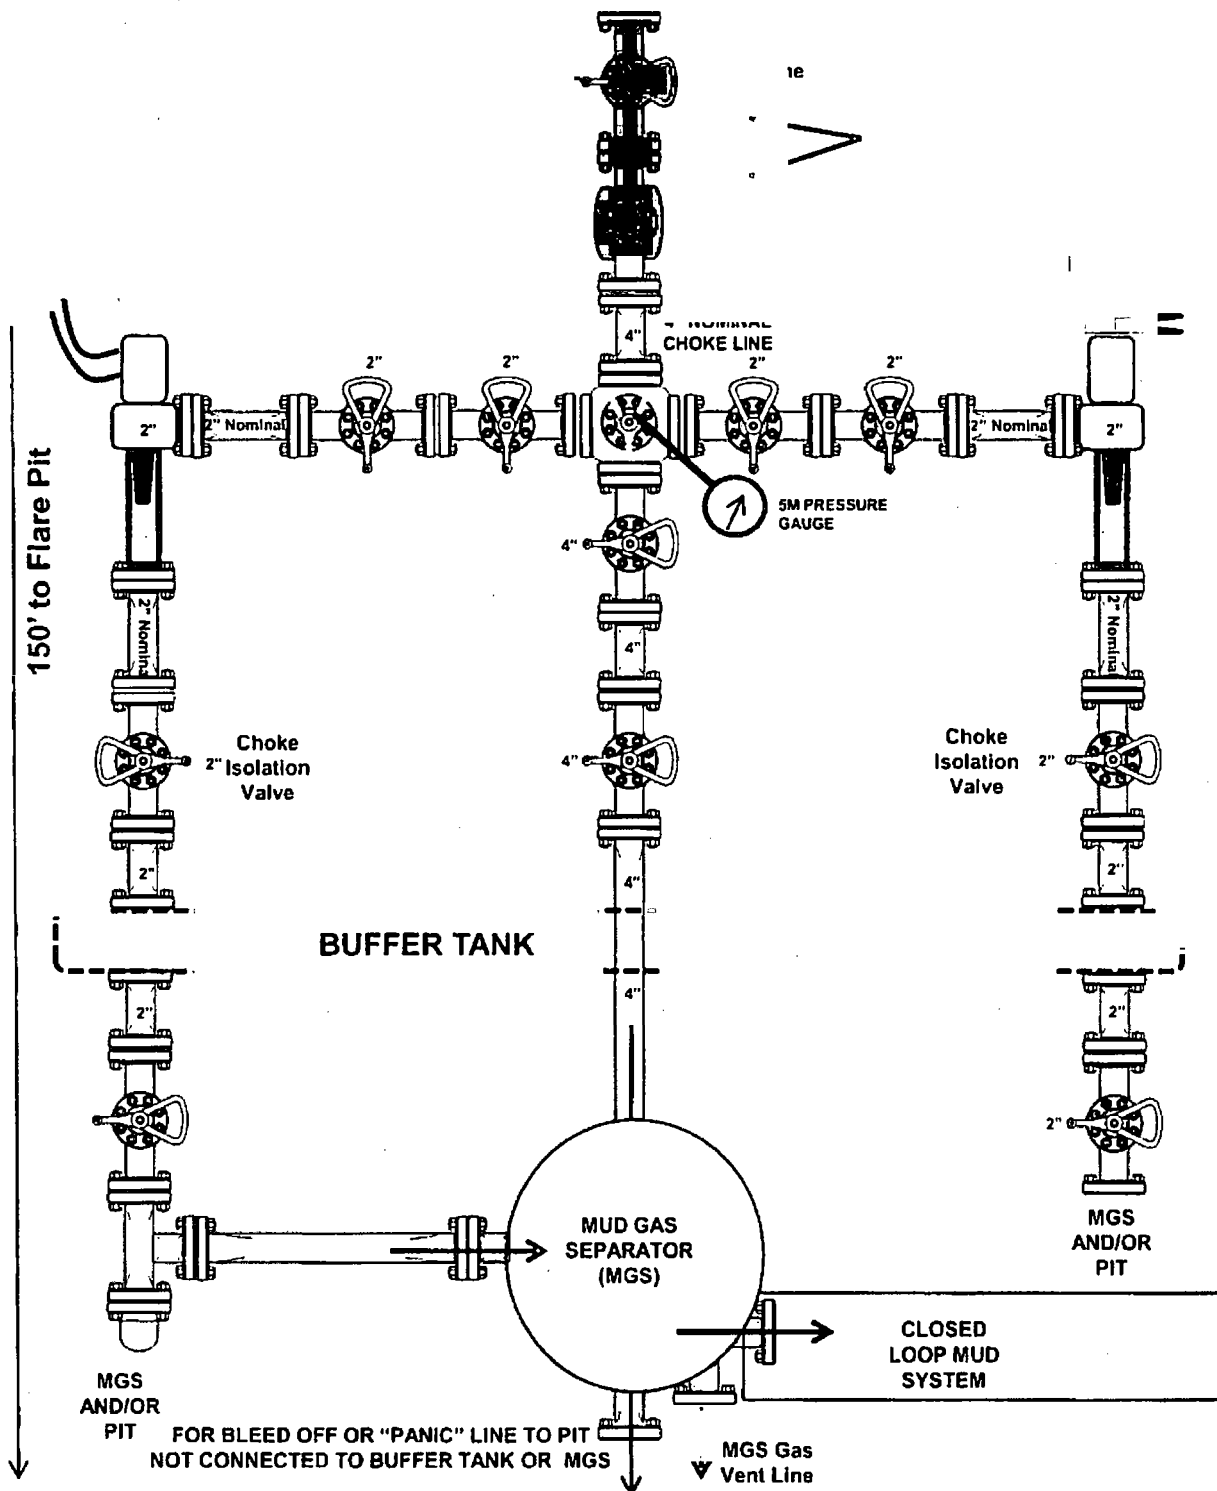


3,000 psi BOP Schematic

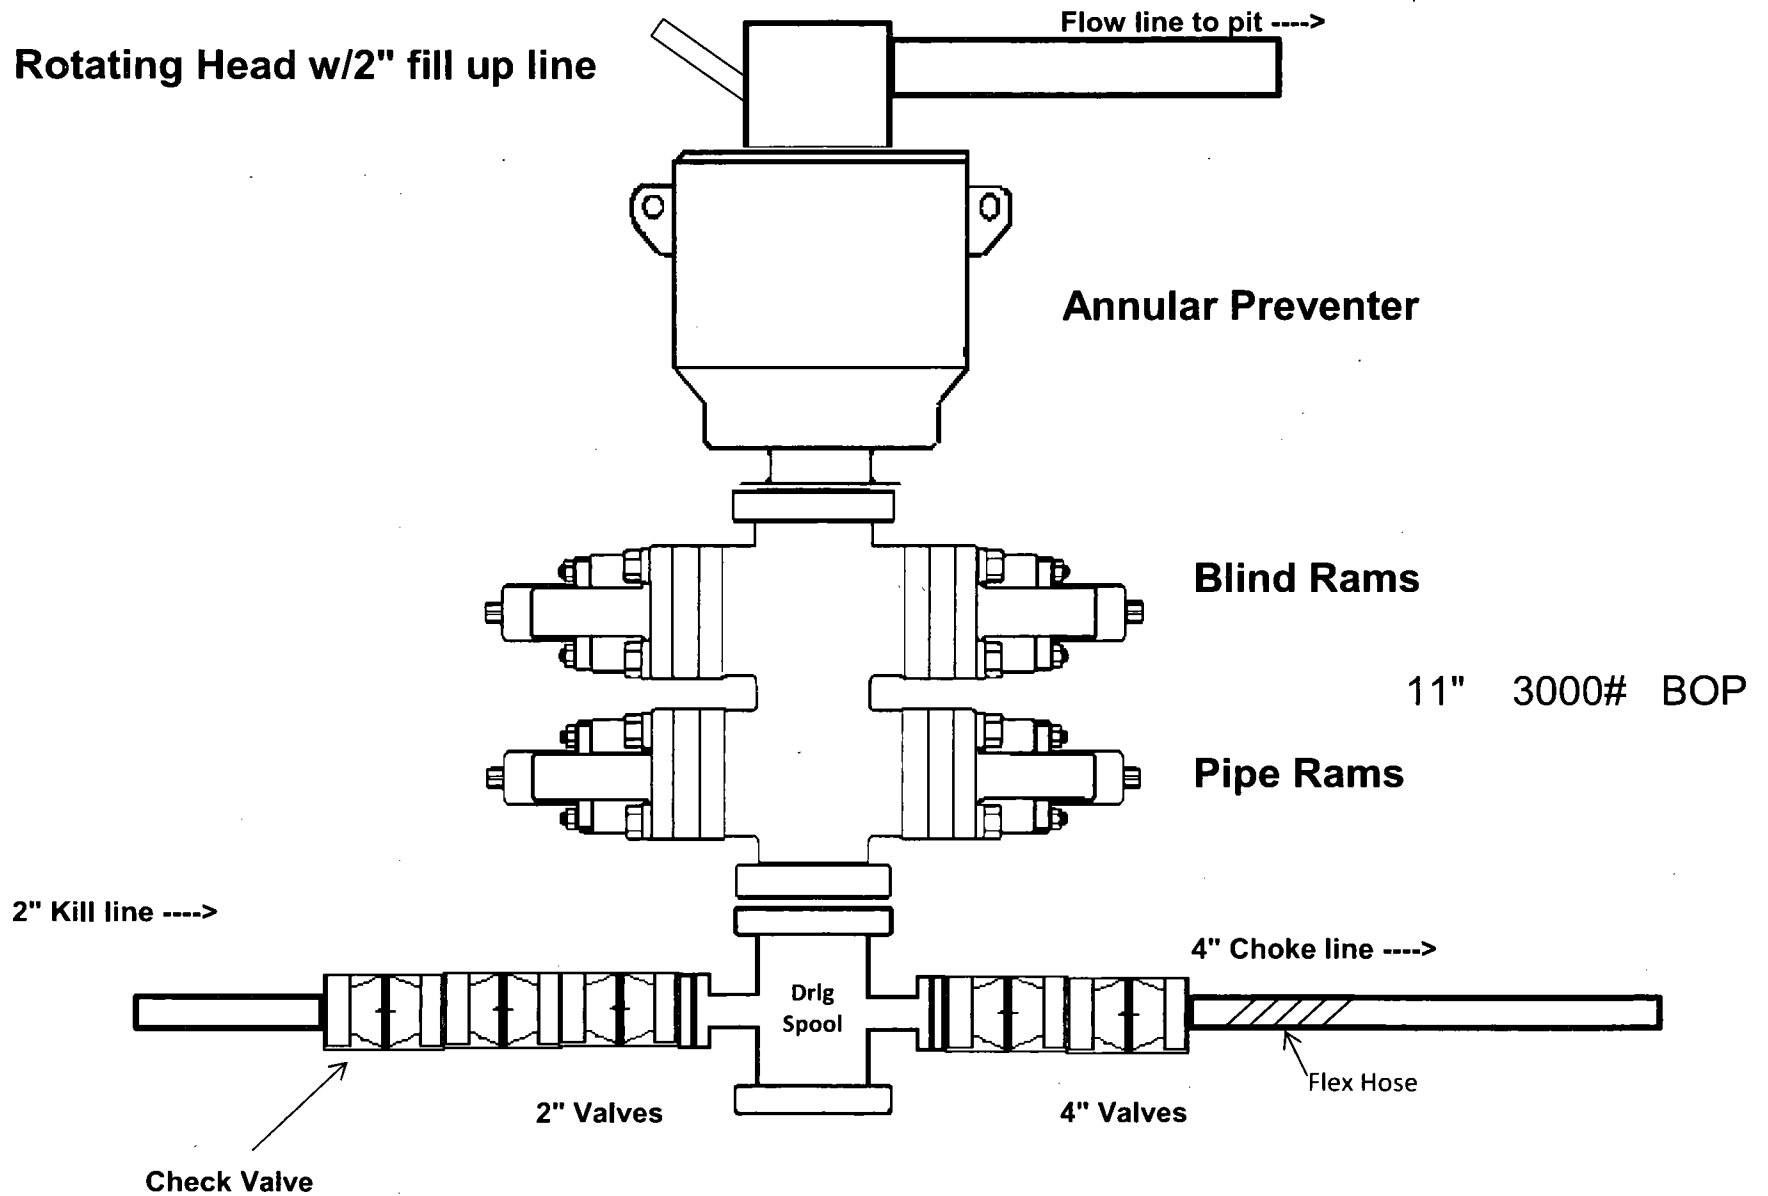

5,000 psi BOP Schematic

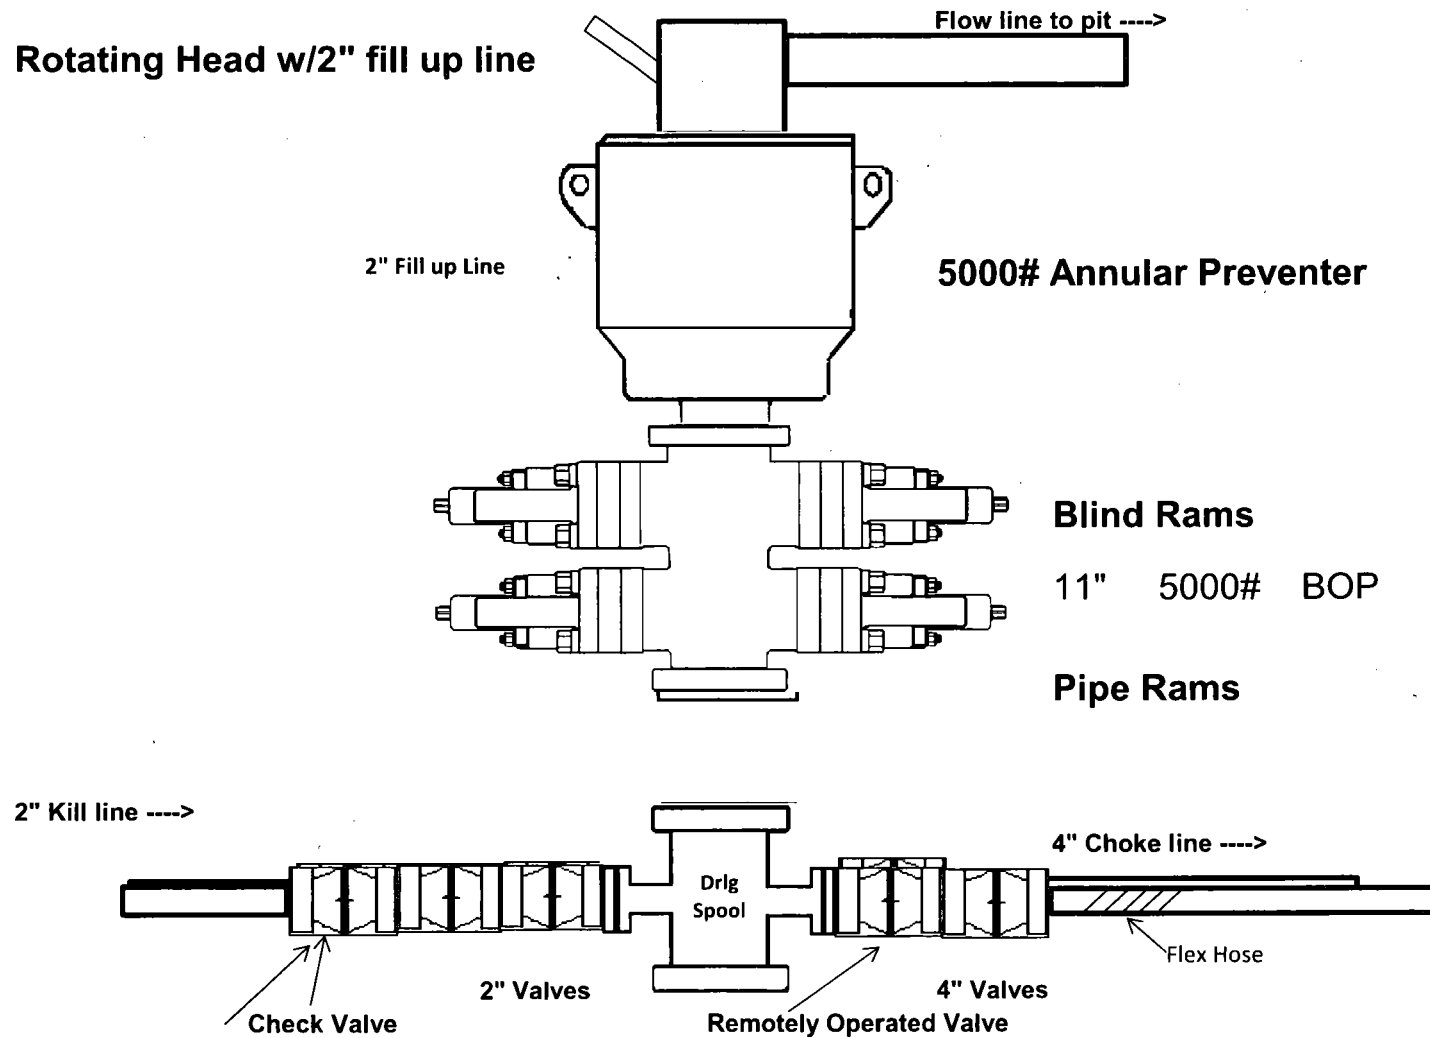

3,000 psi BOP Schematic

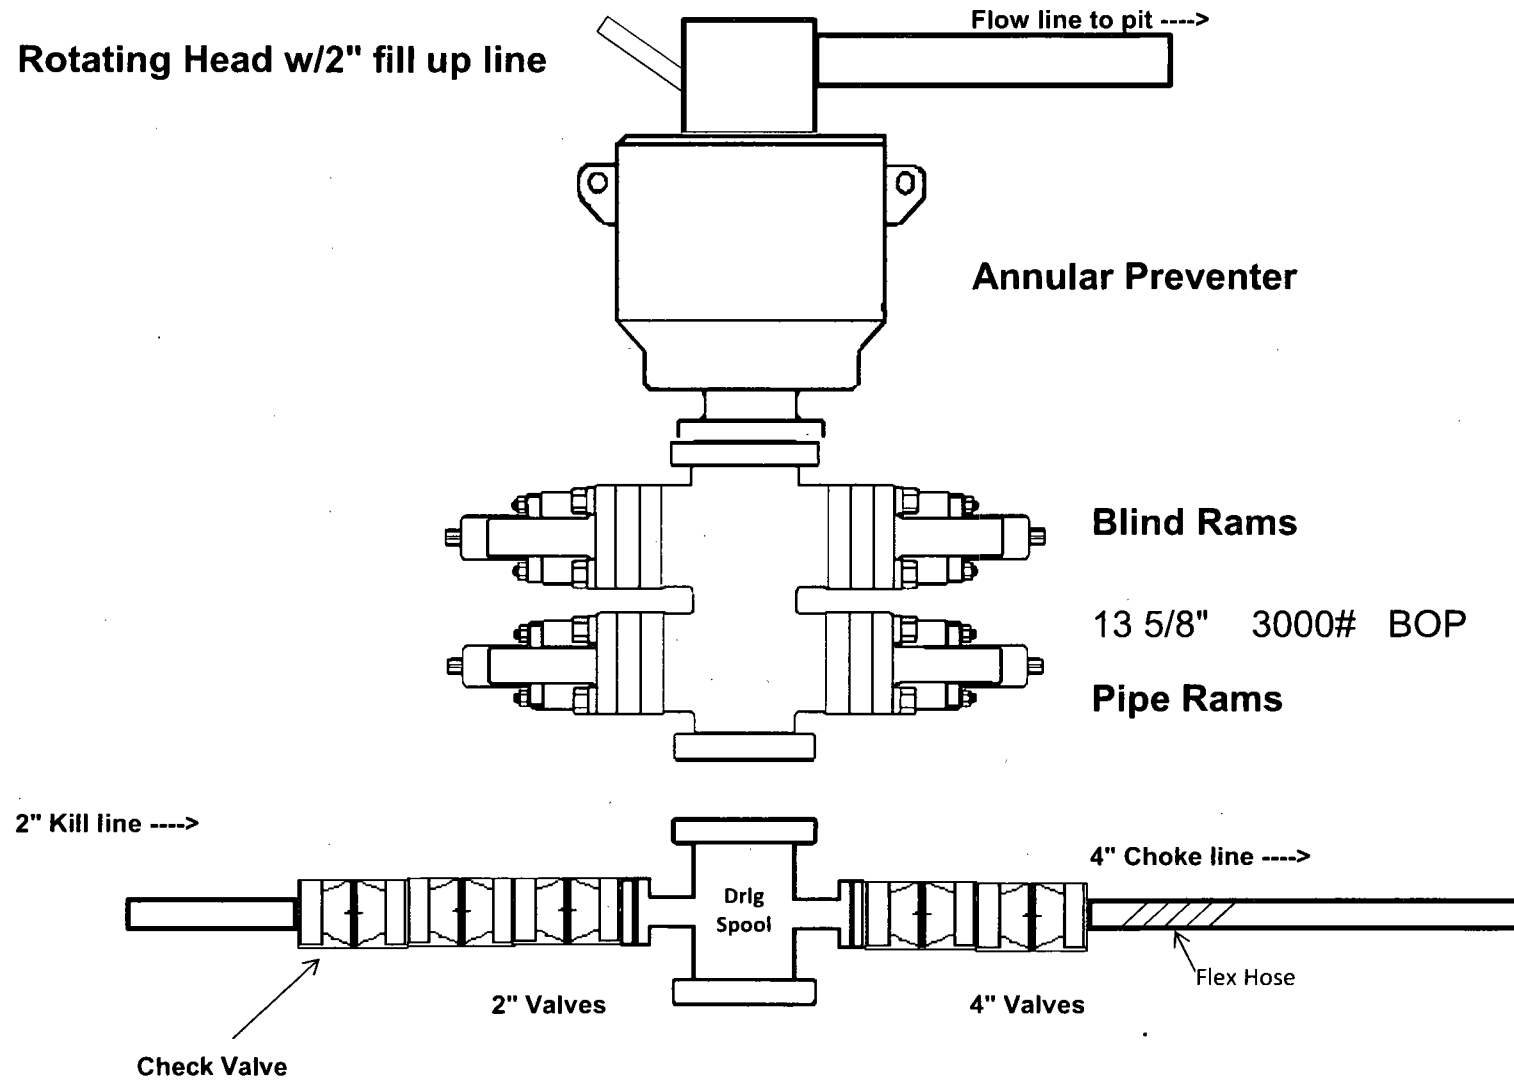



ContiTech

QUALITY CONTROL	No.: QC-DB- 351 / 2016
	Page : 1 / 88
Hose No.: 72879	Revision : 0
	Date: 05. September 2016.
	Prepared by : <i>Robert Kozlov</i>
	Appr. by: <i>SSG</i>

CHOKE AND KILL HOSE

id.: 3" 69 MPa x 13,72 m (45 ft)

DATA BOOK

Purchaser: SCANDRILL

Purchaser Order No.: 143799

ContiTech Rubber Order No.: 543951

ContiTech Oil & Marine Corp. Order No.:
4500795683 COM880841

NOT DESIGNED FOR WELL TESTING



ContiTech

CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016

Page: 5 / 88

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1050	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500795683	
CONTITECH RUBBER order N°: 543951		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 72879		NOMINAL / ACTUAL LENGTH: 13,72 m / 13,80 m			
W.P. 69,0 MPa 10000 psi		T.P. 103,5 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature					
See attachment (1 page)					
COUPLINGS Type		Serial N°	Quality	Heat N°	
3" coupling with 3 1/16" 10K API Swivel Flange end Hub		2587	AISI 4130	J5251	
			AISI 4130	036809	
			AISI 4130	J6433	
3" coupling with 3 1/16" 10K API b.w. Flange end		2584	AISI 4130	J5251	
			AISI 4130	62580	
Not Designed For Well Testing				API Spec 16 C 2 nd Edition- FSL2	
Temperature rate:"B"					
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date: 30. August 2016.		Inspector		Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. <i>Robert Nikolic</i> <i>Yves</i>	

ATTACHMENT OF QUALITY CONTROL
INSPECTION AND TEST CERTIFICATE
No: 1050

CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016

Page: 6 / 88


1/1

File Name : 014986_72879.GEV014986_72879.GEV
File Message : 72879
Device Type : GX10
Serial No. : SSP606399
Data Count : 1302
Print Group : Press-Tamp
Print Range : 2016/08/29 21:12:25.000 - 2016/08/29 23:00:50.000
Comment : 142056635

Sampling Int. : 5.000 sec
Start Time : 2016/08/29 21:12:25.000
Stop Time : 2016/08/29 23:00:50.000

Data No.	Cursor A	Cursor B	Difference
509	2016/08/29 21:54:50.000	2016/08/29 22:54:50.000	01:00:00.000
Absolute Time	Value A	Value B	Value B-A
Tag Comment	1068.16	1054.43	-13.73
Pressure[bar]	26.17	25.88	-0.29
Ambient Temperature[°C]			

Handwritten Signature
ContiTech Rubber
Industrial Kft.
Quality Control Dept.
(3)

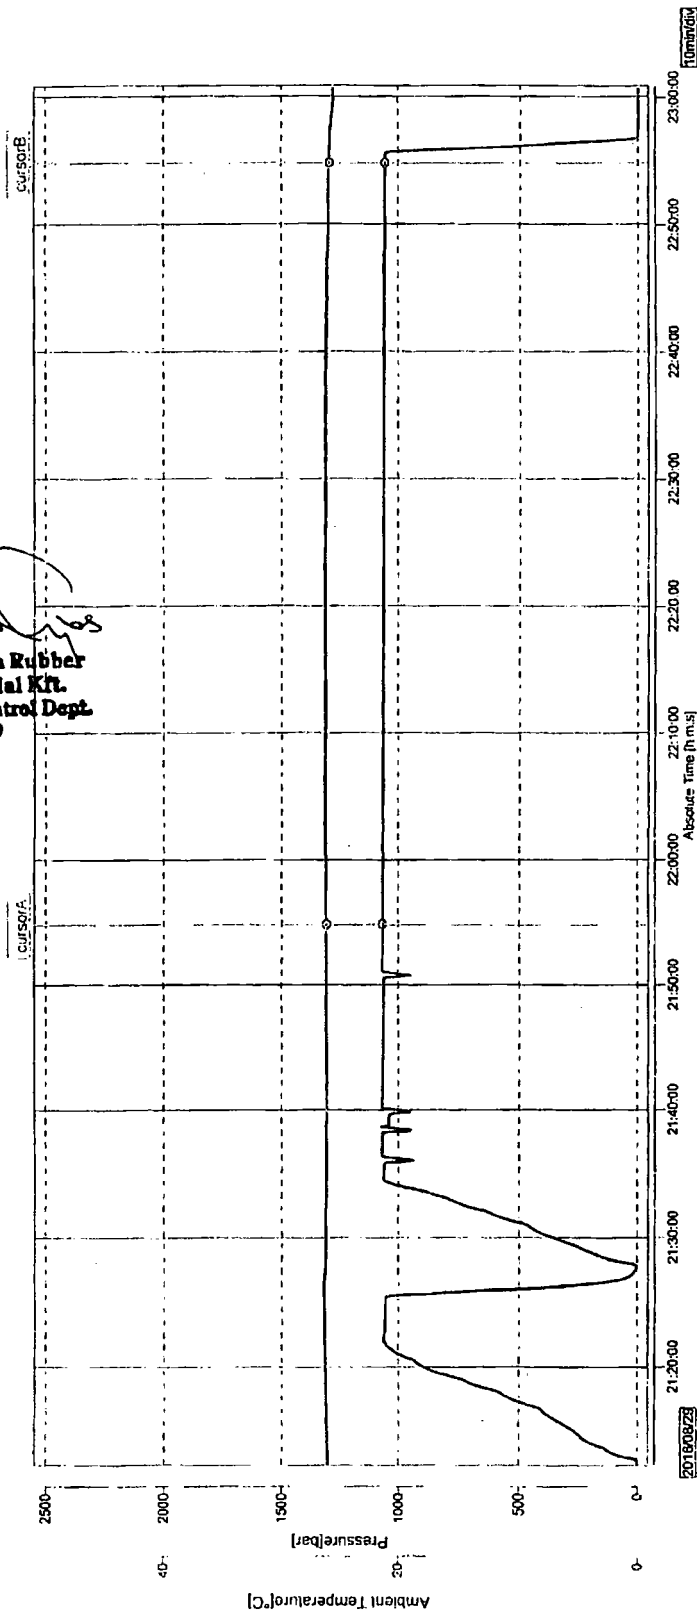



CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016

Page: 7 / 88

ContiTech

Hose Data Sheet

CRI Order No.	543951
Customer	ContiTech Oil & Marine Corp.
Customer Order No	4500795683 COM880841
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16C 2ND EDITION FSL2
Inside dia in inches	3
Length	45 ft
Type of coupling one end	FLANGE 3.1/16" 10K API SPEC 6A TYPE 6BX, BUTT WELDED, BX154ST.ST. LINED R.GR. SOUR
Type of coupling other end	FLANGE 3.1/16" 10K API SPEC 17D SV SWIVEL FLANGE, BX154 ST.ST. LINED R.GR. SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	CONTINENTAL CONTITECH
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	Yes
Lifting collar	Yes
Element C	Yes
Safety chain	Yes
Safety wire rope	No
Max.design temperature [°C]	100
Min.design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Sándor Szabo
ContiTech Rubber
Industrial Kft.
QC2



ContiTech Fluid Technology

ContiTech Oil & Marine Corp, # 11535 Brillmoore Park Dr., Houston, TX 77041-6916 USA		Delivery Note	
ScanDrill Inc. 9395 HWY 2767 TYLER TX 75708		Document No.	83352143
		Document Date	10/05/2016
		Customer Number	15483
		Customer VAT No.	
		Supplier Number	
		N° EORI:	FR41027953300021
		Purchase Order No.	143799
		Purchase Order Date	07/01/2016
		Sales Order Number	880841
		Sales Order Date	07/05/2016
		Unloading Point	
Transport-Details - Shipping		Page 1 of 3	
Conditions		Weights (Gross / Net)	
Shipping Conditions	0 days	Total Weight	2,323 LB
Inco Terms	EXW Houston, TX	Net Weight	1,643 LB
	Ex Works		
 <i>Buyer: Joe Ward</i> <i>E-mail: jward@scandrill.com</i> <i>Tel: 903.597.5368</i> <i>Payment Terms:</i> <i>50% Due at order Placement</i> <i>50% Due Prior to Dispatch</i> <i>Rev 01 - 092116 - Sales Tax added to the order.</i>			
Item	Material/Description	Quantity	Weight
10	HCK3FA45IPSIVS 3" x 45ft, Choke and Kill Hose, WP 10K End A: 3.1/16" 10K Flange, API Spec. 6A Type 6BX, Butt Welded, BX154 Stainless Steel 316 Lined Ring Groove - Sour End B: 3.1/16" 10K Flange, API Spec 17D SV Swivel Flange, BX154 Stainless Steel 316 Lined Ring Groove - Sour Standard: API SPEC 16C 2ND EDITION FSL2 - Monogrammed Working Pressure: 10000 psi Test Pressure: 15000 psi Fire Rated: No Armoured: Yes - Stainless Steel 316L Interlock Design Temperature: -20 to 100°C High Temperature Exposure / Survival @ 177 Deg C (internal in a kick situation) As Per API 16C B.12.5!	1 PC	1,643 LB

ContiTech Oil & Marine Corp.
11535 Brillmoore Park Drive
Houston, TX 77041
USA

Phone: (832)-327-0141
Fax: (832)-327-0148
www.contitech-oil-gas.com
sales@fluid.contitech.us

Managing Director
(President)
Zuzana Czovek

Bank: JPMorgan Chase,
707 Travis St, 9 Floor N, Houston, TX 77002
Account: 08100044552
ABA/Routing: 021000021, ACH: 111000614






ContiTech Fluid Technology

Conditions Shipping Conditions 0 days Inco Terms EXW Houston, TX Ex Works		Delivery Note Document No. 83352143 Document Date 10/05/2016 Page 2 of 3	
<p>Brand Name: Continental ContiTech</p> <p>serial no:72879</p> <p>Supplied with: 2 x Safety Clamps 2 x Lifting Collars Double Eyed 2 x Safety Chains c/w Shackles Each End x 8ft</p> <p>Packing to ISPM-15 Heat Treated Packing type: Wooden Crate, Gross weight: 1056 kg / 2323 lbs Dimensions: 2870 x 640 x 2800 mm (L x W x H) 113 x 25.2 x 110.2 inch To be handled/shipped in a vertical position</p> <p>HTS# 4009.42.0050 ECCN: EAR99 COO: Hungary</p> <p>20 00TAX-SALES 1 PC 0 LB SALES TAX %8.25</p> <p>Buyer: Joe Ward E-mail: jward@scandrill.com Tel: 903.597.5368</p> <p>Payment Terms: 50% Due at order Placement 50% Due Prior to Dispatch</p> <p>Rev 01 - 092116 - Sales Tax added to the order.</p> <p>Order/Item 880841/20 07/05/2016 Customer's PO no./item 143799</p>			
Inner packages			




ContiTech Fluid Technology

Conditions		Delivery Note	
Shipping Conditions	0 days	Document No.	83352143
Inco Terms	EXW Houston, TX	Document Date	10/05/2016
	Ex Works	Page 3 of 3	
Quantity Packaging		Material	Charge
1	113 X 25.2 X 110.2 INCH -Wooden crate	HCK3FA45IPSIVS	1
Package number	118448718		

(1) Ship-to party ScanDrill Inc. 9395 HWY 2767 TYLER TX 75708		(2) Unloading point - storage location - usage	
(3) Delivery note no. 83352143 		(4) Vendor address (short name, plant, ZIP, city) ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston TX 77041-6916	
(8) Supplier ref. no.			
(9) Quantity		(5) Net weight 1,643 LB	(6) Gross weight 2,323 LB
<i>SN: 72879</i> (12) ContiTech Sales order no.		(7) Number of packages 1	
		(10) Description of delivery, service	
		(13) Packing date 10/07/16	(14) Engineering change status
(15) Package no. 118448718 		(16) Customer PO no. 143799 	

Material label VDA 4902 Vers. 4

2,000 psi BOP Schematic

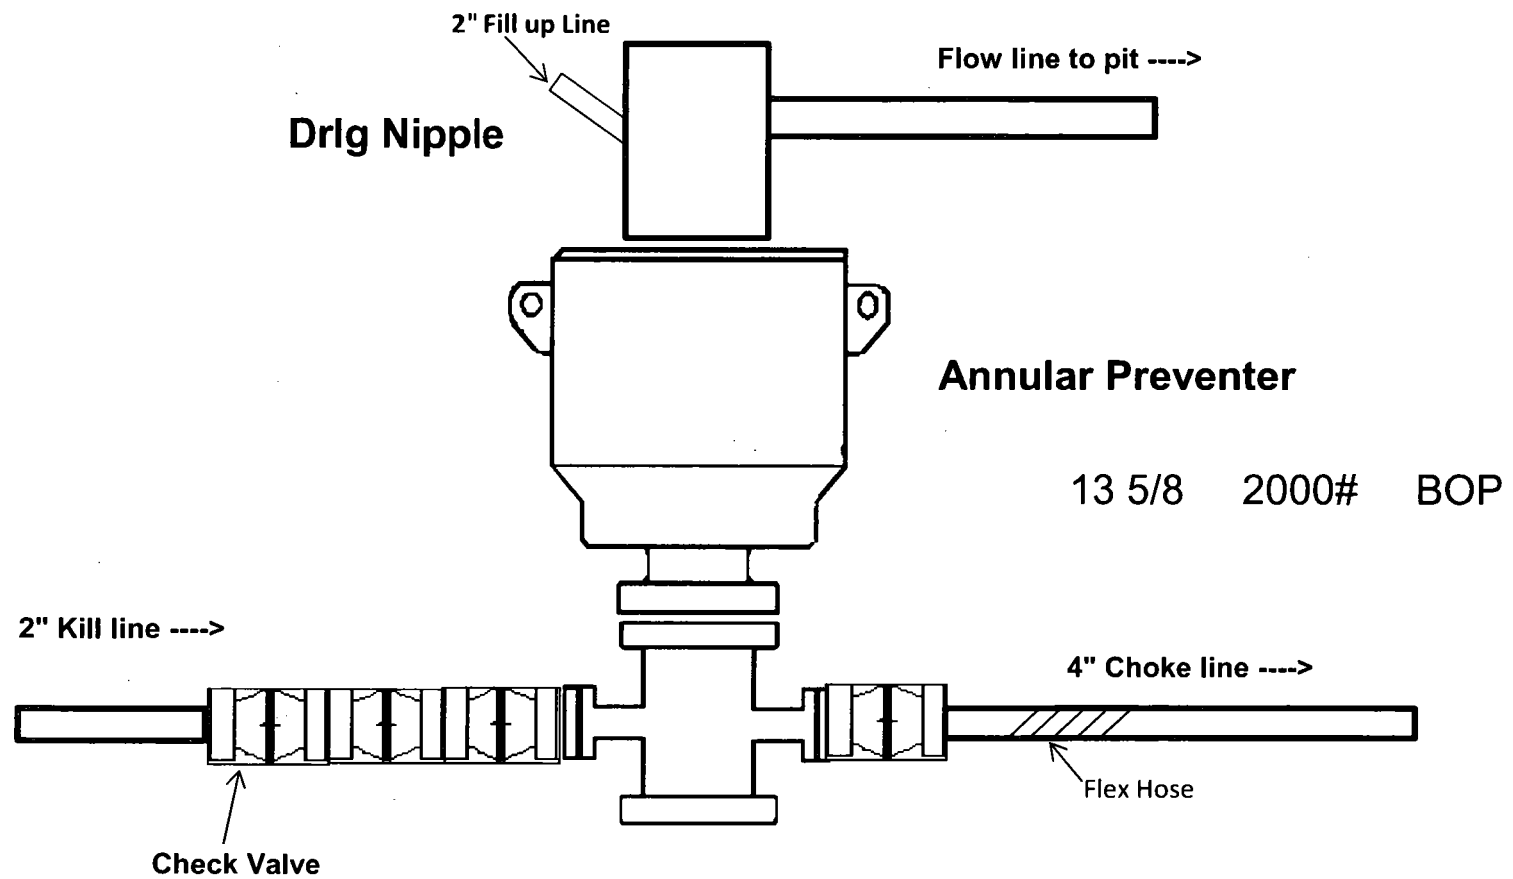



ContiTech

QUALITY CONTROL	No.: QC-DB- 351 / 2016
	Page : 1 / 88
Hose No.: 72879	Revision : 0
	Date: 05. September 2016.
	Prepared by : <i>Robert Koczka</i>
	Appr. by: <i>SSG</i>

CHOKE AND KILL HOSE

id.: 3" 69 MPa x 13,72 m (45 ft)

DATA BOOK

Purchaser: SCANDRILL

Purchaser Order No.: 143799

ContiTech Rubber Order No.: 543951

ContiTech Oil & Marine Corp. Order No.:
4500795683 COM880841

NOT DESIGNED FOR WELL TESTING



ContiTech

CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016
Page: 5 / 88

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1050	
PURCHASER: ContiTech Oil & Marine Corp.			P.O. N°: 4500795683		
CONTITECH RUBBER order N°: 543951		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 72879		NOMINAL / ACTUAL LENGTH: 13,72 m / 13,80 m			
W.P. 69,0 MPa 10000 psi		T.P. 103,5 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature					
See attachment (1 page)					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		2587		AISI 4130	
3 1/16" 10K API Swivel Flange end				AISI 4130	
Hub				AISI 4130	
3" coupling with		2584		AISI 4130	
3 1/16" 10K API b.w. Flange end				AISI 4130	
Not Designed For Well Testing					
API Spec 16 C 2 nd Edition- FSL2					
Temperature rate:"B"					
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
30. August 2016.				ContiTech Rubber Industrial Kft. Quality Control Dept. <i>Prokurátor</i> <i>Yves Cigas</i>	

ATTACHMENT OF QUALITY CONTROL
INSPECTION AND TEST CERTIFICATE
No: 1050

CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016

Page: 6 / 88


1/1

File Name : 014986_72879.GEV,...014996_72879.GEV
File Message : 72879
Device Type : GX10
Serial No. : SSP606399
Data Count : 1302
Print Group : Press-Temp
Print Range : 2016/08/29 21:12:25.000 - 2016/08/29 23:00:50.000
Comment : 142056635

Sampling Int. : 5.000 sec
Start Time : 2016/08/29 21:12:25.000
Stop Time : 2016/08/29 23:00:50.000

Data No.	Cursor A	Cursor B	Difference
509	2016/08/29 21:12:25.000	2016/08/29 22:54:50.000	01:30:00.000
Absolute Time	2016/08/29 21:12:25.000	2016/08/29 22:54:50.000	01:30:00.000
Tag Comment	Value A	Value B	Value B-A
Pressure[bar]	1088.16	1054.43	-13.73
Ambient Temperature[°C]	26.17	25.88	-0.29

[Signature]
ContiTech Rubber
Industrial Kft.
Quality Control Dept.
(1)

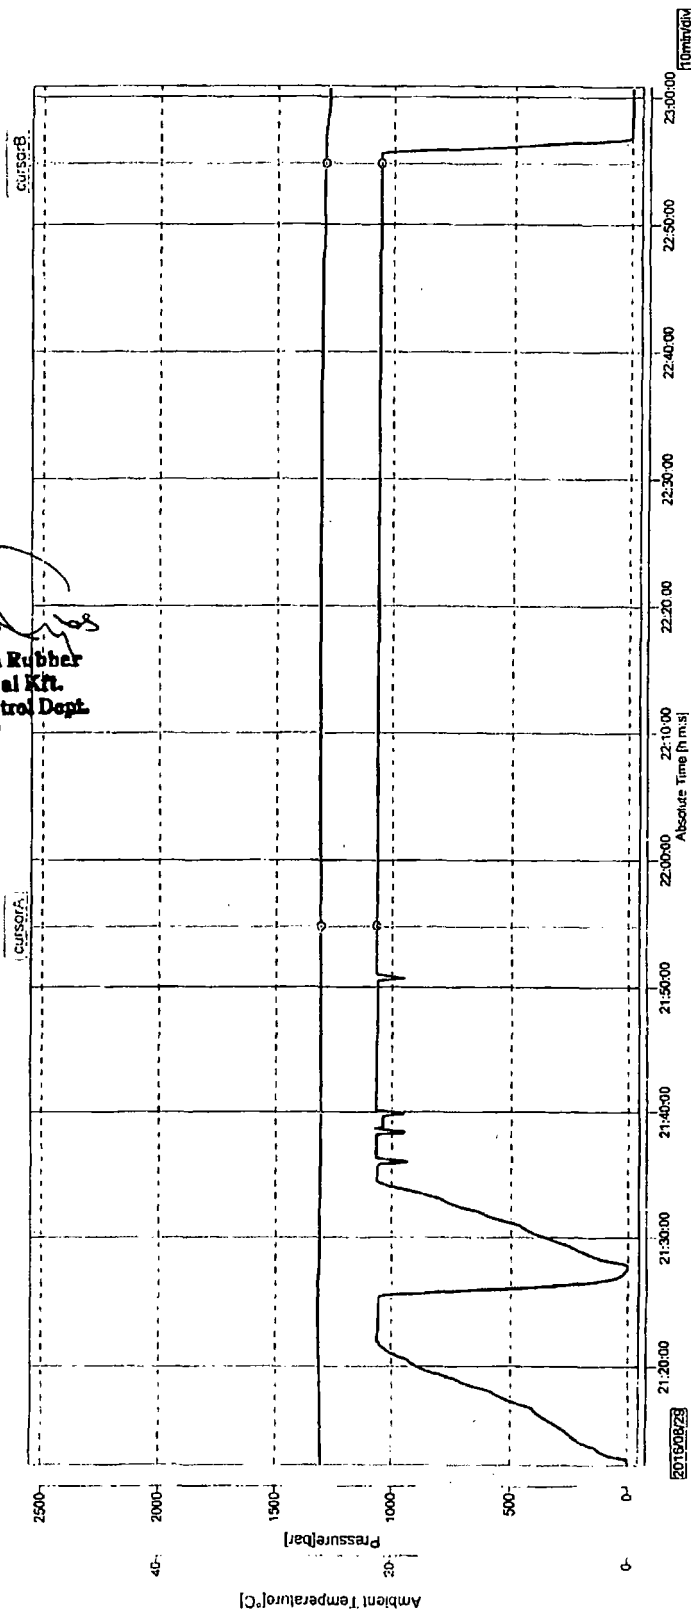



CONTITECH RUBBER
Industrial Kft.

No: QC-DB- 351 / 2016

Page: 7 / 88

ContiTech

Hose Data Sheet

CRI Order No.	543951
Customer	ContiTech Oil & Marine Corp.
Customer Order No	4500795683 COM880841
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16C 2ND EDITION FSL2
Inside dia in inches	3
Length	45 ft
Type of coupling one end	FLANGE 3.1/16" 10K API SPEC 6A TYPE 6BX, BUTT WELDED, BX154ST.ST. LINED R.GR. SOUR
Type of coupling other end	FLANGE 3.1/16" 10K API SPEC 17D SV SWIVEL FLANGE, BX154 ST.ST. LINED R.GR. SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	CONTINENTAL CONTITECH
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	Yes
Lifting collar	Yes
Element C	Yes
Safety chain	Yes
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Solo Sados
ContiTech Rubber
Industrial Kft.
QC2



ContiTech Fluid Technology

ContiTech Oil & Marine Corp. # 11535 Brittmoores Park Dr., Houston, TX 77041-6916 USA		Delivery Note	
ScanDrill Inc. 9395 HWY 2767 TYLER TX 75708		Document No.	83352143
		Document Date	10/05/2016
		Customer Number	15483
		Customer VAT No.	
		Supplier Number	
		N° EORI:	FR41027953300021
		Purchase Order No.	143799
		Purchase Order Date	07/01/2016
		Sales Order Number	880841
		Sales Order Date	07/05/2016
		Unloading Point	
Transport-Details - Shipping		Page 1 of 3	
Conditions		Weights (Gross / Net)	
Shipping Conditions	0 days	Total Weight	2,323 LB
Inco Terms	EXW Houston, TX	Net Weight	1,643 LB
	Ex Works		
 <i>Buyer: Joe Ward</i> <i>E-mail: jward@scandrift.com</i> <i>Tel: 903.597.5368</i> <i>Payment Terms:</i> <i>50% Due at order Placement</i> <i>50% Due Prior to Dispatch</i> <i>Rev 01 - 092116 - Sales Tax added to the order.</i>			
Item	Material/Description	Quantity	Weight
10	HCK3FA45IPSIVS 3" x 45ft, Choke and Kill Hose, WP 10K End A: 3.1/16" 10K Flange, API Spec. 6A Type 6BX, Butt Welded, BX154 Stainless Steel 316 Lined Ring Groove - Sour End B: 3.1/16" 10K Flange, API Spec 17D SV Swivel Flange, BX154 Stainless Steel 316 Lined Ring Groove - Sour Standard: API SPEC 16C 2ND EDITION FSL2 - Monogrammed Working Pressure: 10000 psi Test Pressure: 15000 psi Fire Rated: No Armoured: Yes - Stainless Steel 316L Interlock Design Temperature: -20 to 100°C High Temperature Exposure / Survival @ 177 Deg C (internal in a kick situation) As Per API 16C B.12.5!	1 PC	1,643 LB

ContiTech Oil & Marine Corp.
11535 Brittmoores Park Drive
Houston, TX 77041
USAPhone: (832)-327-0141
Fax: (832)-327-0148
www.contitech-oil-gas.com
sales@fluid.contitech.usManaging Director
(President)
Zuzana CzovekBank: JPMorgan Chase,
707 Travis St, 9 Floor N, Houston, TX 77002
Account: 08100044552
ABA/Routing: 021000021, ACH: 111000614






ContiTech Fluid Technology

Conditions Shipping Conditions 0 days Inco Terms EXW Houston, TX Ex Works		Delivery Note Document No. 83352143 Document Date 10/05/2016 Page 2 of 3	
<p>Brand Name: Continental ContiTech</p> <p>serial no:72879</p> <p>Supplied with: 2 x Safety Clamps 2 x Lifting Collars Double Eyed 2 x Safety Chains c/w Shackles Each End x 8ft</p> <p>Packing to ISPM-15 Heat Treated Packing type: Wooden Crate, Gross weight: 1056 kg / 2323 lbs Dimensions: 2870 x 640 x 2800 mm (L x W x H) 113 x 25.2 x 110.2 inch To be handled/shipped in a vertical position</p> <p>HTS# 4009.42.0050 ECCN: EAR99 COO: Hungary</p> <p>20 00TAX-SALES 1 PC 0 LB SALES TAX %8.25</p> <p>Buyer: Joe Ward E-mail: jward@scandrift.com Tel: 903.597.5368</p> <p>Payment Terms: 50% Due at order Placement 50% Due Prior to Dispatch</p> <p>Rev 01 - 092116 - Sales Tax added to the order.</p> <p>Order/Item 880841/20 07/05/2016 Customer's PO no./item 143799</p>			
Inner packages			



ContiTech Fluid Technology

Conditions		Delivery Note	
Shipping Conditions	0 days	Document No.	83352143
Inco Terms	EXW Houston, TX	Document Date	10/05/2016
	Ex Works	Page 3 of 3	
Quantity Packaging		Material	Charge
1	113 X 25.2 X 110.2 INCH -Wooden crate	HCK3FA45IPSIVS	1
Package number	118448718		

(1) Ship-to party ScanDrill Inc. 9395 HWY 2767 TYLER TX 75708		(2) Unloading point - storage location - usage	
(3) Delivery note no. 83352143 		(4) Vendor address (short name, plant, ZIP, city) ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston TX 77041-6916	
(8) Supplier ref. no.			
(9) Quantity		(5) Net weight 1,643 LB	(6) Gross weight 2,323 LB
(12) ContiTech Sales order no.		(7) Number of packages 1	
SN: 72879		(10) Description of delivery, service	
(13) Packing date 10/07/16		(14) Engineering change status	
(15) Package no. 118448718 		(16) Customer PO no. 143799 	

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1110	13.375"	54.5	J55	STC	2.22	1.18	8.50
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.07	3.25
12.25"	4000	5195	9.625"	40	L80	LTC	1.13	1.56	5.73
8.75"	0	14,473	5.5"	17	P110	LTC	1.61	2.89	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating LLC, Columbus Federal Com 21H

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Col	SF Burst	SF Tension
	From	To							
13.5"	0'	1025'	10 3/4"	45.5	L80	STC	5.14	.86	14.7
9 7/8"	0'	11,500'	7 5/8"	29.7	HCP110	BTC	1.125	1.27	2.74
6 3/4"	0'	22,397'	5.5"	23	P110	Ultra SF	1.95	1.95	2.5
BLM Minimum Safety Factor							1.125	1.125	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

- Burst SF on Surf is $0.86 > 0.7$
- 5.5" Ultra SF connection OD = 5.65"

COG Operating LLC, Columbus Federal Com 21H

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Col	SF Burst	SF Tension
	From	To							
13.5"	0'	1025'	10 3/4"	45.5	L80	STC	5.14	.86	14.7
9 7/8"	0'	11,500'	7 5/8"	29.7	HCP110	BTC	1.125	1.27	2.74
6 3/4"	0'	22,397'	5.5"	23	P110	Ultra SF	1.95	1.95	2.5
BLM Minimum Safety Factor							1.125	1.125	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

- Burst SF on Surf is $0.86 > 0.7$.
- 5.5" Ultra SF connection OD = 5.65".

COG Operating LLC, Columbus Federal Com 21H

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Col	SF Burst	SF Tension
	From	To							
13.5"	0'	1025'	10 3/4"	45.5	L80	STC	5.14	.86	14.7
9 7/8"	0'	11,500'	7 5/8"	29.7	HCP110	BTC	1.125	1.27	2.74
6 3/4"	0'	22,397'	5.5"	23	P110	Ultra SF	1.95	1.95	2.5
BLM Minimum Safety Factor							1.125	1.125	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

- Burst SF on Surf is $0.86 > 0.7$.
- 5.5" Ultra SF connection OD = 5.65".

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1110	13.375"	54.5	J55	STC	2.22	1.18	8.50
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.07	3.25
12.25"	4000	5195	9.625"	40	L80	LTC	1.13	1.56	5.73
8.75"	0	14,473	5.5"	17	P110	LTC	1.61	2.89	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1110	13.375"	54.5	J55	STC	2.22	1.18	8.50
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.07	3.25
12.25"	4000	5195	9.625"	40	L80	LTC	1.13	1.56	5.73
8.75"	0	14,473	5.5"	17	P110	LTC	1.61	2.89	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h


Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1110	13.375"	54.5	J55	STC	2.22	1.18	8.50
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.07	3.25
12.25"	4000	5195	9.625"	40	L80	LTC	1.13	1.56	5.73
8.75"	0	14,473	5.5"	17	P110	LTC	1.61	2.89	2.73
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

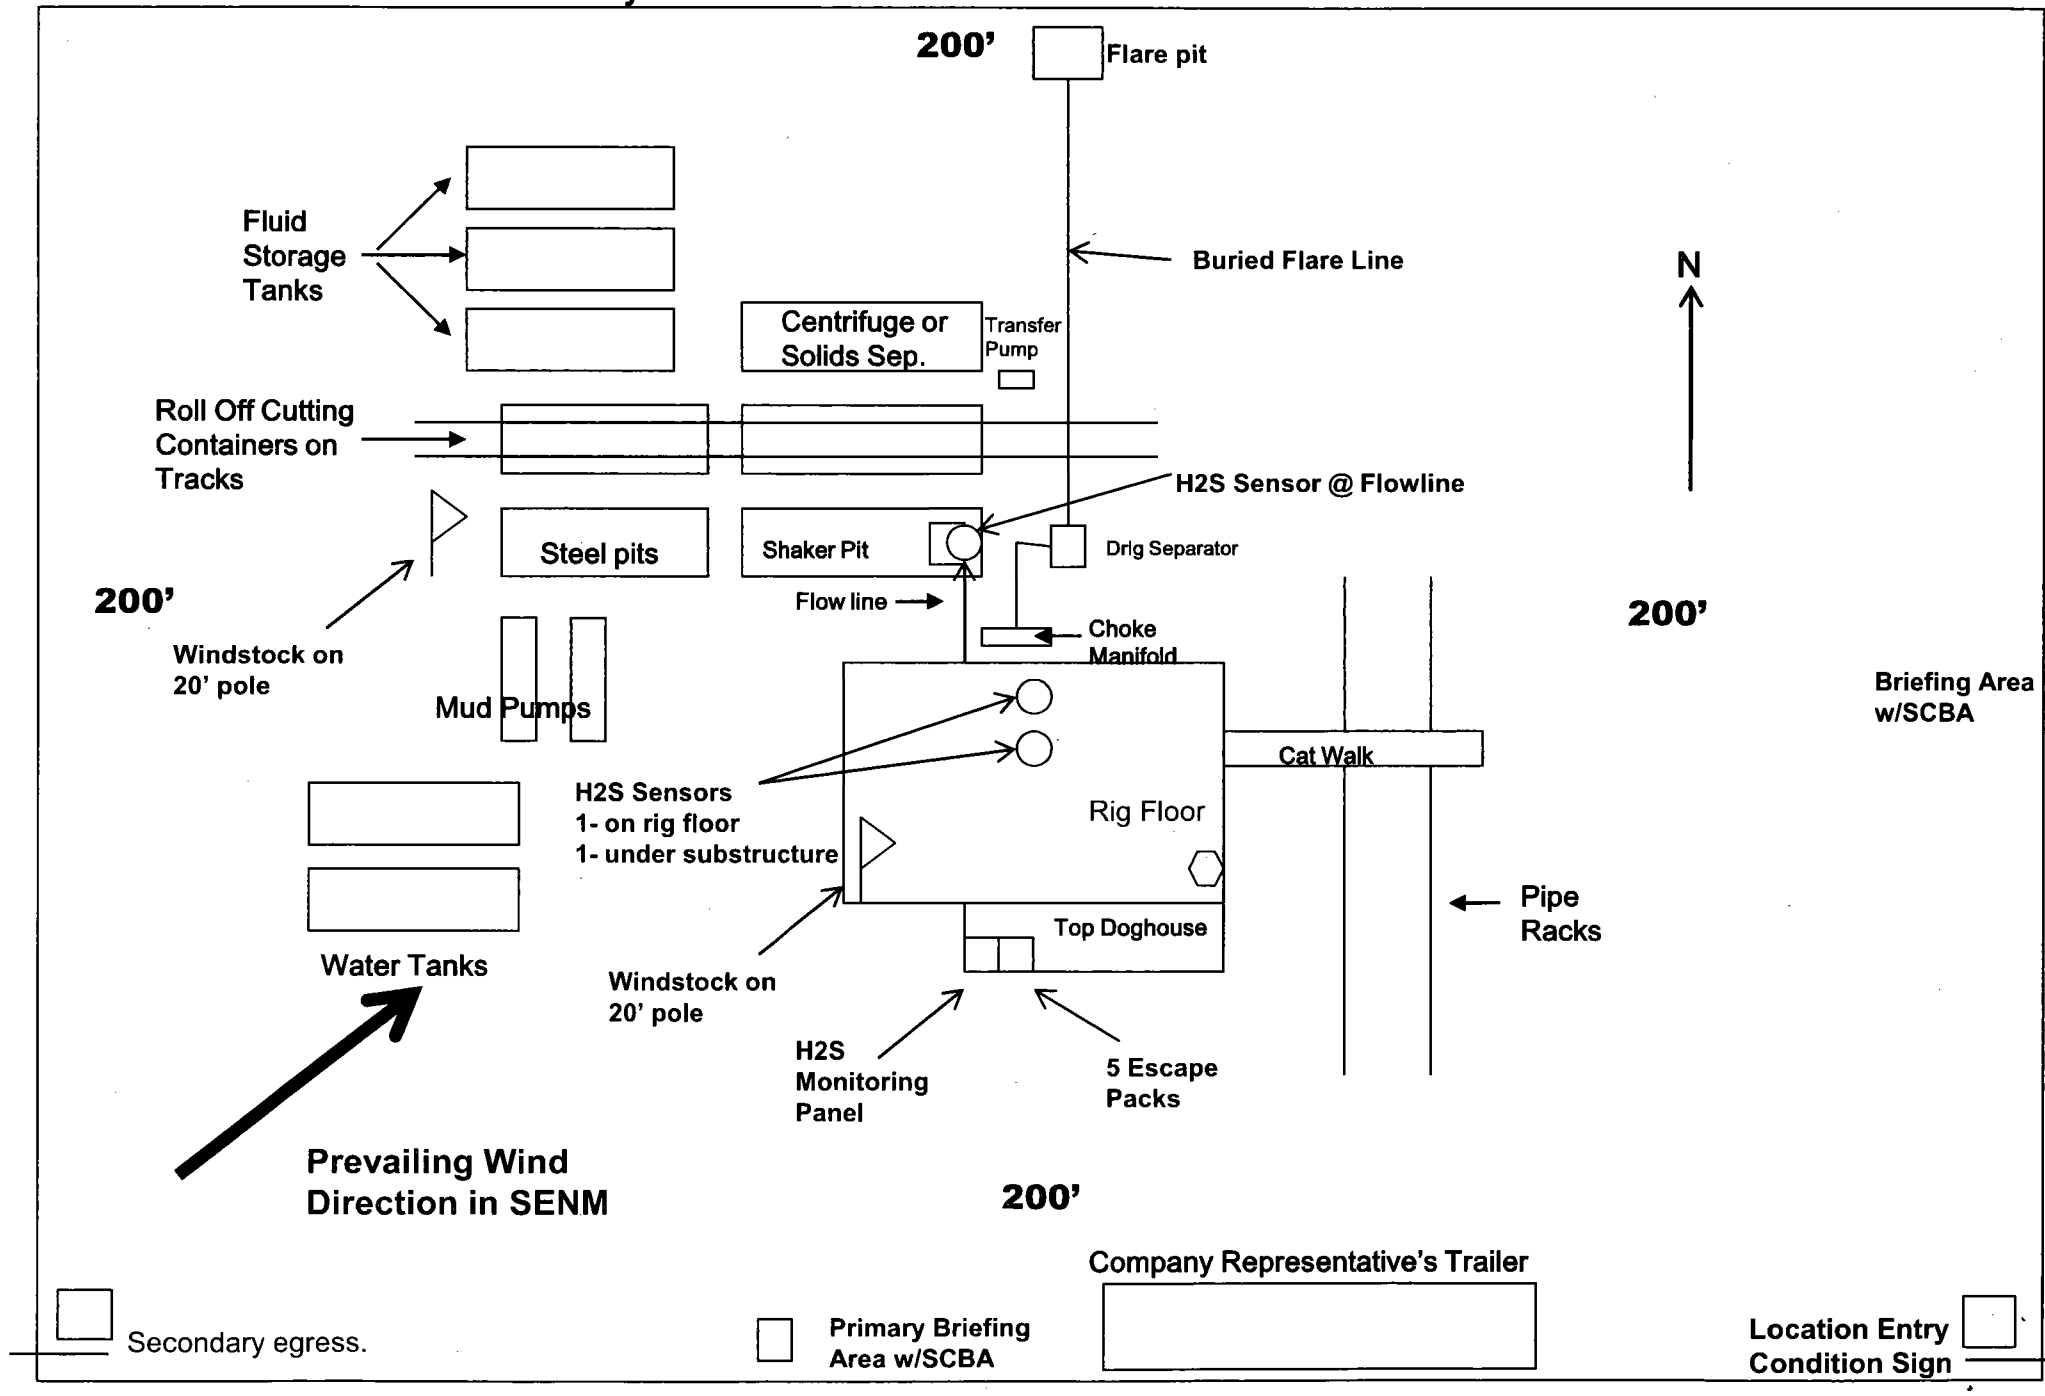

COG Operating, LLC - Dominator 25 Federal Com #105H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary?	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

COG Operating, LLC - Dominator 25 Federal Com #105H

3. Cementing Program

Casing	# Sk	Wt. lb/ gal	Yld ft ³ / sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	470	13.5	1.75	9	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl ₂
Inter.	1000	12.7	2.0	9.6	16	Lead: 35:65:6 C Blend
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl
5.5 Prod	610	11.9	2.5	19	72	Lead: 50:50:10 H Blend
	1370	14.4	1.24	5.7	19	Tail: 50:50:2 Class H Blend

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	3,500'	25% OH in Lateral (KOP to EOL) – 40% OH in Vertical

COG Operating, LLC - Dominator 25 Federal Com #105H

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	---

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12-1/4"	13-5/8"	2M	Annular	x	2000 psi
			Blind Ram		2M
			Pipe Ram		
			Double Ram		
			Other*		
8-3/4"	13-5/8"	3M	Annular	x	50% testing pressure
			Blind Ram	x	3M
			Pipe Ram	x	
			Double Ram		
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
N	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

COG Operating, LLC - Dominator 25 Federal Com #105H

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	9-5/8" Int shoe	Saturated Brine	10 - 10.1	28-34	N/C
9-5/8" Int shoe	Lateral TD	Cut Brine	8.6 - 9.3	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

COG Operating, LLC - Dominator 25 Federal Com #105H

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	4640 psi at 9585' TVD
Abnormal Temperature	NO 155 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S Plan attached

8. Other Facets of Operation

Y	Is it a walking operation?
N	Is casing pre-set?

x	H2S Plan.
x	BOP & Choke Schematics.
x	Directional Plan



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

04/13/2018

APD ID: 10400025058

Submission Date: 12/08/2017

Highlighted data
reflects the most
recent changes

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

COG_Dominator_Existing_Rd_20171121094216.pdf

Existing Road Purpose: ACCESS

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

COG_Dominator_105H_Roads_20171205083216.pdf

New road type: TWO-TRACK

Length: 11277.3 Feet

Width (ft.): 30

Max slope (%): 33

Max grade (%): 1

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Water will be diverted where necessary to avoid ponding, prevent erosion, maintain good drainage, and to be consistent with local drainage patterns.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: Caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: Blading

Access other construction information: No turnouts are planned. Re routing access road around proposed well location.

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: None necessary.

Road Drainage Control Structures (DCS) description: None needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

COG_Dominator_105H_1Mile_Data_20171205083231.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Production will be sent to the Dominator 25 Federal CTB 2 facility. A surface flow line of approximately 57.8' of 3.5" steel pipe carrying oil, gas and water under a maximum pressure of 125 psi will follow the road to the facility at the Dominator 25 Federal CTB 2 location. We plan to install a 4" surface polyethylene pipe transporting Gas Lift Gas from the Dominator 25 Federal CTB 2 to the multiple well pad that includes the Dominator 25 Federal Com #105H, #305H, #405H, #606H, #708H and #707H wells. The surface Gas Lift Gas pipe of approximately 57.8' under a maximum pressure of 125 psi will be installed no farther than 10 feet from the edge of the road.

Production Facilities map:

COG_Dominator_105H_Flowlines_20171205083649.pdf

COG_Dominator_105H_Prod_Facil_20171205083658.pdf

COG_Dominator_CTB_2_20171205083713.pdf

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: INTERMEDIATE/PRODUCTION CASING

Water source type: OTHER

Describe type: Brine Water.

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT,PRIVATE CONTRACT

Source land ownership: COMMERCIAL

Water source transport method: TRUCKING,TRUCKING

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 15000

Source volume (acre-feet): 1.9333965

Source volume (gal): 630000

Water source use type: STIMULATION, SURFACE CASING

Water source type: OTHER

Describe type: Fresh Water.

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT,PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE,PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 225000

Source volume (acre-feet): 29.000946

Source volume (gal): 9450000

Water source and transportation map:

COG_Dominator_Frac_Pond_20171127081721.pdf

COG_Dominator_105H_BrineH2O_20171205083816.pdf

COG_Dominator_105H_FreshH2O_20171205083826.pdf

Water source comments: Fresh water will be obtained from the C-01285 Dinwiddle Cattle Co Water Well located in Section 5, T26S, R36E. The water will be stored in the proposed Dominator 25 Federal Frac Pond located in section 25, T25S, R33E. Brine water will be obtained from the Malaga II Brine station located in Section 12, T23S, R28E.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Caliche will be obtained from the actual well site if available. If not available onsite, caliche will be purchased from approved BLM federal pit located in Section 23. T25S. R33E.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluids and produced oil and water during drilling and completion operations

Amount of waste: 6000 barrels

Waste disposal frequency : One Time Only

Safe containment description: All drilling waste will be stored safely and disposed of properly

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: SEWAGE

Waste content description: Human waste and gray water

Amount of waste: 250 gallons

Waste disposal frequency : Weekly

Safe containment description: Waste will be properly contained and disposed of properly at a state approved disposal facility

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations

Amount of waste: 125 pounds

Waste disposal frequency : Weekly

Safe containment description: Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Trucked to an approved disposal facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location Roll off cuttings containers on tracks

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: YES

Ancillary Facilities attachment:

COG_Dominator_105H__GCP_20171205083845.pdf

Comments: GCP Attached

Section 9 - Well Site Layout

Well Site Layout Diagram:

COG_Dominator_CTB_2_20171128113705.pdf

COG_Dominator_105H_Flowlines_20171205083905.pdf

COG_Dominator_105H_Prod_Facil_20171205083914.pdf

Comments: Production will be sent to the Dominator 25 Federal CTB 2 facility. A surface flow line of approximately 57.8' of 3.5" steel pipe carrying oil, gas and water under a maximum pressure of 125 psi will follow the road to the facility at the Dominator 25 Federal CTB 2 location. We plan to install a 4" surface polyethylene pipe transporting Gas Lift Gas from the Dominator 25 Federal CTB 2 to the multiple well pad that includes the Dominator 25 Federal Com #105H, #305H, #405H, #606H, #708H and #707H wells. The surface Gas Lift Gas pipe of approximately 57.8' under a maximum pressure of 125 psi will be installed no farther than 10 feet from the edge of the road.

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: DOMINATOR 25 FEDERAL COM

Multiple Well Pad Number: 105H, 305H, 405H, 606H, 708H AND 707H

Recontouring attachment:

Drainage/Erosion control construction: Due to the flat topography of this location and the stockpiling of the topsoil on the east side of the location, no erosion control is necessary.

Drainage/Erosion control reclamation: Reclaim the east side 80'.

Well pad proposed disturbance (acres): 3.67

Road proposed disturbance (acres): 2.9

Powerline proposed disturbance (acres): 0

Pipeline proposed disturbance (acres): 0.01

Other proposed disturbance (acres): 22.96

Total proposed disturbance: 29.54

Well pad interim reclamation (acres): 0.73

Road interim reclamation (acres): 2.9

Powerline interim reclamation (acres): 0

Pipeline interim reclamation (acres): 0.01

Other interim reclamation (acres): 0

Total interim reclamation: 3.64

Well pad long term disturbance (acres): 2.94

Road long term disturbance (acres): 2.9

Powerline long term disturbance (acres): 0

Pipeline long term disturbance (acres): 0.01

Other long term disturbance (acres): 22.96

Total long term disturbance: 28.81

Reconstruction method: New construction of pad.

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Topsoil redistribution: East.

Soil treatment: None

Existing Vegetation at the well pad: Shinnery Oak/Mesquite grassland

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Shinnery Oak/Mesquite grassland

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: N/A

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

Seed Summary	
Seed Type	Pounds/Acre

Total pounds/Acre:

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: Rand

Last Name: French

Phone: (432)254-5556

Email: rfrench@concho.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: N/A

Weed treatment plan attachment:

Monitoring plan description: N/A

Monitoring plan attachment:

Success standards: N/A

Pit closure description: N/A

Pit closure attachment:

COG_Dominator_105H_Closed_Loop_20171205083936.pdf

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

Operator Name: COG OPERATING LLC

Well Name: DOMINATOR 25 FEDERAL COM

Well Number: 105H

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: Onsite completed on 10/5/2017 by Rand French (COG); Gerald Herrera (COG) and Jeff Robertson (BLM).

Other SUPO Attachment

COG_Dominator_105H_Certif_20171205084035.pdf

under my direct supervision, have inspected the drill site and

Nov 13th, 2017.

Walt R.

love signatory): Rand French

E-mail: info@ncho.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

04/13/2018

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

04/13/2018

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000215

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: