Form 3160-5 (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018

SUNDRY	NOTICES AND REPORTS is form for proposals to drill	ON WELLS HOB	BS OCD Lease Seria	1 No. '506			
Do not use thi abandoned we	is form for proposals to drill II. Use form 3160-3 (APD) for	or to re-enter an r such proposals-MAY	0 8 2018 6. If Indian, A	llottee or Tribe Name			
SUBMIT IN	TRIPLICATE - Other instructi	ons on page 2	7. If Unit or C	A/Agreement, Name and/or No.			
Type of Well	ner		8. Well Name	and No. See Attached			
Name of Operator CHEVRON USA INCORPORA	Contact: LAUF ATED E-Mail: LBECERRA@CI	RA BECERRA HEVRON.COM	9. API Well N Multiple	lo. See Attached			
3a. Address 6301 DEAUVILLE BLVD MIDLAND, TX 79706	-all shops	Phone No. (include area code 32-687-7665	WC025G	Pool or Exploratory Area 09S263327G UP WOLFCAMF 09S263327G-UP WOLFCAMF			
MIDLAND, TX 79706 4. Location of Well (Footage, Sec., T	., R., M., or Survey Description)	Hahl	e 11. County or	Parish, State			
MultipleSee Attached		LODDS	LEA COL	JNTY, NM			
12. CHECK THE AF	PPROPRIATE BOX(ES) TO I	NDICATE NATURE (OF NOTICE, REPORT, O	R OTHER DATA			
TYPE OF SUBMISSION		ТҮРЕ С	F ACTION				
■ Notice of Intent	☐ Acidize	□ Deepen	☐ Production (Start/Resu	me) Water Shut-Off			
	☐ Alter Casing	☐ Hydraulic Fracturing	□ Reclamation	■ Well Integrity			
☐ Subsequent Report	☐ Casing Repair	■ New Construction	☐ Recomplete	Other			
☐ Final Abandonment Notice	☐ Change Plans	☐ Plug and Abandon	□ Temporarily Abandon	Change to Original A PD			
	☐ Convert to Injection	☐ Plug Back	■ Water Disposal				
13. Describe Proposed or Completed Ope If the proposal is to deepen directions Attach the Bond under which the wor following completion of the involved testing has been completed. Final At determined that the site is ready for final	ally or recomplete horizontally, give s rk will be performed or provide the Bo I operations. If the operation results in pandonment Notices must be filed only	ubsurface locations and meas ond No. on file with BLM/BI a multiple completion or rec	ured and true vertical depths of a A. Required subsequent reports completion in a new interval, a F	all pertinent markers and zones. must be filed within 30 days orm 3160-4 must be filed once			
We are requesting a variance	to the original APD to use the	spudder rig to pre-set s	urface casing.				
See attachments for detailed p	program and rig layout.						
This request applies to the foll	lowing wells on this pad:						
SD EA 29 32 FED P11 13H - 30-025-44333							
SD EA 29 32 FED P11 14H - 3 SD EA 29 32 FED P11 15H - 3 SD EA 29 32 FED P11 16H - 3	30-025-44335	CO	CONDITIONS OF APPROVAL				
SD EA 29 32 FED PTT 10H	30-025-44330						
14. I hereby certify that the foregoing is	Electronic Submission #41257 For CHEVRON USA	INCORPORATED, sent t	o the Hobbs				
Committed to AFMSS for processing by ZOTA STEVENS on 04/30/2018 (18ZS0068SE) Name (Printed/Typed) LAURA BECERRA Title PERMITTING SPECIALIST							
Tambers Speak Entrol Of the	LOLINIV	TAIL TERM	THING OF EGINEIOT				
Signature (Electronic S	Submission)	Date 04/26/2	2018				
	THIS SPACE FOR F	EDERAL OR STATE	OFFICE USE				
A		THEFT	TIM ENGINEES	Deta 04/20/2040			
_Approved By ZOTA STEVENS _	d Ammount of this section does not		EUM ENGINEER	Date 04/30/2018			
Conditions of approval, if any, are attached certify that the applicant holds legal or equ which would entitle the applicant to condu	itable title to those rights in the subje						

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2) ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

Additional data for EC transaction #412575 that would not fit on the form

Wells/Facilities, continued

Agreement NMNM27506	Lease NMNM27506	Well/Fac Name, Number SD EA 29 32 FED COM P11 13H	API Number 30-025-44333-00-X1	Location Sec 29 T26S R33E NWNW 195FNL 828FWL 32.021225 N Lat, 103.600136 W Lon
NMNM27506	NMNM27506	SD EA 29 32 FED COM P11 14H	30-025-44334-00-X1	Sec 29 T26S R33E NWNW 195FNL 853FWL 32.021225 N Lat. 103.600052 W Lon
NMNM27506	NMNM27506	SD EA 29 32 FED COM P11 15H	30-025-44335-00-X1	Sec 29 T26S R33E NWNW 195FNL 878FWL 32.021225 N Lat. 103.599976 W Lon
NMNM27506	NMNM27506	SD EA 29 32 FED COM P11 16H	30-025-44336-00-X1	Sec 29 T26S R33E NWNW 195FNL 903FWL 32.021225 N Lat, 103.599892 W Lon

Chevron U.S.A. Inc. (CUSA) SUNDRY ATTACHMENT: SPUDDER RIG

DATA OPERATOR NAME: Chevron U.S.A. Inc.

1. SUMMARY OF REQUEST:

CUSA respectfully requests approval for the following operations for the surface hole in the drill plan:


1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

2. Description of Operations

- 1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - **a.** After drilling the surface hole section, the spudder rig will run casing and cement following all the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - **b.** The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
- 2. The wellhead will be installed and then tested offline after the WOC time has been reached.
- 3. An abandonment cap at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on one wing-valve.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
- 4. Spudder rig operations are expected to take 2-3 days per well on the pad.
- 5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nippled up and tested on the wellhead before drilling operations resume on each well.
 - **a.** The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - **b.** The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
- 7. CUSA will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
- 8. Once the rig is removed, CUSA will secure the wellhead area by placing a guard rail around the cellar area.

Pad Name	Well No.	Surface Rig Start	Surface Rig Finish	Surface Rig Duration (Days)	Larger Dev Rig Spud Date	Well Status	Days Between Rigs	APD Approved	APD Expires	Lease Status
SD EA 18 19 FED P14	12H – 15H	5/4/2018	5/12/2018	8	3/25/2019	SI	317	10/11/2017	10/11/2019	Held by production by existing producing wells
SD EA 18 19 FED COM P13	8H – 11H	5/12/2018	5/20/2018	8	2/22/2019	SI	278	9/28/2017	9/28/2019	Held by production by existing producing wells
SD EA 29 32 FED COM P10	17H – 20H	5/20/2018	5/28/2018	8	10/4/2018	SI	129	2/8/2018	2/8/2020	Held by production by existing producing wells
SD EA 29 32 FED COM P11	13H – 16H	5/28/2018	6/5/2018	8	11/6/2018	SI	154	12/20/2017	12/20/2019	Held by production by existing producing wells

Surface Rig Layout

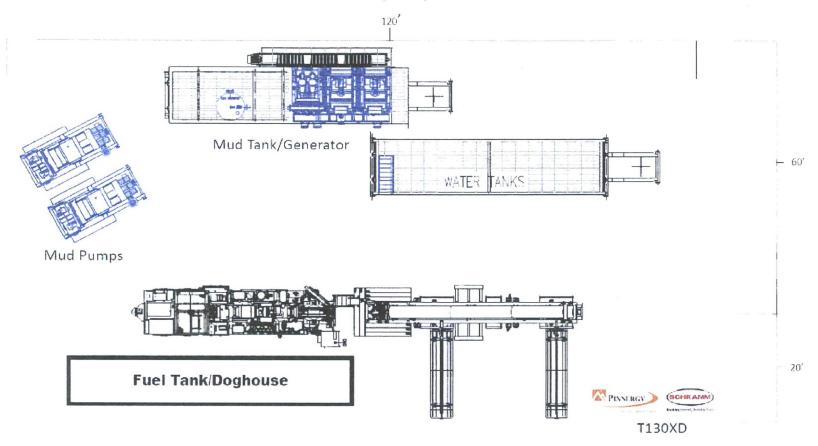

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: Chevron USA Inc.

LEASE NO.: NM27506

WELL NAME & NO.: | SD EA 29 32 Fed Com P11 – Multiwells pad

SURFACE HOLE FOOTAGE: **BOTTOM HOLE FOOTAGE**

LOCATION:

COUNTY:

Sec. 29, T. 26 S, R. 33 E Lea County, New Mexico

Generate

All other COA still applied except the following:

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. The operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. The operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.

ZS 043018