Form 3160-3 (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR

8192

5. Lease Serial No.

FORM APPROVED OMB No. 1004-0137 Expires: January 31, 2018

SUREAU OF LAND MANAGEMENT	NMNM09

APPLICATION FOR PERMIT TO DRIL	L OR REENTER	6. If Indian, Allotee or Tribe Name				
1a. Type of work:	TER	7. If Unit or CA Agreement, Na	ame and No.			
1b. Type of Well:		8. Lease Name and Well No.				
1c. Type of Completion: Hydraulic Fracturing Single	Zone Multiple Zone	BIG CAT 16-9 STATE FED (2014			
	ъ .	l / Σ'. Ν	ZOM!			
		217H [316163	\rightarrow			
2. Name of Operator DEVON ENERGY PRODUCTION COMPANY LP [6137]	71	9 API-Well No. (30-6	25-4520			
	Phone No. (include area code) 05)552-6571	10 Field and Pool, or Explorate SAND DUNES / BONESPRI				
	·	11. Sec., T. R. M. or Bik and S	777706			
 Location of Well (Report location clearly and in accordance with a At surface NESE / 2314 FSL / 1114 FEL / LAT 32.3037251 	' '	SEC 16 / T23S / R32E / NMF	•			
At proposed prod. zone NENE / 330 FNL / 920 FEL / LAT 32	1/ >					
14. Distance in miles and direction from nearest town or post office*		12. County or Parish	3. State			
			IM.			
15. Distance from proposed* 1114 feet 16.	No of acres in lease 17. Spacii	g,Unit dedicated to this well				
property or lease line, ft. 640	0 (/ 240	✓				
(Also to nearest drig. unit line, if any)						
to nearest well drilling completed	Proposed Depth 20. BLM/ 460 feet / 18044 feet FED: CO	BIA Bond No. in file				
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22.	Approximate date work will start*	23. Estimated duration				
3694 feet 08/	27/2018) /	45 days				
24	4. Attachments					
The following, completed in accordance with the requirements of Ons (as applicable)	shore Oil and Gas Order No. 1, and the H	lydraulic Fracturing rule per 43 (CFR 3162.3-3			
Well plat certified by a registered surveyor.	•	s unless covered by an existing bo	ond on file (see			
2. A Drilling Plan.	Item 20 above).					
 A Surface Use Plan (if the location is on National Forest System La SUPO must be filed with the appropriate Forest Service Office) 	inds, the 5. Operator certification. 6. Such other site specific infor BLM.	mation and/or plans as may be req	uested by the			
25. Signature	Name (Printed/Typed)	Date				
(Electronic Submission)	Jenny Harms / Ph: (405)552-6560	03/02/20	18			
Title Regulatory Compliance Professional			<u>.</u>			
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575)234-5959	Date	10			
Title (Office (575)234-5959	09/13/20				
Assistant Field Manager Lands & Minerals	CARLSBAD					
Application approval does not warrant or certify that the applicant hol	ds legal or equitable title to those rights	in the subject lease which would	entitle the			
applicant to conduct operations théreon. Conditions of approval, if any, are attached.						
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make	it a crime for any person knowingly and	willfully to make to any departm	ent or agency			
Call at the 10 and a call of the Carlotte of t	and the same of th	,				

of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

pproval Date: 09/13/2018

GCP Rec 09/13/2018 (Continued on page 2)

*(Instr.__ on pag.



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

©erator Certification Data Report 09/13/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Jenny Harms Signed on: 03/02/2018

Title: Regulatory Compliance Professional

Street Address: 333 W Sheridan Ave

City: Oklahoma City State: OK Zip: 73102

Phone: (405)552-6560

Email address: jenny.harms@dvn.com

Field Representative

Representative Name: Ray Vaz

Street Address: 6488 Seven rivers Hwy

City: Artesia State: NM Zip: 88210

Phone: (575)748-1871

Email address: ray.vaz@dvn.com



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Application Data Report

APD ID: 10400027904 Submission Date: 03/02/2018

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Well Type: OIL WELL Well Work Type: Drill



Show Final Text

Section 1 - General

APD ID: 10400027904 Tie to previous NOS?

Submission Date: 03/02/2018

BLM Office: CARLSBAD Federal/Indian APD: FED **User:** Jenny Harms

Title: Regulatory Compliance

Professional Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM098192

Lease Acres: 640

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: DEVON ENERGY PRODUCTION COMPANY LP

Operator letter of designation:

Operator Info

Operator Organization Name: DEVON ENERGY PRODUCTION COMPANY LP

Operator Address: 333 West Sheridan Avenue

Zip: 73102

Operator PO Box:

Operator City: Oklahoma City

State: OK

Operator Phone: (405)552-6571

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: SAND DUNES

Pool Name: BONESPRING

Is the proposed well in an area containing other mineral resources? USEABLE WATER, NATURAL GAS, OIL

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: TODD Number: 7

Well Class: HORIZONTAL MDP3 16 WELL PAD

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type: Well sub-Type: INFILL

Describe sub-type:

Distance to town:

Distance to nearest well: 1086 FT

Distance to lease line: 1114 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat:

Big_Cat_16_9_State_Fed_Com_217H_C_102_Sig_20180302073505.pdf

Well work start Date: 08/27/2018

Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 5796

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	231 4	FSL	111 4	FEL	23S	32E	16	Aliquot NESE	32.30372 51	- 103.6746 721	LEA	1	NEW MEXI CO	S	STATE	369 4	0	0
KOP Leg #1	231 4	FSL	111 4	FEL	23S	32E	16	Aliquot NESE	32.30372 51	- 103.6746 721	LEA		NEW MEXI CO	S	STATE	369 4	989 4	988 7
PPP Leg #1	263 4	FSL	920	FEL	23S	32E	16	Aliquot NESE	32.32375 73	- 103.6741 084	LEA	NEW MEXI CO		S	STATE	- 659 3	106 44	102 87

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	0		920	FEL	23S	32E	9	Aliquot SENE	32.31189 87	- 103.6740 594	LEA	l	NEW MEXI CO	i	NMNM 098192	- 676 6	130 83	104 60
EXIT Leg #1	330		920	FEL	238	32E	9	Aliquot NENE	32.32549 92	- 103.6740 594	LEA	NEW MEXI CO	NEW MEXI CO	ı	NMNM 098192	- 676 6	180 44	104 60
BHL Leg #1	330		920	FEL	23S	32E	9	Aliquot NENE	32.32549 92	- 103.6740 594	LEA	l	NEW MEXI CO	l	NMNM 098192	- 676 6	180 44	104 60



APD ID: 10400027904

Well Type: OIL WELL

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

Submission Date: 03/02/2018

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Well Work Type: Drill



Show Final Text

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1		3357.5	0	0	OTHER : Surface	NONE	No
2	RUSTLER	2182.5	1175	1175	SANDSTONE	NONE	No
3	SALADO	1802.5	1555	1555	SALT	NONE	No
4	DELAWARE	-1457.5	4815	4815	SANDSTONE	NATURAL GAS,OIL	No
5	BONE SPRING	-5327.5	8685	8685	SANDSTONE	NATURAL GAS,OIL	No
6	BONE SPRING 1ST	-6487.5	9845	9845	SANDSTONE	NATURAL GAS,OIL	No
7	BONE SPRING 2ND	-7087.5	10445	10445	SANDSTONE	NATURAL GAS,OIL	Yes

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 10460

Equipment: BOP/BOPE will be installed per Onshore Oil & Damp; amp; Gas Order #2 requirements prior to drilling below 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Damp; amp; Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

Big_Cat_16_9_State_Fed_Com_217H_3M_BOPE_Chk_20180302075149.pdf

BOP Diagram Attachment:

Big_Cat_16_9_State_Fed_Com_217H_3M_BOPE_Chk_20180302075157.pdf

Page 1 of 6

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Pressure Rating (PSI): 3M

Rating Depth: 6000

Equipment: BOP/BOPE will be installed per Onshore Oil & Dil & Order #2 requirements prior to drilling below 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

Big_Cat_16_9_State_Fed_Com_217H_3M_BOPE_Chk_20180302075208.pdf

BOP Diagram Attachment:

Big_Cat_16_9_State_Fed_Com_217H_3M_BOPE_Chk_20180302075214.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1210	0	1210	-6802	-7566	1210	H-40	ı	OTHER - BTC	1.12 5	1.25	BUOY	1.6	BUOY	1.6
2	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	6000	0	6000	-6802	- 11052	6000	J-55	ı	OTHER - BTC	1.12 5	1.25	BUOY	1.6	BUOY	1.6
3	PRODUCTI ON	8.75	5.5	NEW	API	N	0	18044	0	10460	-6802	- 16802	18044	P- 110	17	OTHER - BTC	1.12 5	1.25	BUOY	1.6	BUOY	1.6

Casing Attachments

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP	
Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H	
Casing Attachments	
Casing ID: 1 String Type: SURFACE	
Inspection Document:	
Spec Document:	
Tapered String Spec:	
Casing Design Assumptions and Worksheet(s):	
Big_Cat_16_9_State_Fed_Com_217H_SurfCsg_Ass_20180302075244.pdf	
Casing ID: 2 String Type: INTERMEDIATE	
Inspection Document:	
Spec Document:	
Tapered String Spec:	
Casing Design Assumptions and Worksheet(s):	
Big_Cat_16_9_State_Fed_Com_217H_Int_Csg_Ass_20180302075301.pdf	
Casing ID: 3 String Type:PRODUCTION	
Inspection Document:	
Spec Document:	
Tapered String Spec:	

Section 4 - Cement

Casing Design Assumptions and Worksheet(s):

 $Big_Cat_16_9_State_Fed_Com_217H_ProdCasing_Ass_20180302075333.pdf$

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1210	948	1.33	14.8	1261	50	С	0.125 lbs/sack Poly-F- Flake

INTERMEDIATE	Lead	0	5500	618	3.63	10.5	2239	30	С	(65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sks Poly-E-Flake
INTERMEDIATE	Tail	5500	6000	153	1.33	14.8	204	30	С	0.125 lbs/sack Poly-F- Flake
PRODUCTION	Lead	5800	9800	386	3.27	9	1263	25	TUNED	Tuned light
PRODUCTION	Tail	9890	1804 4	2169	1.2	14.5	2603	25	Н	(50:50) Clas H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	ЬН	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1210	WATER-BASED MUD	8.5	9				2			
1210	6000	SALT SATURATED	10	11				2			
6000	1804 4	WATER-BASED MUD	8.5	9.3							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GRMWD from TD to from KOP. Cement bond logs will be run in vertical to determine top of cement. Stated logs run will be in the completion report and submitted to the BLM.

List of open and cased hole logs run in the well:

CALIPER, CBL, DS, GR, MUDLOG

Coring operation description for the well:

N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5230

Anticipated Surface Pressure: 2928.8

Anticipated Bottom Hole Temperature(F): 167

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Big_Cat_16_9_State_Fed_Com_217H_H2S_Pln_20180302080017.pdf

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Big_Cat_16_9_State_Fed_Com_217H_Dir_Surv_20180302080030.pdf


Other proposed operations facets description:


Multi-Bowl Verbiage Multi-Bowl Wellhead Closed-Loop Design Plan Co-Flex


Other proposed operations facets attachment:


Big_Cat_16_9_State_Fed_Com_217H_Clsd_Loop_20180302080040.pdf
Big_Cat_16_9_State_Fed_Com_217H_Co_flex_20180302080048.pdf
Big_Cat_16_9_State_Fed_Com_217H_Drilling_Plan_20180302080058.pdf
Big_Cat_16_9_State_Fed_Com_217H_GCP_20180302080105.pdf
Big_Cat_16_9_State_Fed_Com_217H_MB_Verb_3M_20180302080115.pdf
Big_Cat_16_9_State_Fed_Com_217H_MB_Wellhd_20180302080124.pdf

Other Variance attachment:

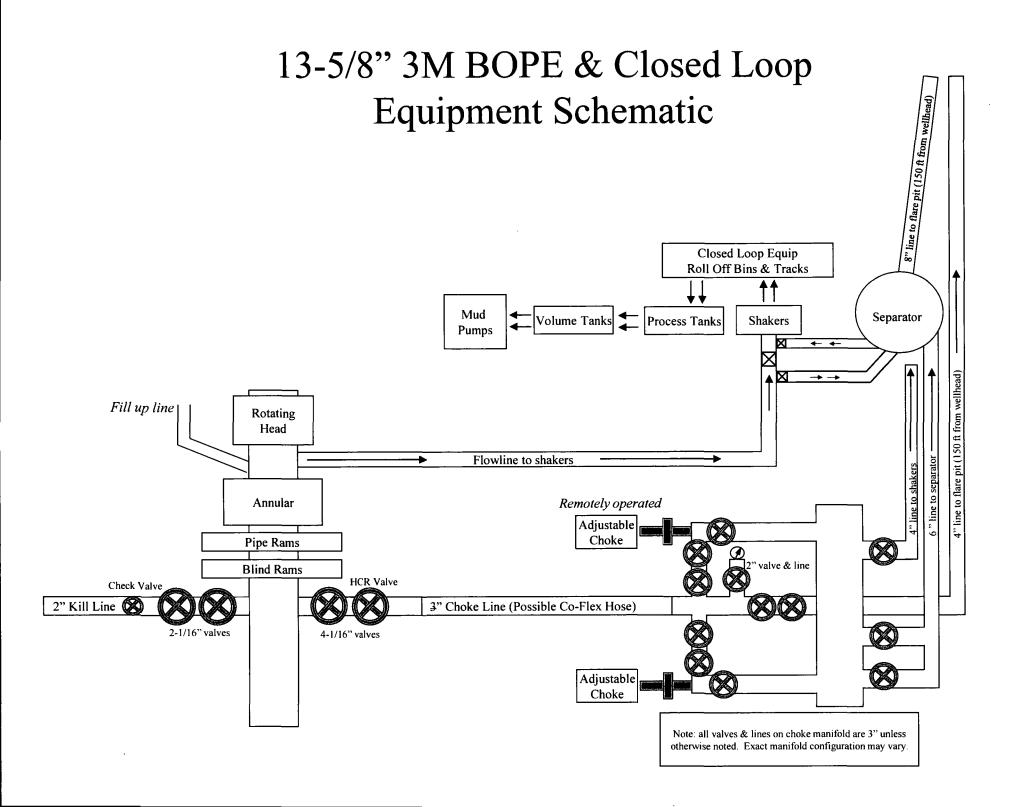

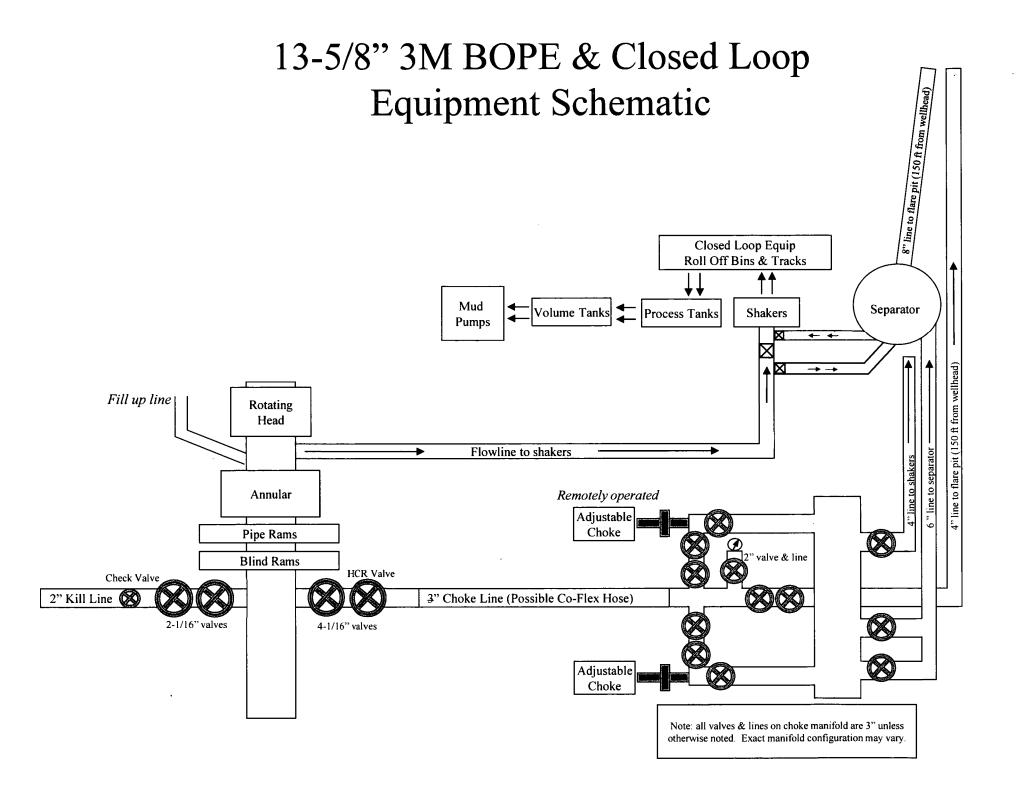

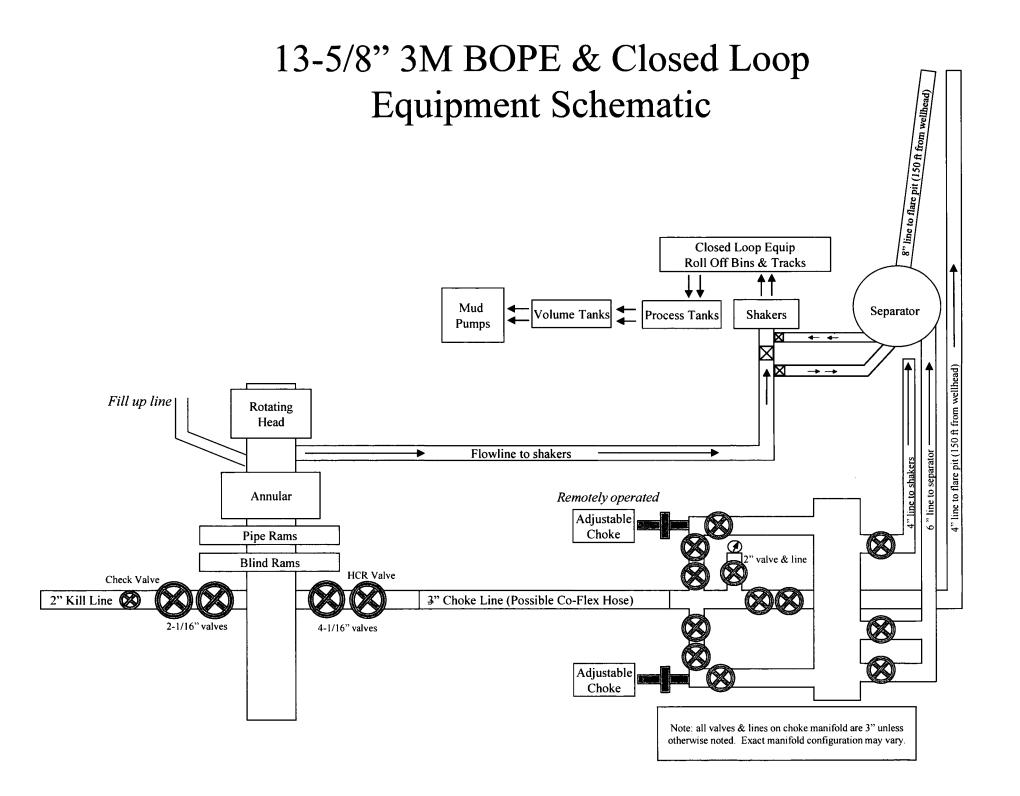

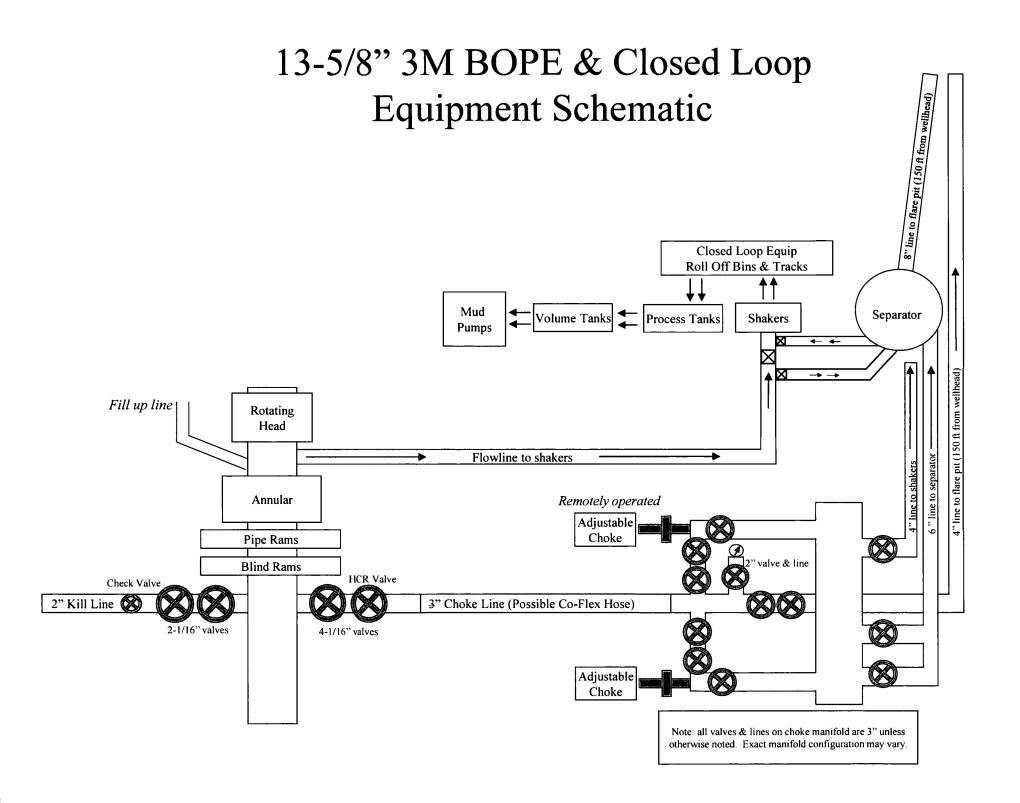

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Surface Casing Burst Design									
Load Case	External Pressure	Internal Pressure							
Pressure Test	Formation Pore Pressure	Max mud weight of next hole- section plus Test psi							
Drill Ahead	Formation Pore Pressure	Max mud weight of next hole section							
Displace to Gas	Formation Pore Pressure	Dry gas from next casing point							

Surface Casing Collapse Design								
Load Case	External Pressure	Internal Pressure						
Full Evacuation	Water gradient in cement, mud above TOC	None						
Cementing	Wet cement weight	Water (8.33ppg)						

Surface Casing Tension Design				
Load Case	Assumptions			
Overpull	100kips			
Runing in hole	3 ft/s			
Service Loads	N/A			

Intermediate

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Intermediate Casing Burst Design					
Load Case	External Pressure	Internal Pressure			
Pressure Test	Formation Pore Pressure	Max mud weight of next hole- section plus Test psi			
Drill Ahead	Formation Pore Pressure	Max mud weight of next hole section			
Fracture @ Shoe	Formation Pore Pressure	Dry gas			

Intermediate Casing Collapse Design					
Load Case External Pressure Internal Pressure					
Full Evacuation	Water gradient in cement, mud above TOC	None			
Cementing	Wet cement weight	Water (8.33ppg)			

Intermediate Casing Tension Design					
Load Case Assumptions					
Overpull	100kips				
Runing in hole	2 ft/s				
Service Loads	N/A				

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Production Casing Burst Design					
Load Case	External Pressure	Internal Pressure			
Pressure Test	Formation Pore Pressure	Fluid in hole (water or produced water) + test psi			
Tubing Leak	Formation Pore Pressure	Packer @ KOP, leak below surface 8.6 ppg packer fluid			
Stimulation	Formation Pore Pressure	Max frac pressure with heaviest frac fluid			

Production Casing Collapse Design				
Load Case	External Pressure	Internal Pressure		
Full Evacuation	Water gradient in cement, mud above TOC.	None		
Cementing	Wet cement weight	Water (8.33ppg)		

Production Casing Tension Design					
Load Case Assumptions					
Overpull 100kips					
Runing in hole	2 ft/s				
Service Loads	N/A				

1. Geologic Formations

TVD of target	10,460	Pilot hole depth	N/A
MD at TD:	18,044	Deepest expected fresh water:	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1,185	·	
Salado	1,580		
Base of Salt	4,820		
Delaware	4,830		
1 st Bone Spring Lime	8,750		
2 nd Bone Spring Sand	10,450		

^{*}H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Hole	Casing	g Interval	Csg.	Weight	Grade	Conn.	SF	SF	SF
Size	From	To	Size	(lbs)			Collapse	Burst	Tension
17.5"	0	1210	13.375"	48	H40	BTC	1.125	1.25	1.6
12.25"	0	4500	9.625"	40	J55	BTC	1.125	1.25	1.6
12.25"	4500	6000	9.625"	40	HCK55	BTC	1.125	1.25	1.6
8.75"	0	18,044	5.5"	17	P110	BTC	1.125	2.07	1.6
				BLM Min	imum Safet	ty Factor	1.125	1	1.6 Dry
									1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y

Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P? If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Casing	# Sks	Wt. Ib/ gal	Yld ft3/ sack	H ₂ 0 gal/s k	500# Comp. Strengt h (hours)	Slurry Description	
Surf.	950	14.8	1.33	6.32	6	Lead: Class C Cement + 0.125 lbs/sack Poly-F-Flake	
Inter.	618	10.5	3.625	22	14	Tuned Light Weight	
	153	14.8	1.33	6.32	6	Tail: Class C Cement + 0.125 lbs/sack Poly-F-Flake	
Prod.	386	9	3.27	13.5	21	Lead: Tuned Light Cement	
	2169	14.5	1.2	5.31	25	Tail: (50:50) Clas H Cement: Poz (Fly Ash) + 0.5%	
				1		bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2%	
						BWOC HR-601 + 2% bwoc Bentonite	

DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the

cement will be onsite for review.

Casing String	TOC	% Excess
13-3/8" Surface	0'	50%
9-5/8" Intermediate	0'	30%
5-1/2" Production	5800;	25%

4. Pressure Control Equipment

N A variance is requested for the use of a diverter on the surface casing. See attached for schematic.

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Туре		V	Tested to:
			Annular		x	50% of working pressure
			Blind Ram	<u> </u>		
12-1/4"	13-5/8"	3M	Pipe Ram			3M
			Double Rar	n	X	SIVI
			Other*			
	13-5/8"	3M	Annular		X	50% testing pressure
			Blind Ram			
8-3/4"			Pipe Ram			
0-3/4			Double Rar	n	x	3M
			Other *			
			Annular			
			Blind Ram			
]		Pipe Ram			
			Double Ram			
			Other			
			*			

^{*}Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

- Y Formation integrity test will be performed per Onshore Order #2.
 On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
- A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
 - Y Are anchors required by manufacturer?
- Y A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.

- o Wellhead will be installed by wellhead representatives.
- o If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- Wellhead representative will install the test plug for the initial BOP test.
- Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the packoff, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- o If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- o Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Onshore Order #2.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi. Low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2.

If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.

After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a Kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon's proposed wellhead manufactures will be EMC Technologies, Cactus Wellhead, or Cameron.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

See attached schematic.

5. Mud Program

Depth From To		Type	Weight (ppg)	Viscosity	Water Loss
0	1210	FW Gel	8.6-8.8	28-34	N/C
1210	6000	Saturated Brine	10.0-11.0	28-34	N/C
6000	18,044	Cut Brine	8.5-9.3	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain	PVT/Pason/Visual Monitoring
of fluid?	

6. Logging and Testing Procedures

Logg	Logging, Coring and Testing.				
X	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole).				
	Stated logs run will be in the Completion Report and submitted to the BLM.				
	No Logs are planned based on well control or offset log information.				
	Drill stem test? If yes, explain				
	Coring? If yes, explain				

Add	itional logs planned	Interval		
,	Resistivity	Int. shoe to KOP		
	Density	Int. shoe to KOP		
X	CBL	Production casing		
X	Mud log	KOP to TD		
	PEX			

7. Drilling Conditions

Condition	Specify what type and where?		
BH Pressure at deepest TVD	5,186 psi		
Abnormal Temperature	No		

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N	H2S is present
Y	H2S Plan attached

8. Other facets of operation

Is this a walking operation? No. Will be pre-setting casing? No.

Attachments				
X	Directional Plan			
	Other, describe			

A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.


- Wellhead will be installed by wellhead representatives.
- If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- Wellhead representative will install the test plug for the initial BOP test.
- Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2

After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon's proposed wellhead manufactures will be FMC Technologies, Cactus Wellhead, or Cameron.

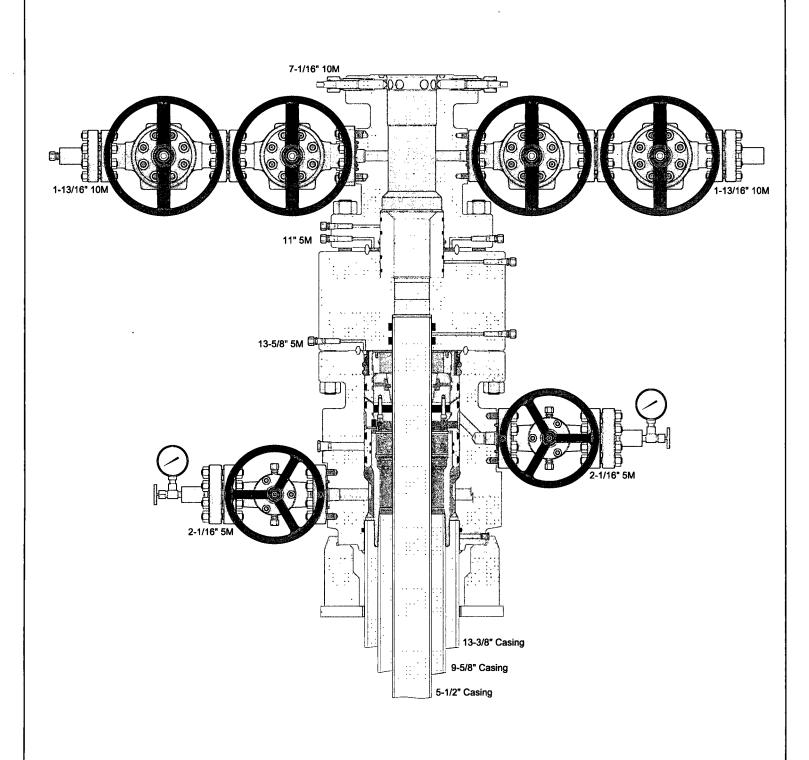



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

SUPO Data Report

Submission Date: 03/02/2018

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Well Type: OIL WELL

APD ID: 10400027904

Well Work Type: Drill



Show Final Text

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Big Cat 16 9 State Fed Com 217H Access Rd 20180302080145.pdf

Existing Road Purpose: ACCESS, FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

Existing Road Improvement Description: Improve road to accommodate Drilling and Completion operations.

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

Big_Cat_16_9_State_Fed_Com_217H_New_Rds_1_20180302080200.pdf Big_Cat_16_9_State_Fed_Com_217H_New_Rds_20180302080209.pdf

New road type: LOCAL

Length: 624.5

Feet

Width (ft.): 30

Max slope (%): 6

Max grade (%): 4

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Water Drainage Ditch

New road access plan or profile prepared? NO

New road access plan attachment:

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Access road engineering design? NO

Access road engineering design attachment:

Access surfacing type: GRAVEL

Access topsoil source: ONSITE

Access surfacing type description:

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: See attached Interim reclamation diagram.

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: na

Road Drainage Control Structures (DCS) description: na

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Big_Cat_16_9_State_Fed_Com_217H_One_Mile_Map_20180302082048.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: Please see CTB Plat

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: STIMULATION Water source type: OTHER

Describe type: Fresh Water

Source latitude: Source longitude:

Source datum:

Water source permit type: OTHER
Source land ownership: FEDERAL

Water source transport method: PIPELINE

Source transportation land ownership: STATE

Water source volume (barrels): 135000 Source volume (acre-feet): 17.400568

Source volume (gal): 5670000

Water source and transportation map:

BIG_CAT_16_9_STATE_FED_COM_217H_Water_X_Map_20180302082106.pdf

Water source comments: The attached Water Transfer Map is a proposal only and the final route and documentation will be provided by a Devon contractor prior to installation. When available Devon will always follow existing disturbance.

Drill material:

New water well? NO

New Water Well Info

Well latitude: Well Longitude: Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft): Est thickness of aquifer:

Aquifer comments:

Drilling method:

Aquifer documentation:

Well depth (ft): Well casing type:

Well casing outside diameter (in.): Well casing inside diameter (in.):

New water well casing?

Used casing source:

Grout material: Grout depth:

Casing length (ft.): Casing top depth (ft.):

Well Production type: Completion Method:

Water well additional information:

State appropriation permit:

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Dirt fill and caliche will be used to construct well pad. Map attached.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: PRODUCED WATER

Waste content description: Average produced BWPD over the first year of production

Amount of waste: 1000 barrels

Waste disposal frequency: Daily Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: OFF-LEASE INJECTION Disposal location ownership: PRIVATE

Disposal type description:

Disposal location description: Multiple methods for handling waste will be utilized. Via trucking, Dvn owned disposal

system and or third party pipeline take away.

Waste type: COMPLETIONS/STIMULATION

Waste content description: Flow back water during completion operations.

Amount of waste: 3000 barrels

Waste disposal frequency: One Time Only

Safe containment description: N/A

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Various disposal locations in Lea and Eddy counties.

Waste type: FLOWBACK

Waste content description: Average produced BWPD over the flowback period (first 30 days of production).

Amount of waste: 2000 barrels

Waste disposal frequency : Daily Safe containment description: N/A

Safe containment attachment:

Waste disposal type: OFF-LEASE INJECTION Disposal location ownership: STATE

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Disposal type description:

Disposal location description: Produced water during flowback will be disposed of at various disposals in Lea and Eddy

County.

Waste type: DRILLING

Waste content description: Water Based Cuttings

Amount of waste: 1980

barrels

Waste disposal frequency: Daily Safe containment description: N/A

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL

Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: All cuttings will disposed of at R360, Sundance, or equivalent.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.)

Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? NO

Description of cuttings location

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Big_Cat_16_9_State_Fed_Com_217H_Rig_Layout_20180302082235.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Multiple Well Pad Name: TODD MDP3 16 WELL PAD Type of disturbance: New Surface Disturbance

Multiple Well Pad Number: 7

Recontouring attachment:

Big_Cat_16_9_State_Fed_Com_217H_Grading_X_PIn_20180302082250.pdf

Drainage/Erosion control construction: N/A Drainage/Erosion control reclamation: N/A

Well pad proposed disturbance

(acres): 8.27

Road proposed disturbance (acres):

0.43

Powerline proposed disturbance

(acres): 0.43 Pipeline proposed disturbance

(acres): 1.585

Other proposed disturbance (acres): 0

Total proposed disturbance: 10.715

Well pad interim reclamation (acres):

Road interim reclamation (acres): 0

Powerline interim reclamation (acres):

Pipeline interim reclamation (acres): 0

Other interim reclamation (acres): 0

Total interim reclamation: 5.698

Well pad long term disturbance

(acres): 2.572

Road long term disturbance (acres):

Powerline long term disturbance

(acres): 0.43

Pipeline long term disturbance

(acres): 1.585

Other long term disturbance (acres): 0

Total long term disturbance: 5.017

Disturbance Comments:

Reconstruction method: Operator will use Best Management Practices"BMP" to mechanically recontour to obtain the desired outcome.

Topsoil redistribution: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns.

Soil treatment: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns.

Existing Vegetation at the well pad: Shinnery, yucca, grasses and mesquite.

Existing Vegetation at the well pad attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H Existing Vegetation Community at the road: Shinnery, yucca, grasses and mesquite. **Existing Vegetation Community at the road attachment:** Existing Vegetation Community at the pipeline: Shinnery, yucca, grasses and mesquite. **Existing Vegetation Community at the pipeline attachment:** Existing Vegetation Community at other disturbances: Shinnery, yucca, grasses and mesquite. **Existing Vegetation Community at other disturbances attachment:** Non native seed used? NO Non native seed description: Seedling transplant description: Will seedlings be transplanted for this project? NO Seedling transplant description attachment: Will seed be harvested for use in site reclamation? NO Seed harvest description: Seed harvest description attachment: Seed Management Seed Table Seed type: Seed source: Seed name: Source name: Source address: Source phone: Seed cultivar: Seed use location: PLS pounds per acre: Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP Well Name: BIG CAT 16-9 STATE FED COM Well Number: 217H First Name: JACOB Last Name: OCHOA Email: JACOB.OCHOA@DVN.COM Phone: (575)748-9934 Seedbed prep: Seed BMP: Seed method: Existing invasive species? NO Existing invasive species treatment description: Existing invasive species treatment attachment: Weed treatment plan description: Maintain weeds on an as need basis. Weed treatment plan attachment: Monitoring plan description: Monitor as needed. Monitoring plan attachment: Success standards: N/A Pit closure description: N/A Pit closure attachment: Section 11 - Surface Ownership Disturbance type: PIPELINE Describe: Surface Owner: BUREAU OF LAND MANAGEMENT Other surface owner description: **BIA Local Office: BOR Local Office: COE Local Office: DOD Local Office: NPS Local Office: State Local Office: Military Local Office: USFWS Local Office:** Other Local Office: **USFS** Region: USFS Forest/Grassland: **USFS Ranger District:**

Operator Name: DEVON ENERGY PRODUCTION COMPA	ANY LP
Well Name: BIG CAT 16-9 STATE FED COM	Well Number: 217H
Disturbance type: NEW ACCESS ROAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT	
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	
NPS Local Office:	
State Local Office:	
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:
Disturbance type: EXISTING ACCESS ROAD	
Describe:	
Surface Owner: BUREAU OF LAND MANAGEMENT	
Other surface owner description:	
BIA Local Office:	
BOR Local Office:	
COE Local Office:	
DOD Local Office:	9
NPS Local Office:	
State Local Office:	
Military Local Office:	
USFWS Local Office:	
Other Local Office:	
USFS Region:	
USFS Forest/Grassland:	USFS Ranger District:

Well Name: BIG CAT 16-9 STATE FED COM

Well Number: 217H

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? YES

Use APD as ROW? YES

ROW Type(s): 281001 ROW - ROADS, 288100 ROW - O&G Pipeline, FLPMA (Powerline)

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: 6/23/2017

Other SUPO Attachment

Big_Cat_16_9_State_Fed_Com_217H_CTB_20180302082427.pdf
Big_Cat_16_9_State_Fed_Com_217H_Elec_Lines_20180302082437.pdf
Big_Cat_16_9_State_Fed_Com_217H_GCP_20180302082448.pdf
Big_Cat_16_9_State_Fed_Com_217H_Flowlines_20180302082459.pdf
Big_Cat_16_9_State_Fed_Com_217H_Int_Rec_20180302082510.pdf

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Original to Appropriate District Office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

GAS	CA	PTI	IRE	PΙ	AN
11/1/1/			JIND		

Date: 1/16/2017	
☑ Original☐ Amended - Reason for Amendment:	Devon & OGRID No.: <u>Devon Energy Prod Co., LP</u> (6137)

This Gas Capture Plan outlines actions to be taken by the Devon to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility - Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location	Footages	Expected	Flared or	Comments
		(ULSTR)		MCF/D	Vented	
FLUFFY CAT 16-21		Lot I, Sec 16,	2314 FSL			BIG CAT 16 CTB 9
STATE FED COM 218H		T23S, R 32E	1114 FEL			
BIG CAT 16-9 STATE		Lot I, Sec 16,	2314 FSL			BIG CAT 16 CTB 9
FED COM 217H		T23S, R 32E	1084 FEL	1		

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if DCP system is in place. The gas produced from production facility is dedicated to <u>DCP</u> and will be connected to <u>DCP</u> low/high pressure gathering system located in <u>Lea</u> County, New Mexico. It will require <u>100'</u> of pipeline to connect the facility to low/high pressure gathering system. <u>Devon</u> provides (periodically) to <u>DCP</u> a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, <u>Devon</u> and DCP have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at <u>DCP</u> Processing Plant located in Sec.19, Twn. <u>19S</u>, Rng. <u>32E</u>, <u>Eddy</u> County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on <u>DCP</u> system at that time. Based on current information, it is <u>Devon's</u> belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation On lease
 - o Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines





Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

PWD disturbance (acres):

Section 3 - Unlined Pits

Injection well mineral owner:

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Unlined pit PWD on or off channel:	
Unlined pit PWD discharge volume (bbl/day):	
Unlined pit specifications:	
Precipitated solids disposal:	
Decribe precipitated solids disposal:	
Precipitated solids disposal permit:	
Unlined pit precipitated solids disposal schedule:	
Unlined pit precipitated solids disposal schedule attachment:	
Unlined pit reclamation description:	
Unlined pit reclamation attachment:	
Unlined pit Monitor description:	
Unlined pit Monitor attachment:	
Do you propose to put the produced water to beneficial use?	
Beneficial use user confirmation:	
Estimated depth of the shallowest aquifer (feet):	
Does the produced water have an annual average Total Dissol that of the existing water to be protected?	ved Solids (TDS) concentration equal to or less than
TDS lab results:	
Geologic and hydrologic evidence:	
State authorization:	
Unlined Produced Water Pit Estimated percolation:	
Unlined pit: do you have a reclamation bond for the pit?	
Is the reclamation bond a rider under the BLM bond?	
Unlined pit bond number:	
Unlined pit bond amount:	
Additional bond information attachment:	
Section 4 - Injection	
Would you like to utilize Injection PWD options? NO	
Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Injection PWD discharge volume (bbl/day):	

Injection well type:	
Injection well number:	Injection well name:
Assigned injection well API number?	Injection well API number:
Injection well new surface disturbance (acres):	
Minerals protection information:	
Mineral protection attachment:	
Underground Injection Control (UIC) Permit?	
UIC Permit attachment:	
Section 5 - Surface Discharge	
Would you like to utilize Surface Discharge PWD options? NO	
Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Surface discharge PWD discharge volume (bbl/day):	
Surface Discharge NPDES Permit?	
Surface Discharge NPDES Permit attachment:	
Surface Discharge site facilities information:	
Surface discharge site facilities map:	
Section 6 - Other	
Would you like to utilize Other PWD options? NO	
Produced Water Disposal (PWD) Location:	
PWD surface owner:	PWD disturbance (acres):
Other PWD discharge volume (bbl/day):	
Other PWD type description:	
Other PWD type attachment:	
Have other regulatory requirements been met?	
Other regulatory requirements attachment:	



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Info Data Report 09/13/2018

Bond Information

Federal/Indian APD: FED

BLM Bond number: CO1104

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: