

DATE 9/8/80

HUBER W.I. 75%
DEAL NO. 14-N-66A
PROPERTY NO. 14P7819


WELL DATA SHEET

Lease Stoltz State SWD Well No. 1

Location 554' FS&WL, Sec. 6, T-15S, County Lea State N. M.

R-35E
K.B. Elev. 4062'
G.L. Elev. 4051'
D.F. Elev. 4061'

Date Completed 5/30/66
Formation(s) Lower Wolfcamp

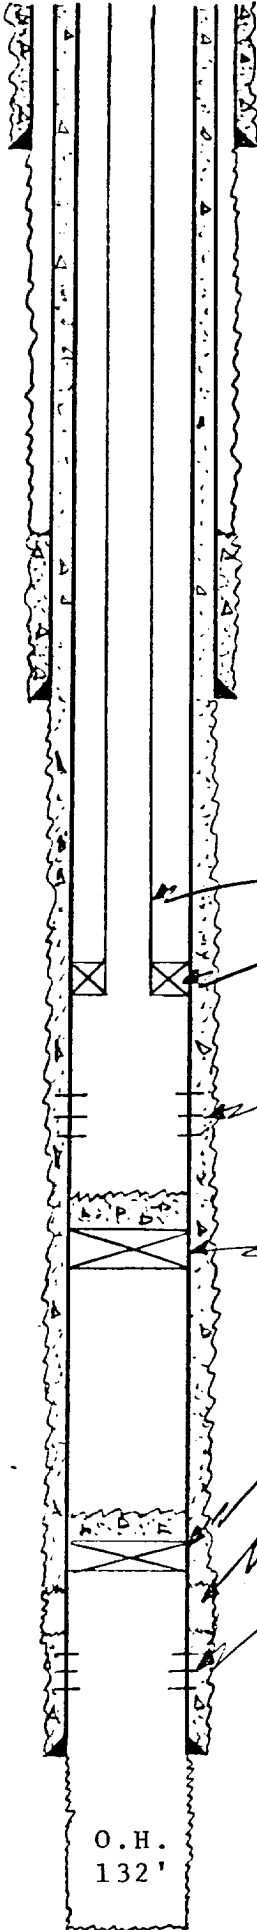

13-3/8 " 54 #
Gr. J55 Thd. ST&C
Set @ 385'
w/ 275 Sks.
Hole Size 17"
Cement Circulated

Intermediate String
Top Cement @ 3600'

8-5/8 " 32&34 #
Gr. J55 Thd. ST&C
Set @ 4525'
w/ 200 Sks.
Hole Size 12 1/4"

146 jts. 2-3/8" 4.75#, J-55
EUE 8 Rnd. PCID Tbg. @ 4502'

Baker Lok-Set pkr. @ 4506'
Set in 10,000# tension

Perfs: 4660'-6404'
Total 186 holes O.A.

CIBP @ 6610' w/10' cmt.
on top

CIBP @ 10,000' w/10' cmt. on top

No cmt. 9350'-9680' by Bond Log
Good Cement Bond 9680' to surface by log

Old perfs. 10,220' to 10,419'

4 1/2 " 11.6&10.5 #
Gr. J55 Thd. ST&C & LT&C
Set @ 10,450'
w/ 250 Sks.
Hole Size 7-7/8"
Cement Circulated to surface

O.H.
132'

Workovers: 9/5/80 McCullough set
CIBP at 10,000' & 6610'; also
reperforated 1 JSPF as follows:
6398'-6404', 6175'-6205', 6073'-
92', 5980'-95', 5633'-45', 5585'-
92', 5383'-90', 5160'-70', 5053'-
60', 5048'-50', 4863'-69', 4725'-
38', 4710'-20', 4702'-05', 4678'-
82', 4660'-75', total 186 holes
O.A.
Western acidized w/16,000 gals.
max. psi 4900#, min. 2800 psi,
avg. 4500 psi, ISIP 3050#, 15 min.
2950#, bled well off. Avg. inj.
rate 0.85 BWPM @ 200 psi.

Plug Back Total Depth 6,600'
Total Depth 10,582'
Well Name Stoltz State SWD #1

R. R. Sumner 9/8/80