


DRILLING CONTROL CONDITION II-3000 PSI WP

SEE TECH. SPEC. 1512
REV. _____

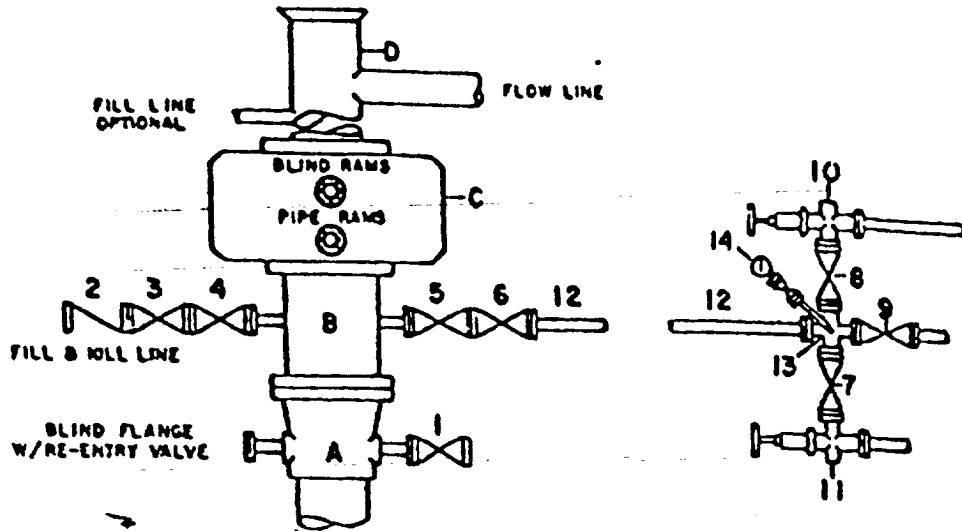

DRILLING CONTROL

MATERIAL LIST - CONDITION II

A	Texaco Wellhead
B	3000# W.P. drilling spool with a 2" minimum flanged outlet for kill-line and 3" minimum flanged outlet for choke line
C	3000# W.P. Dual ram type preventer, hydraulic operated with 1" steel, 3000# W.P. control lines (where sub-structure height is adequate, 2-3000# W.P. single ram type preventers may be utilized.)
D	Bell nipple with flowline and fill-on outlets. (Kill line may also be used for fill-up line.)
1,3,4, 7,8	2" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
2	2" minimum 3000# W.P. back pressure valve
5,6,9	3" minimum 3000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve.
12	3" minimum schedule 80, Grade "B", seamless line pipe
13	2" minimum x 3" minimum 3000# W.P. flanged cross
10, 11	2" minimum 3000# W.P. adjustable choke bodies
14	Cameron Mud Gauge or equivalent (location optional in choke line.)

SCALE	DATE	EST. NO.	CRS. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			



TEXACO, INC.
P.O. BOX 1000
HOUSTON, TEXAS



EXHIBIT B