


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

HOBBS OFFICE

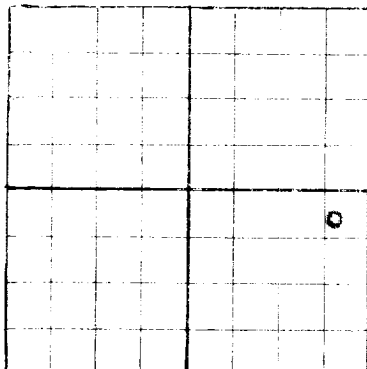

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Texas Company

Box 1720, Fort Worth 1, Texas

State of New Mexico

8

in NW 1/4

6

Address

17-S

Well No.

in

of Sec.

T.

36-S

West Lovington

Lea

R. 3300 N. M. P. M.

Field,

County.

Well is 3300 feet south of the North line and 660 feet west of the East line of Section 6

If State land the oil and gas lease is No. 8-4120

Assignment No. 1

If patented land the owner is --

Address --

If Government land the permittee is --

Address --

The Lessee is

The Texas Company

Box 2332, Houston, Texas

Drilling commenced

January 25

47

Drilling was completed

March 6

47

Name of drilling contractor

Harrell & Bradshaw

Address

National Bank of Tulsa Bldg.

Elevation above sea level at top of casing

3918

feet.

Derrick

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 4750 to 5153' to 5153'

No. 2, from -- to --

No. 3, from -- to --

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from -- to -- feet.

No. 2, from -- to -- feet.

No. 3, from -- to -- feet.

No. 4, from -- to -- feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	48	3rd	Sals	230'	Baker	Guide			
8-5/8"	26	3rd	Sals	1987'	Larkin	Guide			
5-1/2"	15.5	3rd	Sals	4727'	Baker	Guide			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13-3/8"	240'	250	Halliburton	--	--
11"	8-5/8"	1995'	150	Halliburton	--	--
7-3/4"	5-1/2"	4740	200	Halliburton	--	--

PLUGS AND ADAPTERS

Heaving plug—Material -- Length -- Depth Set --

Adapters—Material -- Size --

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
13-3/8"	100	Process	2000	3-7-47	4750-5153'	
		"	6000	3-9-47	4750-5153'	

After final stage of 6000 gallons 3-9-47 well
Results of shooting or chemical treatment:
Produced and flowed 47.5 barrels of oil in 5 hours through tubing
3-10-47

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED
Rotary tools were used from 0 feet to 5153 feet, and from -- feet to -- feet
Cable tools were used from -- feet to -- feet, and from -- feet to -- feet

PRODUCTION
Put to producing March 10 47
The production of the first 24 hours was 49.5 barrels of fluid of which 100% was oil; --% emulsion; --% water; and --% sediment. Gravity, Be API 35.4
If gas well, cu. ft. per 24 hours -- Gallons gasoline per 1,000 cu. ft. of gas --
Rock pressure, lbs. per sq. in. 783

EMPLOYEES

V. J. Garrison J. C. Pair
H. J. Smith Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th

day of March 47

Elizabeth Frye

Notary Public
June 1, 1947

Midland, Texas March 19, 1947

Name C. Halliman

Position District Superintendent

Representing The Texas Company

Company or Operator

Box 1270, Midland, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	250	250	Surface Caliche & Sand
250	570	320	Red Beds
570	785	215	Red Rock
785	926	141	Red Beds
926	1830	904	Red Rock
1830	2135	305	Anhydrite, broken
2135	3212	1077	Salt & Anhydrite
3212	3326	114	Anhydrite
3326	4678	1352	Anhydrite & Lime
4678	4750	72	Lime
4750	5153	403	Porous, Lime
		5153	Total Depth

All depths are measured from Rotary Table or 11' above ground.

DEVIATION TESTS

DEPTH		DEGREE
500	-	1
700	-	0
1000	-	3/4
1500	-	1/2
1956	-	1-1/2
2200	-	1/2
2620	-	1/4
3190	-	1-1/4
3690	-	2
3860	-	1-7/8
4150	-	1-1/2
4330	-	3/4